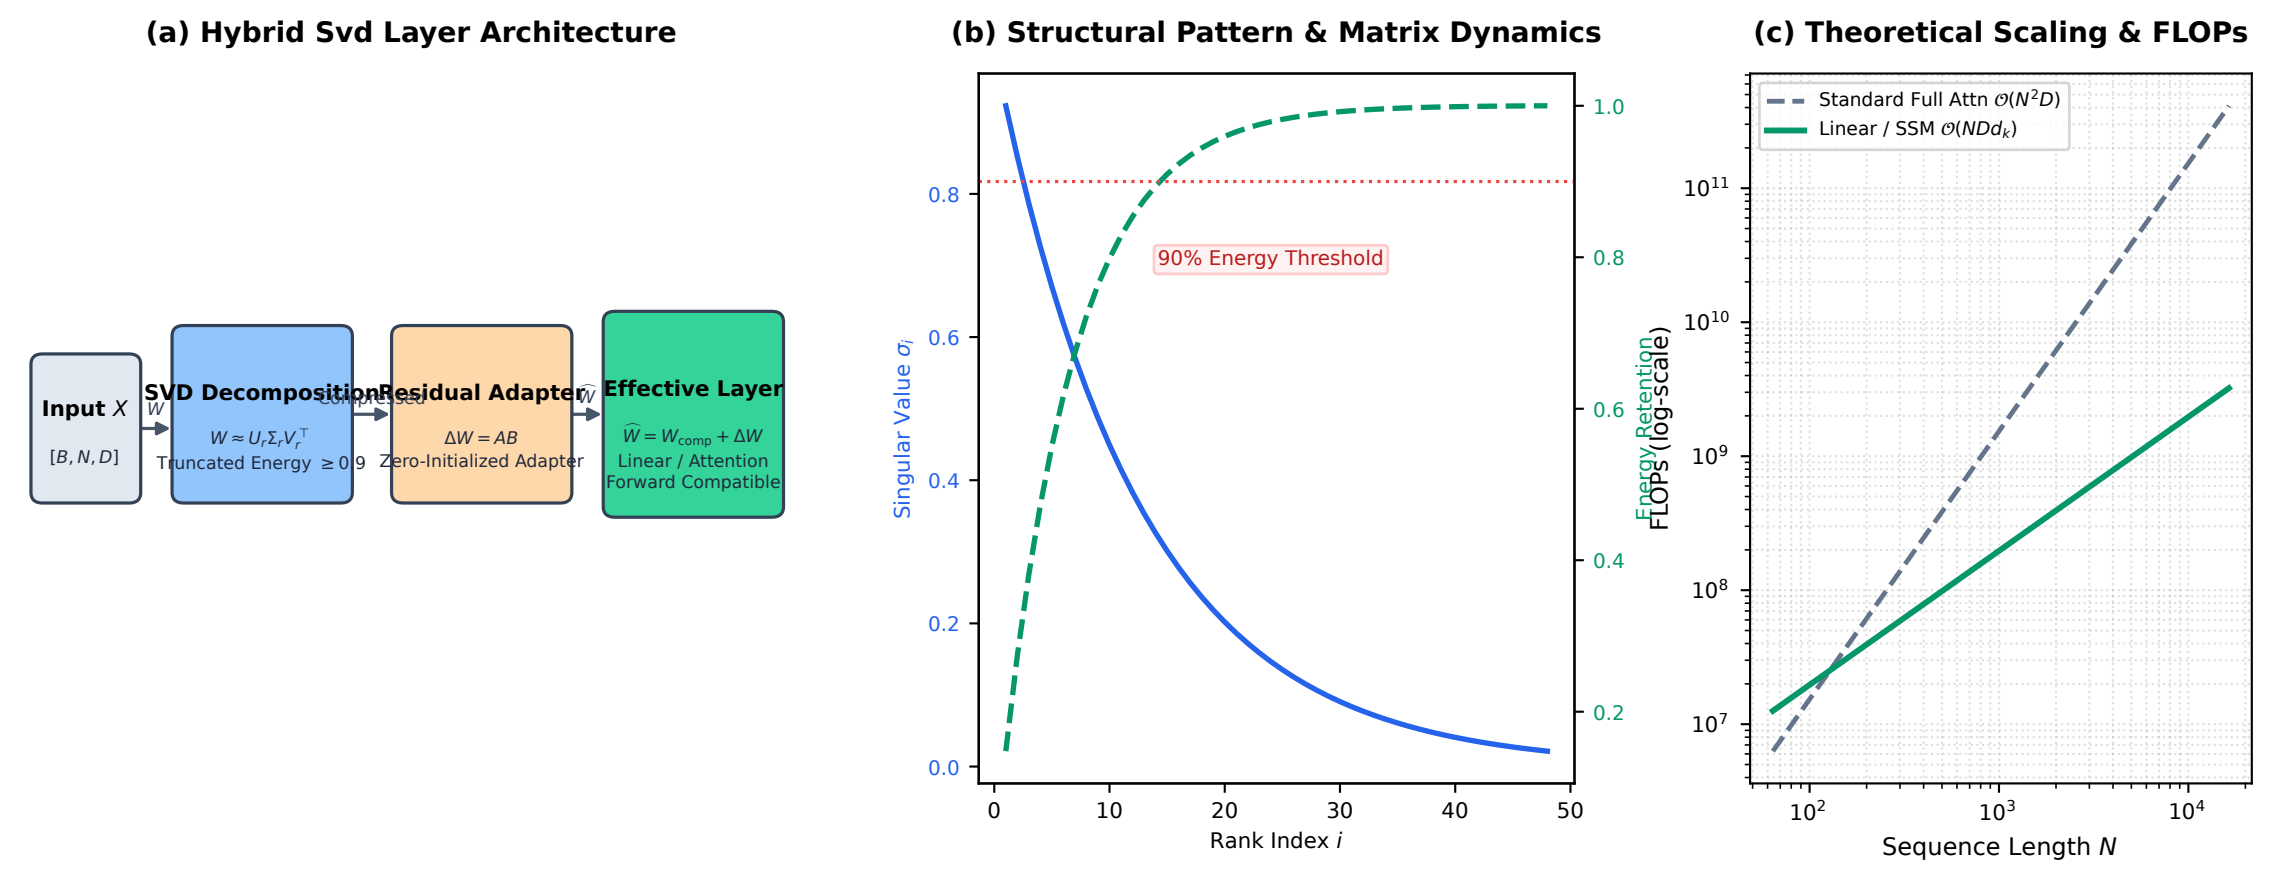
(a) Hybrid Svd Layer Architecture
Input X
$[B, N, D]$
W
SVD Decomposition
$W \approx U_r \Sigma_r V_r^\top$
Truncated Energy ≥ 0.9
Compressed
Residual Adapter
$\Delta W = AB$
Zero-Initialized Adapter
$\widehat{W}$
Effective Layer
$\widehat{W} = W_{\text{comp}} + \Delta W$
Linear / Attention
Forward Compatible
(b) Structural Pattern & Matrix Dynamics
Singular Value σ_i
Energy Retention
90% Energy Threshold
Rank Index i
0.0
0.2
0.4
0.6
0.8
1.0
0
10
20
30
40
50
(c) Theoretical Scaling & FLOPs
Standard Full Attn $\mathcal{O}(N^2D)$
Linear / SSM $\mathcal{O}(NDd_k)$
FLOPs (log-scale)
Sequence Length N
10^7
10^8
10^9
10^{10}
10^{11}
10^2
10^3
10^4