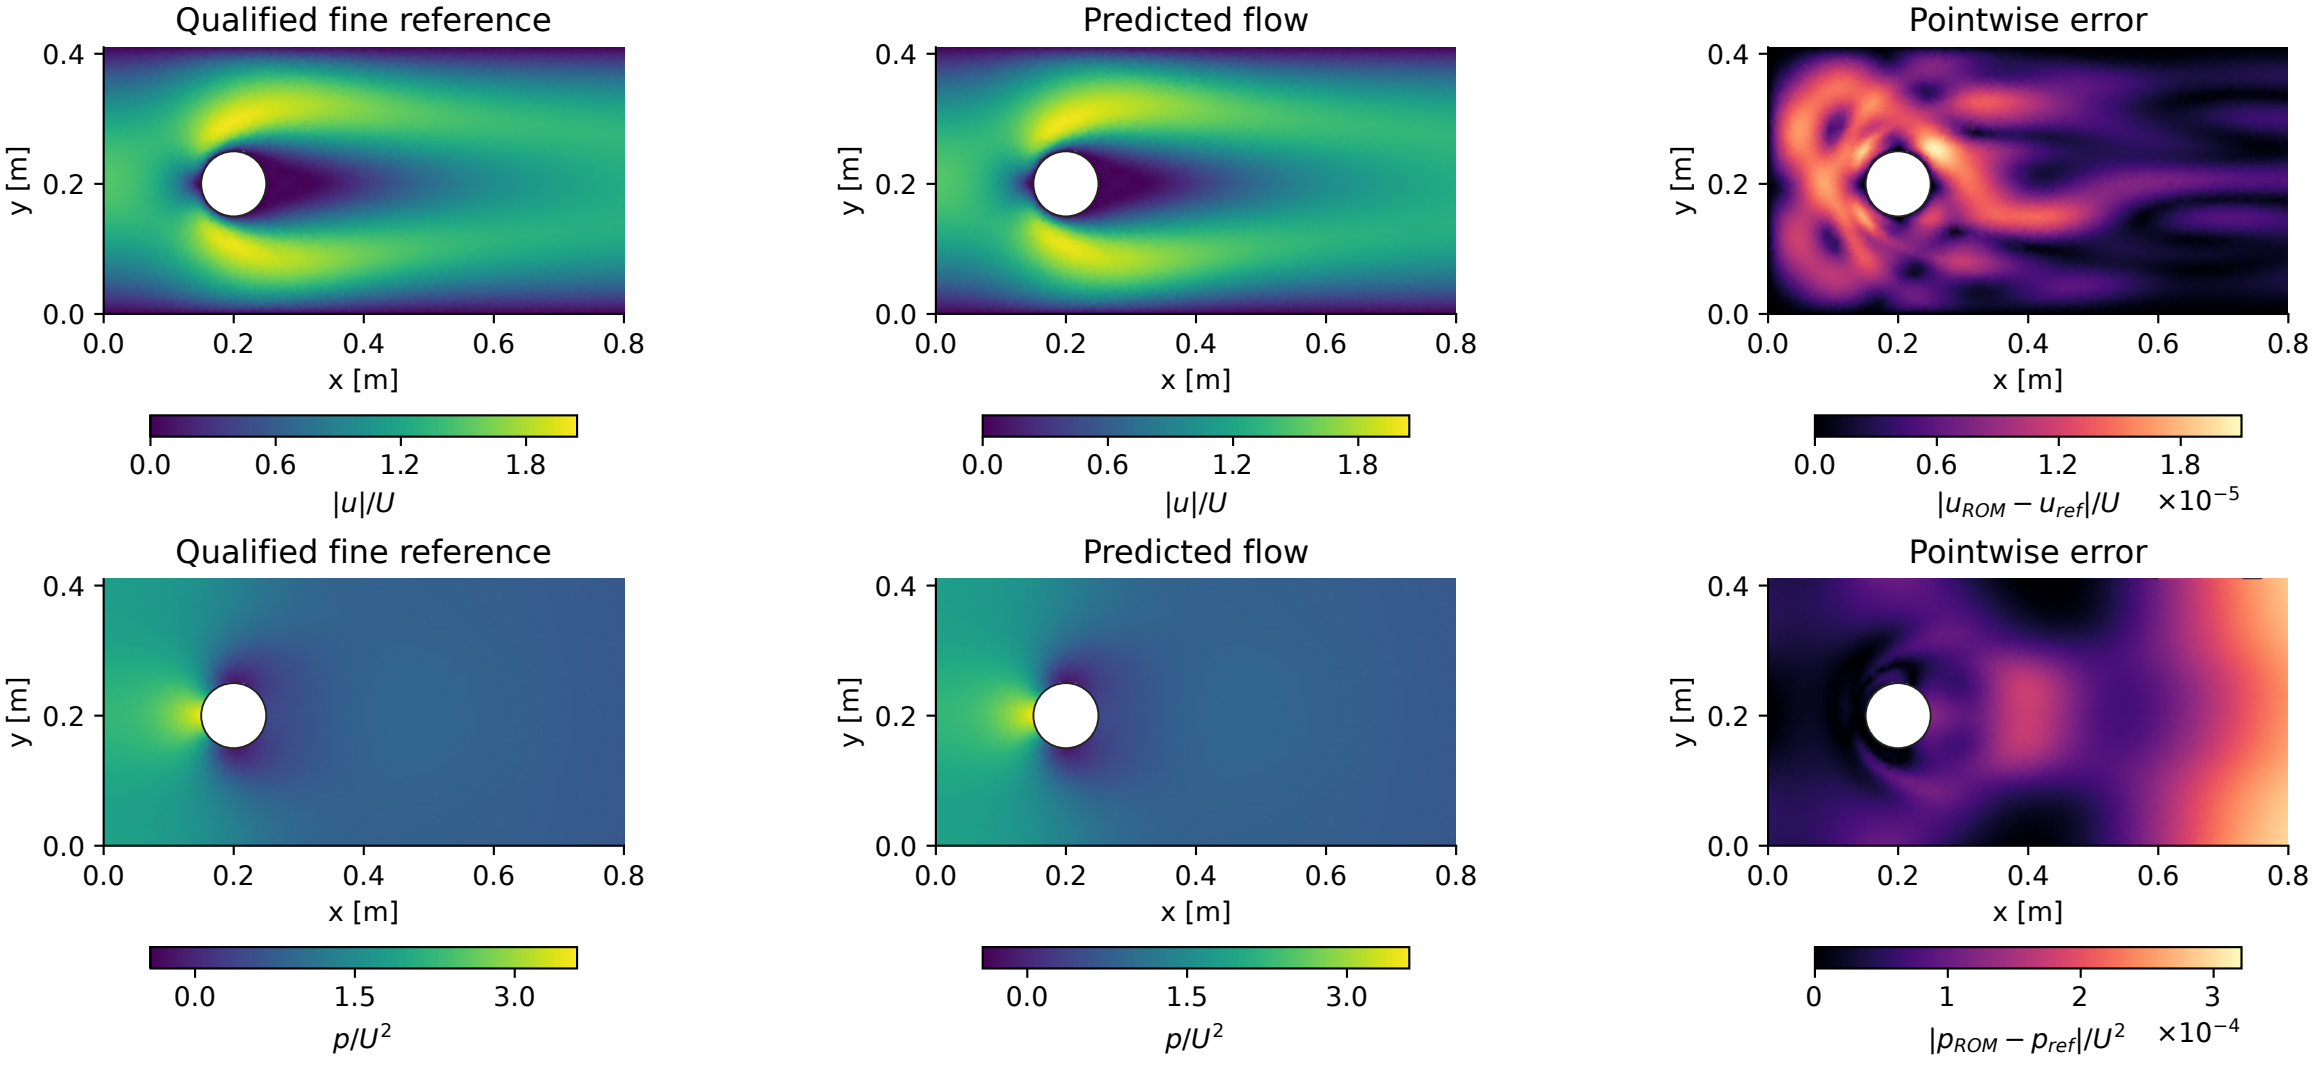

Standard POD r4: Galerkin solved flow — Re = 16.875
Velocity (top) and pressure (bottom); near-cylinder view
Qualified fine reference
Predicted flow
Pointwise error
y [m]
x [m]
0.0
0.2
0.4
0.6
0.8
0.0
0.6
1.2
1.8
|u|/U
|u_ROM − u_ref|/U
×10^−5
Qualified fine reference
Predicted flow
Pointwise error
0.0
1.5
3.0
p/U^2
0
1
2
3
|p_ROM − p_ref|/U^2
×10^−4
4 POD velocity modes plus shared pressure/stability spaces. Actual reduced flow-solve output.
Display interpolation; error scales differ. Errors against stored reference do not certify equal continuum accuracy. Development cases.