

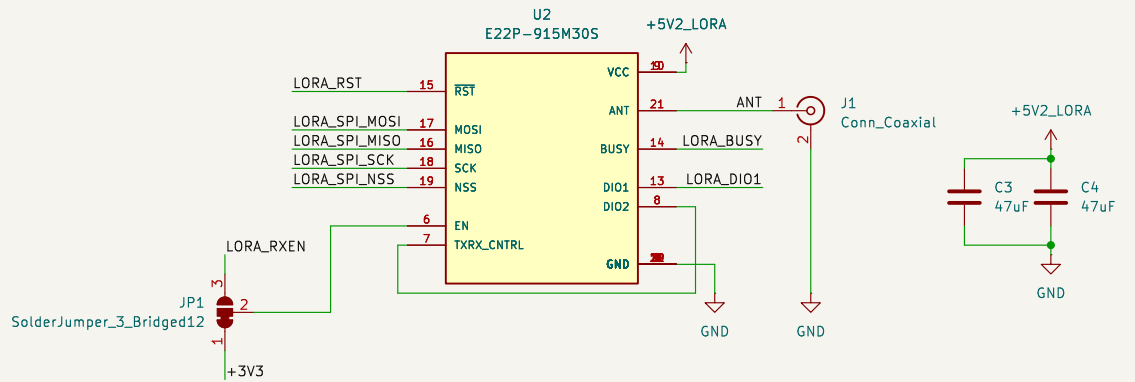


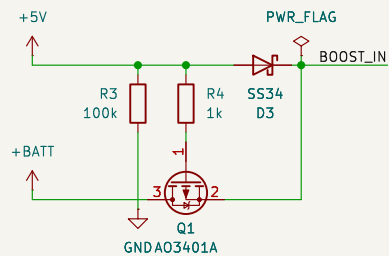
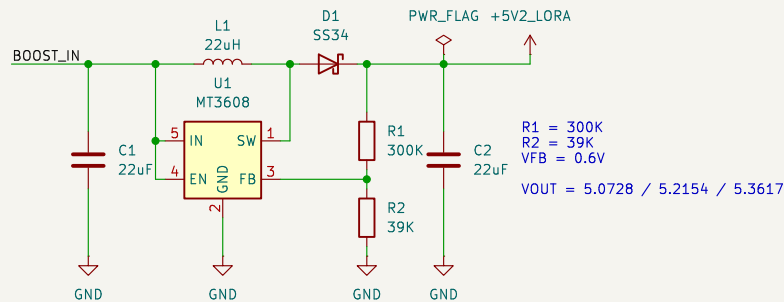


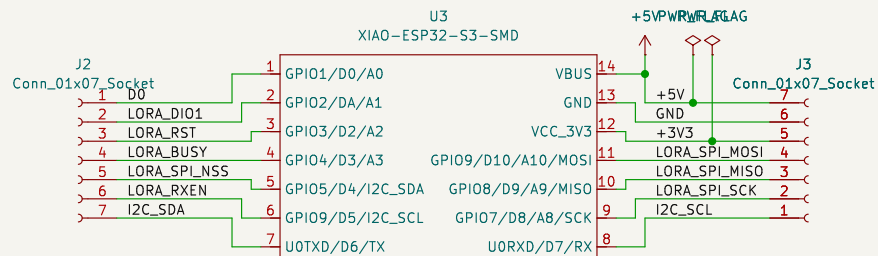

E22 Module uses pin 6 as RX_EN and is connected to SX126X_RXEN in firmware
 In order to use the E22P with stock firmware, pin 6 must be high

You can do this in software with or change the routing like above
<https://github.com/yellowcooln/MeshCore-washtastic-e22p/commit/3ebd5f18f94eb0c87fe2e88f7eaa14b53440a2b4>

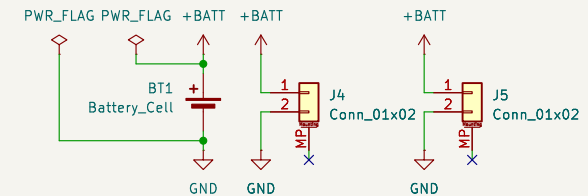

Sheet: /
 File: ikoka-stick-meshtastic-device.kicad_sch

Title:

Size: A4

Date:

Rev:

KiCad E.D.A. 9.0.7

Id: 1/1