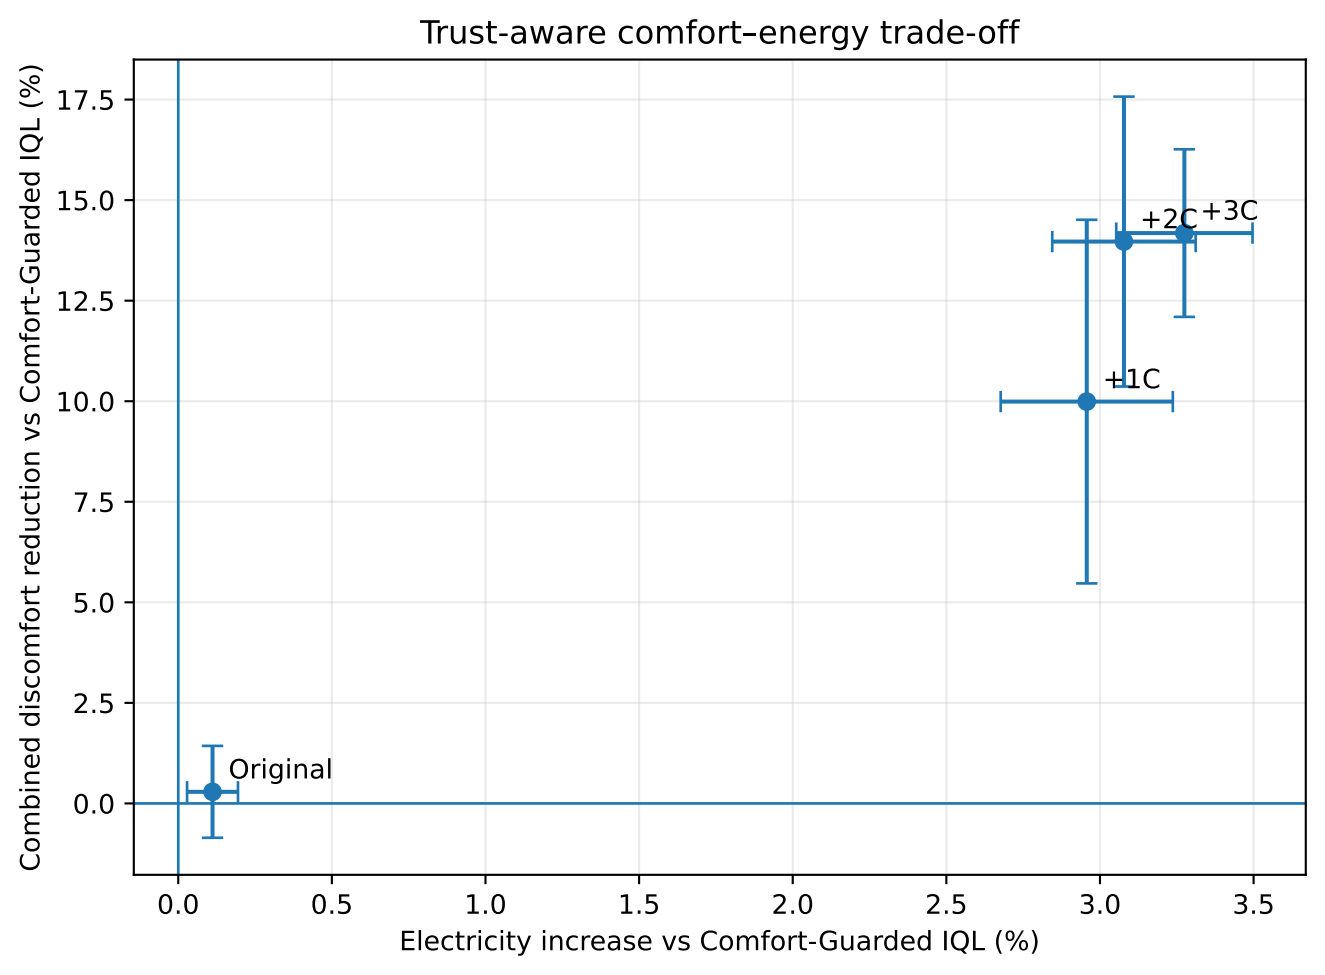
Trust-aware comfort–energy trade-off
Combined discomfort reduction vs Comfort-Guarded IQL (%)
Electricity increase vs Comfort-Guarded IQL (%)
17.5
15.0
12.5
10.0
7.5
5.0
2.5
0.0
0.0
0.5
1.0
1.5
2.0
2.5
3.0
3.5
Original
+1C
+2C
+3C