

Outdoor LED Display Solution




PTA SERIES

Stable Quality, Clear Display

Unlocking Infinite Display Possibilities

Excellent Heat Dissipation: Dual Assurance from Structure and Material

Inspired by engine cooling principles, the design delivers high-efficiency heat dissipation. The power box and modules feature reinforced fins to increase surface area and enhance air convection, effectively removing heat from the cabinet. The aluminum back shell of the module offers superior thermal conductivity, ensuring efficient heat dissipation for enhanced product stability and long-term durability.

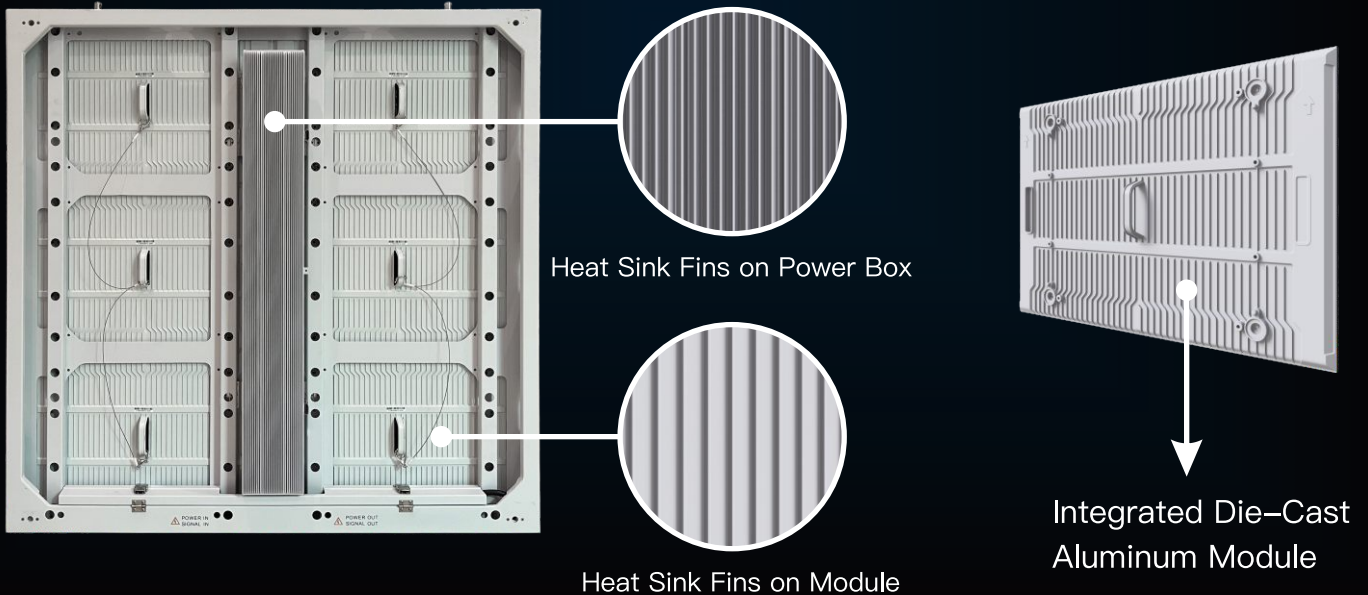

Outdoor-Ready, No Enclosure Needed

Thanks to its outstanding heat dissipation performance, the PTA Series requires no additional cooling equipment such as air conditioners or fans. It supports direct outdoor installation without the need for enclosures or edge framing. The result is a clean and sleek finish with minimal visible cabling, seamlessly blending into any environment.



Ultra-stable, as Bright as Platinum

Excellent quality, extraordinary effect



High temperature resistance



Heavy rain resistance



High humidity resistance



Low temperature resistance



Salt spray proof



Typhoon resistance

Low-Voltage Energy Saving for Cost and Emission Reduction

PTA Series adopts energy-efficient ICs and self-developed power-saving circuitry, combined with high-power low-voltage power supply technology. This significantly reduces operational costs while lowering carbon emissions.





Energy Saving & Emission Reduction

High protection

Waterproof and fireproof significantly enhances its usability and safety.

IP68(Front) waterproof, **30** minutes test for **900**mm water

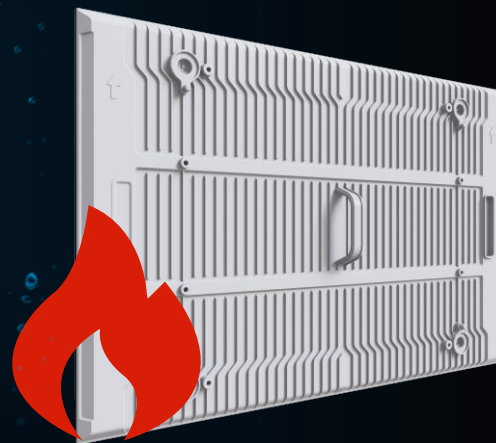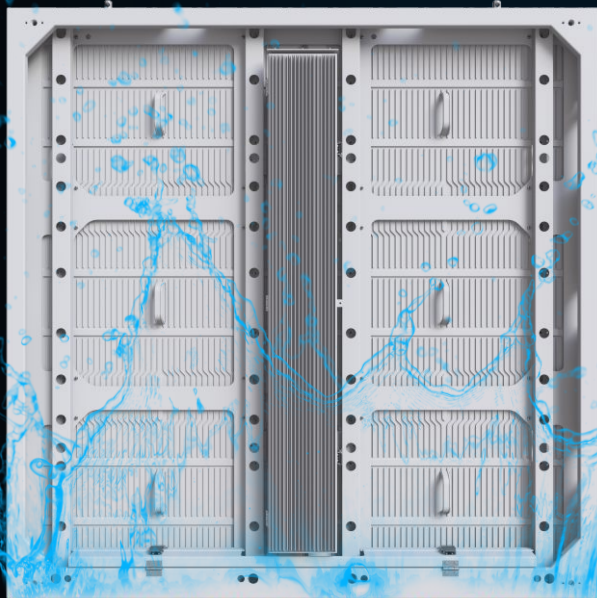


5VB fireproof, sturdy material provides dependable protection from potential fire hazards

Easy Installation and Convenient Upgrade




Module with 4 screws, stable and easy to remove, save repairing costs

Compatible design, upgrade only requires replacing the module

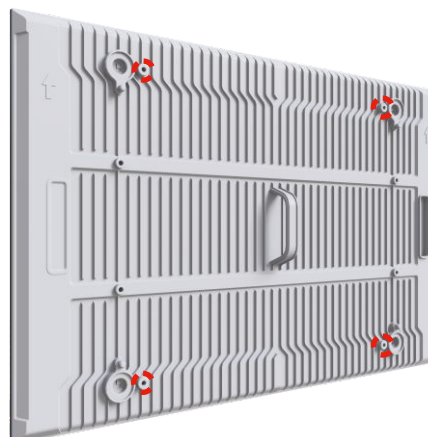

Creative Design, Creat More Dreams

Immersive screen, Build falous visual world

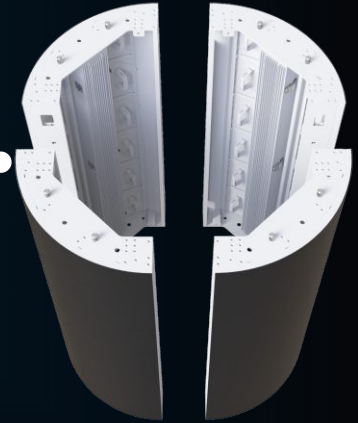

VR corner

Customized corner solution, deep immersion experience

Application



Specifications

Model Name	FAB-P5.7	FAB-P6.6	FAB-P8	FAB-P10
Pixel Pitch (mm)	5.71	6.67	8	10
Pixel Density (dot/m²)	30,625	22,500	15,625	10,000
LED Sealing Type	SMD2727	SMD2727	SMD2727/3535	SMD2727/3535
Module Resolution (PX* PX)	84*56	72*48	60*40	48*32
Module Size (mm * mm)	480*320	480*320	480*320	480*320
Module Weight (kg)	1.98			
Module Thickness (mm)	20			
Horizontal Viewing Angle (Deg)	160°			
Vertical Viewing Angle (Deg)	Upward viewing angle20° Down viewing angle 60°		Upward viewing angle30° Down viewing angle 60°	
Brightness (cd/m²)	5,500–6,500			
Max Power Consumption (W/m²)	600±5%	600±5%	600±5%	600±5%
Average Power Consumption (W/m²)	180	180	180	180
Grey Scale (bit)	14			
Refresh Rate (Hz)	3,840			
Cabinet Size (mm * mm)	960*640/960*960/960*1,280/1,440*640/1,440*960			
Cabinet Thickness (mm)	74			
Cabinet Weight (Kg/m²)	33			
Input Voltage (V)	AC200–240V			
Working Temperature (°C)	-40~+55°C			
Working Humidity (RH)	10%~95%RH			
Storage Humidity (RH)	10%~60%RH			
Storage Temperature (°C)	-40~+60°C			
Maintenance Type	Front/Rear			
Working Environment	Outdoor			
Life Span	>100,000 hours			
Ingress Protection	IP68/IP66			
Certificates	3C, CE			



FABULUX LED

www.fabuluxled.com

FABULUX HQ SZ | FABULUX DG | FABULUX US | FABULUX EU | FABULUX ME

fabulux@fabuluxled.com