




FABULUX LED

OUTDOOR FINE PITCH ENERGY SAVING



PTF1935 SERIES



8,000nits



13,000:1



50% Power Saving

FABULUX1935 VS Others

Higher Contrast, the white area of SMD1935 is **20%** smaller than others.




Others




SMD1935

Flexible Mask Option



High Contrast




Wide Viewing Angle



FABULUX1935

FABULUX1935's ultra-high contrast delivers superior transparency, detail, and vibrancy.

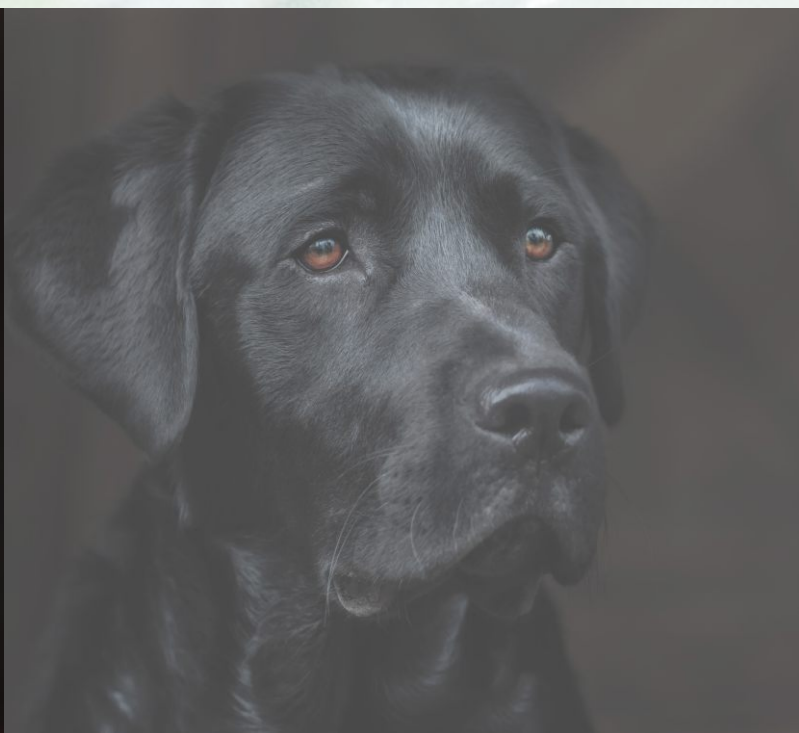

Others

Lower contrast in others causes a grayish look and loss of detail.

FABULUX1935

Video content stays more vivid and clearly visible even in strong sunlight!



8,000nits

High Brightness



13,000:1

High Contrast




FABULUX 1935 is engineered for optimal visibility and color retention in direct sunlight, enhancing its appeal in outdoor environments.

The others have reduced visibility and color saturation in direct sunlight, limiting their effectiveness in certain lighting conditions.



FABULUX1935(3,500nits)

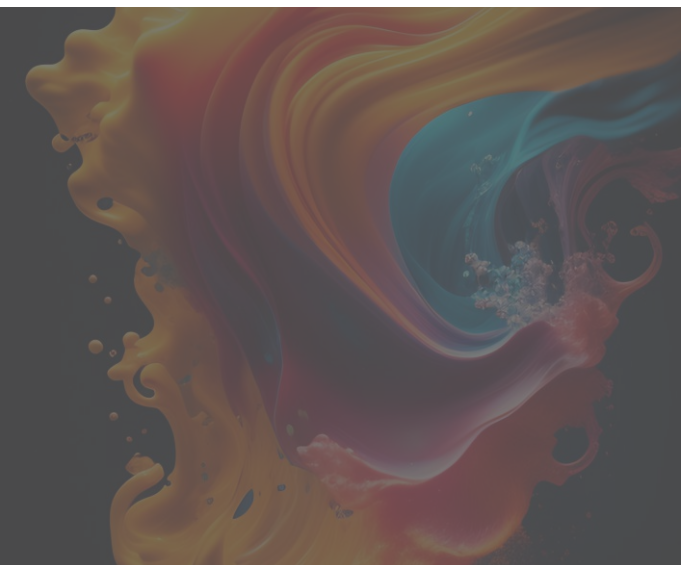

Others(5,000nits)

Exclusive CCES Technology

Fabulux developed exclusive CCES (Common Cathode Energy Saving) technology, which powers the RGB chips separately—3.2V for the red chip and 4.2V for green and blue—reducing power consumption by at least 50%.



50%

Power saving



Stable Operation



Low Carbon



Conservation



Energy Saving




Extremely Light And Thin

Energy-saving Technology

At FABULUX, sustainability is at the core of our values, driving everything from green technology R&D to low-carbon certified products. Our commitment to energy savings and environmental improvement reflects this dedication.

The 5 Legs patented design enhanced stability and improved heat dissipation.

The patented FABULUX 1935 features five legs, providing a larger surface area for heat dissipation, enhancing LED stability.

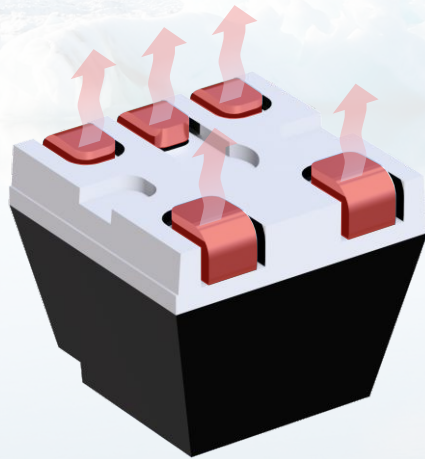

FABULUX1935




Others

The world's unique lamp bead cooling technology, combined with an all-metal aluminum module base and cabinet structure, delivers double heat dissipation performance.

The fanless design prevents dust and moisture from entering the box, reducing the risk of heat dissipation issues from fan failure and enhancing product reliability.




Flexible cabinet size

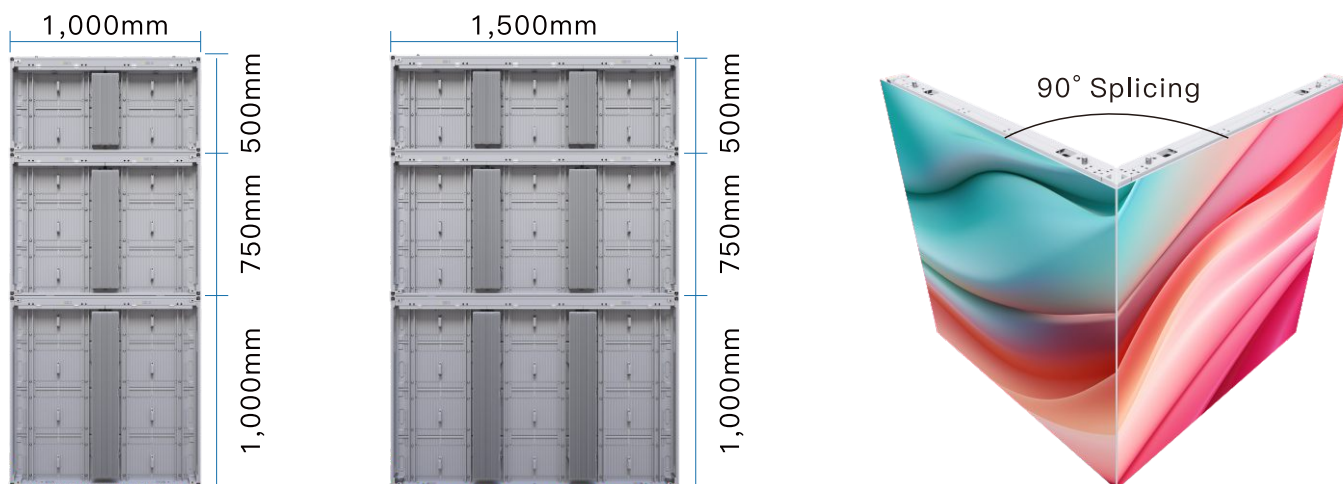

Flexible VR installation



Flexible Cabinet assembly to meet flexible billboard requirements, full size or extra 0.5m for both width/height

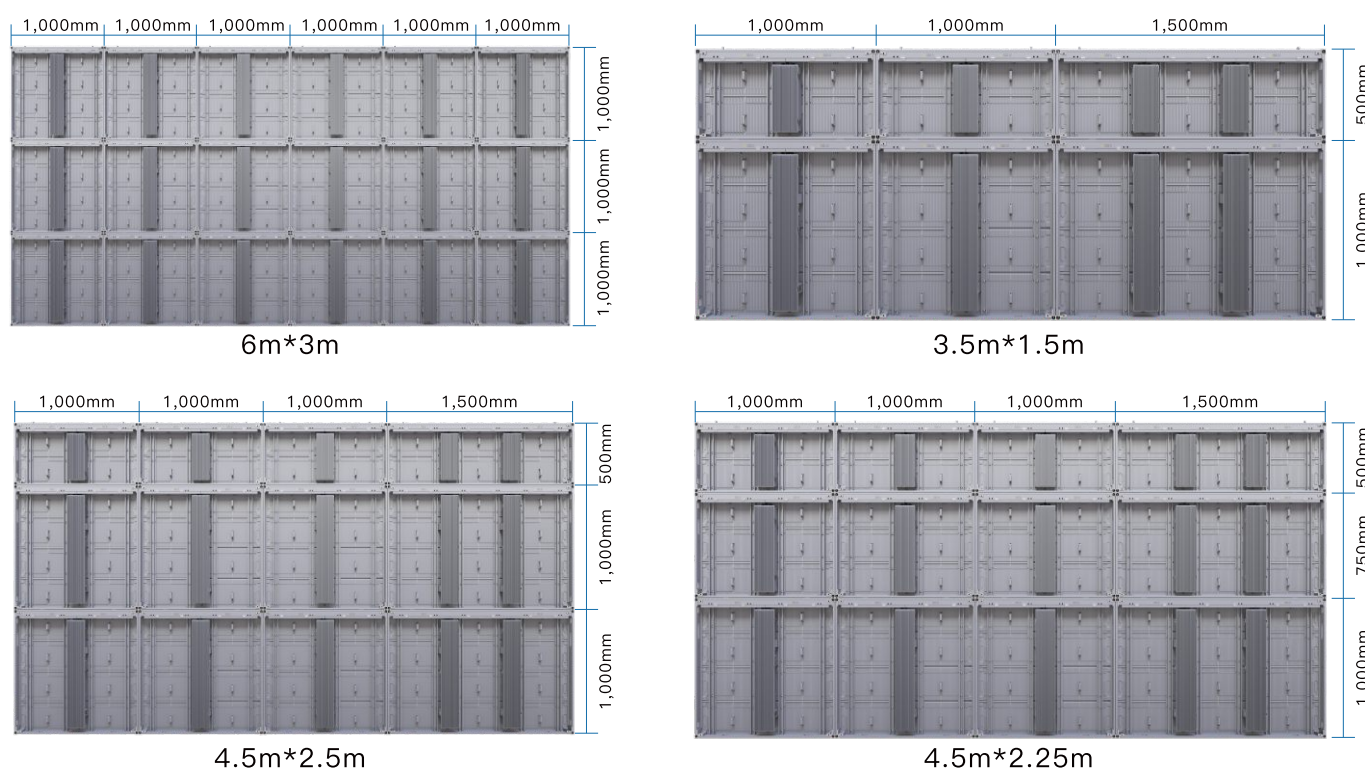

Specifications

Model Name	FAB-PTF3.9			FAB-PTF4.8	
Pixel Pitch (mm)	3.91			4.81	
Pixel Density (dot/m ²)	65,536			43,264	
LED Sealing Type	SMD1935			SMD1935	
Module Resolution (PX* PX)	128*64			104*52	
Module Size (mm * mm)	500*250			500*250	
Module Weight (kg)	1.7			1.7	
Module Thickness	20mm			20mm	
Contrast Ratio	13,000:1			13,000:1	
Horizontal Viewing Angle (Deg)	160°			160°	
Vertical Viewing Angle (Deg)	90°			90°	
Brightness (cd/m ²)	3,000	3,500	4,000	5,000	8,000
Max Power Consumption (W/m ²)	250W±3%/m ²	310W±3%/m ²	350W±3%/m ²	440W±3%/m ²	650W±3%/m ²
Average Power Consumption (W/m ²)	100W/m ²	124W/m ²	140W/m ²	176W/m ²	260W/m ²
Grey Scale (bit)	14-16				
Refresh Rate (Hz)	3,840-7,680				
Cabinet Size (mm * mm)	1,000*500/1,000*750/1,000*1000/1,500*500/1,500*750/1,500*1000				
Cabinet Thickness (mm)	81.5mm				
Cabinet Weight (Kg/m ²)	27kg				
Input Voltage (V)	AC100-240V				
Working Temperature (°C)	-40~+60°C				
Working Humidity (RH)	10%~95%RH				
Storage Humidity (RH)	10%~60%RH				
Storage Temperature (°C)	-40~+60°C				
Maintenance Type	Front/Rear				
Installation Type	Front/Rear				
Life Span	>100,000 hours				
Controlling System	Synchronous/Asynchronous				
Ingress Protection	IP66				
Certificates	CE(LVD、EMC), CB, FCC, ETL				

Notes: The specifications are for reference, actual values may vary.



www.fabuluxled.com

FABULUX HQ SZ | FABULUX DG | FABULUX US | FABULUX EU | FABULUX ME

fabulux@fabuluxled.com