



New Upgraded Lamination Technology



TCOB

Upgrade for greater performance



COB Technology



16:9 Golden Ratio



600-1,000nits




20,000:1



3,840hz

New Upgraded Lamination Technology

The composite adhesive layer utilizes a double-film lamination structure, bonding with the LED chip and PCB board through pressing and vacuum techniques.

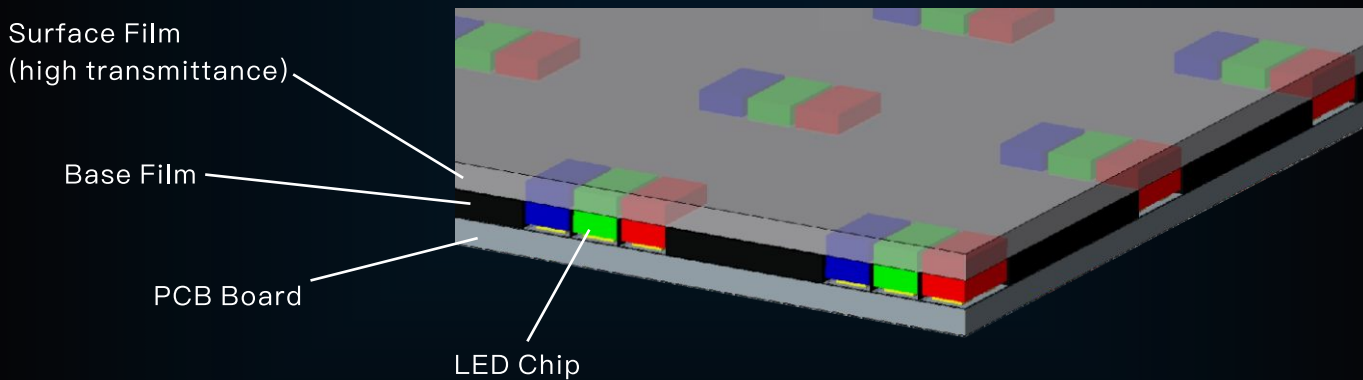


Highly Abrasion-resistant and Superhydrophobic

Effectively for dust-proof
humidity proof and anti-pollution



High Consistent black levels

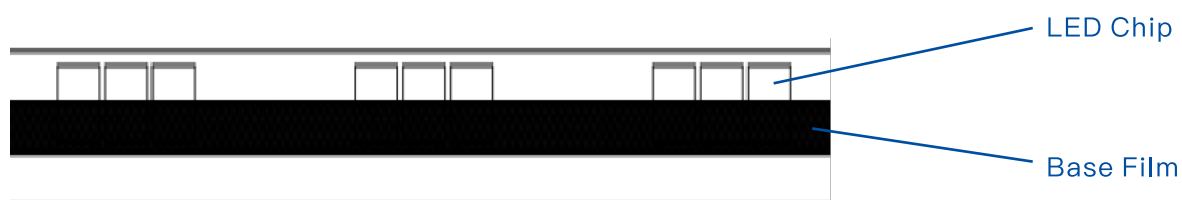


20,000:1

High Contrast


The thickness of the black layer is lower than the thickness of the chip, avoiding the attenuation phenomenon caused by light penetrating the black layer.

Particular cabinet structure design

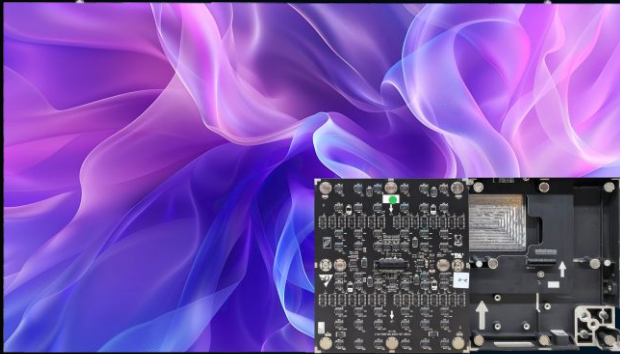

Hard connections for module and power supply

Totally front installation and maintenance.

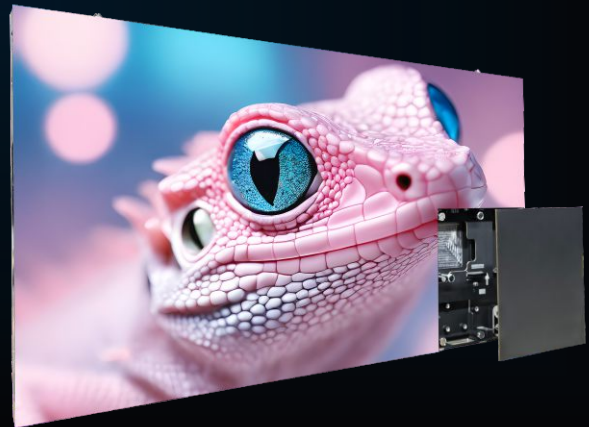


Application



High-end conference



Command center

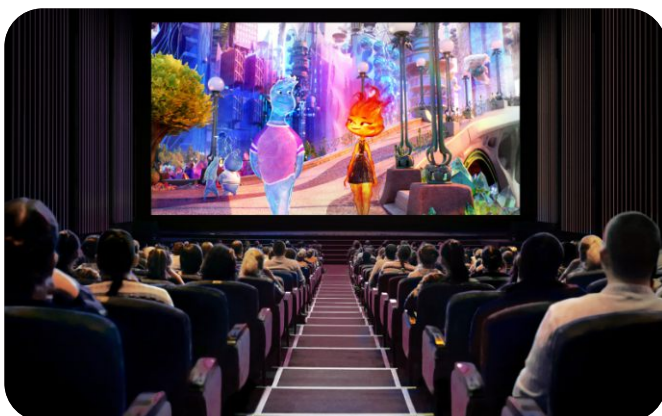

Cinema



TV studio

Specifications

Model Name	FAB-P0.9	FAB-P1.2	FAB-P1.2	FAB-P1.5	FAB-P1.5
Pixel Pitch (mm)	0.9375	1.25	1.25	1.5625	1.5625
Pixel Density (dot/m²)	1,137,777	640,000	640,000	409,600	406,600
LED Sealing Type	COB	COB	COB	COB	COB
Pixel configuration	1R1G1B	1R1G1B	1R1G1B	1R1G1B	1R1G1B
Module Resolution (PX* PX)	160*180	120*135	120*135	96*108	96*108
Module Size (mm * mm)	150*168.75	150*168.75	150*168.75	150*168.75	150*168.75
Module Weight (kg)	0.525	0.525	0.525	0.525	0.525
Contrast Ratio	20,000:1	20,000:1	20,000:1	20,000:1	20,000:1
Horizontal Viewing Angle (Deg)	165	165	165	165	165
Vertical Viewing Angle (Deg)	165	165	165	165	165
Brightness (cd/m²)	600(Standard)				
Drive Mode	Common Cathode	Common Anode	Common Cathode	Common Anode	Common Cathode
Power Consumption Per Square Meter (W/m²)	≤280	≤265	≤245	≤250	≤205
Grey Scale (bit)	13				
Refresh Rate (Hz)	3,840				
Cabinet Size (mm * mm)	600*337.5				
Cabinet Thickness (mm)	29.2mm				
Cabinet Weight (Kg/pc)	4.2				
Input Voltage (V)	AC100-240V 50/60Hz				
Working Temperature (°C)	-20~+40°C				
Working Humidity (RH)	10%~95%RH				
Storage Humidity (RH)	10%~85%RH				
Storage Temperature (°C)	-40~+60°C				
Maintenance Type	Front				
Working Environment	Indoor				
Ingress Protection	IP50/IP20				
Certificates	3C、EMC CLASS-A、CE、ROHS				



www.fabuluxled.com

FABULUX HQ SZ | FABULUX DG | FABULUX US | FABULUX EU | FABULUX ME
fabulux@fabuluxled.com