


Beam layout enumeration (RAW) Case 1/4 [R001]

Span: 7.00m (X) x 5.00m (Y) Stop: short side <= 3.00m
Step decisions: LONG:3 mapped dedup: D001
System=ENUM_Y_SUP Dir=XY Pitch=X=1.25, Y=2.33333 OK=YES TotalW=6.065 kN UtilMax=0.964
Step colors: S1 S2

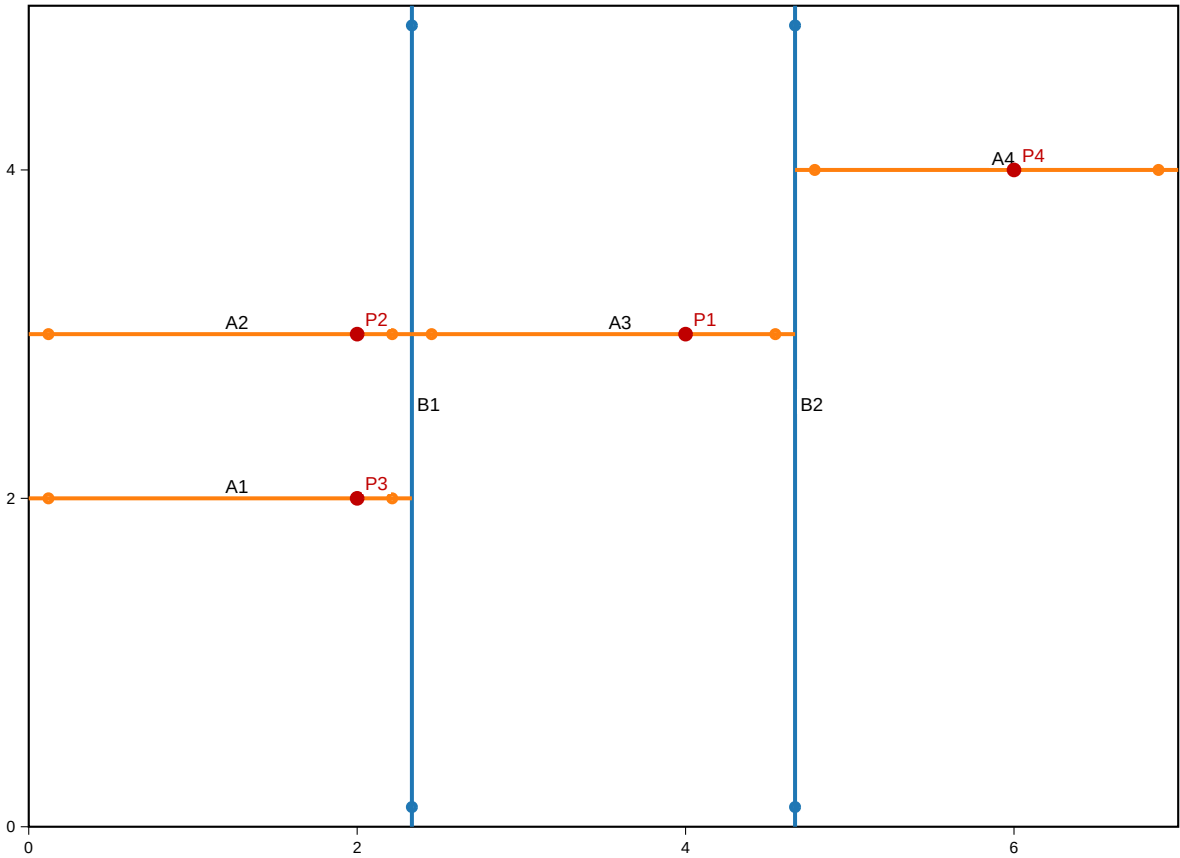

Summary


Lx=7 m, Ly=5 m
Segments=6, Steps=2
Worst member=B1

Beam coordinate list (m)

ID	Step	Ty	Const	Rank	Section	Start (x,y)	End (x,y)
B1	1	Y	2.33	17	H-350x175x7x11	(2.33,0.00)	(2.33,5.00)
B2	1	Y	4.67	15	H-346x174x6x9	(4.67,0.00)	(4.67,5.00)
A1	2	X	2.00	1	H-150x75x5x7	(0.00,2.00)	(2.33,2.00)
A2	2	X	3.00	3	H-198x99x4.5x7	(0.00,3.00)	(2.33,3.00)
A3	2	X	3.00	8	H-248x124x5x8	(2.33,3.00)	(4.67,3.00)
A4	2	X	4.00	1	H-150x75x5x7	(4.67,4.00)	(7.00,4.00)

Beam layout enumeration (RAW) Case 2/4 [R002]

Span: 7.00m (X) x 5.00m (Y) Stop: short side <= 3.00m
Step decisions: SHORT:2 mapped dedup: D002
System=ENUM_X_SUP Dir=XY Pitch=X=2.5, Y=1.75 OK=YES TotalW=6.880 kN UtilMax=0.962
Step colors: S1 S2

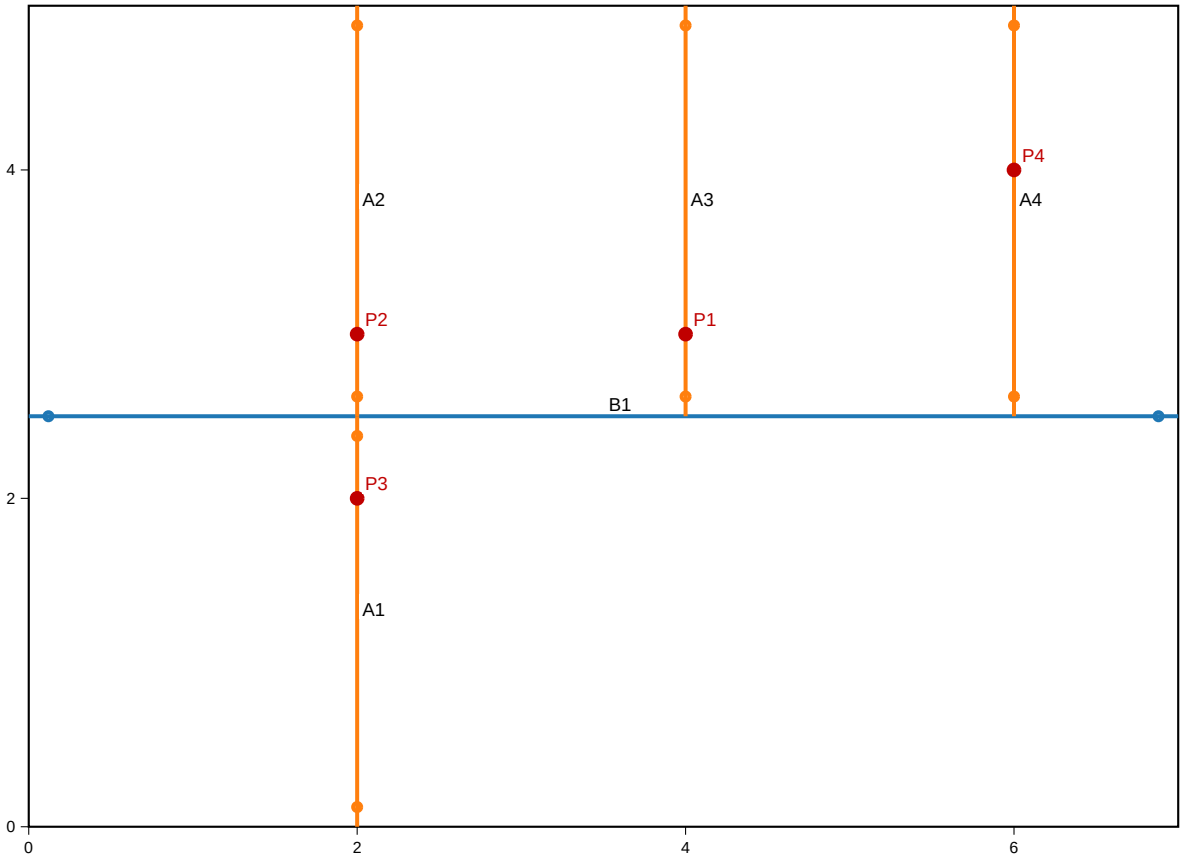

Summary


Lx=7 m, Ly=5 m
Segments=5, Steps=2
Worst member=B1

Beam coordinate list (m)

ID	Step	Ty	Const	Rank	Section	Start (x,y)	End (x,y)
B1	1	X	2.50	31	H-404x201x9x15	(0.00,2.50)	(7.00,2.50)
A1	2	Y	2.00	1	H-150x75x5x7	(2.00,0.00)	(2.00,2.50)
A2	2	Y	2.00	3	H-198x99x4.5x7	(2.00,2.50)	(2.00,5.00)
A3	2	Y	4.00	8	H-248x124x5x8	(4.00,2.50)	(4.00,5.00)
A4	2	Y	6.00	1	H-150x75x5x7	(6.00,2.50)	(6.00,5.00)

Beam layout enumeration (RAW) Case 3/4 [R003]

Span: 7.00m (X) x 5.00m (Y) Stop: short side <= 3.00m
Step decisions: LONG:2 -> LONG:2 mapped dedup: D003
System=GRID_ENUM_SUP Dir=XY Pitch=X=2.5, Y=1.4 OK=YES TotalW=6.449 kN UtilMax=0.966
Step colors: S1 S2 S3

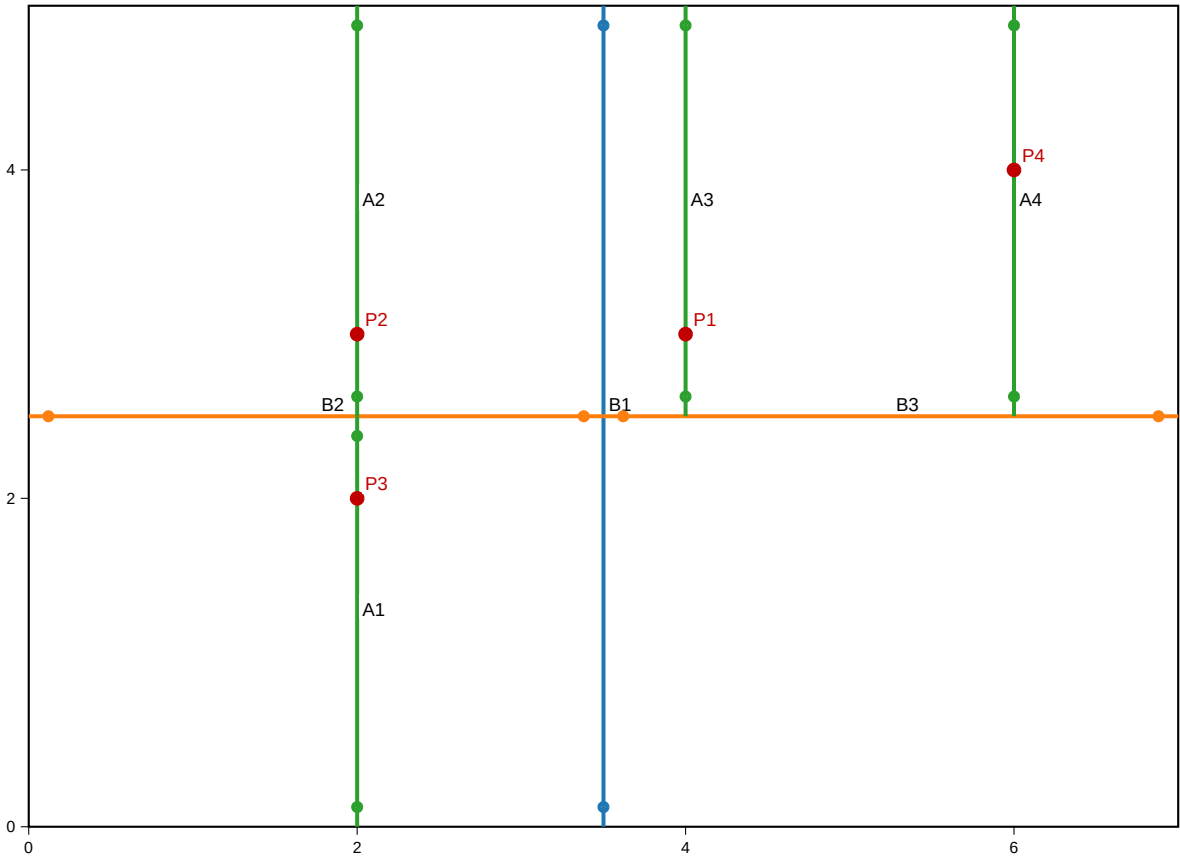

Legend: line color=step (Smax+1 means concentrated-load support lines), end dots=pin markers, red dots=point loads

Summary


Lx=7 m, Ly=5 m
Segments=7, Steps=3
Worst member=B2

Beam coordinate list (m)

ID	Step	Ty	Const	Rank	Section	Start (x,y)	End (x,y)
B1	1	Y	3.50	20	H-396x199x7x11	(3.50,0.00)	(3.50,5.00)
B2	2	X	2.50	12	H-298x149x5.5x8	(0.00,2.50)	(3.50,2.50)
B3	2	X	2.50	8	H-248x124x5x8	(3.50,2.50)	(7.00,2.50)
A1	3	Y	2.00	1	H-150x75x5x7	(2.00,0.00)	(2.00,2.50)
A2	3	Y	2.00	3	H-198x99x4.5x7	(2.00,2.50)	(2.00,5.00)
A3	3	Y	4.00	8	H-248x124x5x8	(4.00,2.50)	(4.00,5.00)
A4	3	Y	6.00	1	H-150x75x5x7	(6.00,2.50)	(6.00,5.00)

Beam layout enumeration (RAW) Case 4/4 [R004]

Span: 7.00m (X) x 5.00m (Y) Stop: short side <= 3.00m
Step decisions: LONG:2 -> SHORT:2 mapped dedup: D004
System=ENUM_Y_SUP Dir=XY Pitch=X=1.25, Y=1.75 OK=YES TotalW=6.423 kN UtilMax=0.949
Step colors: S1 S2 S3

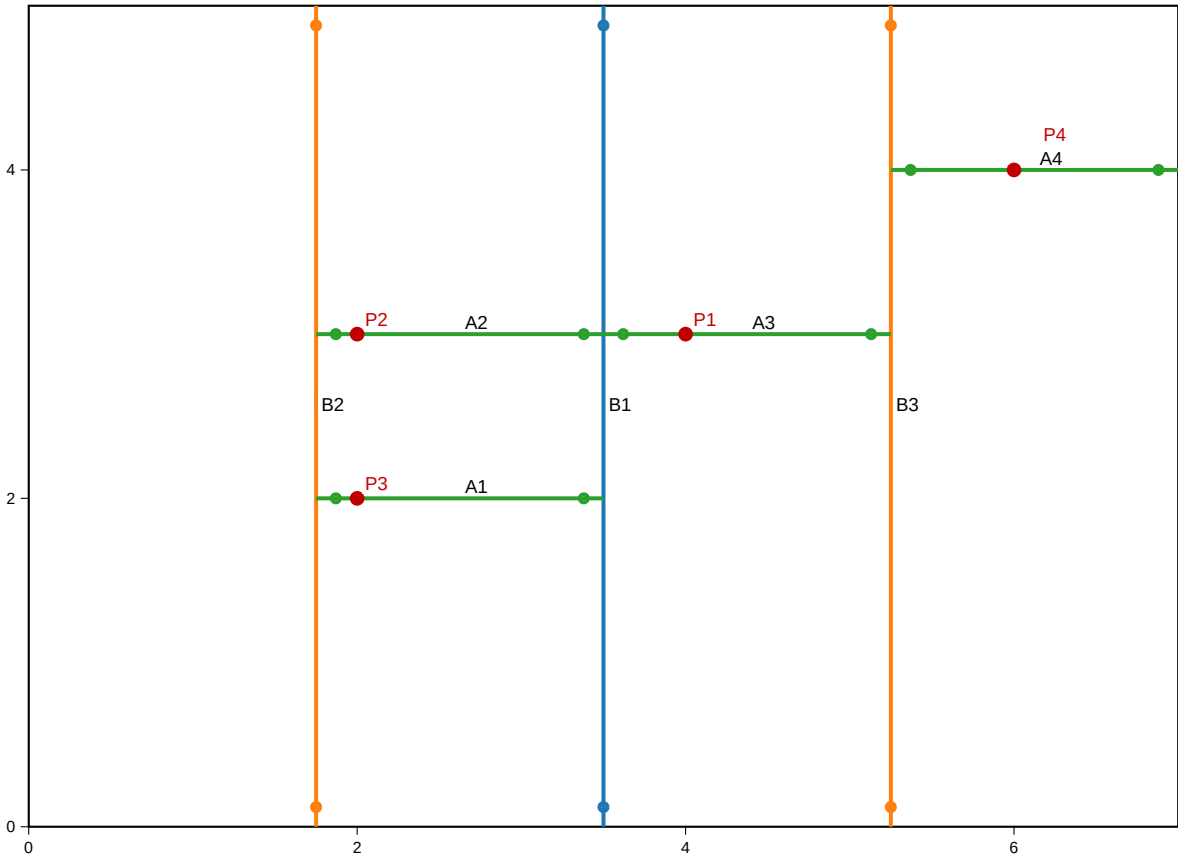

Summary

Lx=7 m, Ly=5 m
Segments=7, Steps=3
Worst member=B3

Beam coordinate list (m)

ID	Step	Ty	Const	Rank	Section	Start (x,y)	End (x,y)
B1	1	Y	3.50	15	H-346x174x6x9	(3.50,0.00)	(3.50,5.00)
B2	2	Y	1.75	15	H-346x174x6x9	(1.75,0.00)	(1.75,5.00)
B3	2	Y	5.25	8	H-248x124x5x8	(5.25,0.00)	(5.25,5.00)
A1	3	X	2.00	1	H-150x75x5x7	(1.75,2.00)	(3.50,2.00)
A2	3	X	3.00	1	H-150x75x5x7	(1.75,3.00)	(3.50,3.00)
A3	3	X	3.00	8	H-248x124x5x8	(3.50,3.00)	(5.25,3.00)
A4	3	X	4.00	1	H-150x75x5x7	(5.25,4.00)	(7.00,4.00)