




TCN19-280 (spider v2), transmission normalized during prestorage


UCN-count-to-monitor ratio

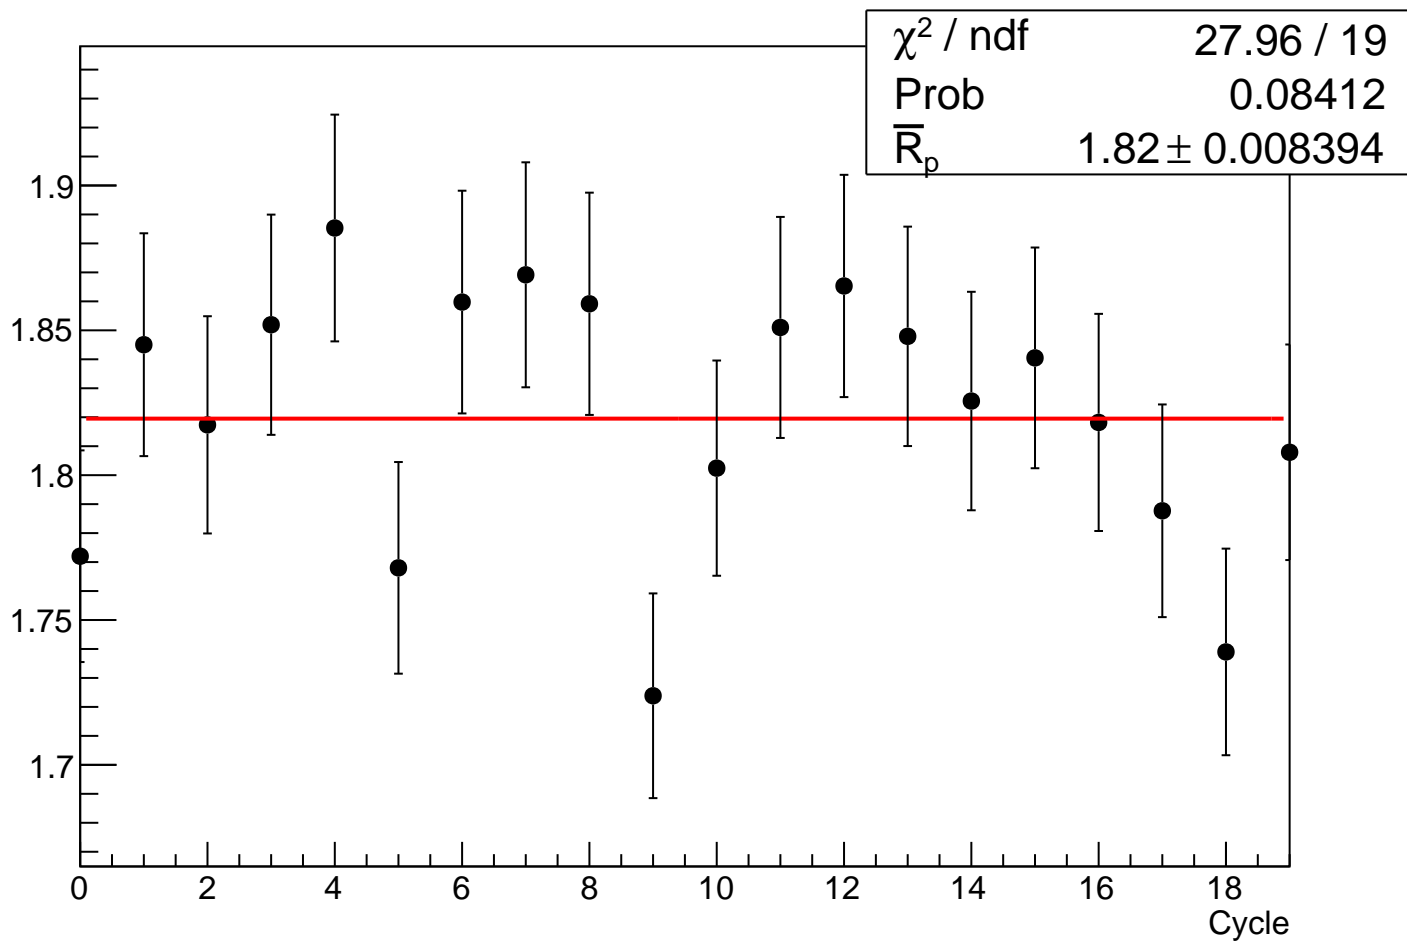


Graph

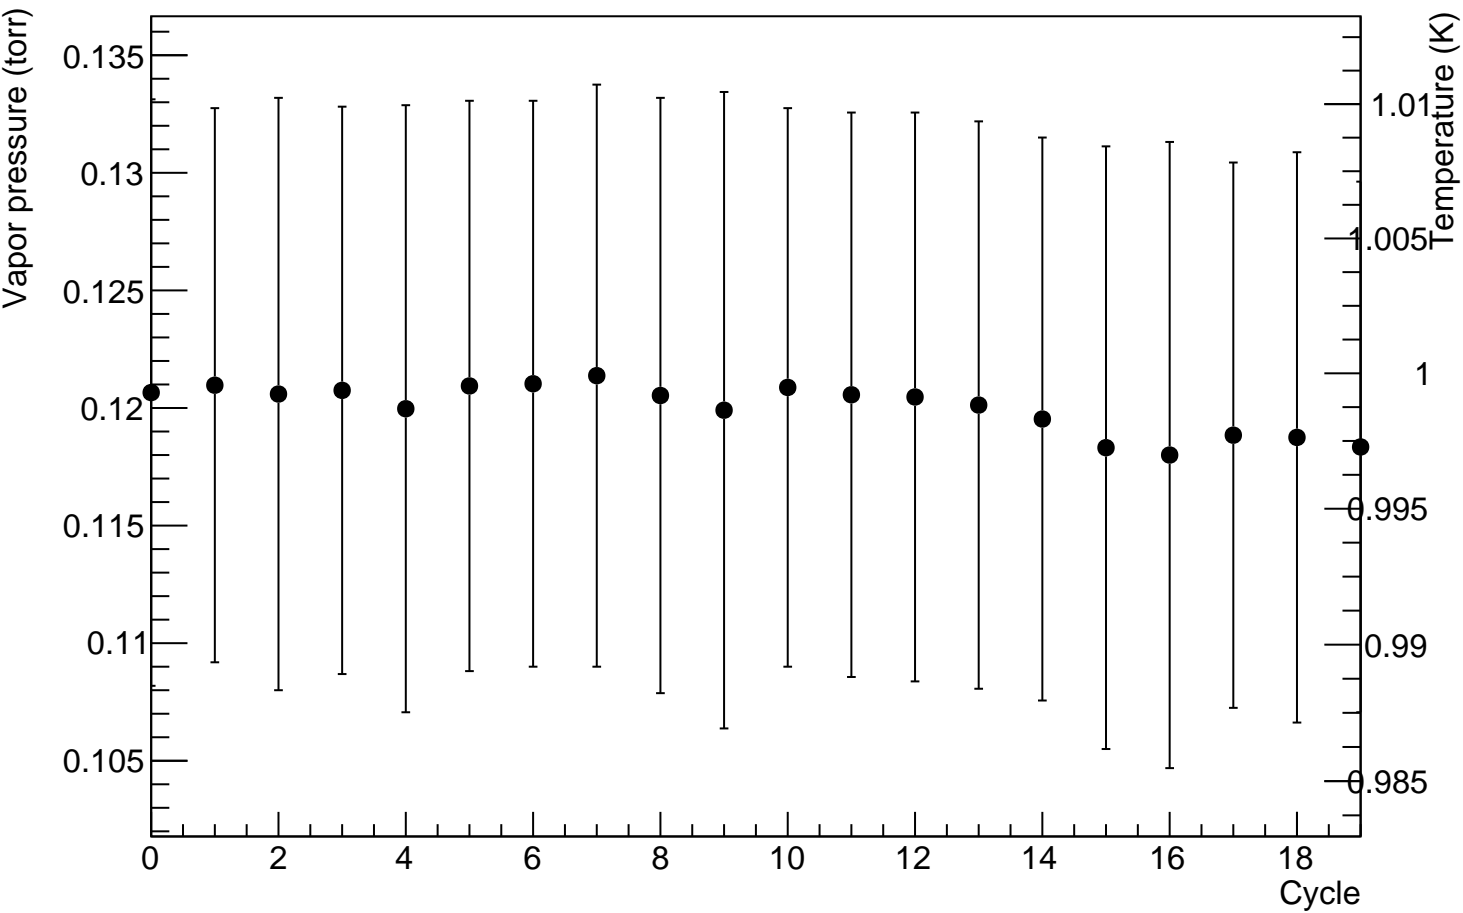


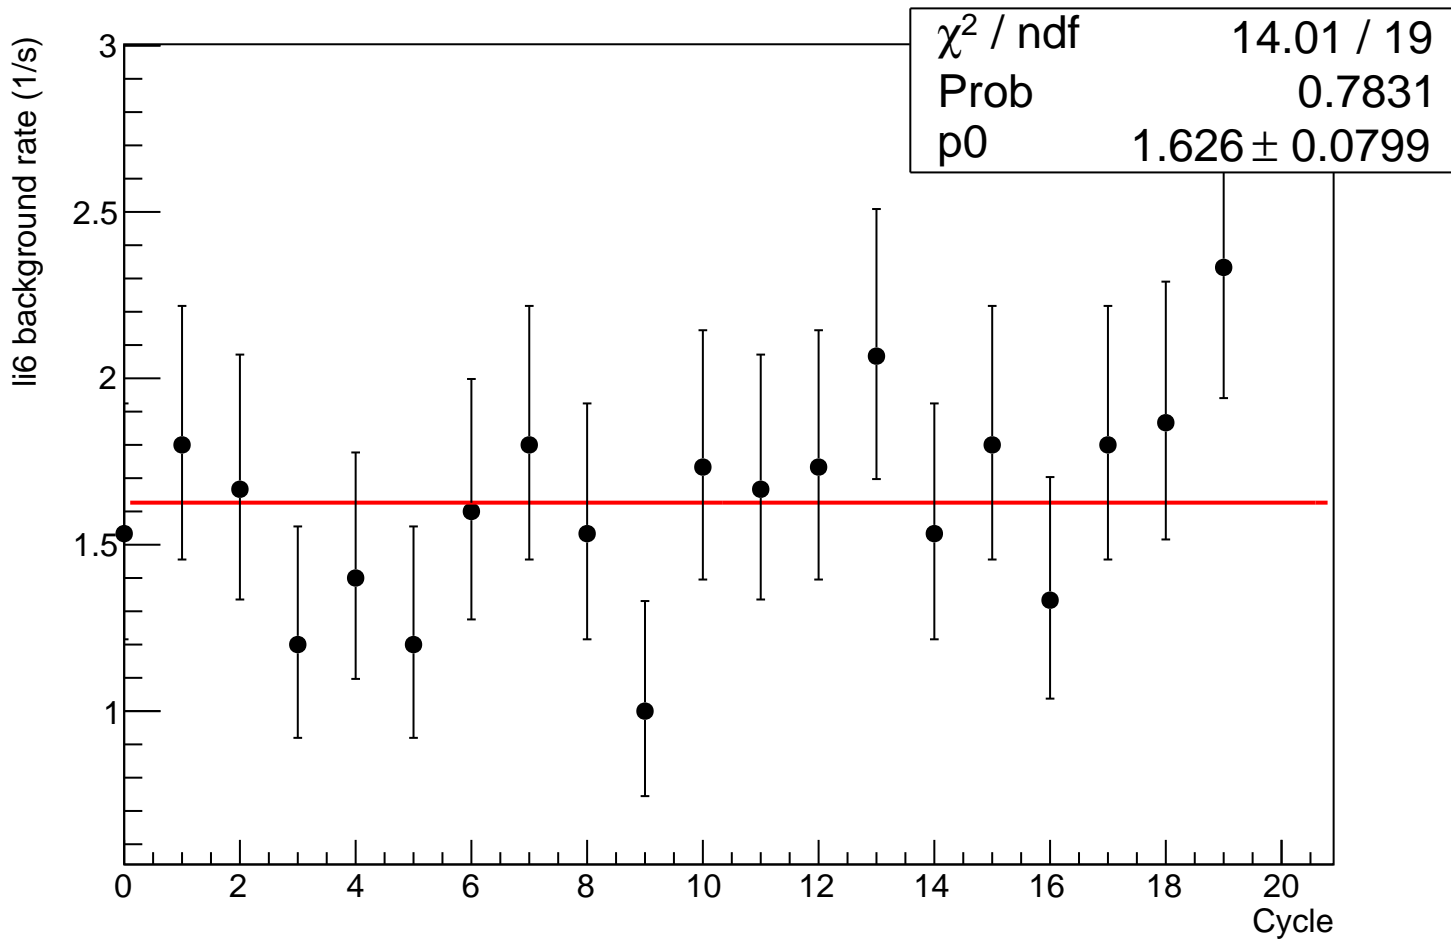


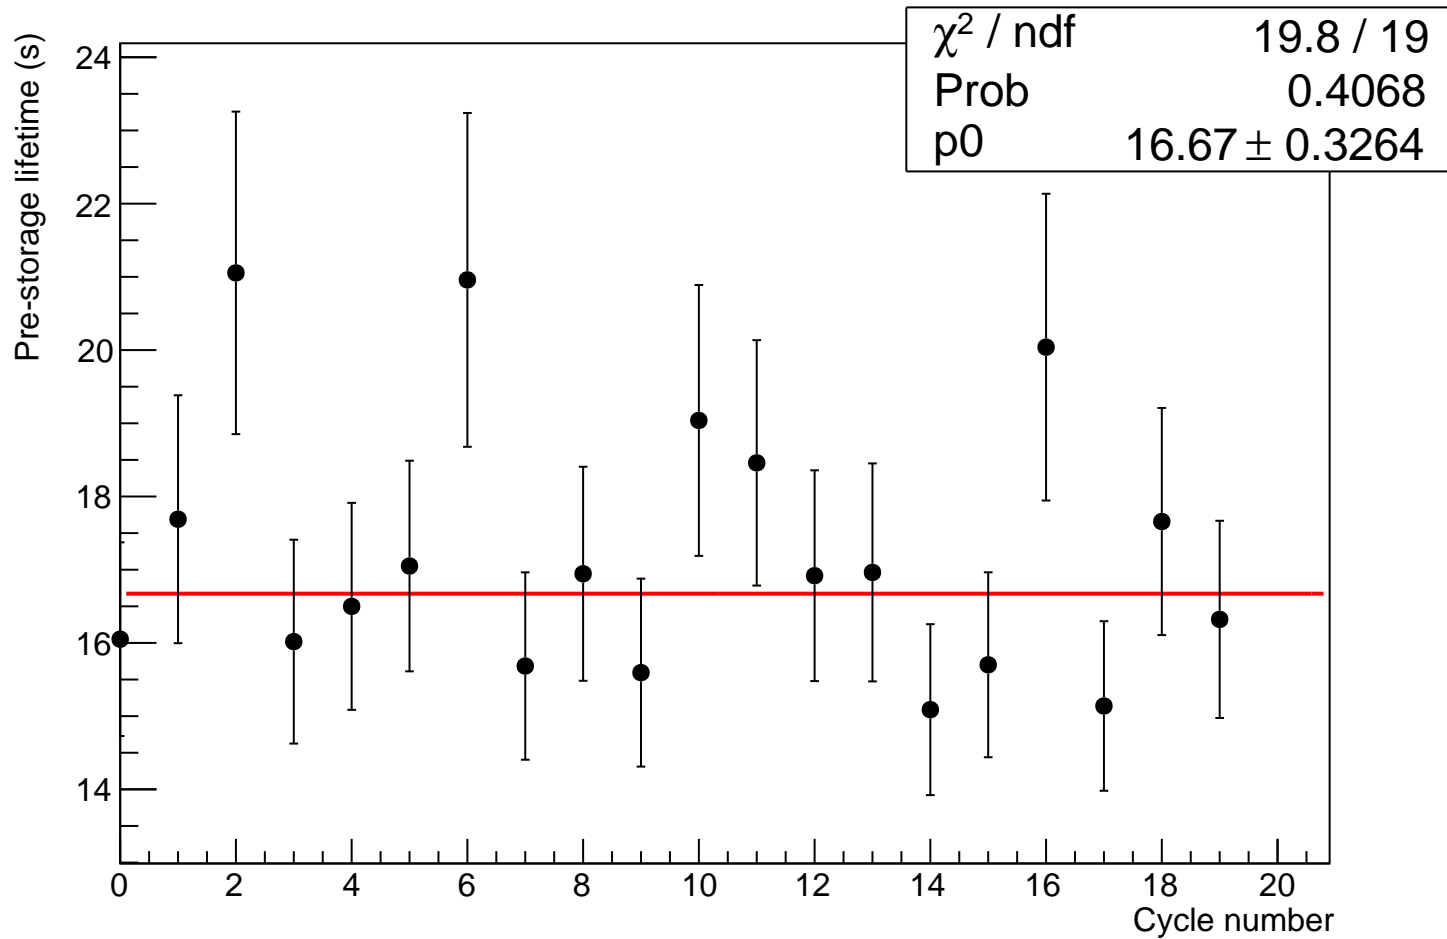


Corrected Li6-He3 ratio

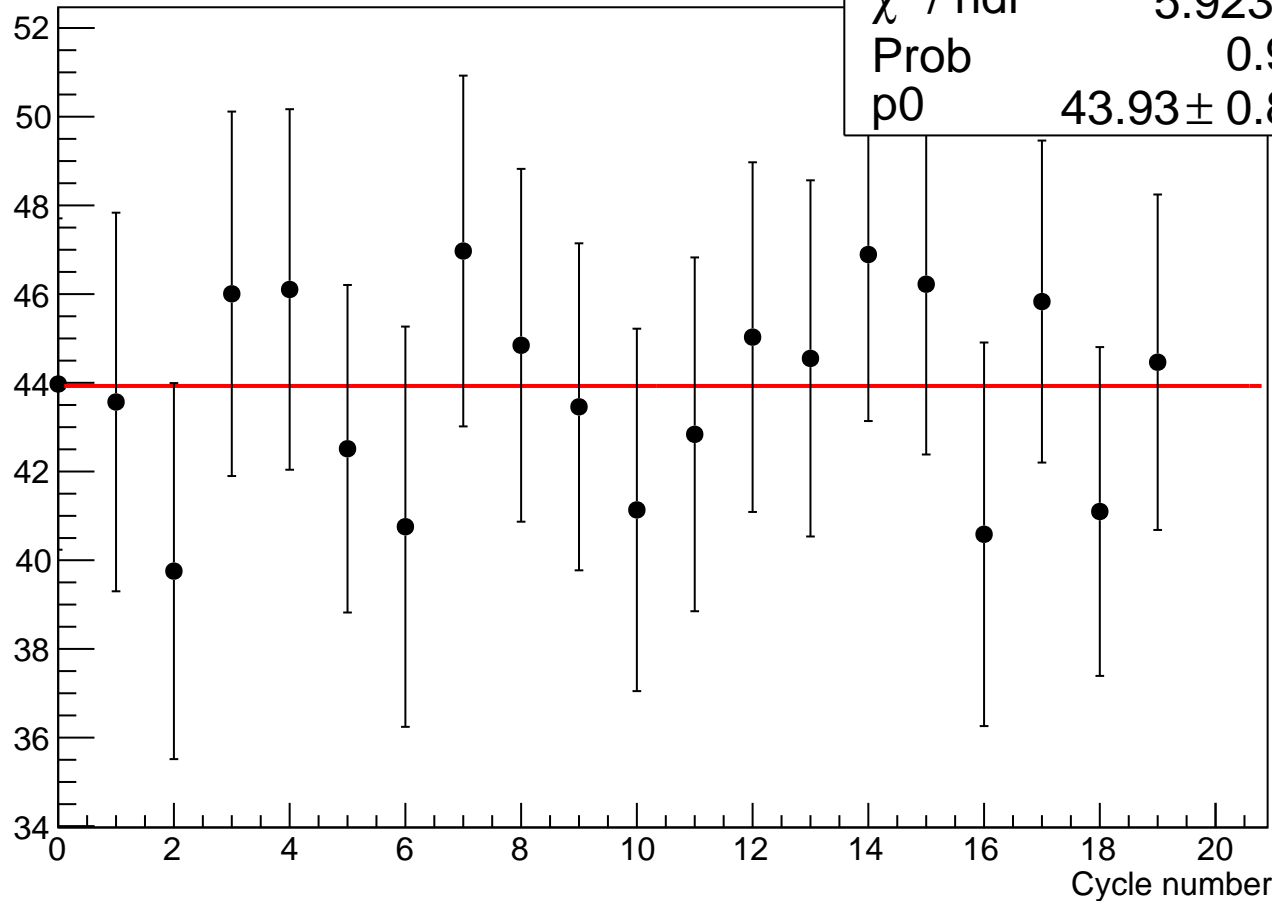

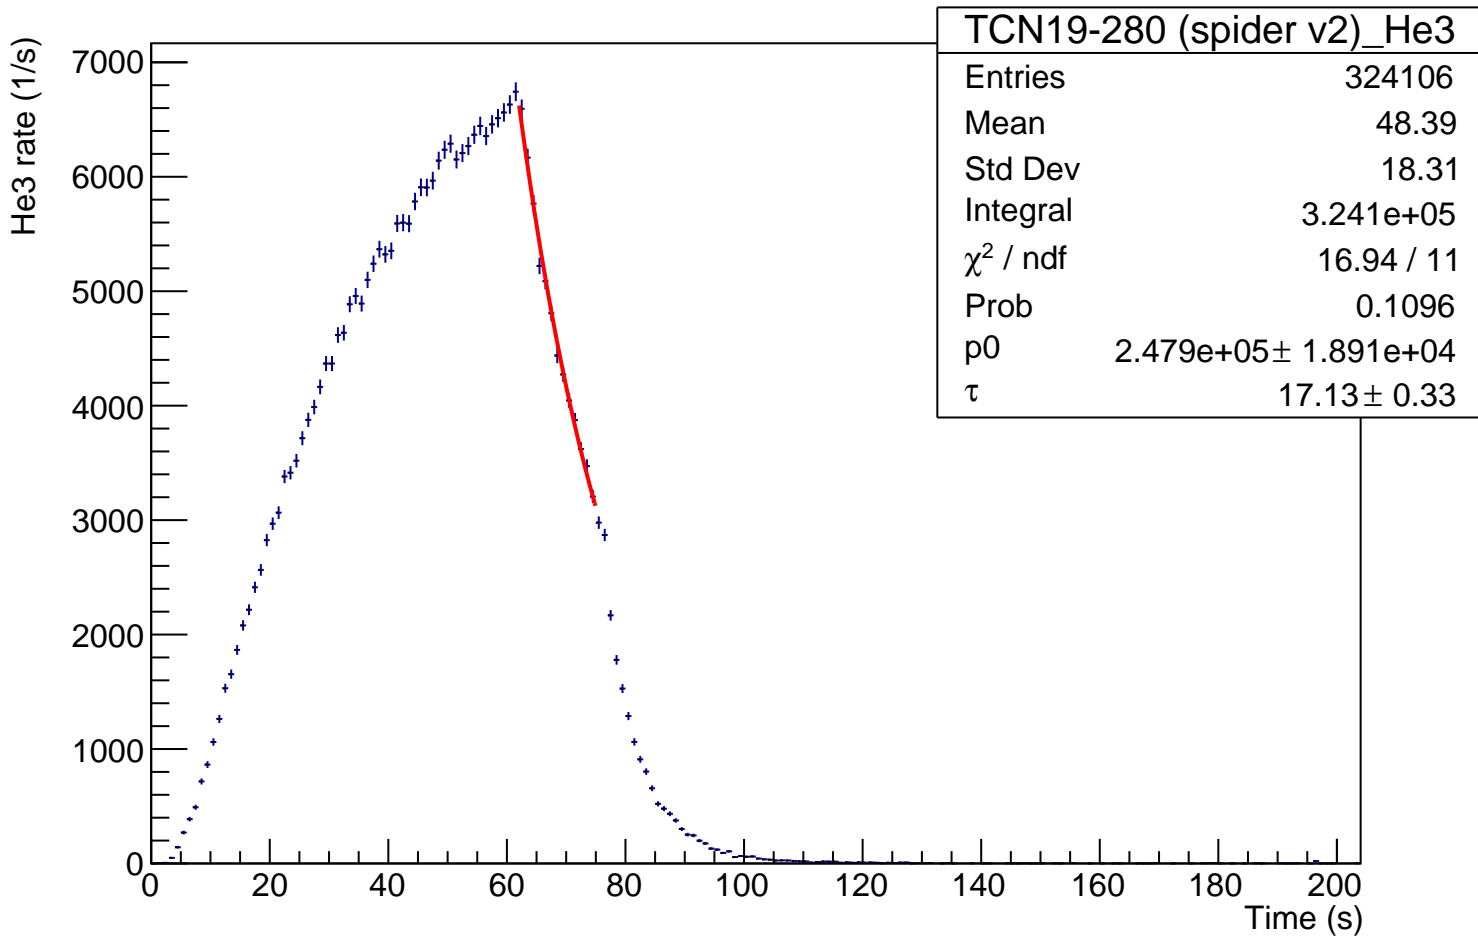


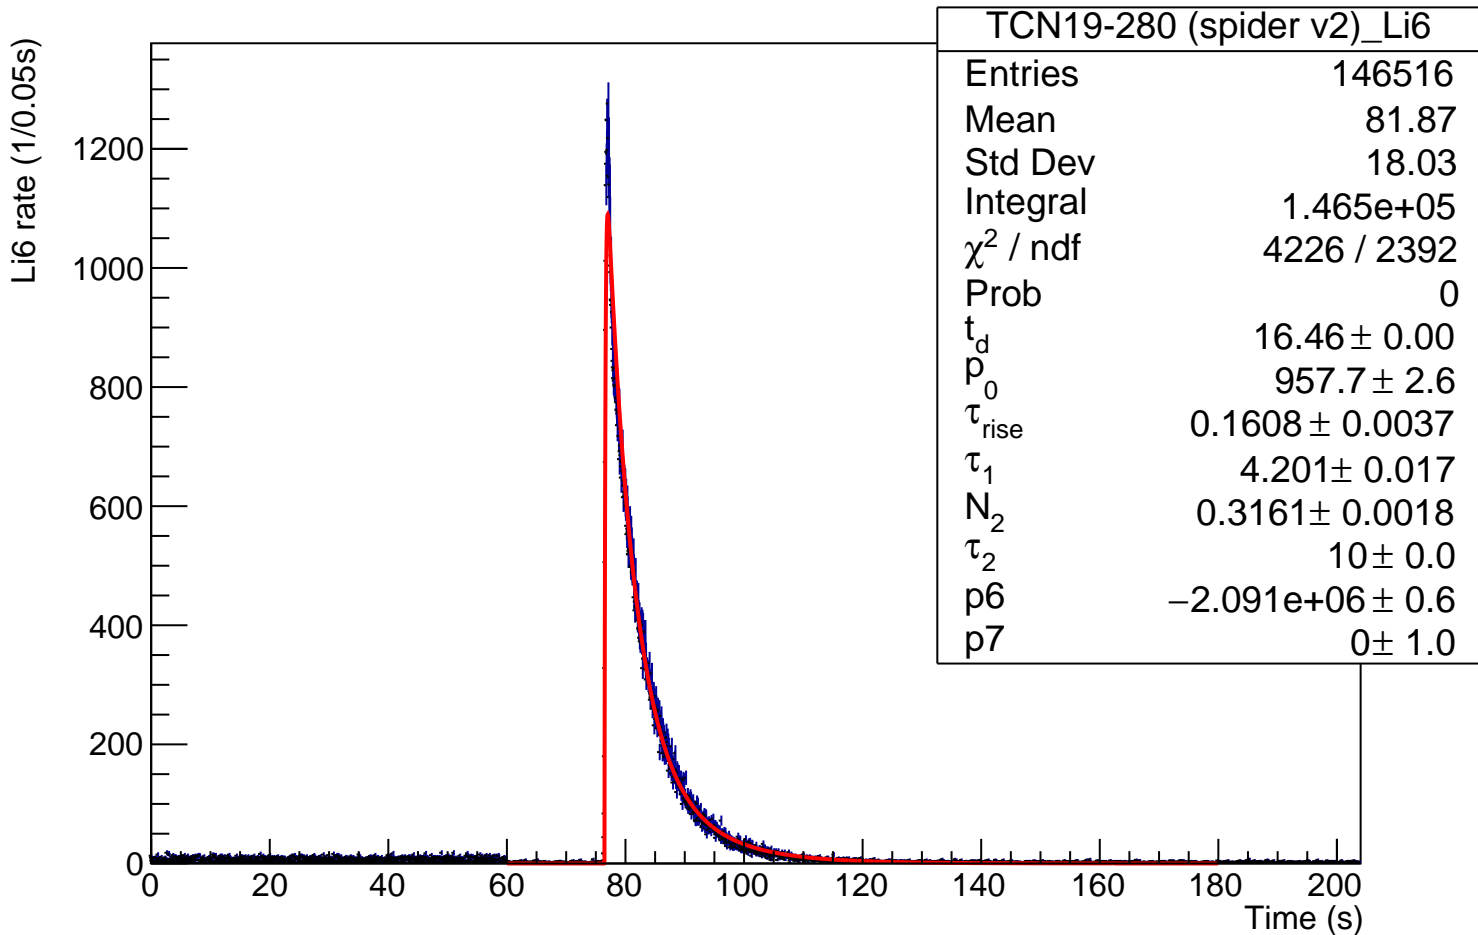

Normalized Li6 rate (1/0.05s)

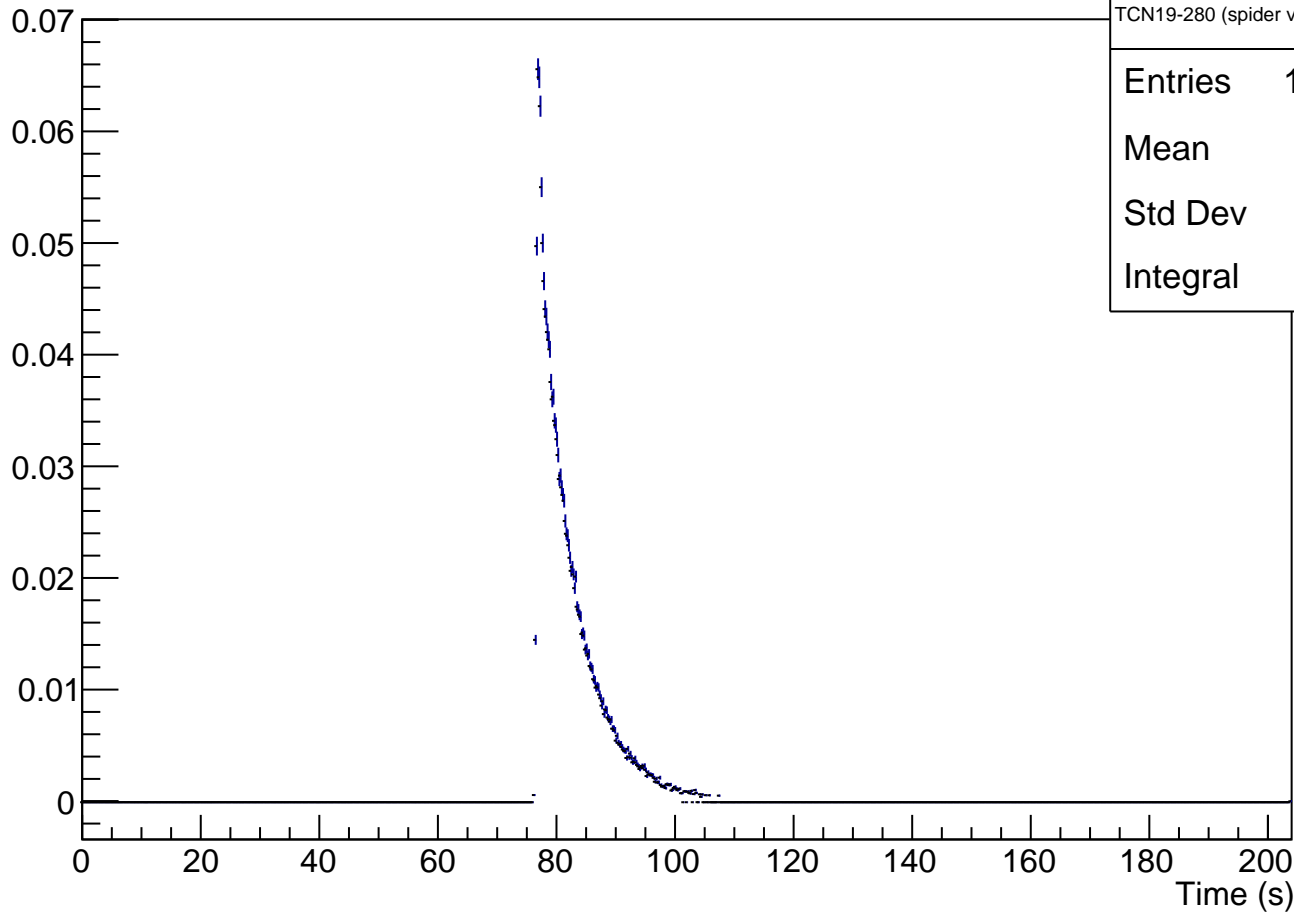

Ratio of cumulated rates

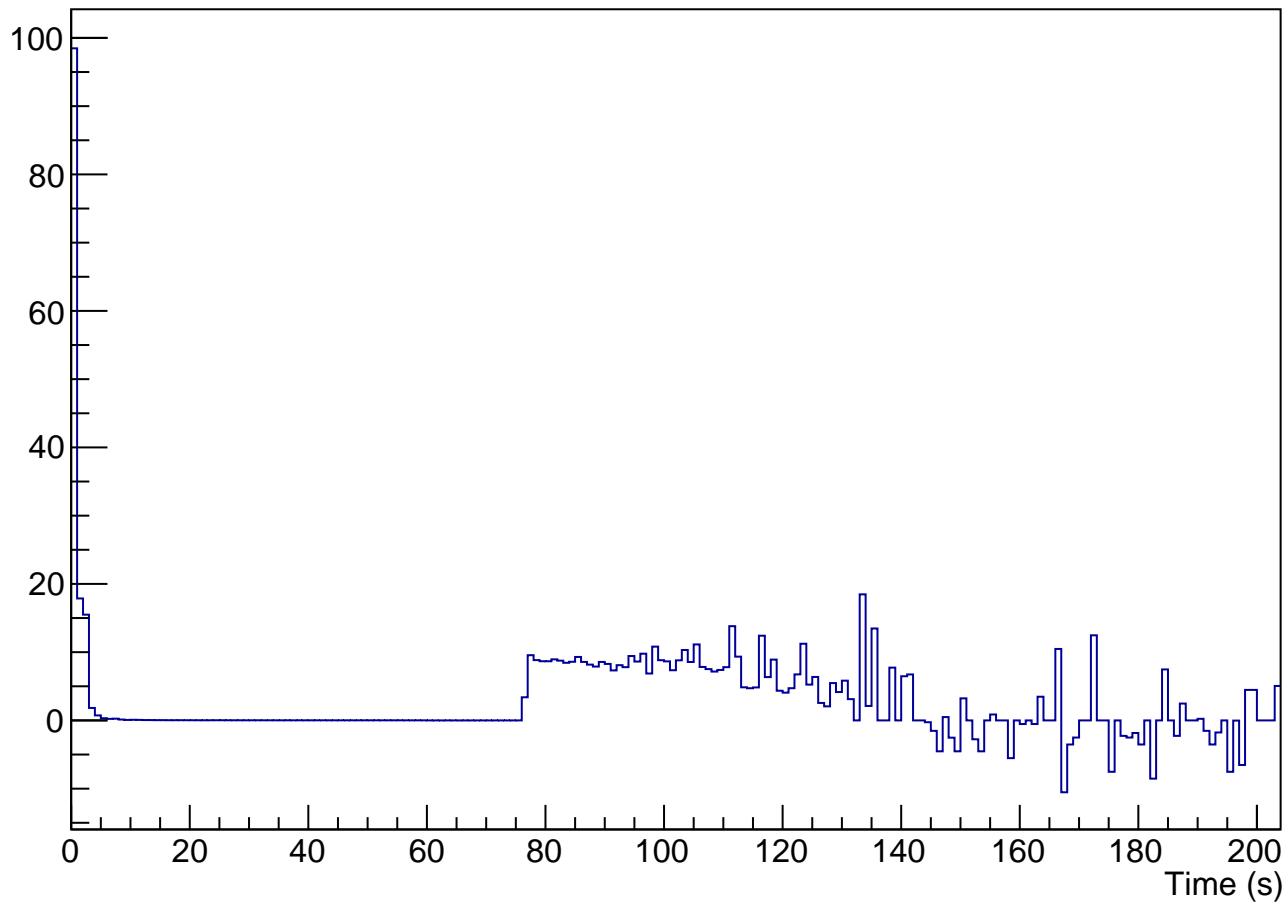

Average rate ratio


TCN19-280 (spider v2)_ratio

Entries 295


Mean 104.3

Std Dev 19.54

Integral 35.46

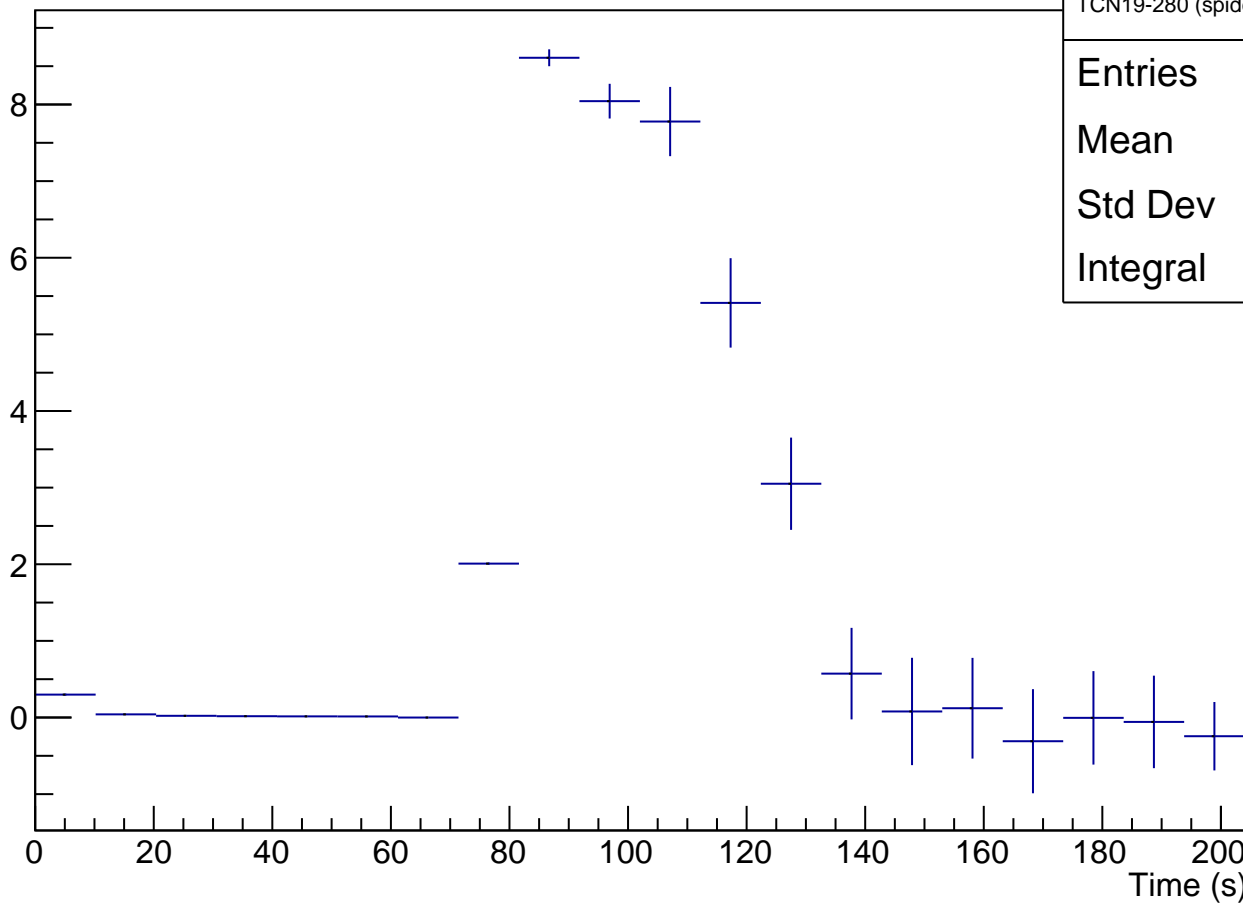

TCN19-280 (spider v2)

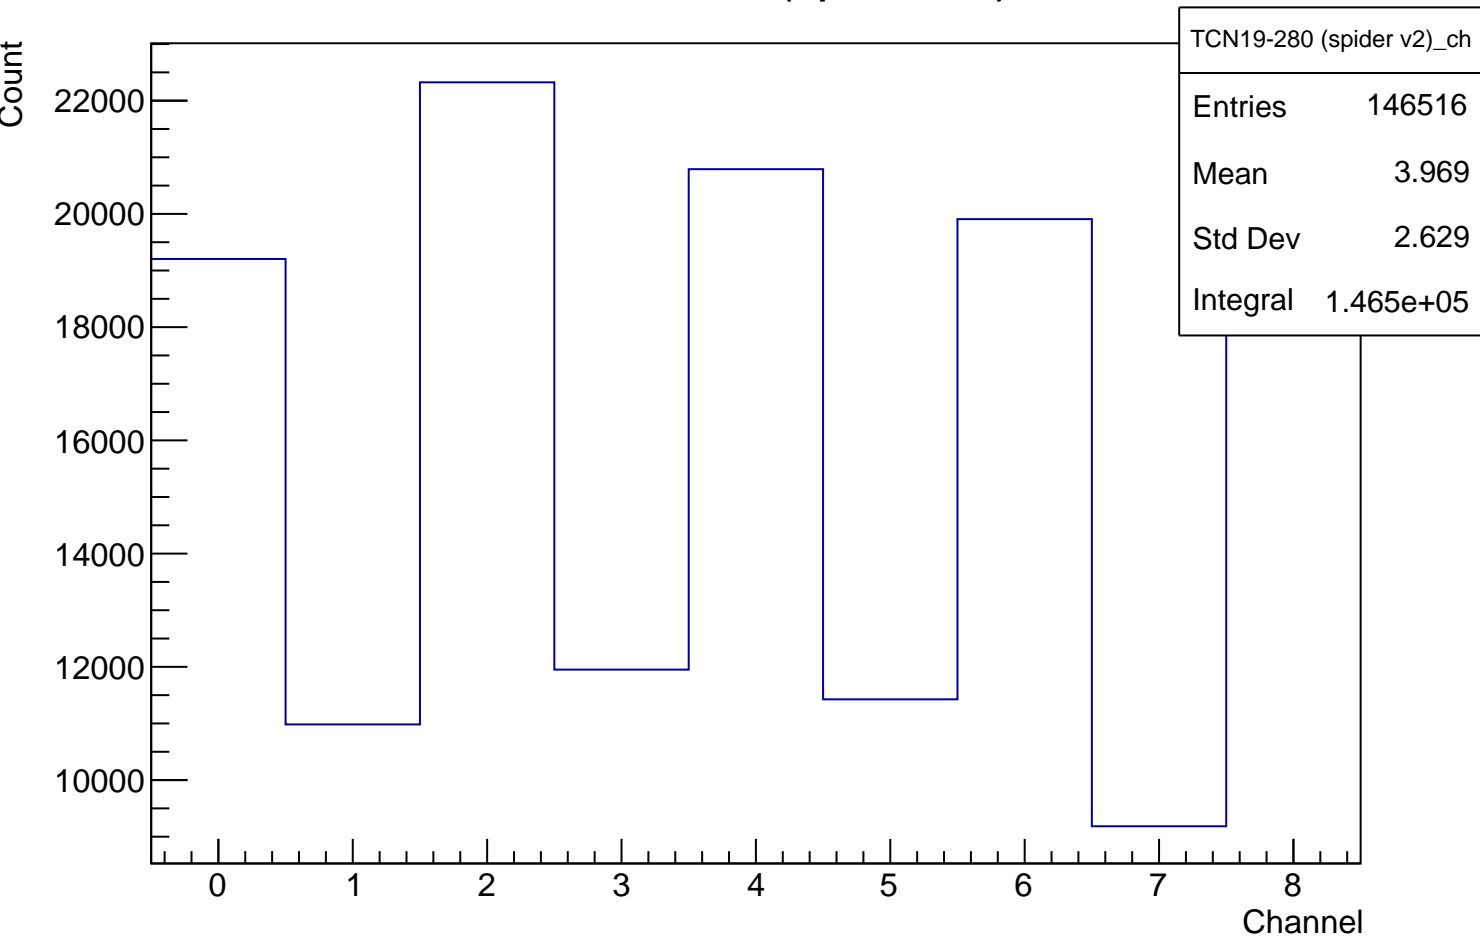

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 20

Mean 0

Std Dev 0

Integral 0