




TCN19-120A, transmission normalized during prestorage


UCN-count-to-monitor ratio

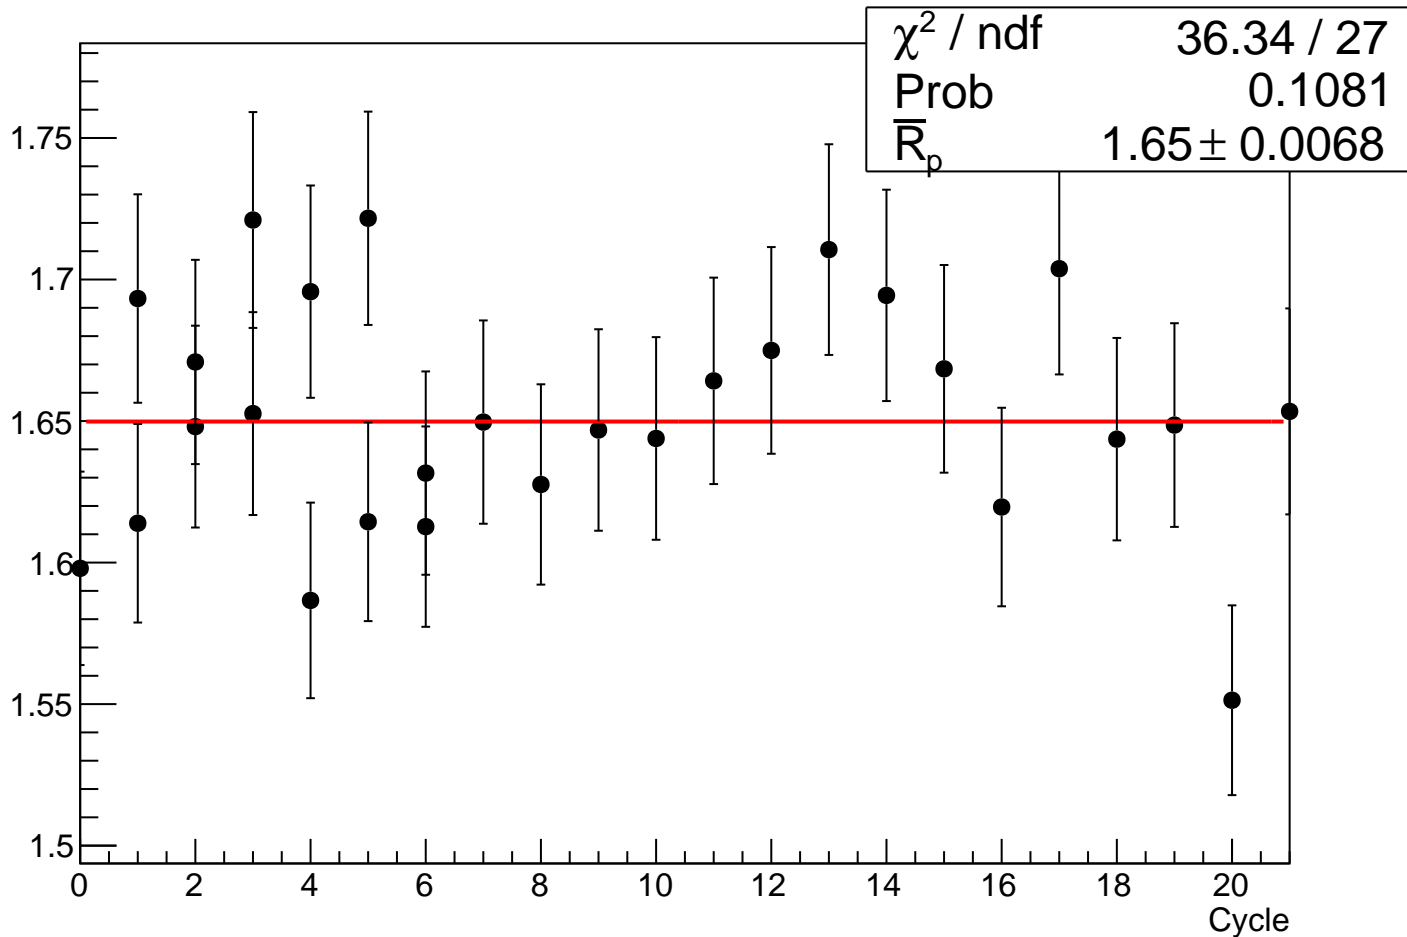

Graph

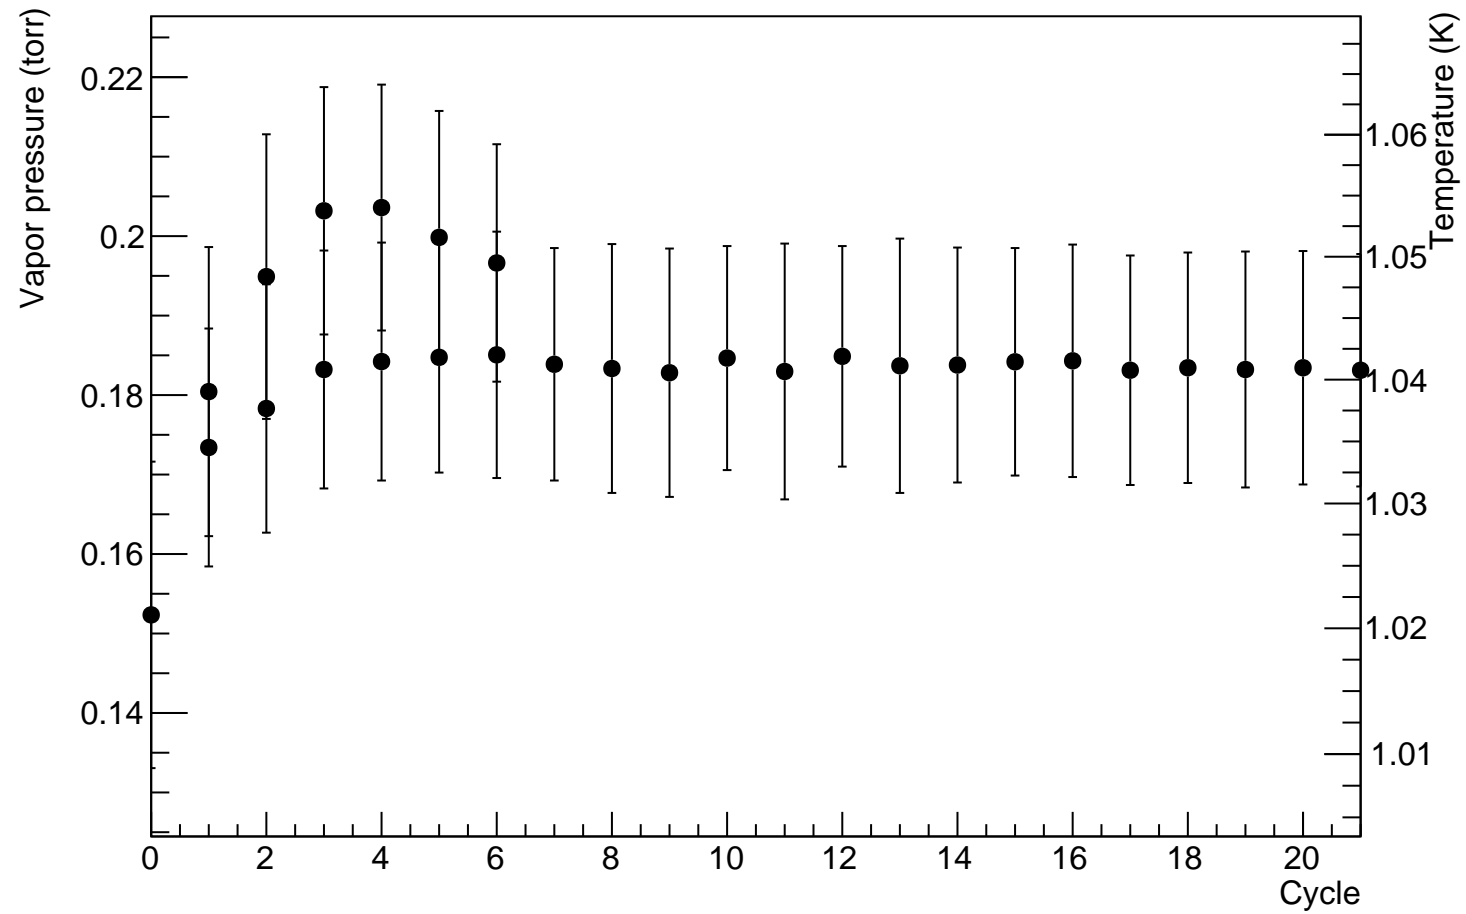


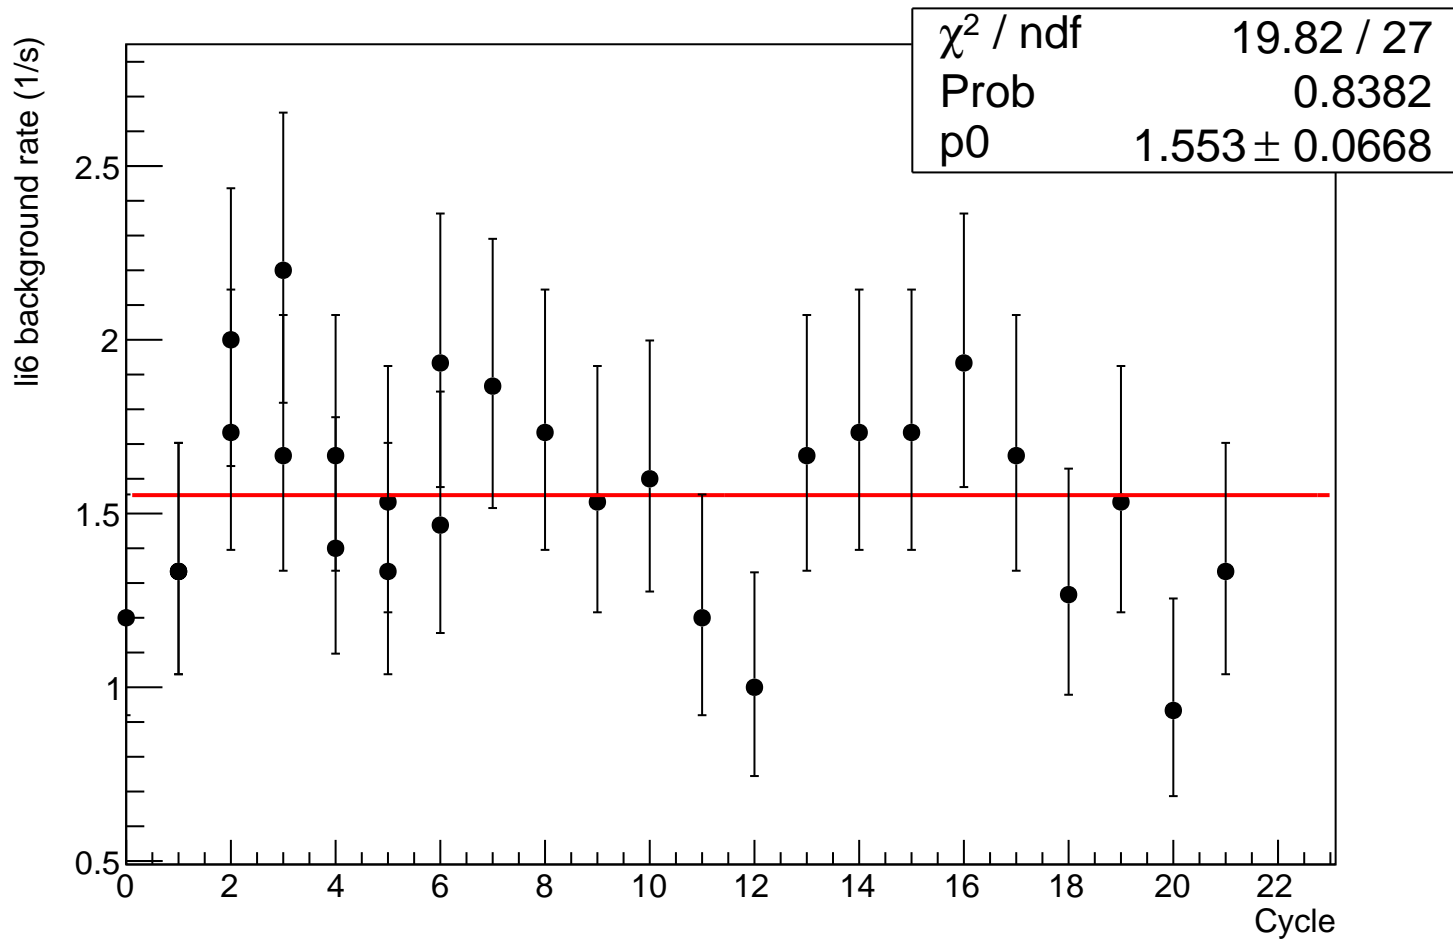


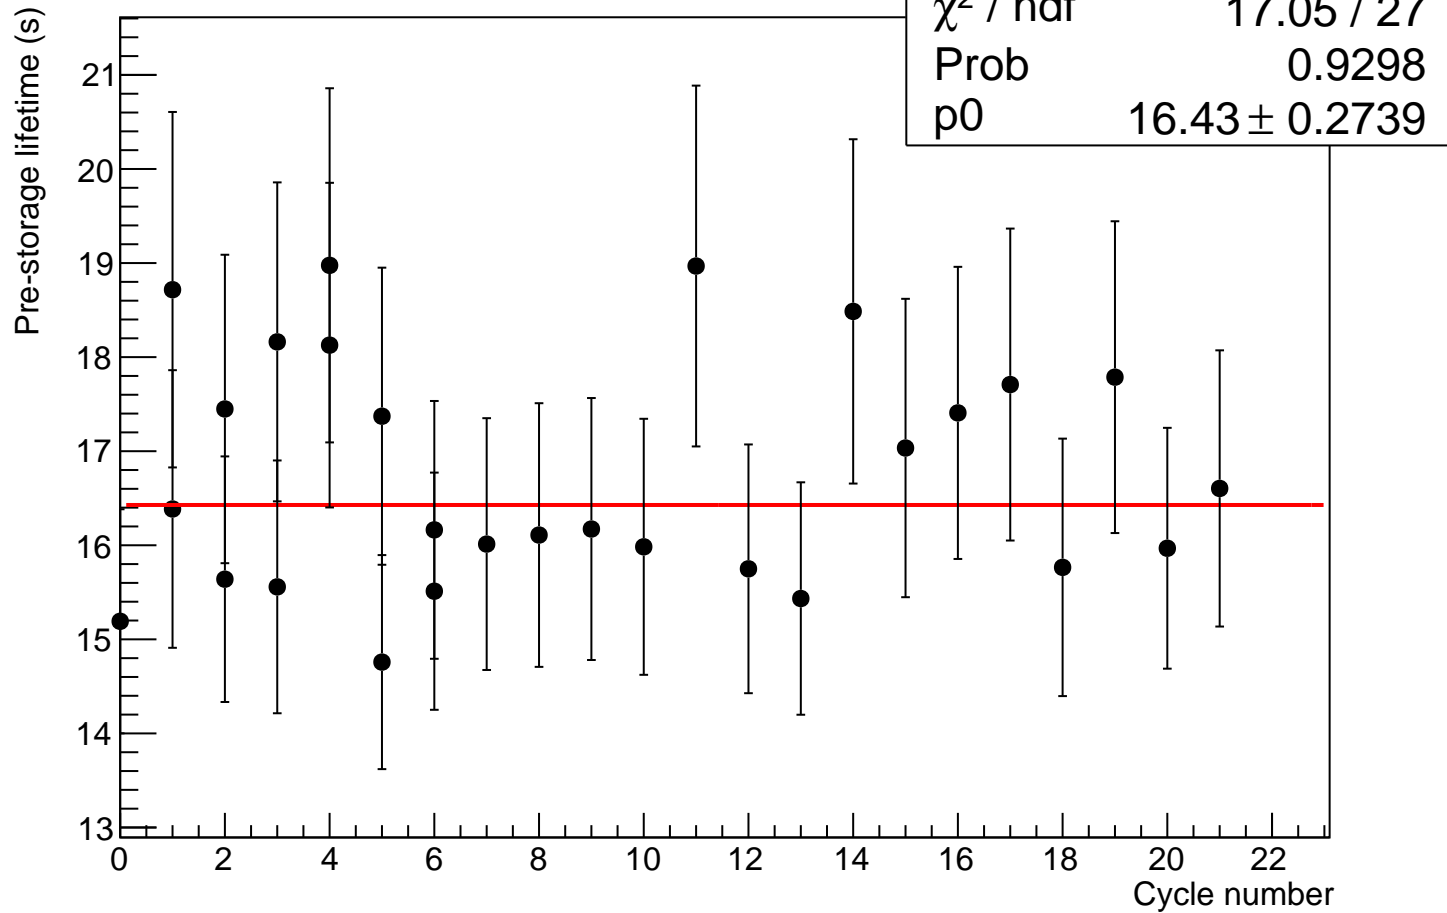


Corrected Li6-He3 ratio

χ^2 / ndf 4.647 / 27
Prob 1
p0 40.23 ± 0.6903

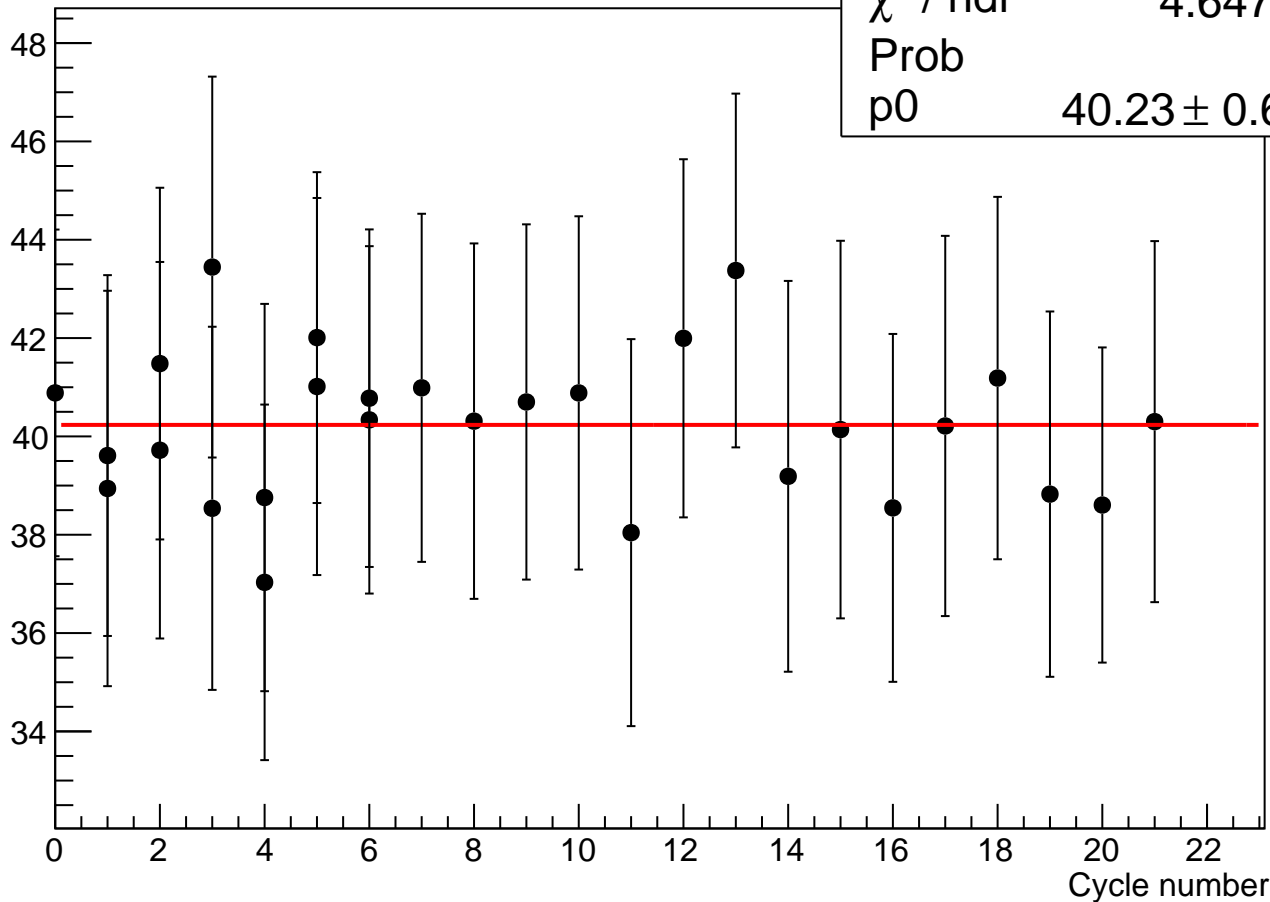


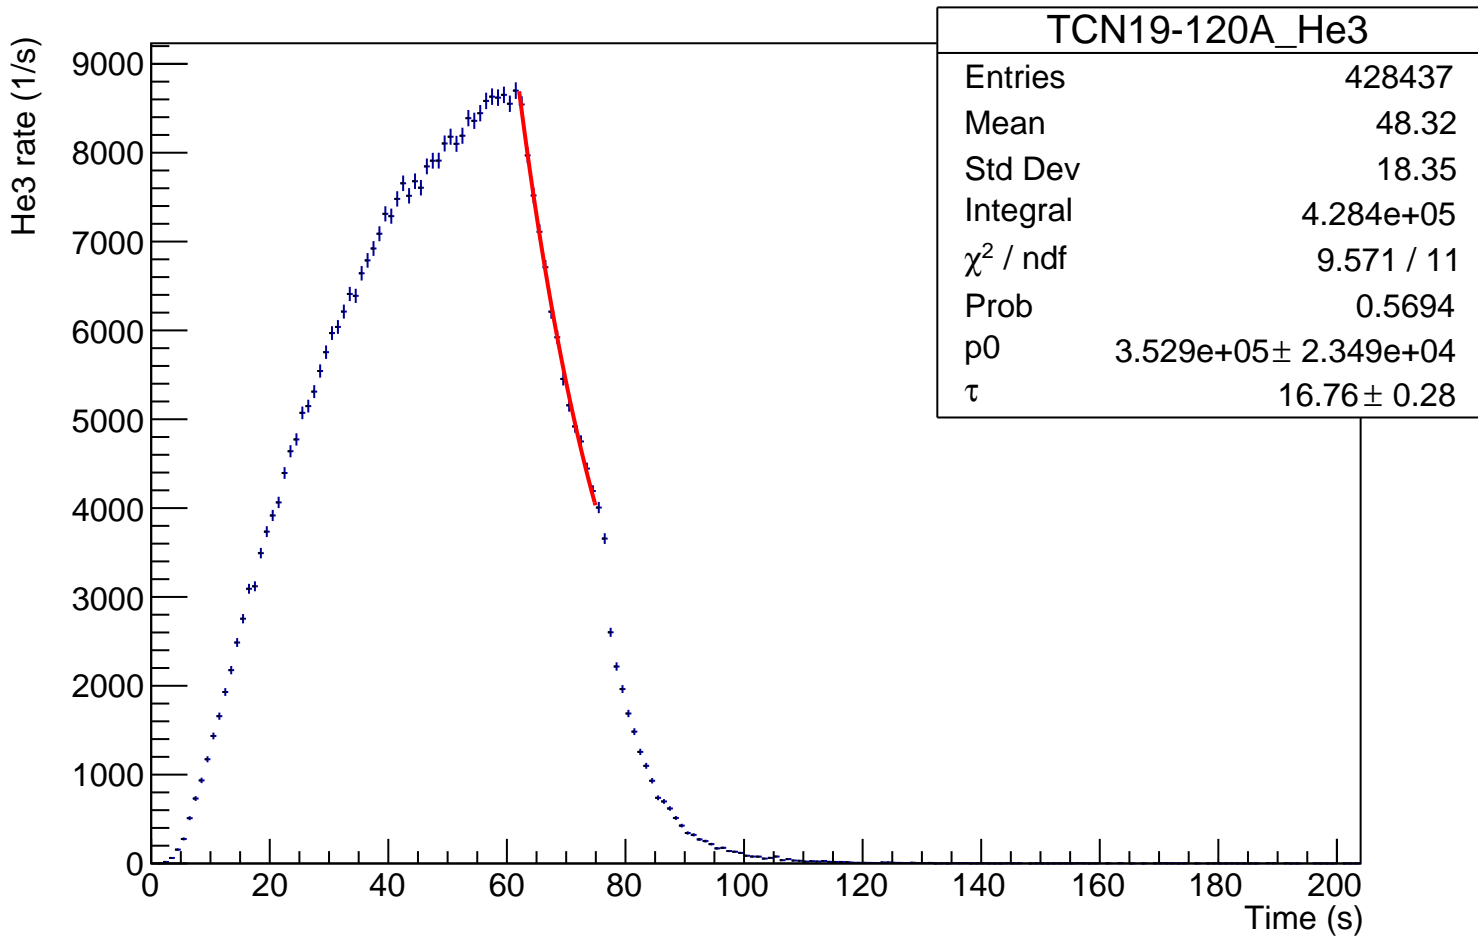


Li6 rate (1/0.05s)

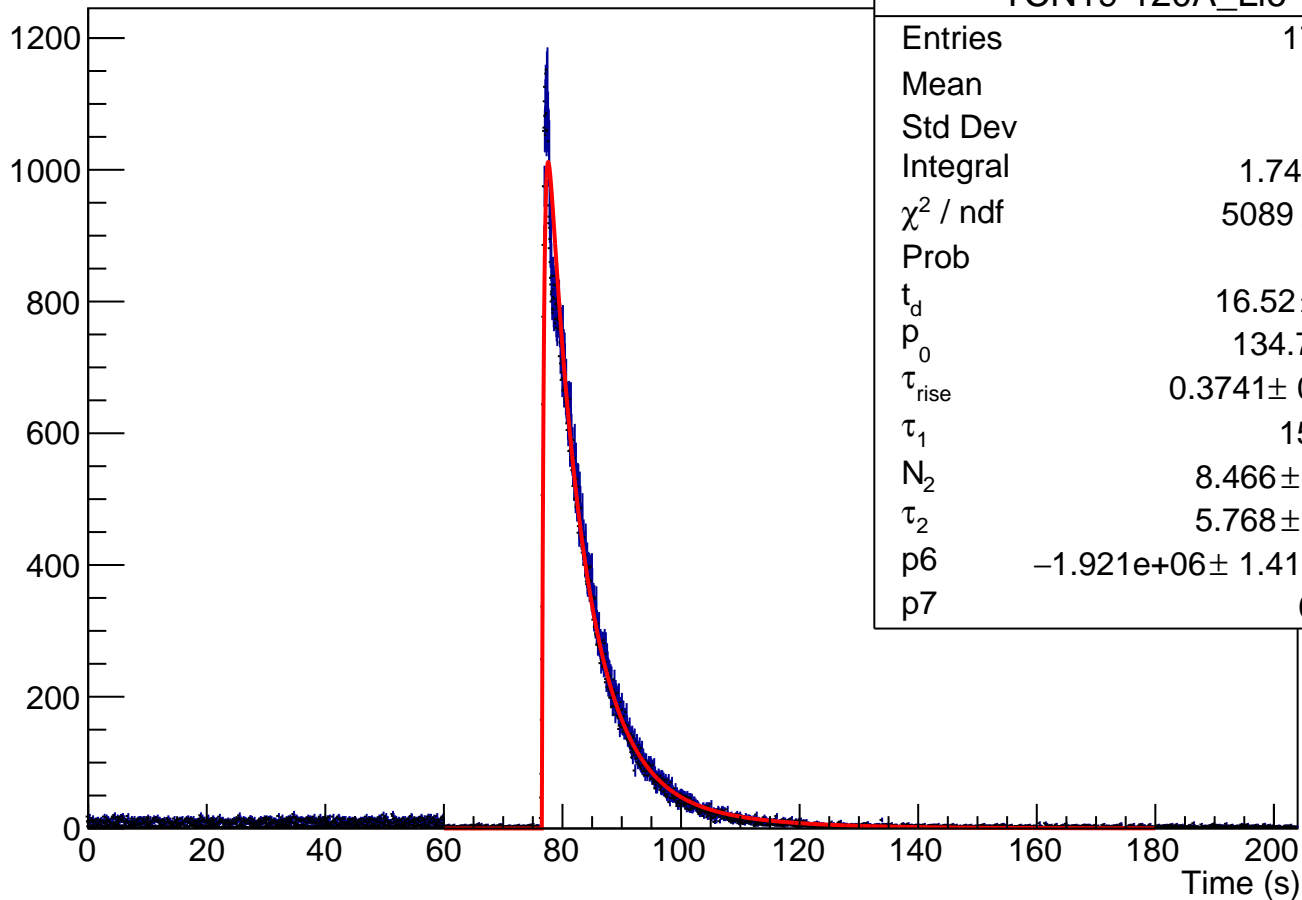


Normalized Li6 rate (1/0.05s)

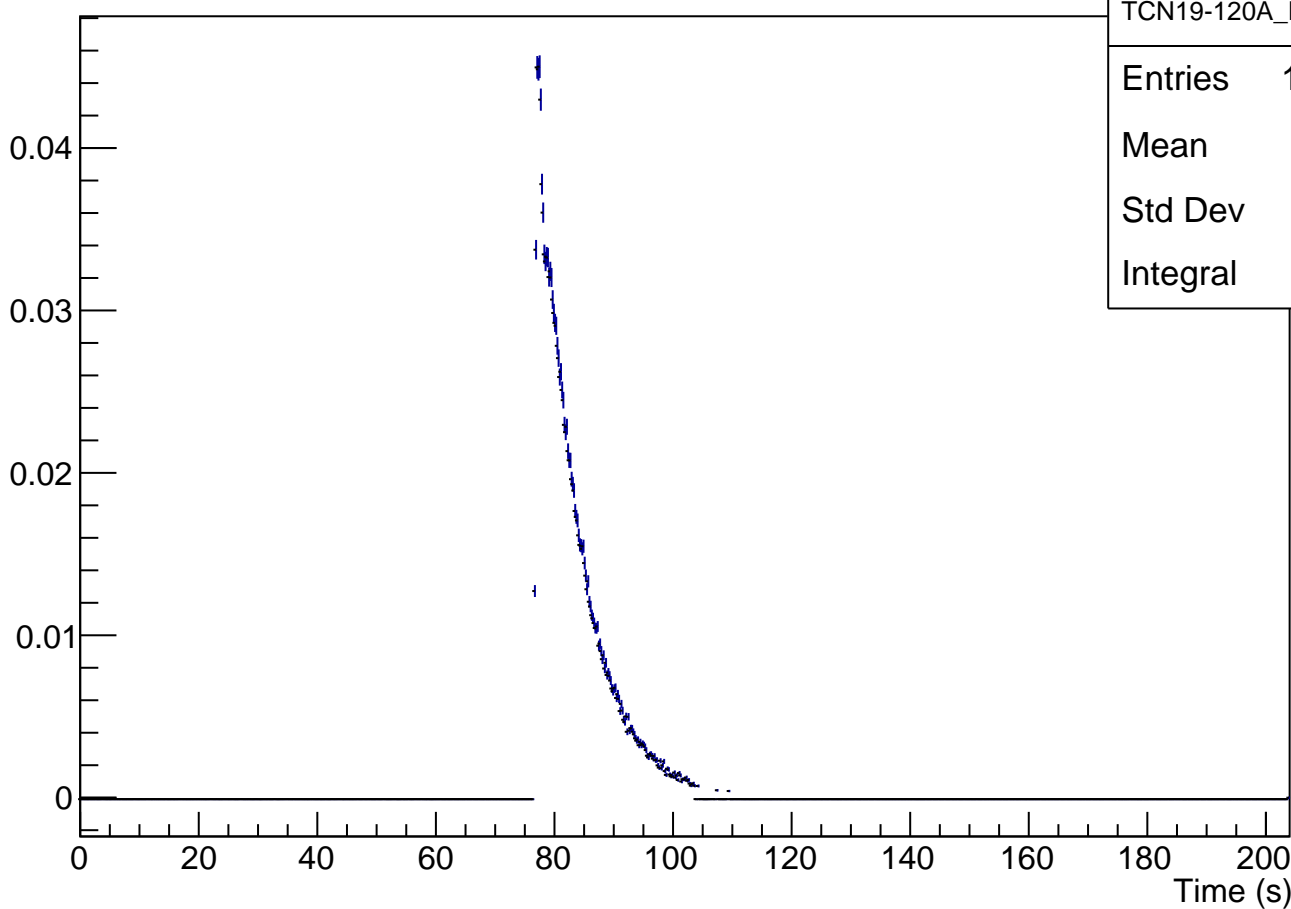

Ratio of cumulated rates

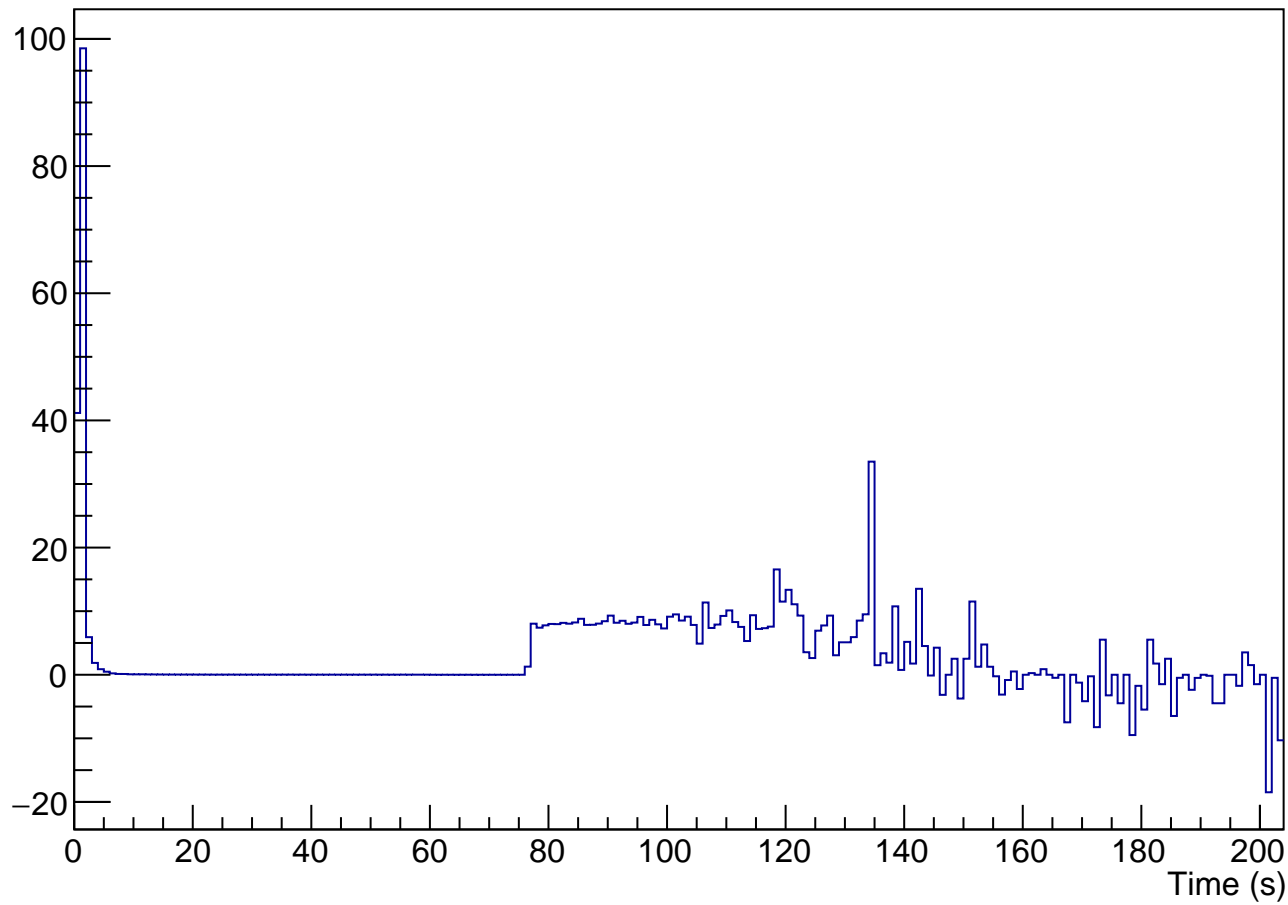

Average rate ratio

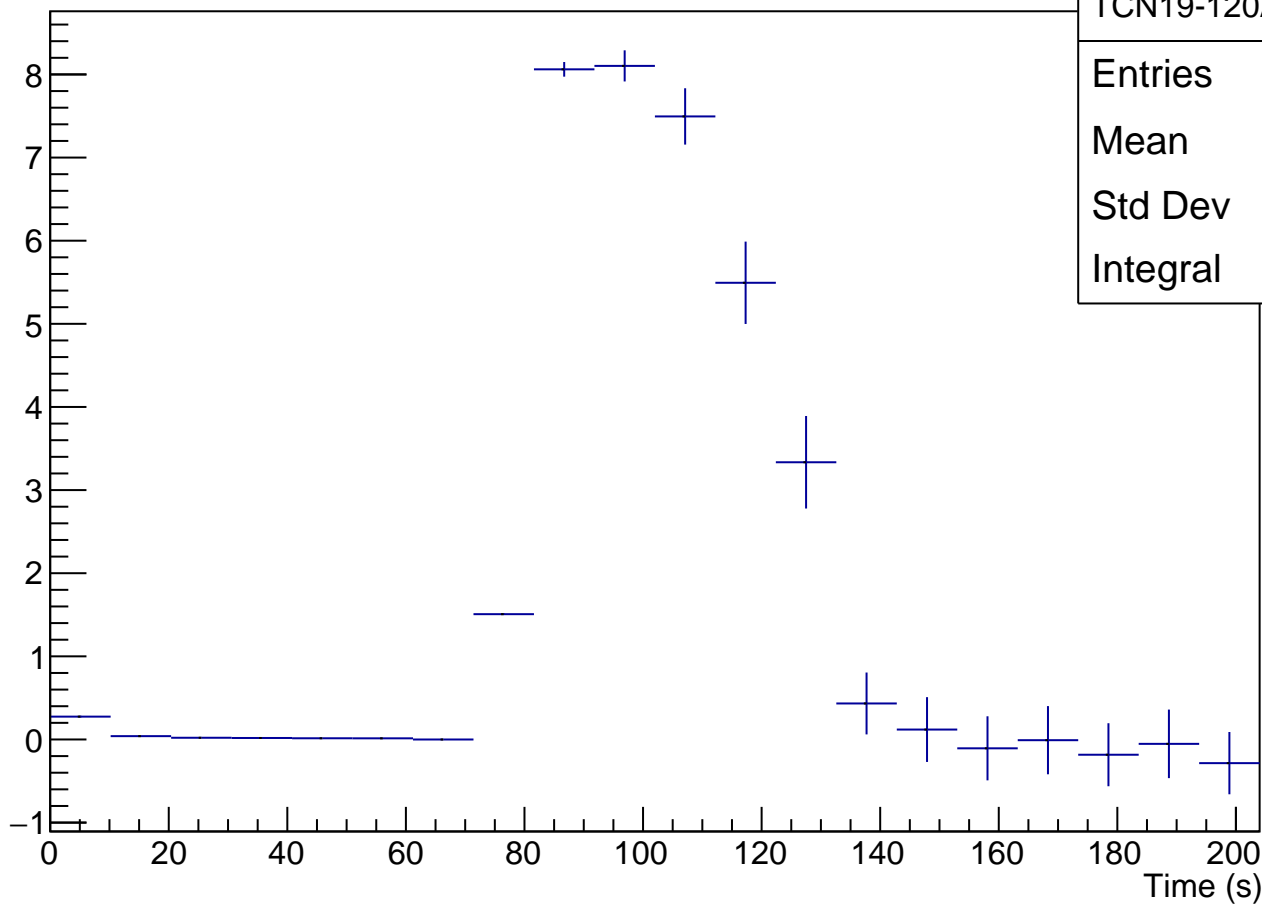

TCN19-120A_ratio


Entries 490

Mean 105.1

Std Dev 16.6

Integral 34.29

TCN19-120A

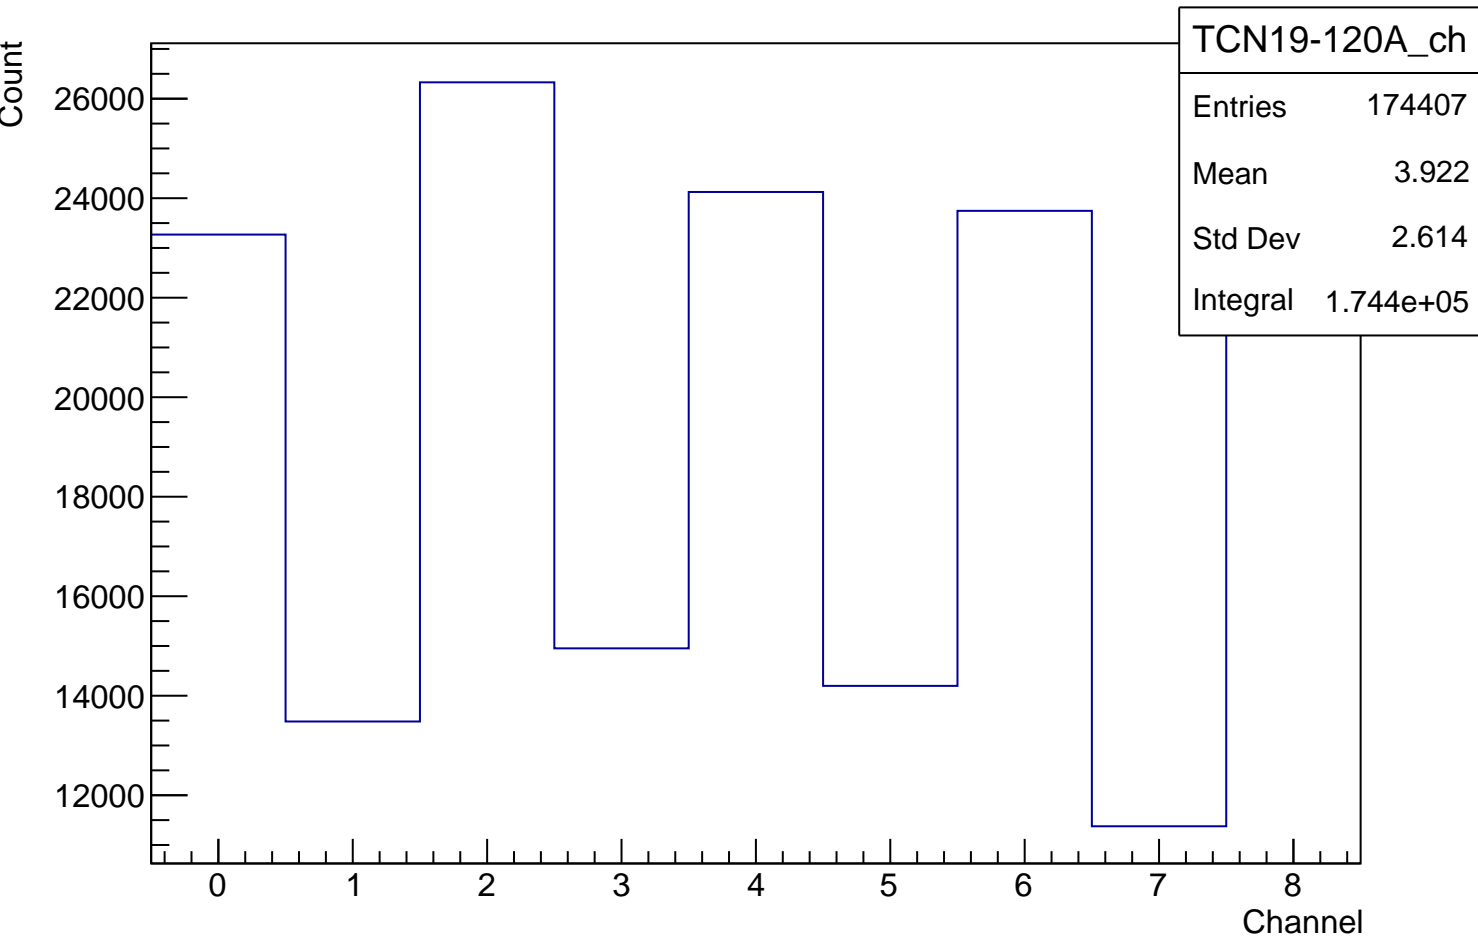

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 28

Mean 0

Std Dev 0

Integral 0