





TCN19-193 (DRex Cu, 20cm), transmission normalized during prestorage

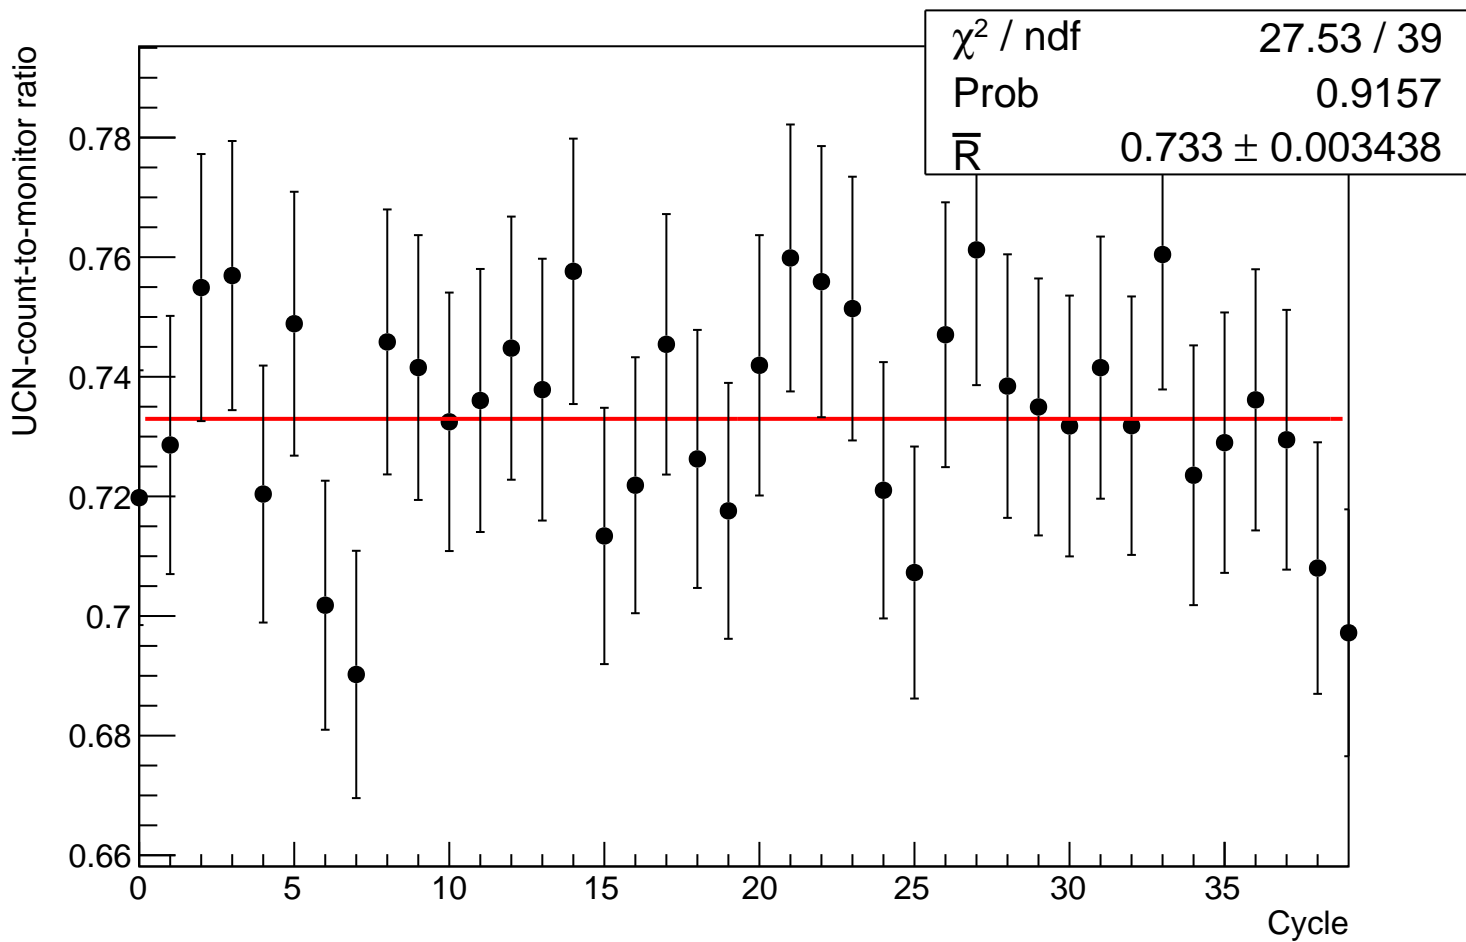


Graph

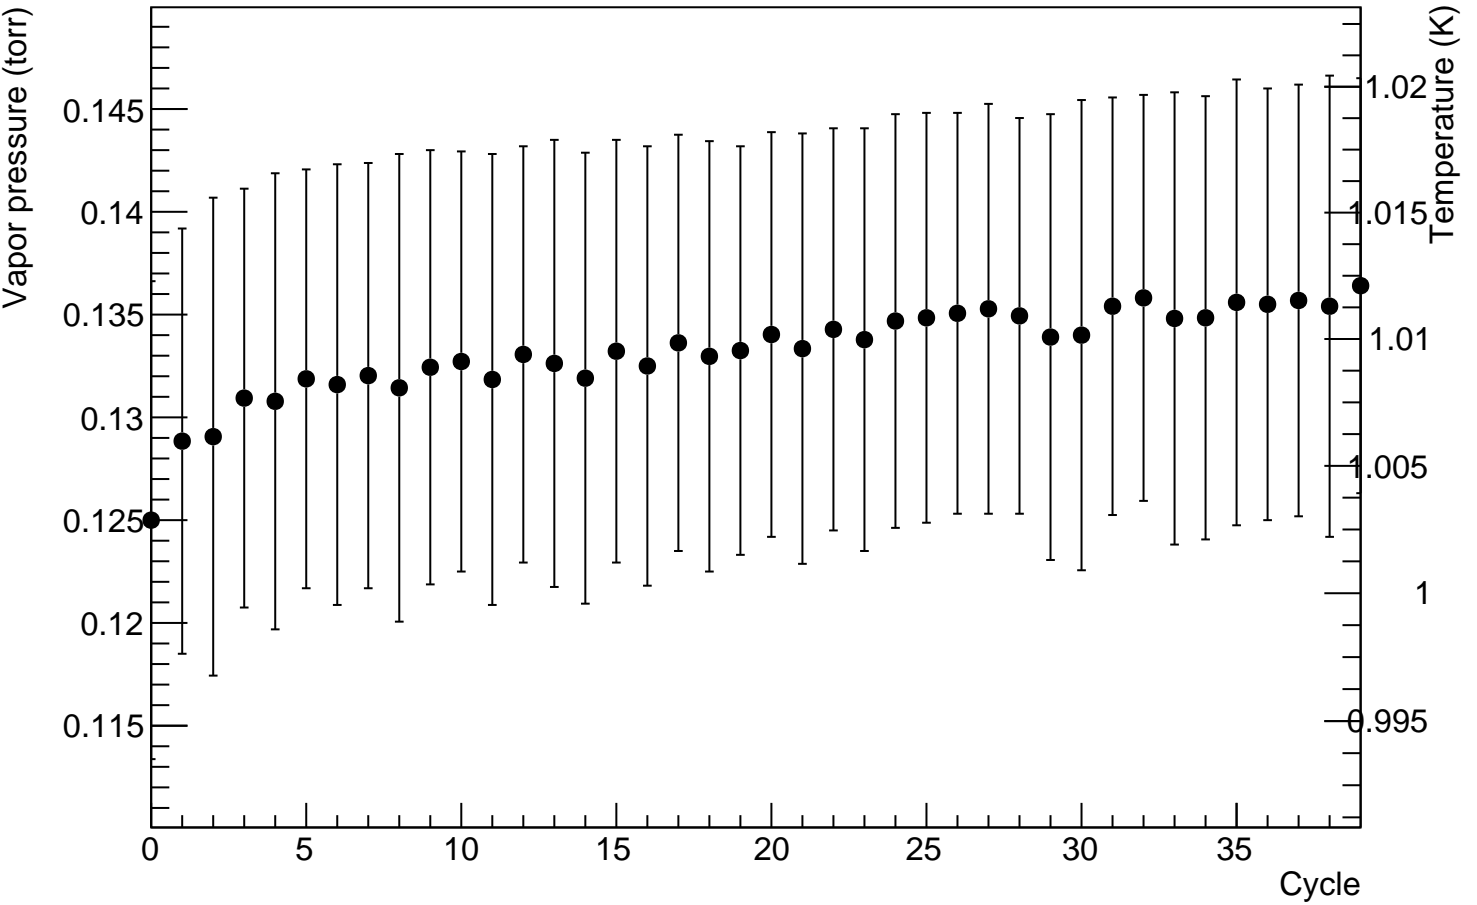


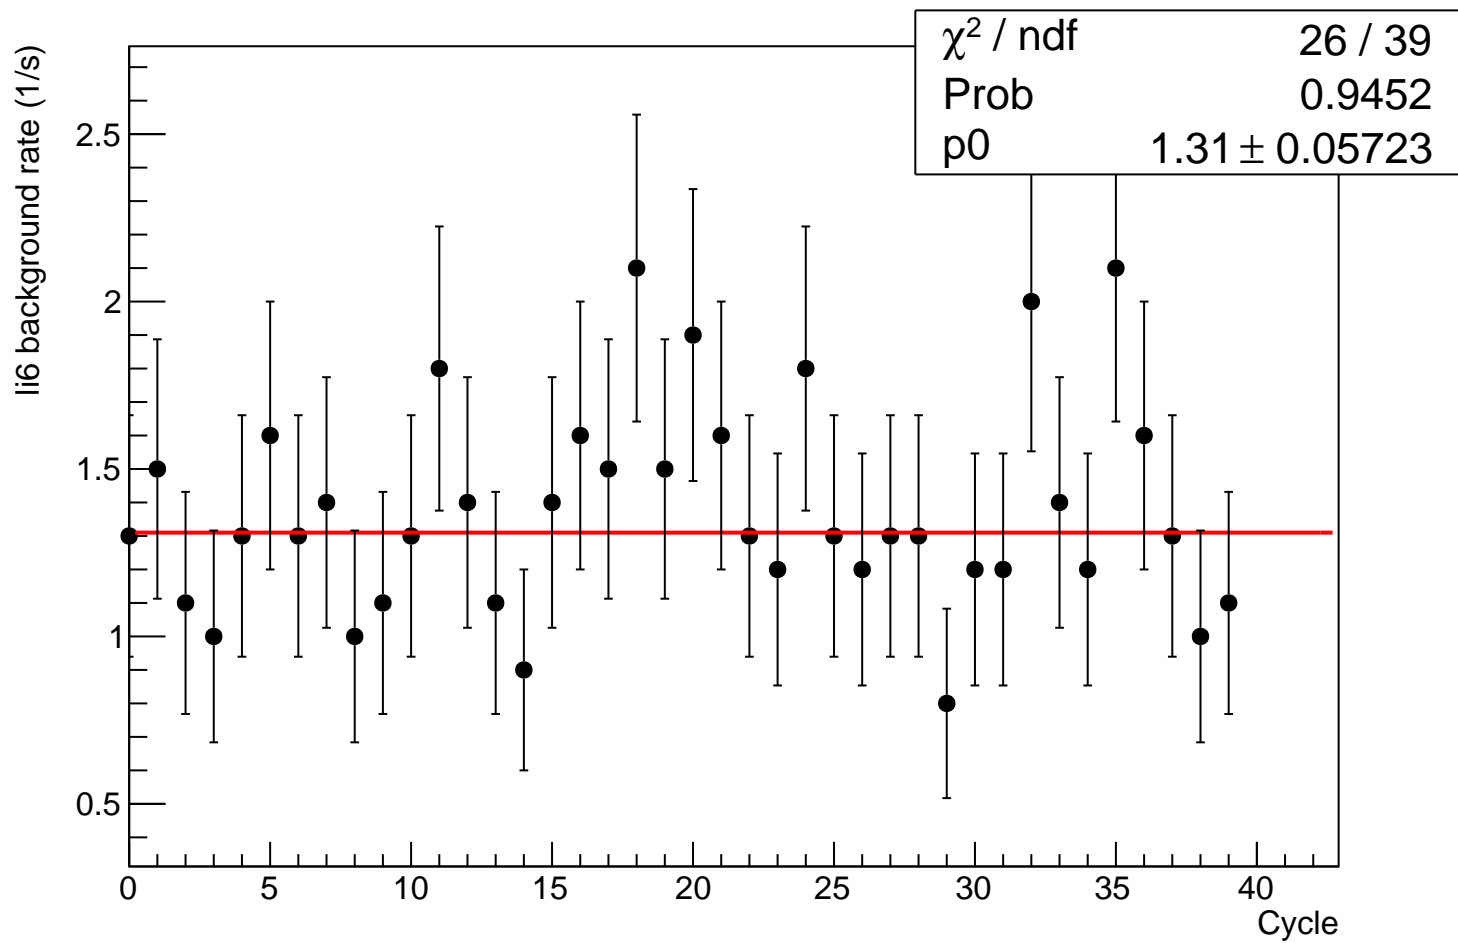

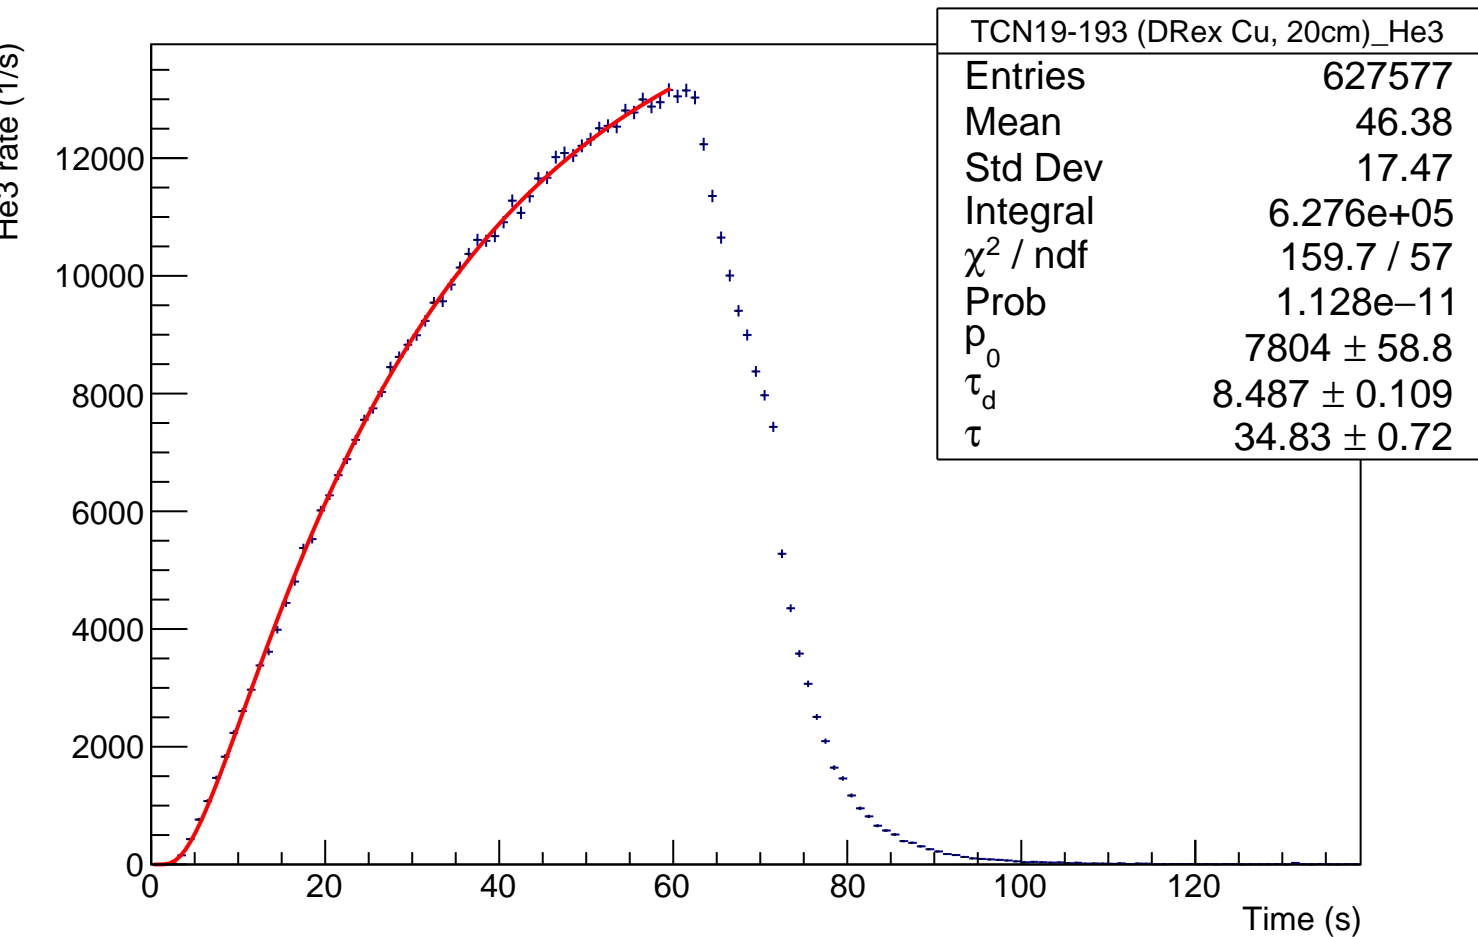

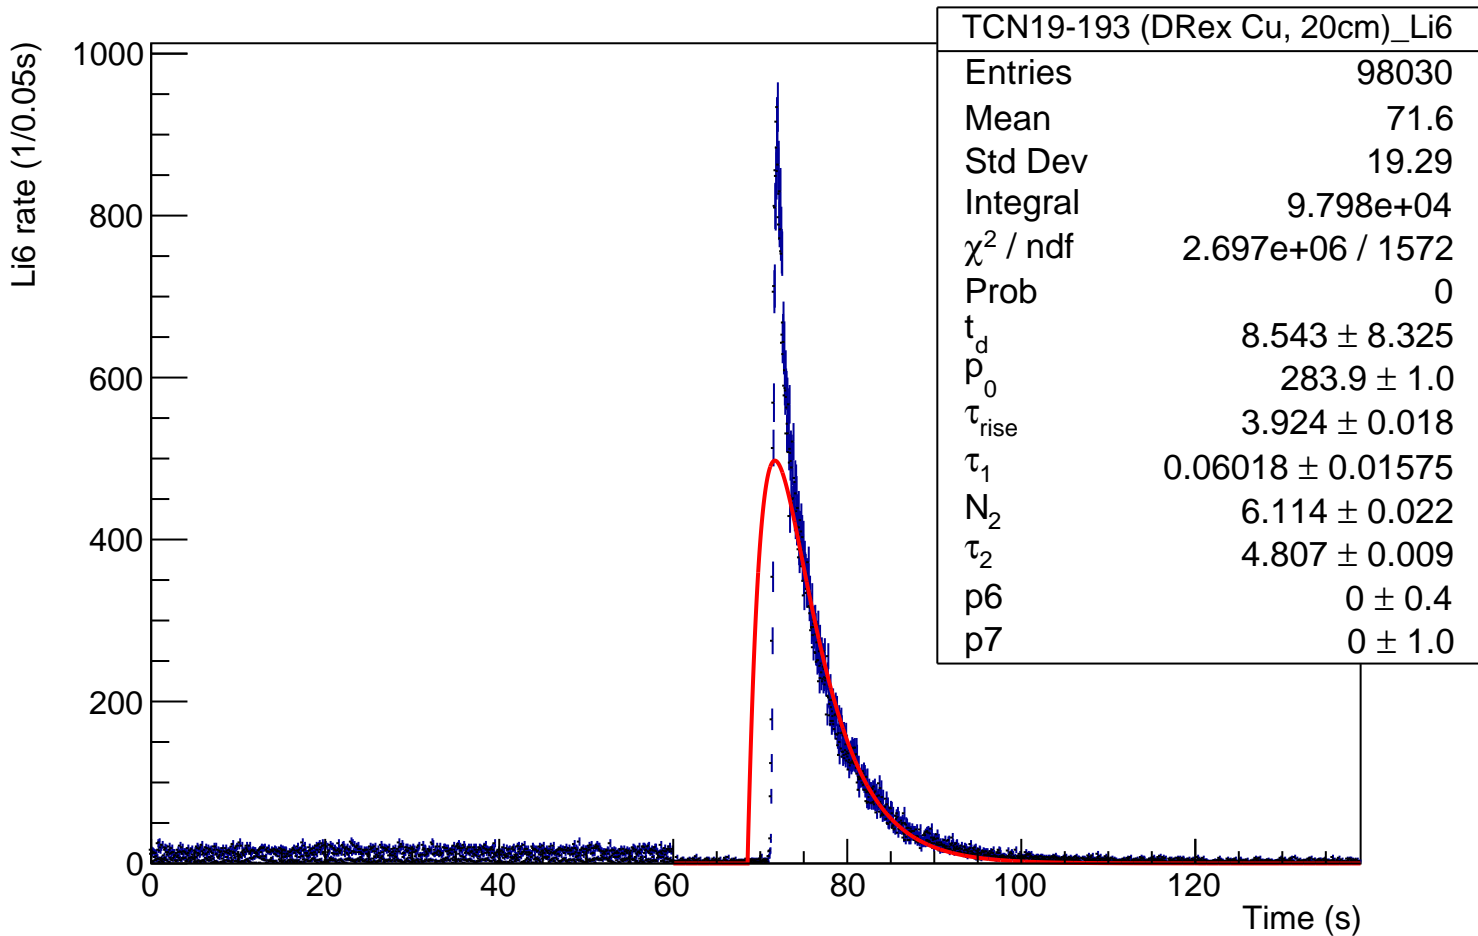

Normalized Li6 rate (1/0.05s)

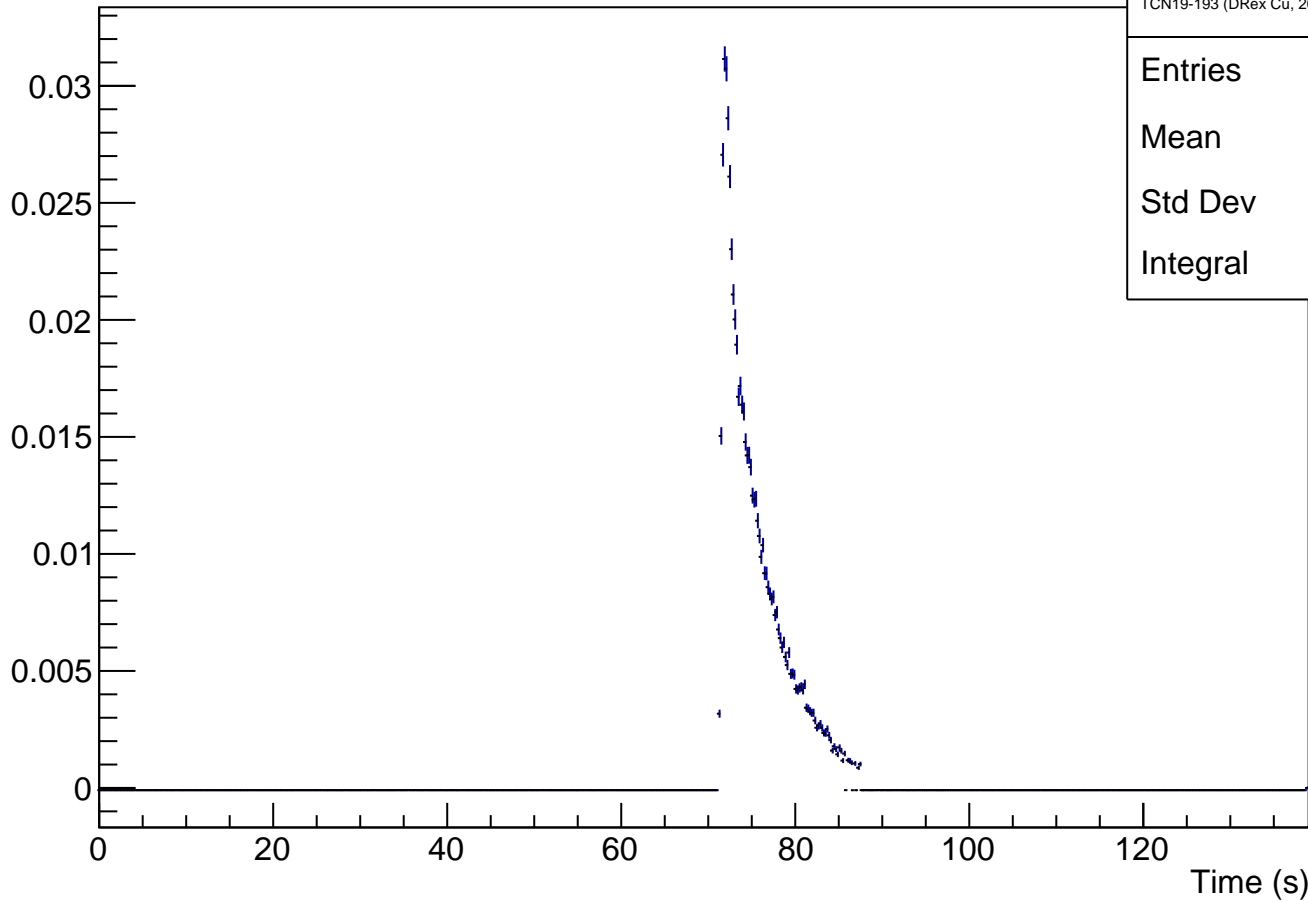


TCN19-193 (DRex Cu, 20cm)_Li6_norm

Entries 82936


Mean 71.77

Std Dev 16.51

Integral 0.5983

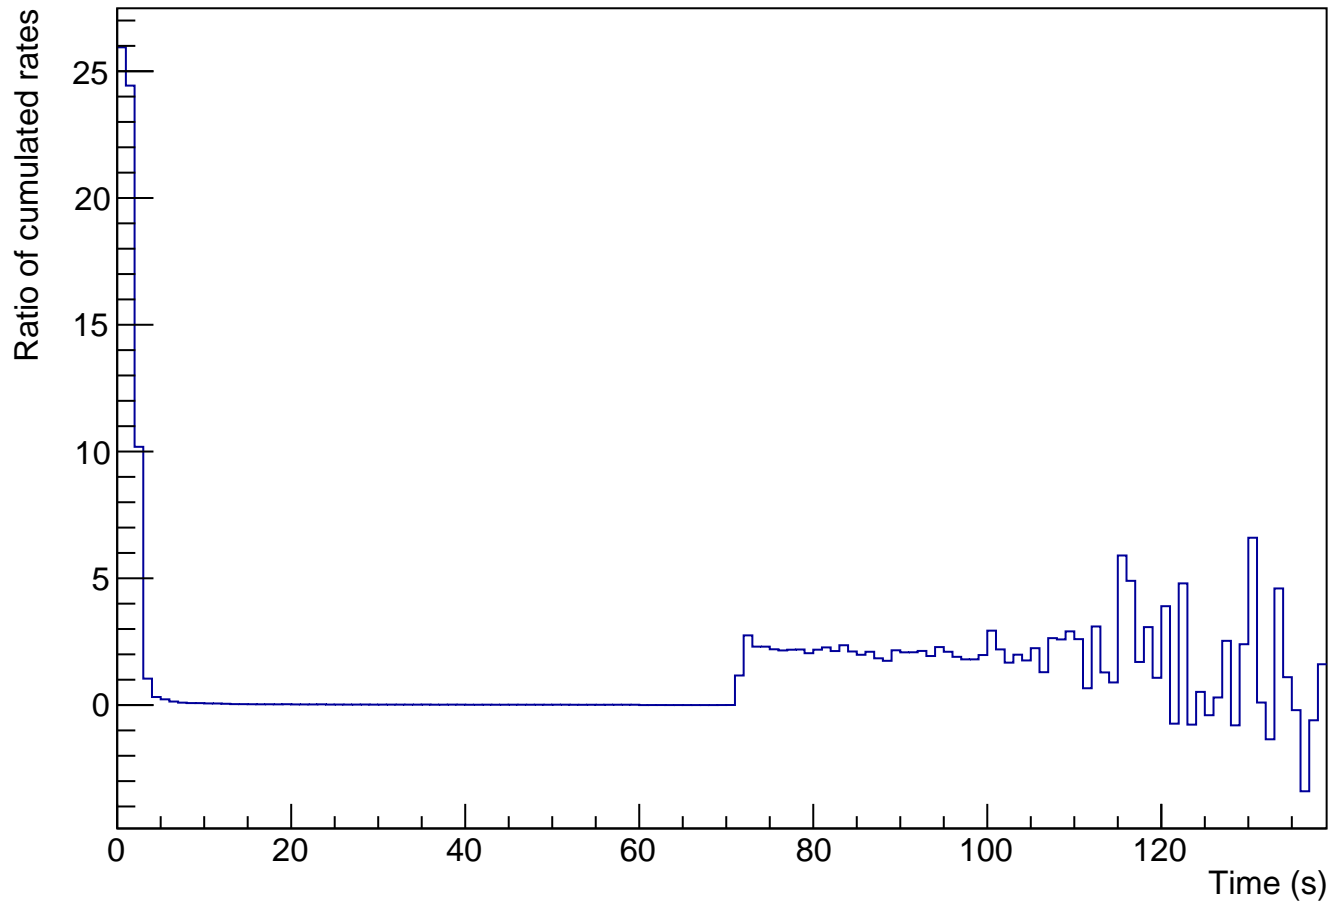

Average rate ratio

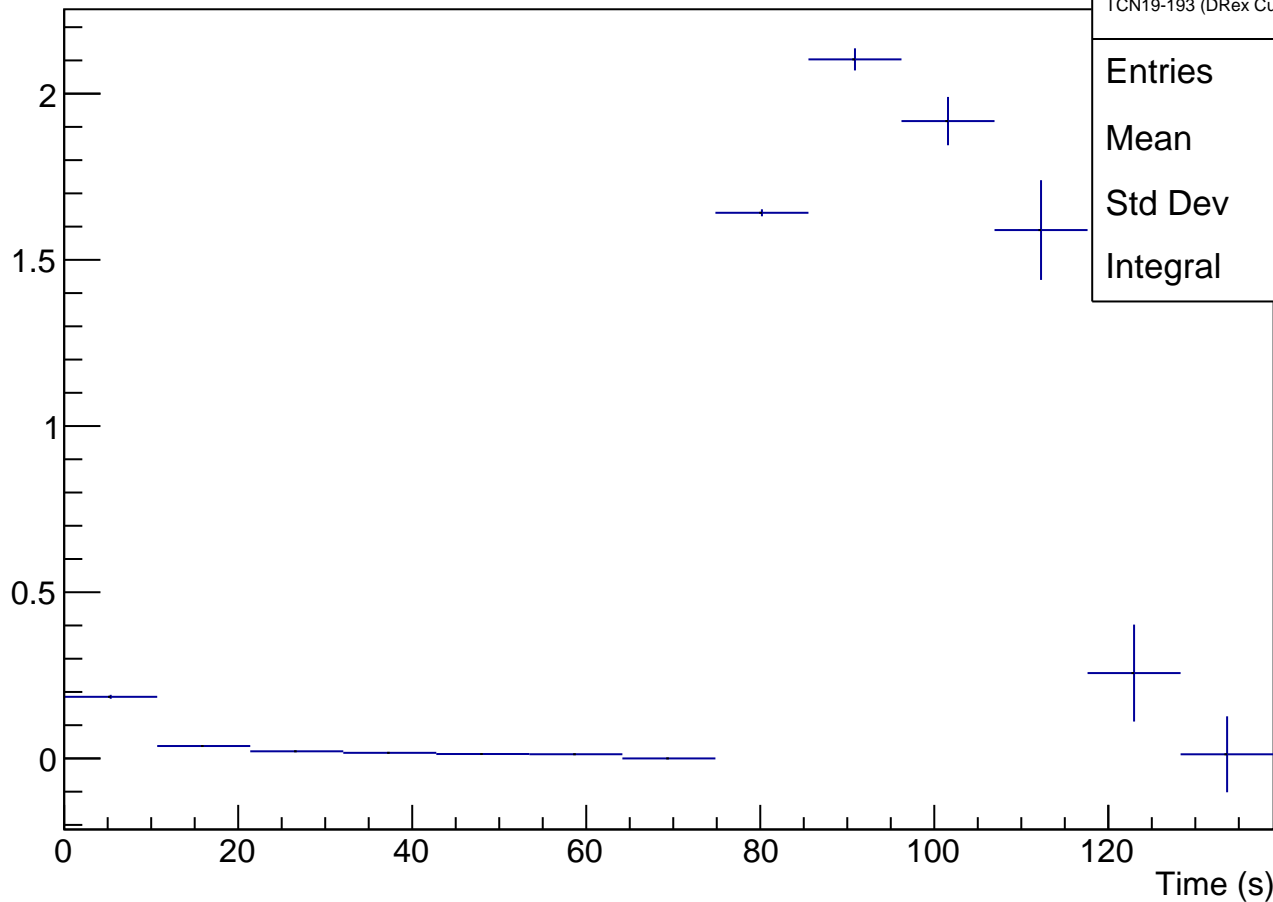

TCN19-193 (DRex Cu, 20cm)_ratio


Entries 454

Mean 95.42

Std Dev 19.8

Integral 7.808

TCN19-193 (DRex Cu, 20cm)

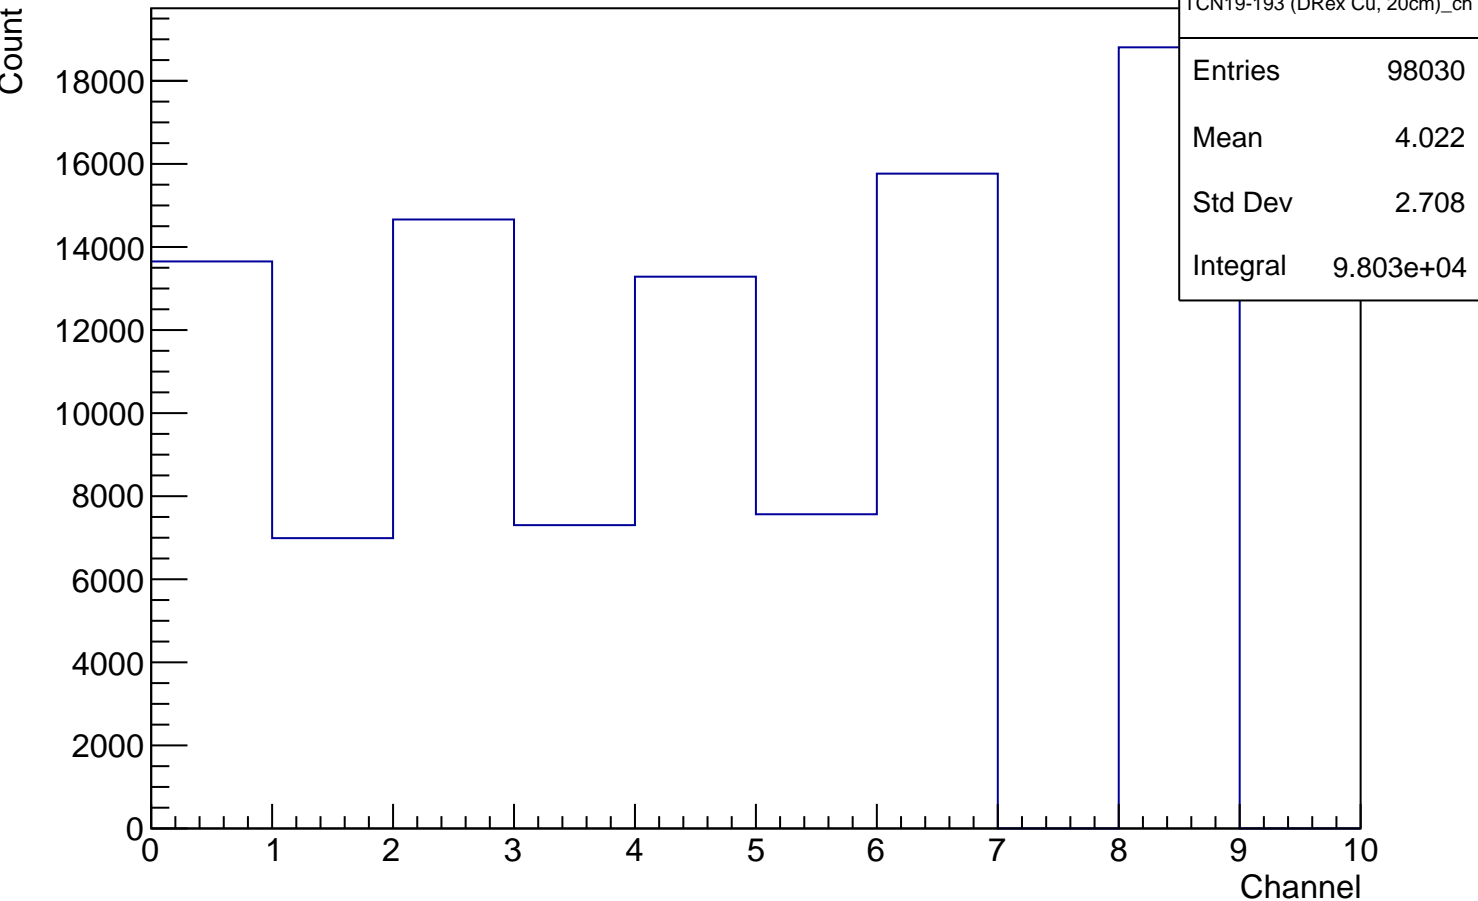

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 40

Mean 0

Std Dev 0

Integral 0