





TCN19-280 (spider v3), transmission normalized during prestorage

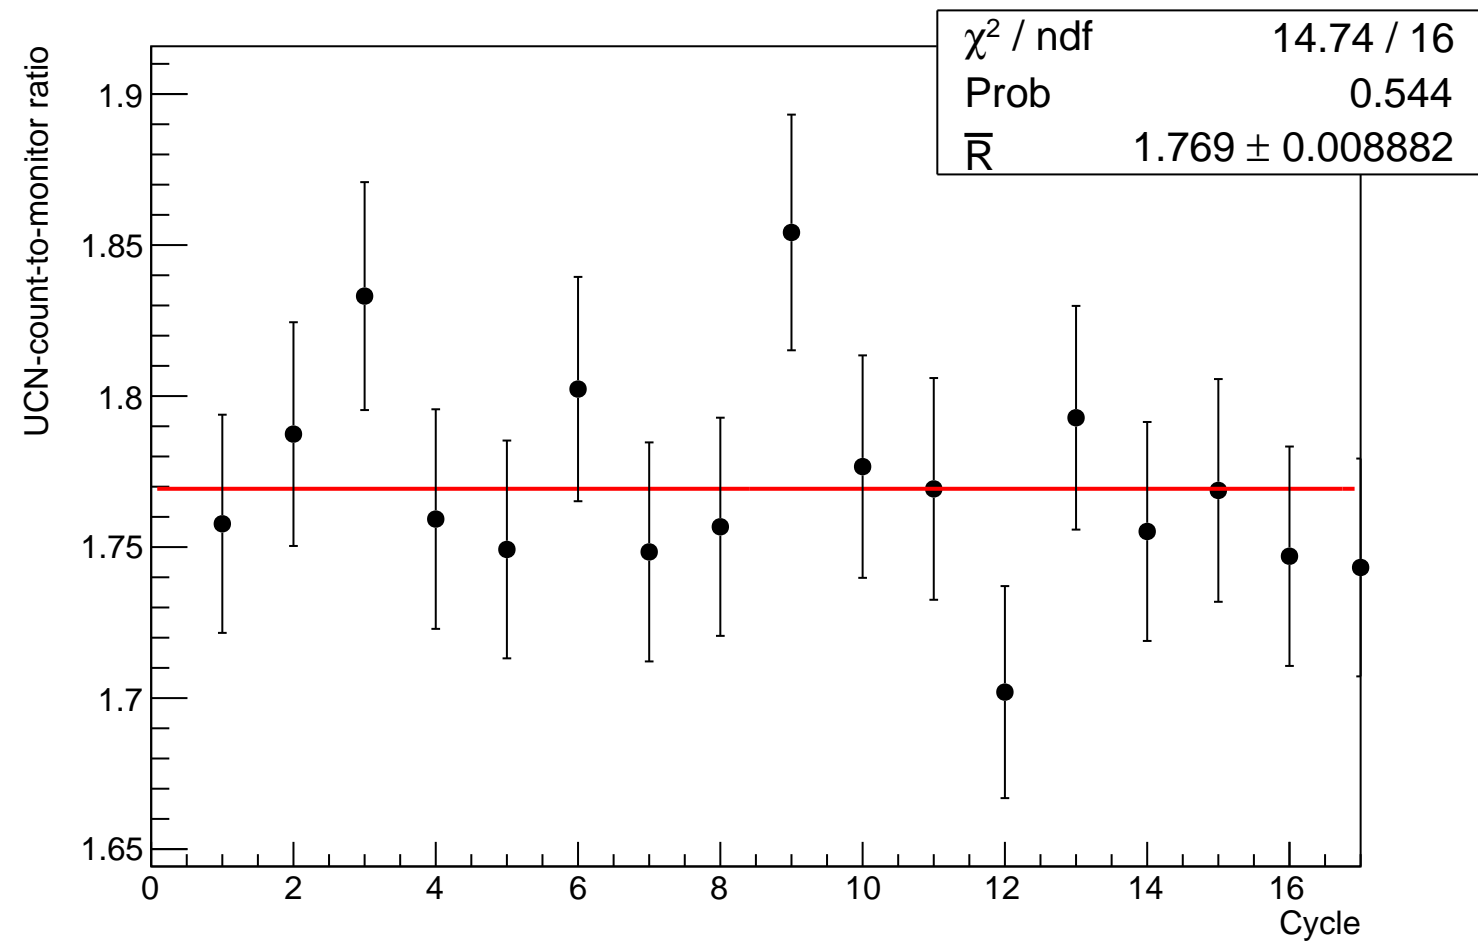


Graph

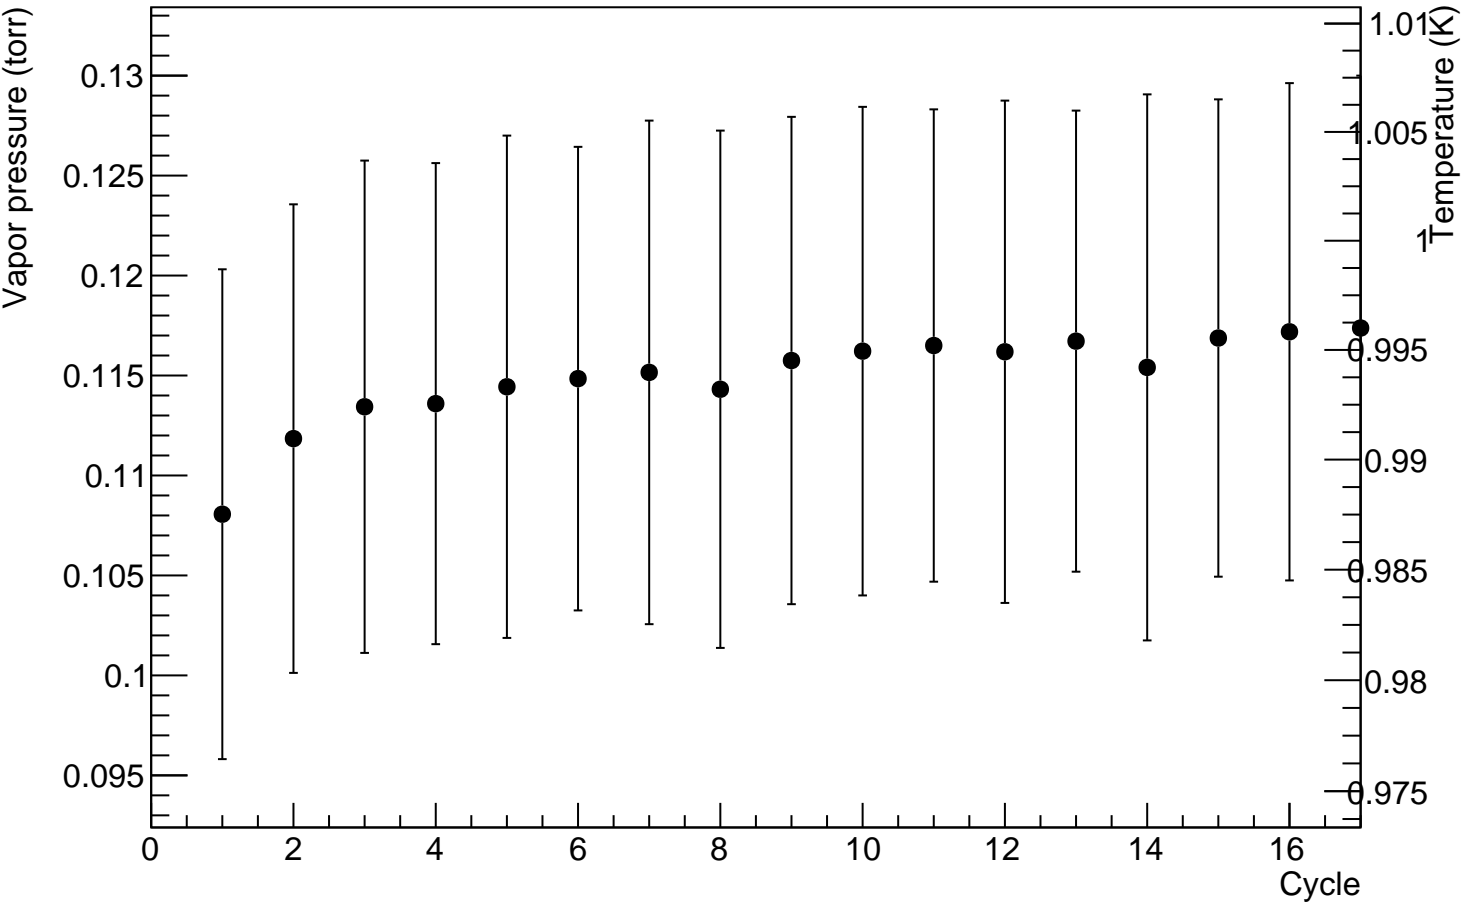


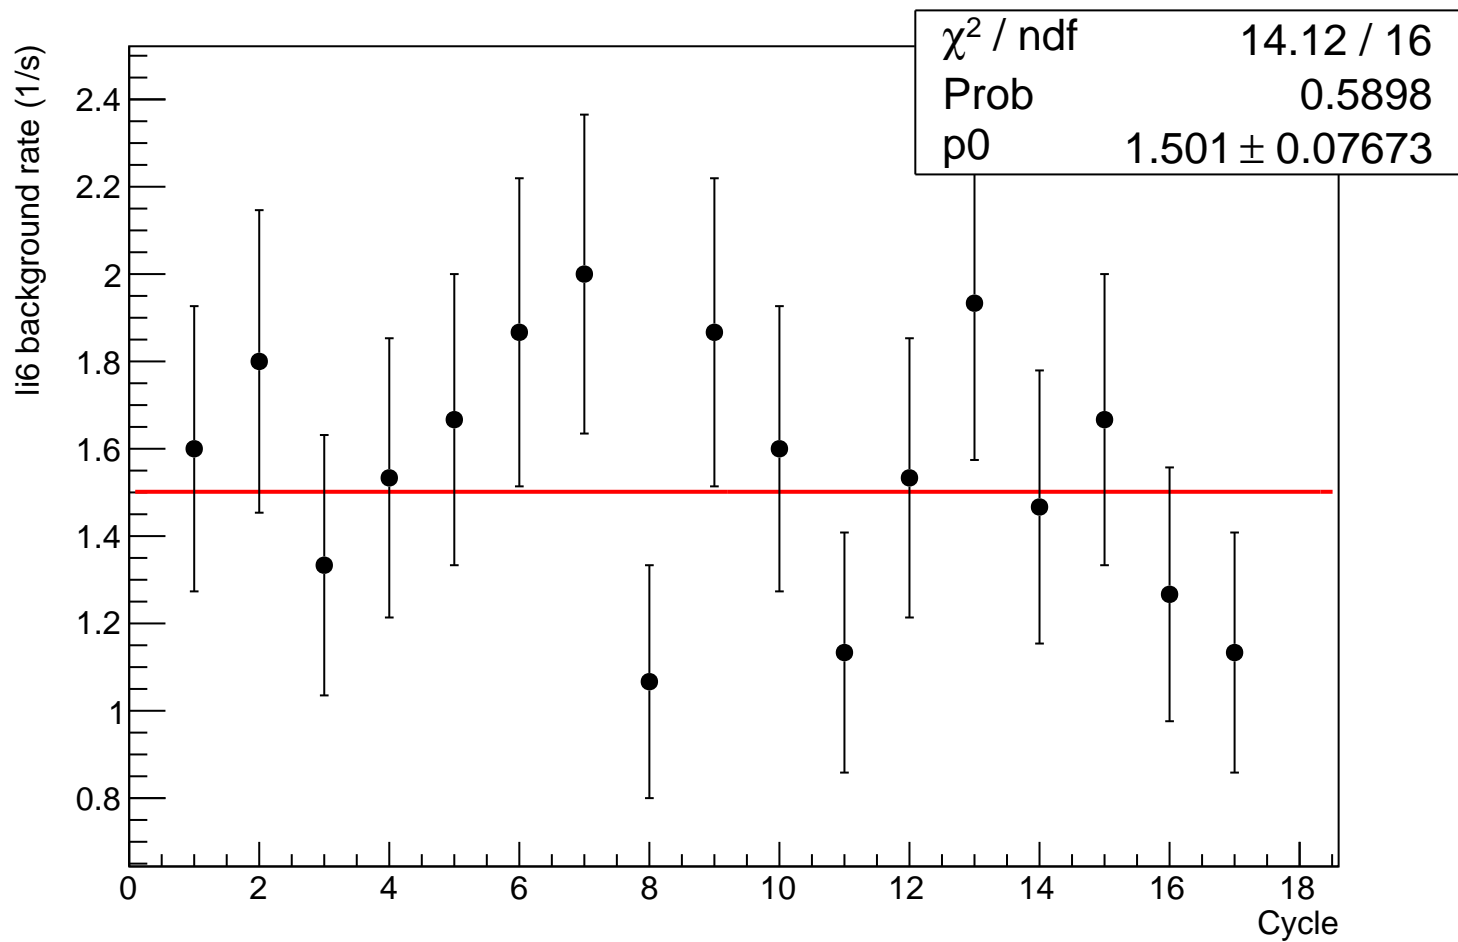

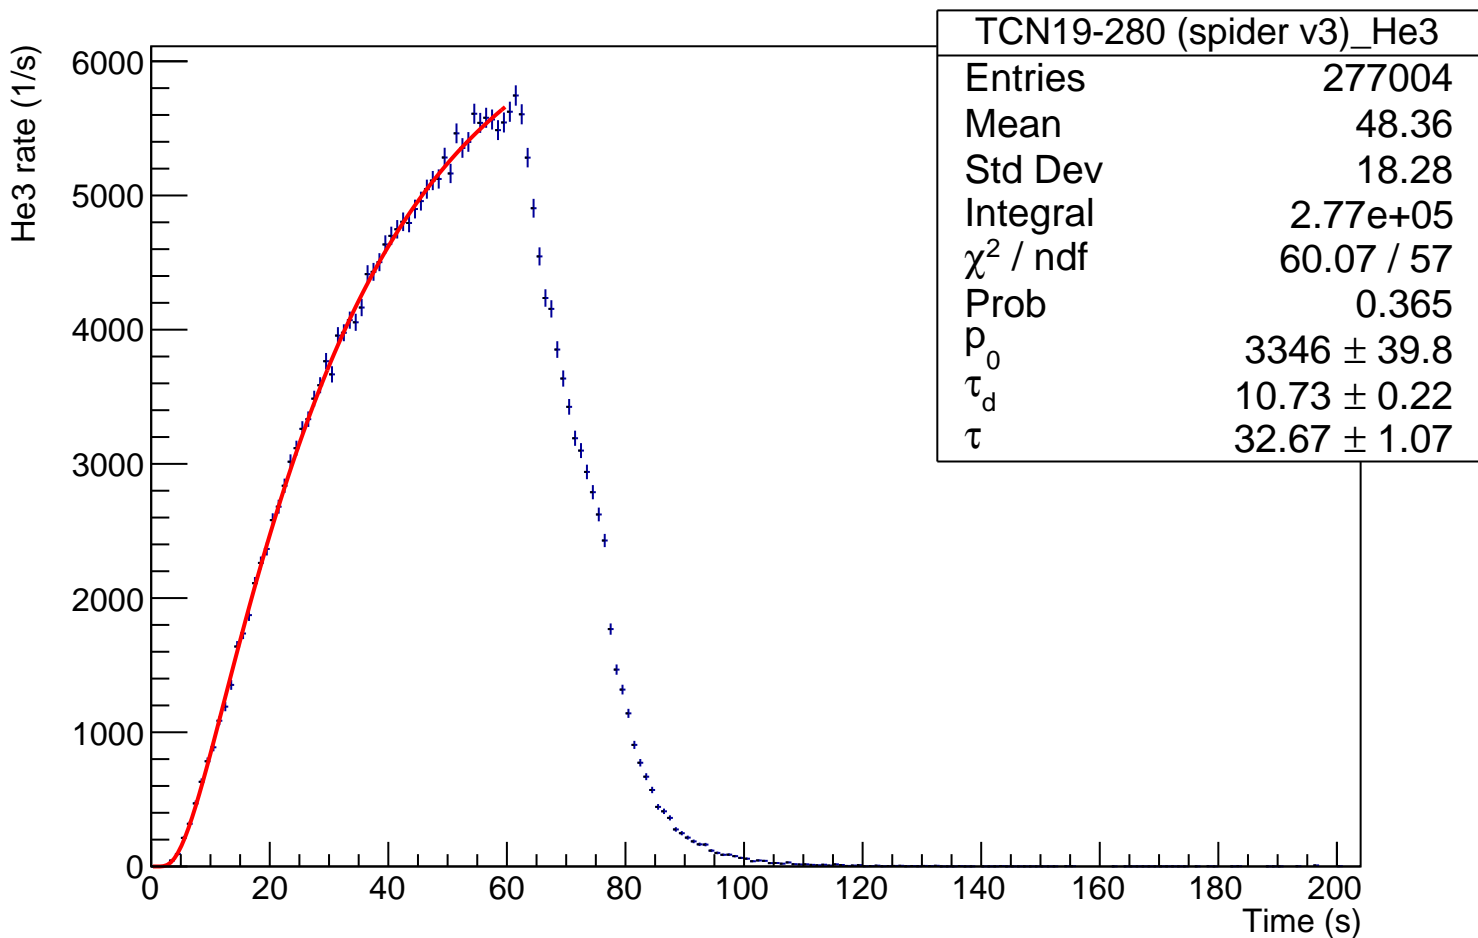

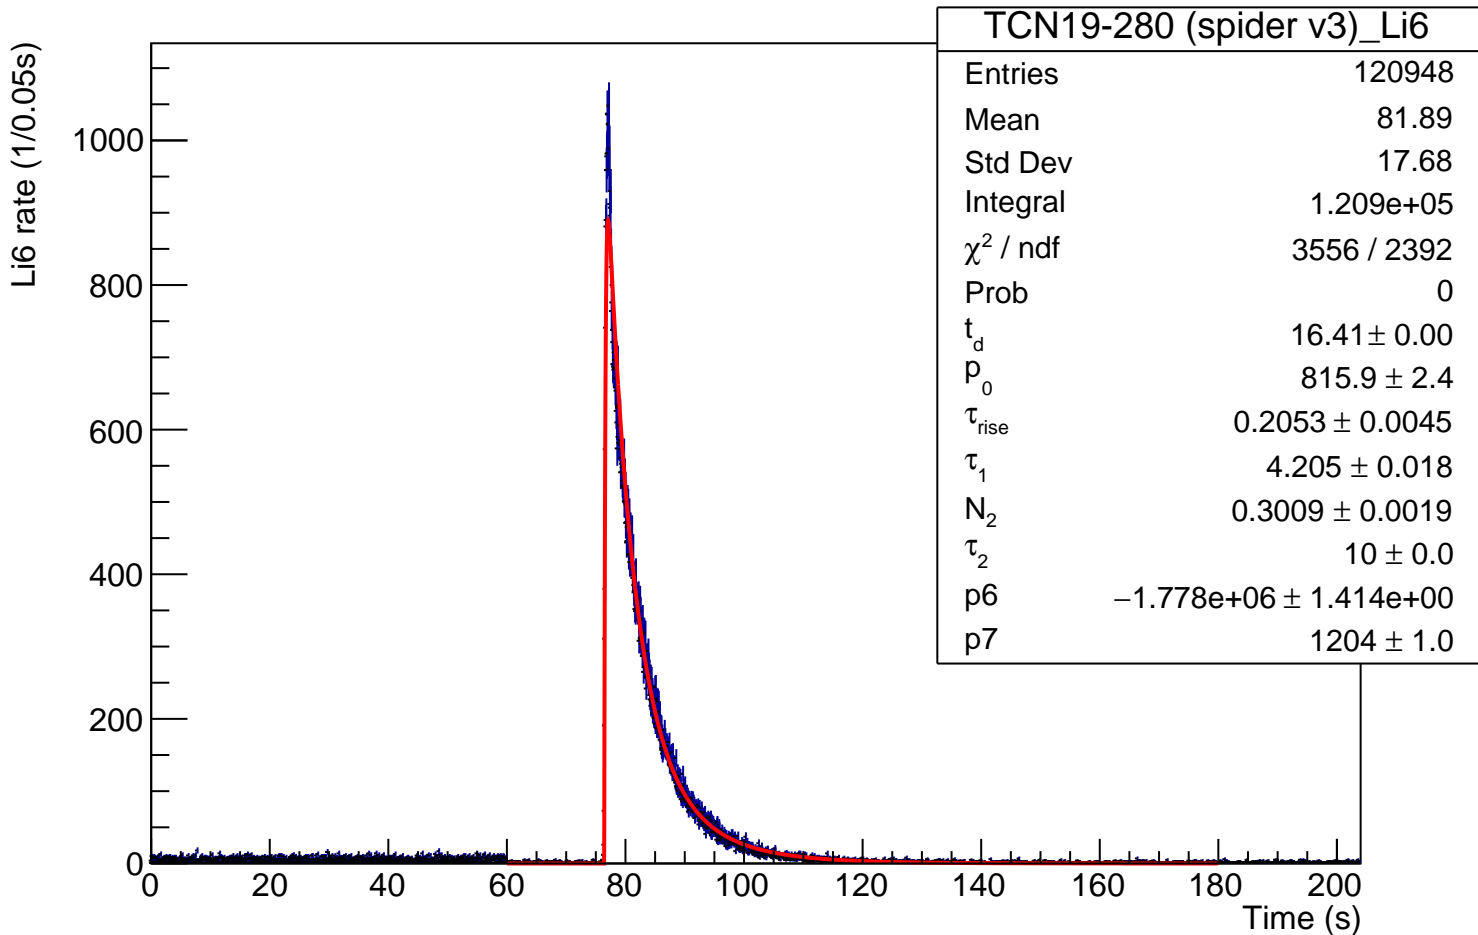

Normalized Li6 rate (1/0.05s)

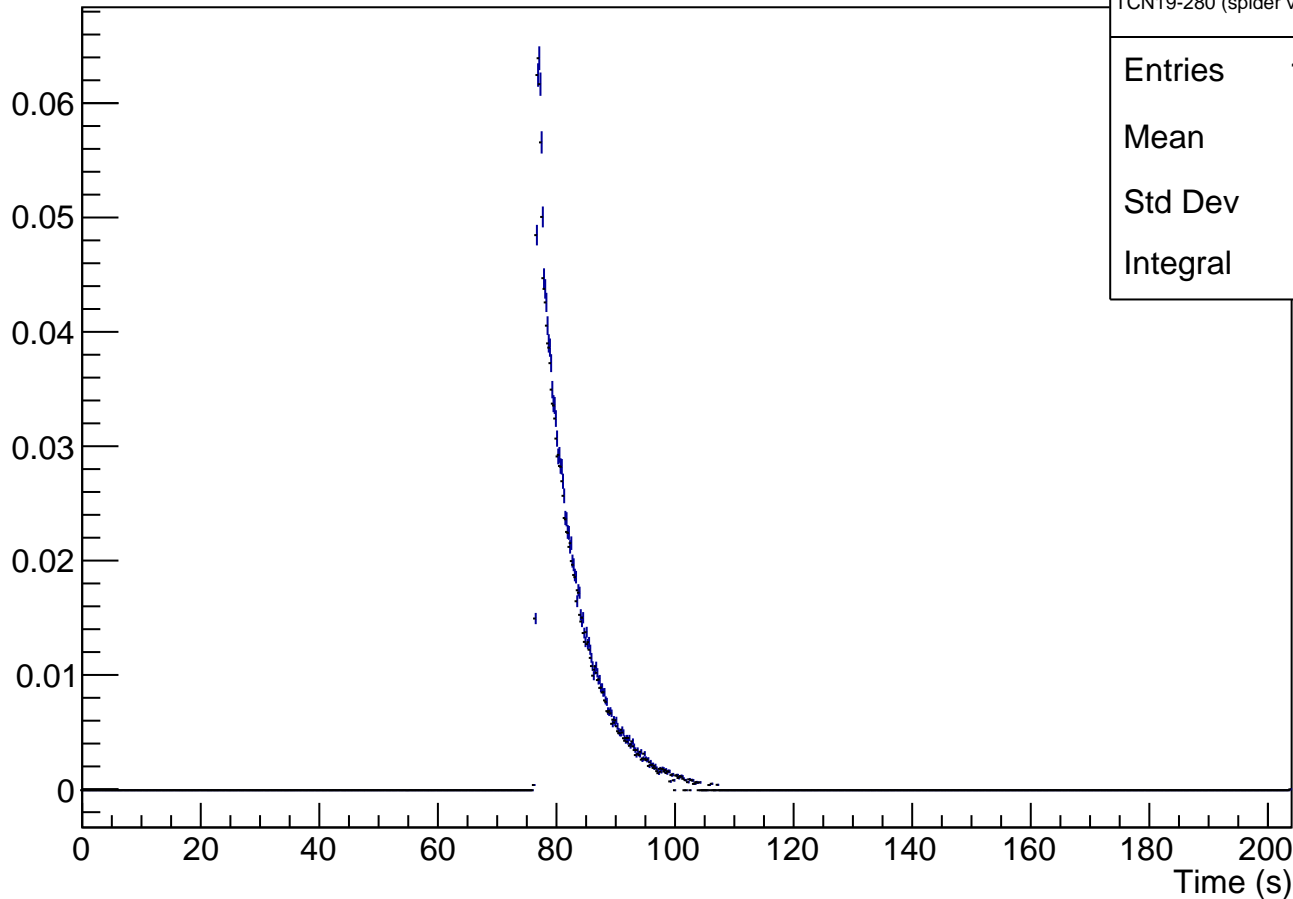

TCN19-280 (spider v3)_Li6_norm


Entries 107769

Mean 80.98

Std Dev 12.31

Integral 1.631

Ratio of cumulated rates

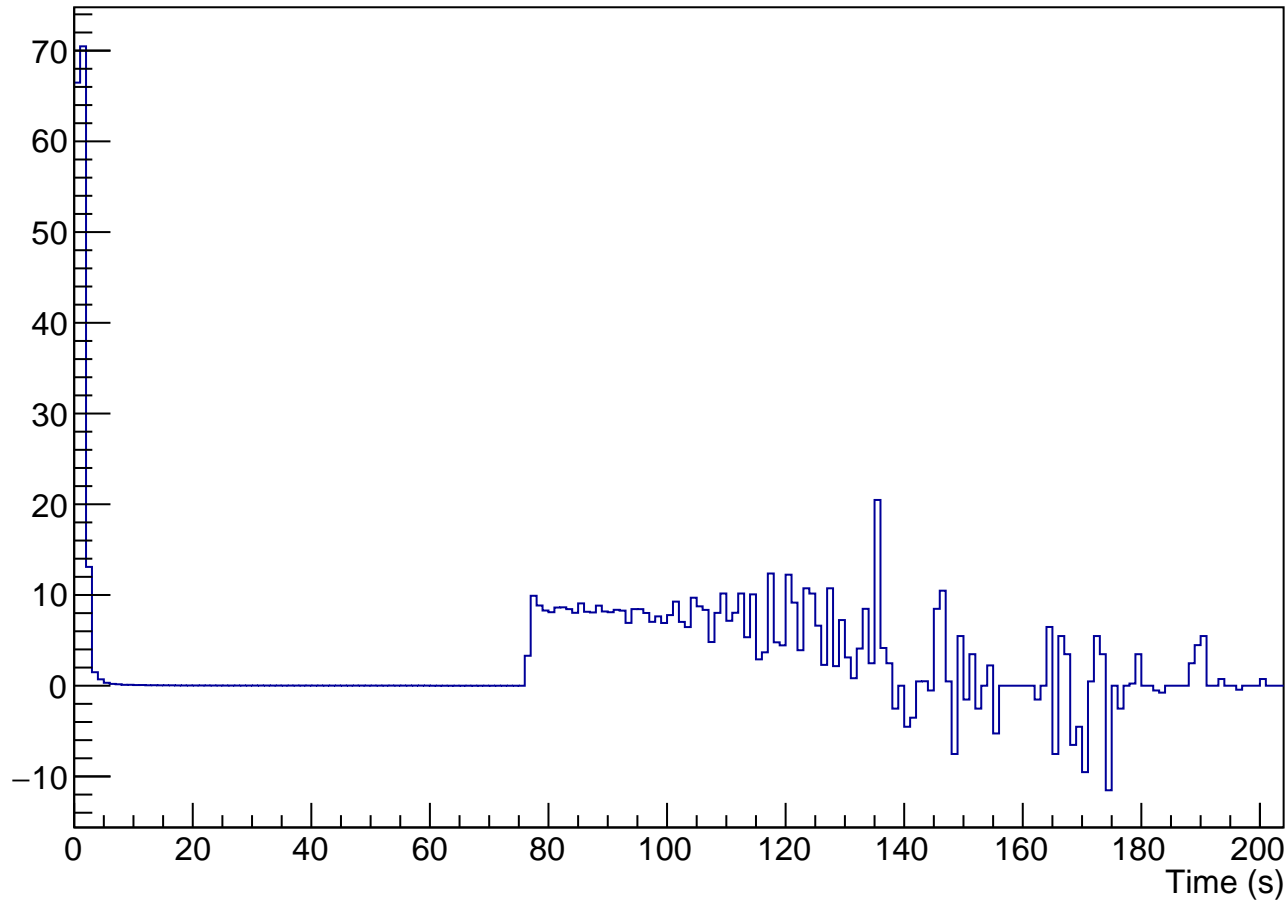

Average rate ratio


TCN19-280 (spider v3)_ratio

Entries 243

Mean 101.9


Std Dev 17.47

Integral 32.94

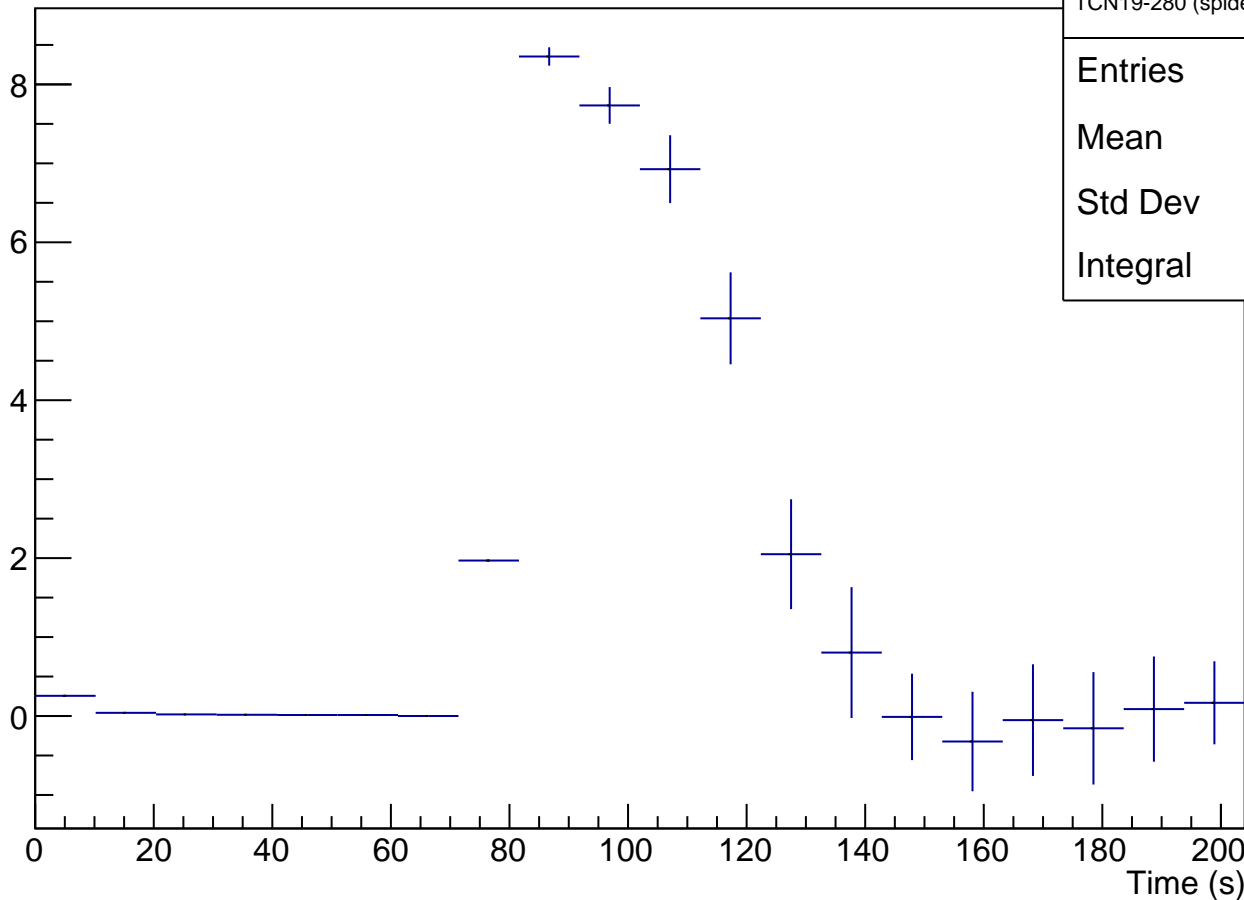

TCN19-280 (spider v3)

Count

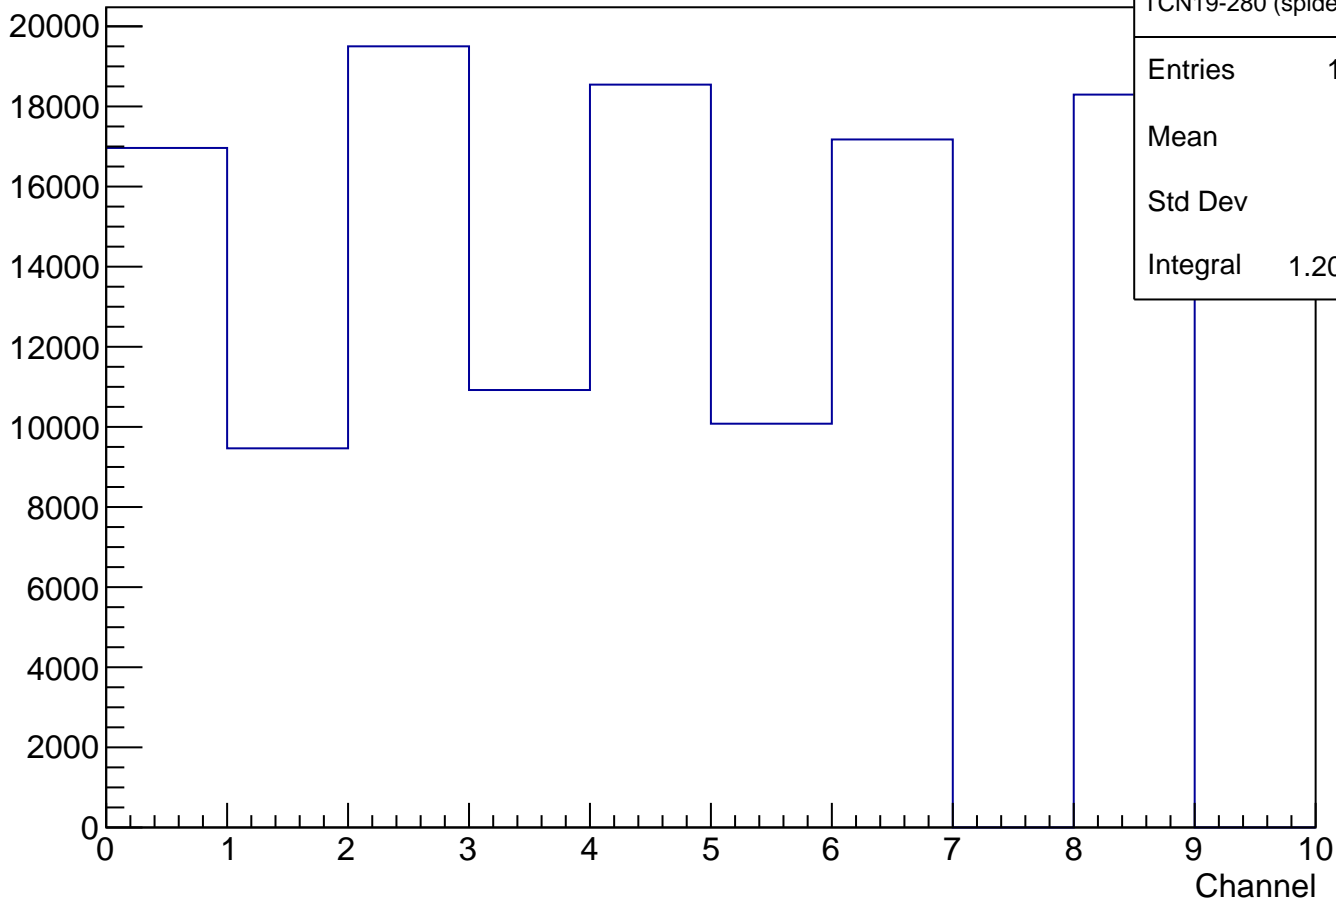

TCN19-280 (spider v3)_ch

Entries 120948

Mean 3.764

Std Dev 2.588

Integral 1.209e+05

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 17

Mean 0

Std Dev 0

Integral 0