





TCN19-280 (spider v4), transmission normalized during prestorage

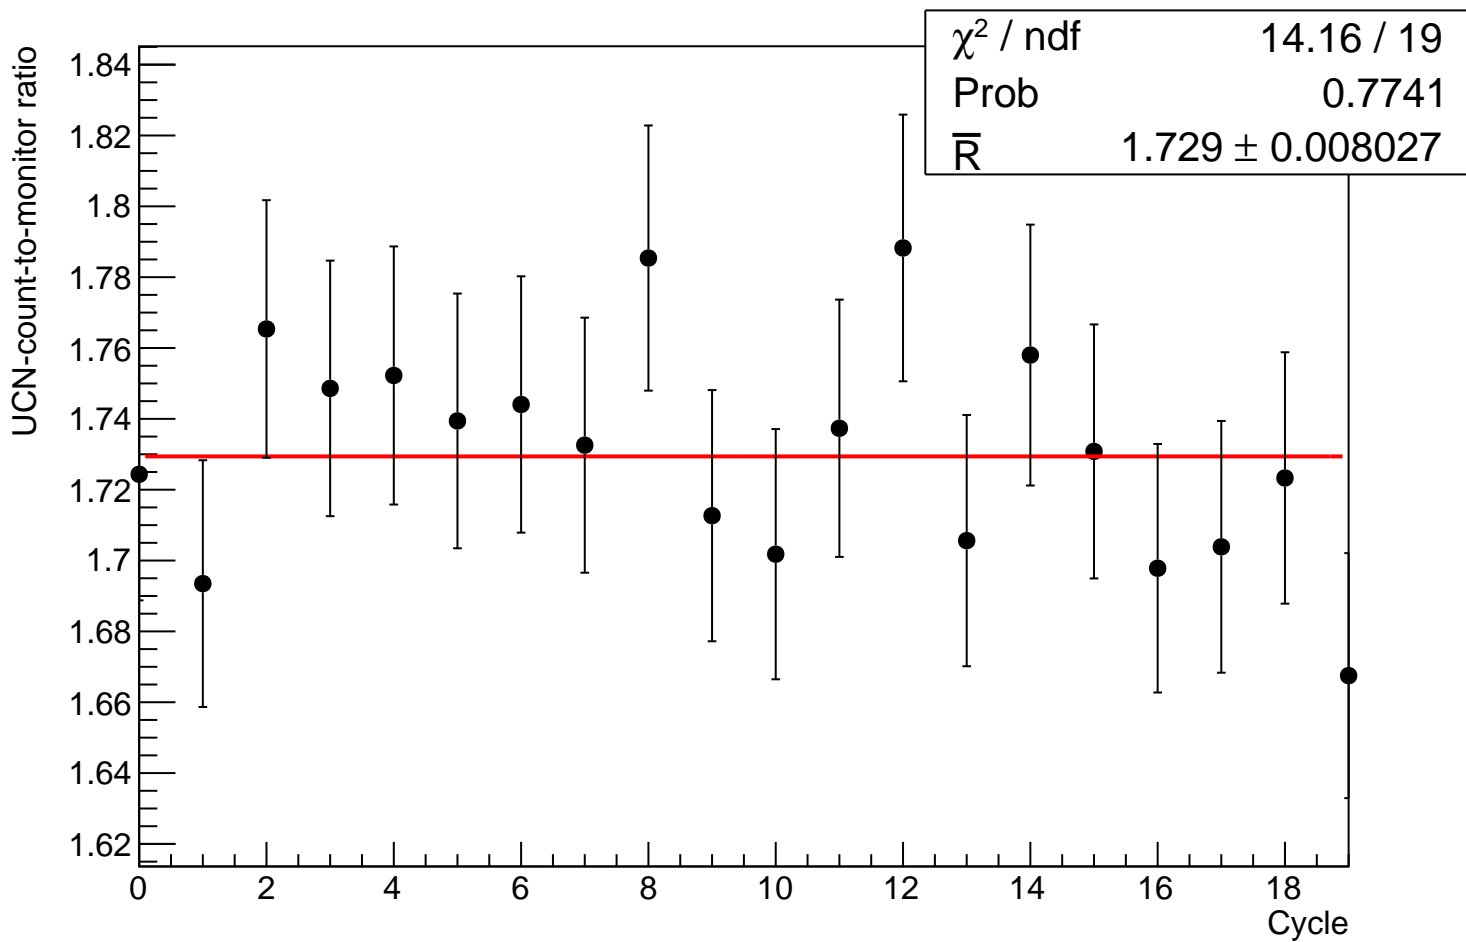


# Graph

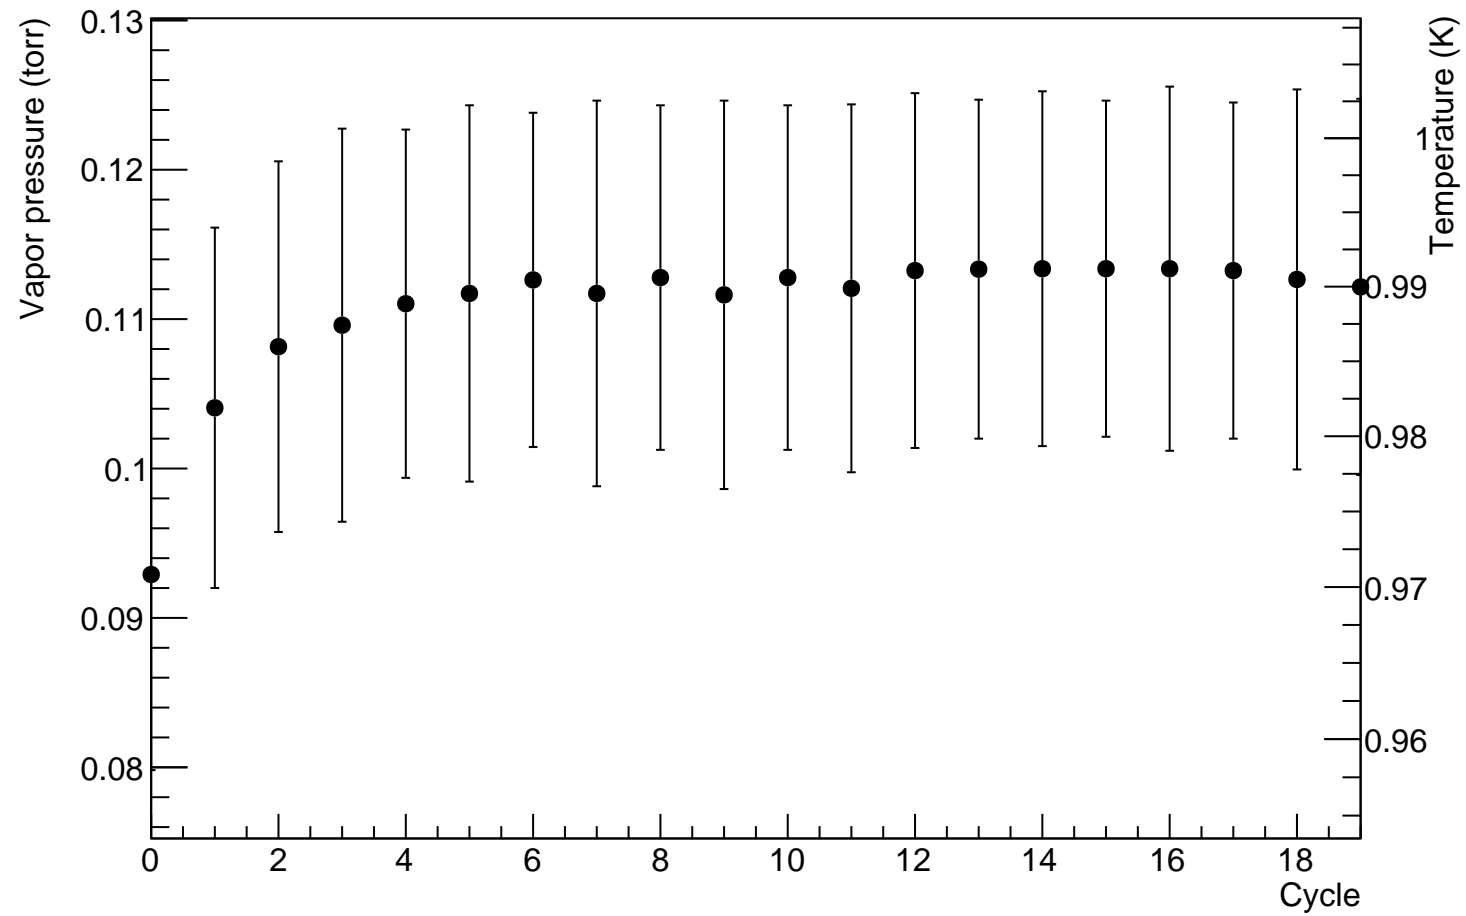


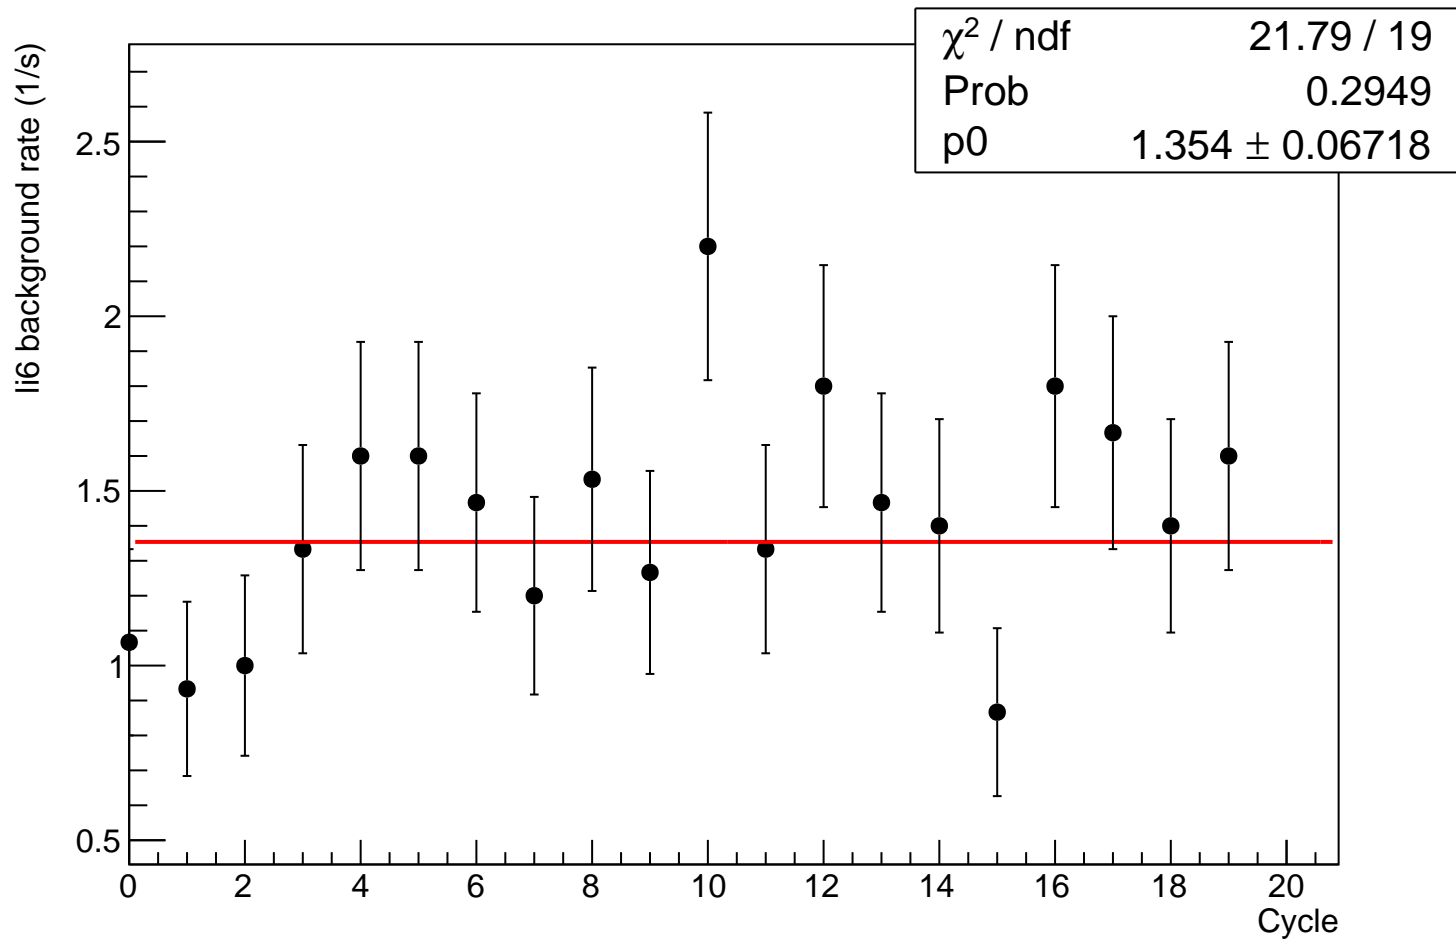


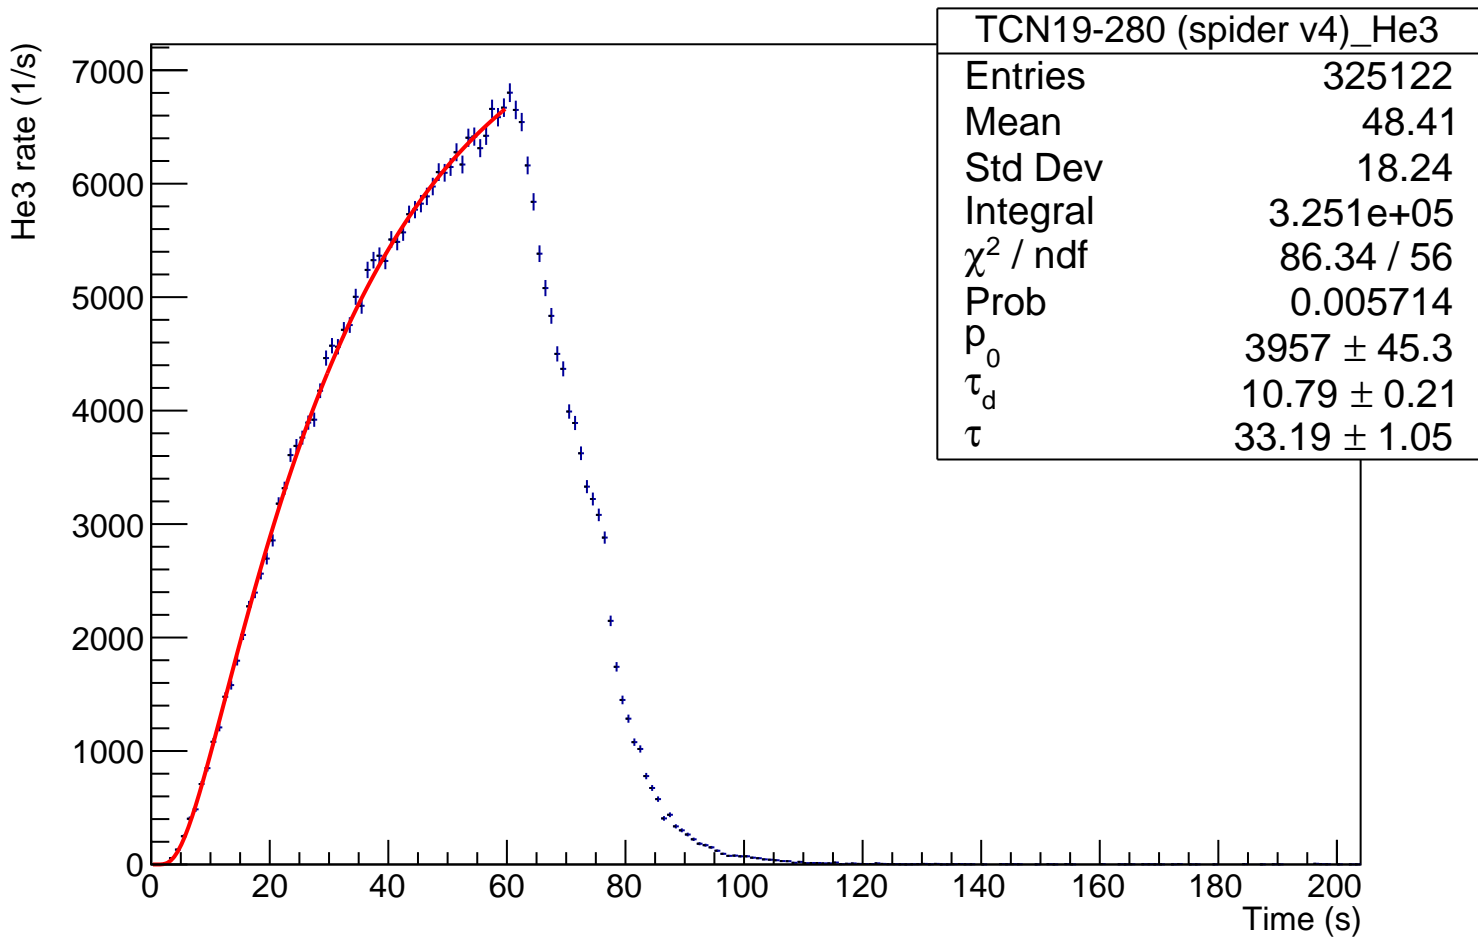

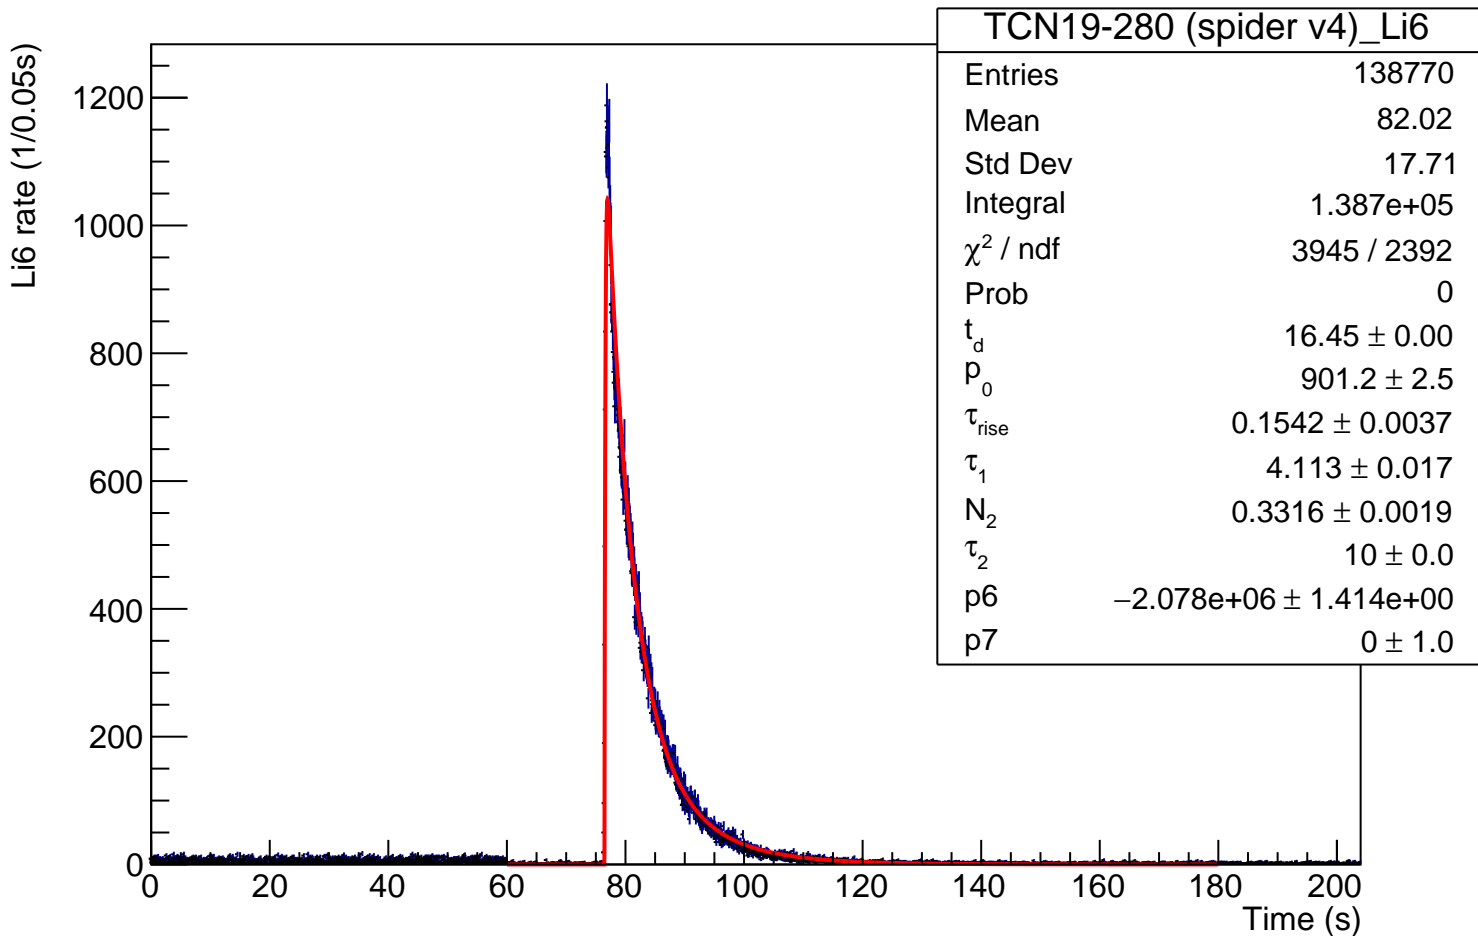


Normalized Li6 rate (1/0.05s)

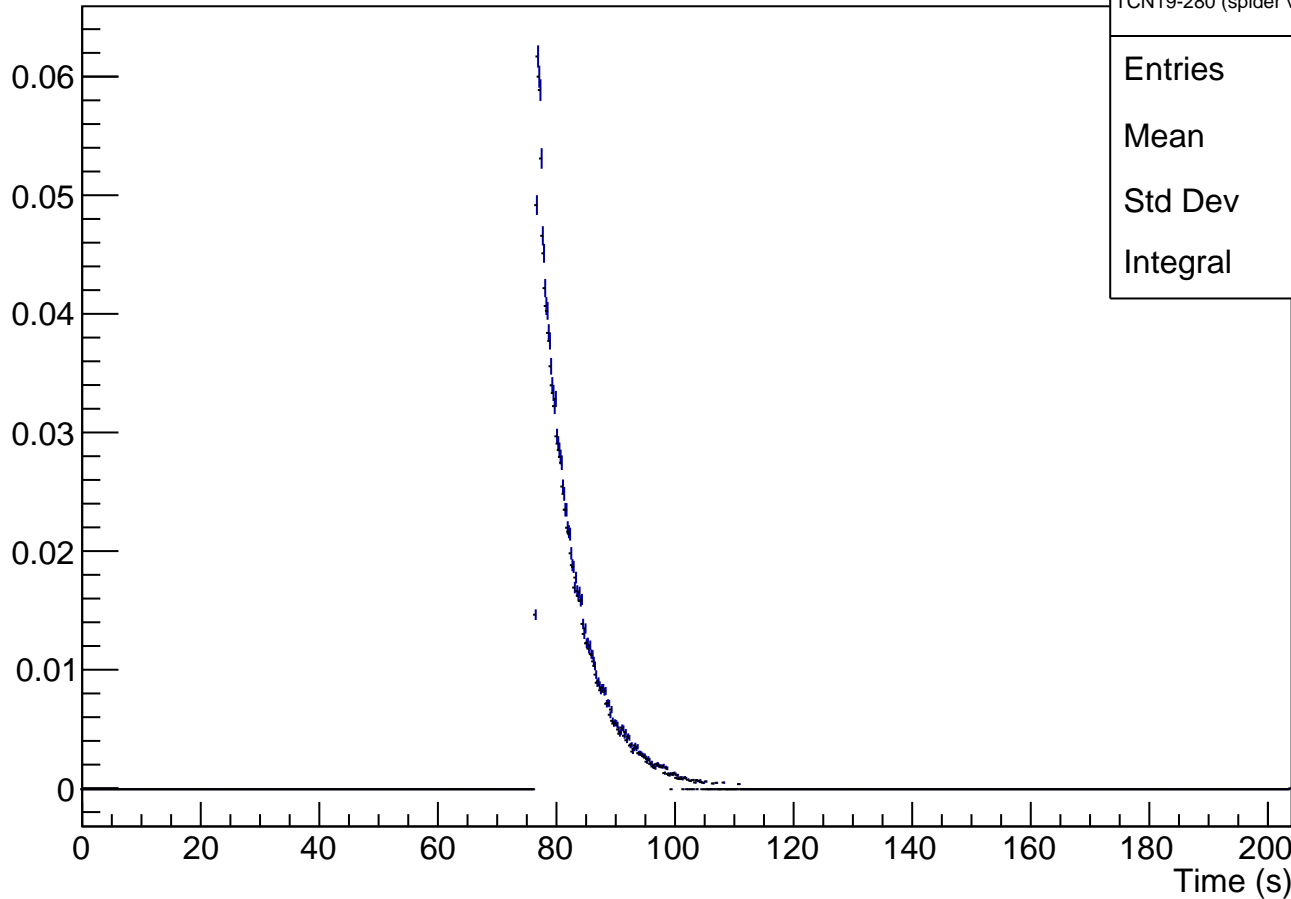

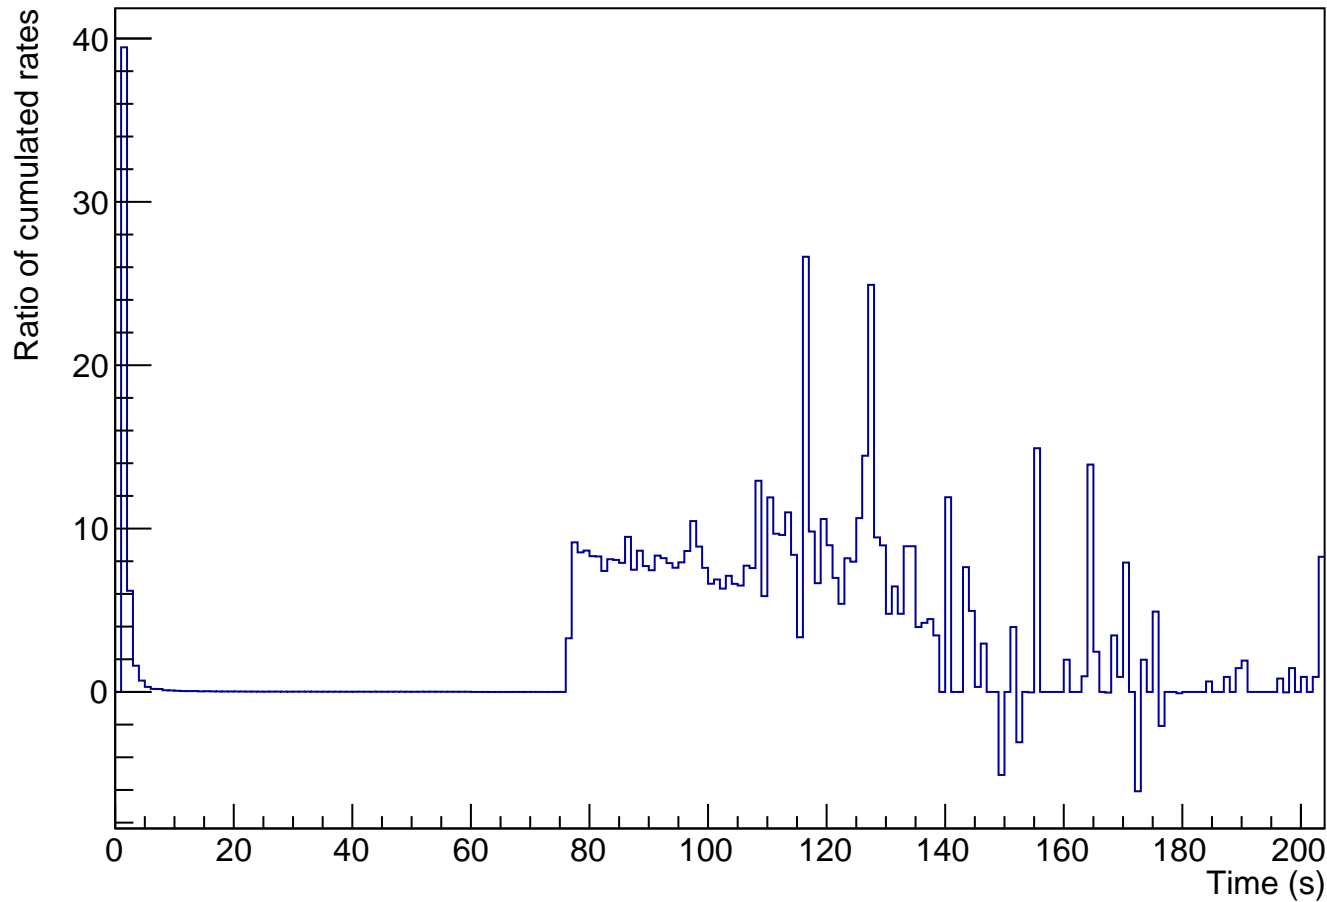

Average rate ratio

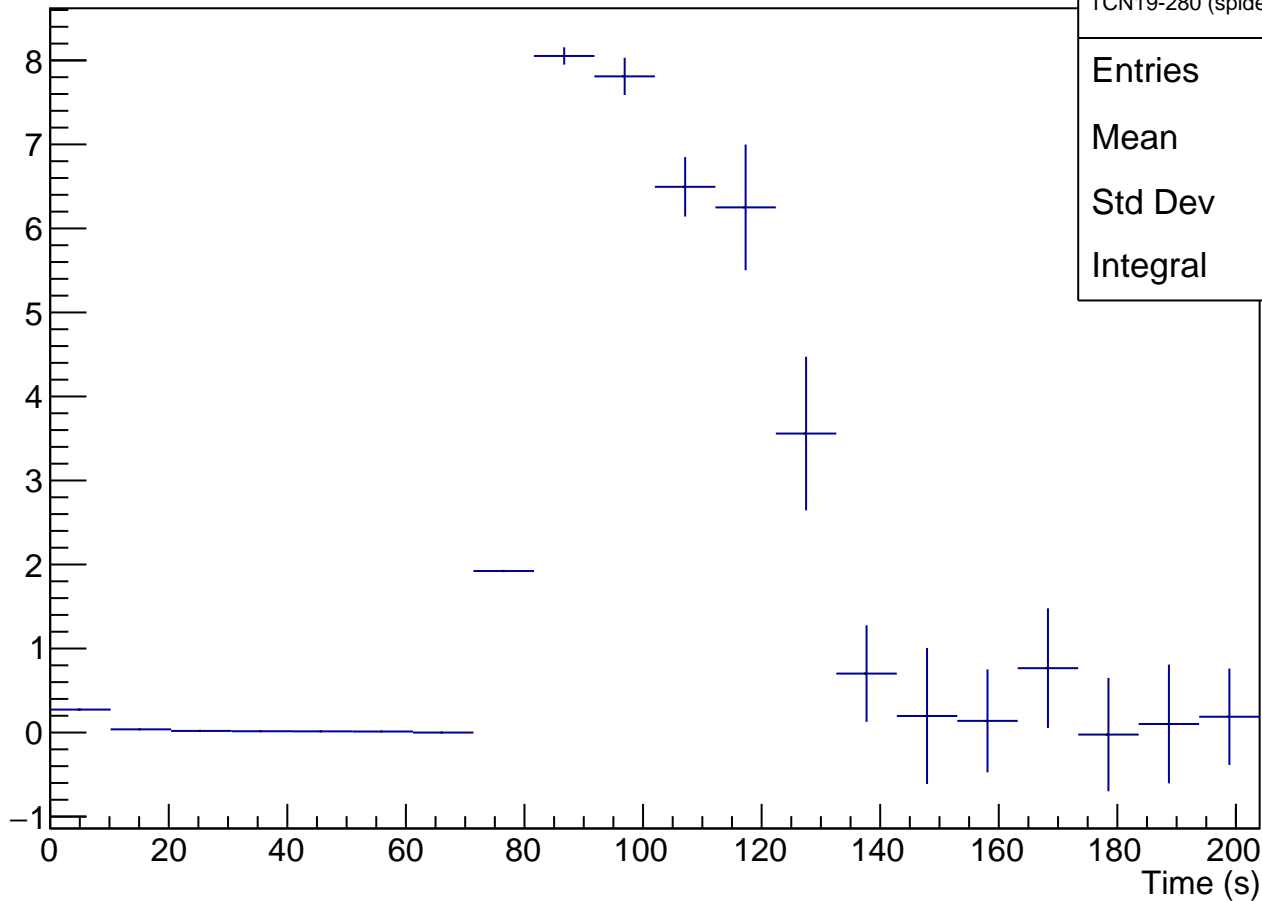

TCN19-280 (spider v4)\_ratio

Entries 267

Mean 110.3


Std Dev 22.21

Integral 36.53



# TCN19-280 (spider v4)

Count

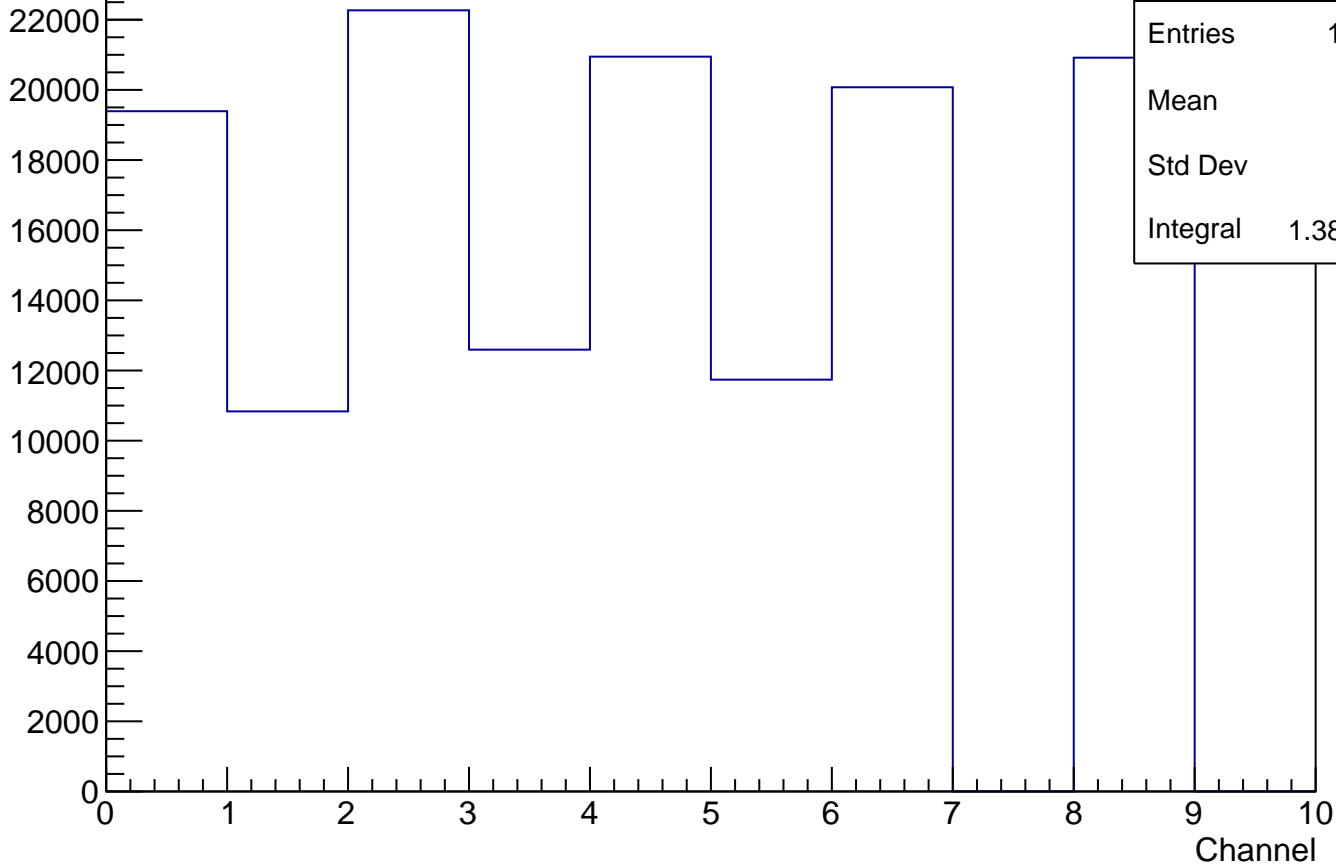

TCN19-280 (spider v4)\_ch

Entries 138770

Mean 3.772

Std Dev 2.587

Integral 1.388e+05

# Li6 window

Frequency

1  
0.8  
0.6  
0.4  
0.2  
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 20

Mean 0

Std Dev 0

Integral 0