





TCN19-193 (DRex Cu, -4.5cm), transmission normalized during prestorage

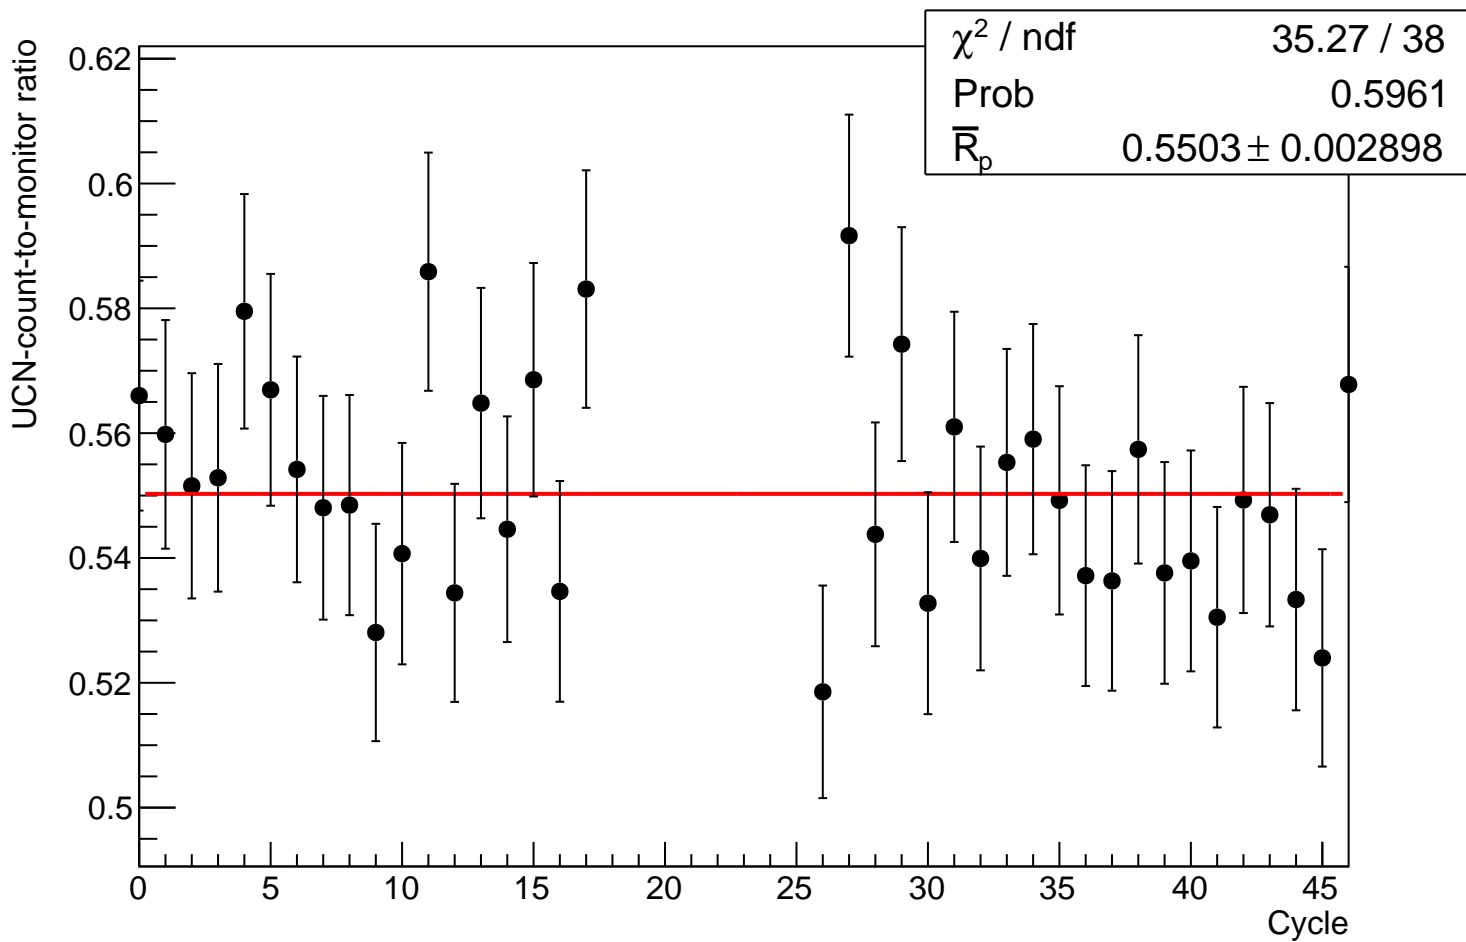



Graph

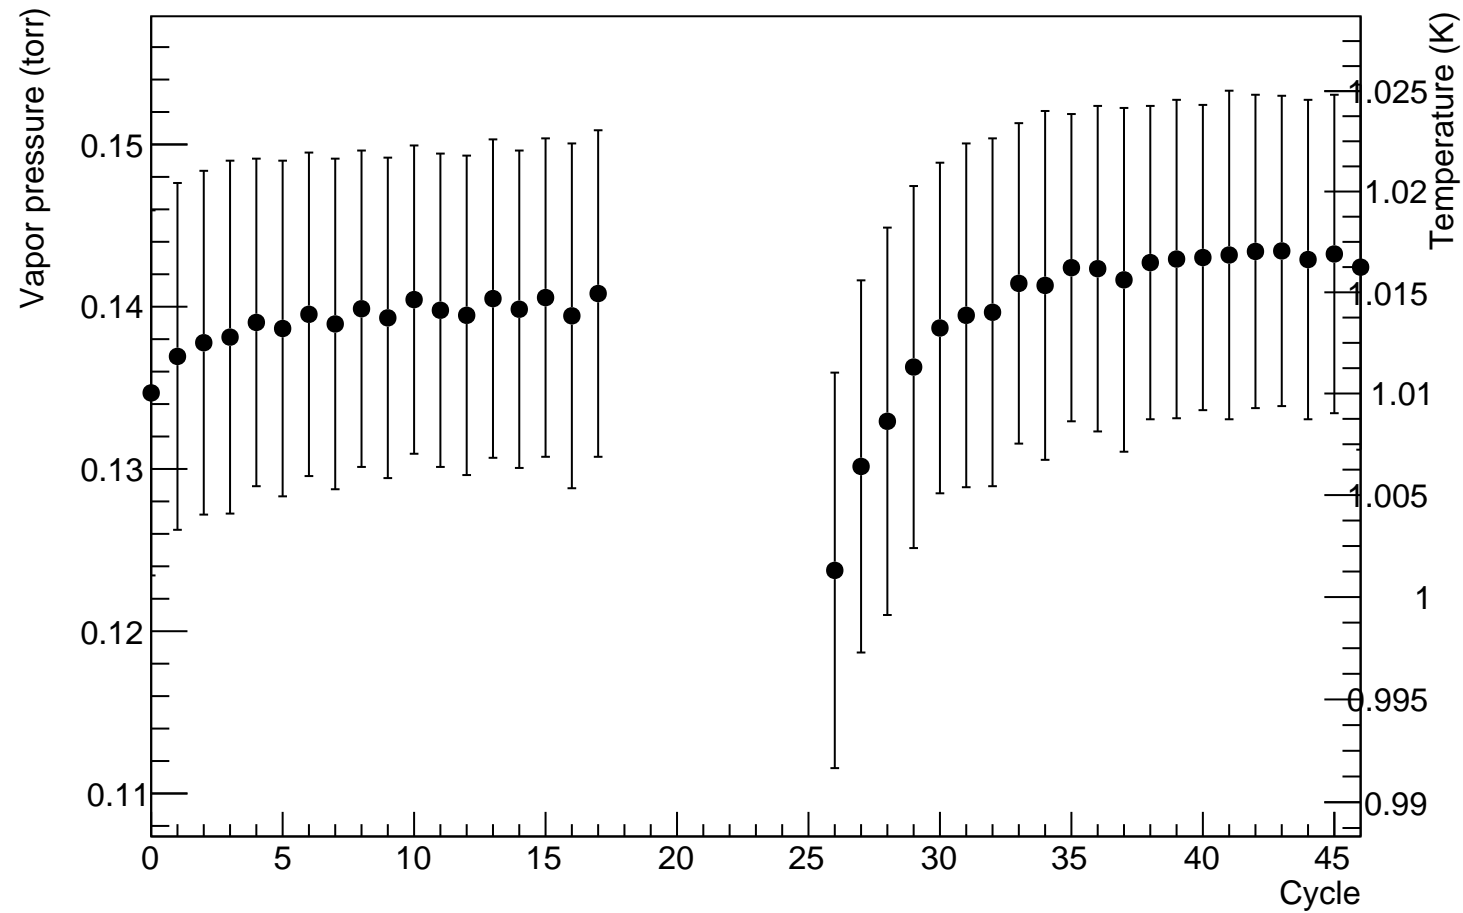


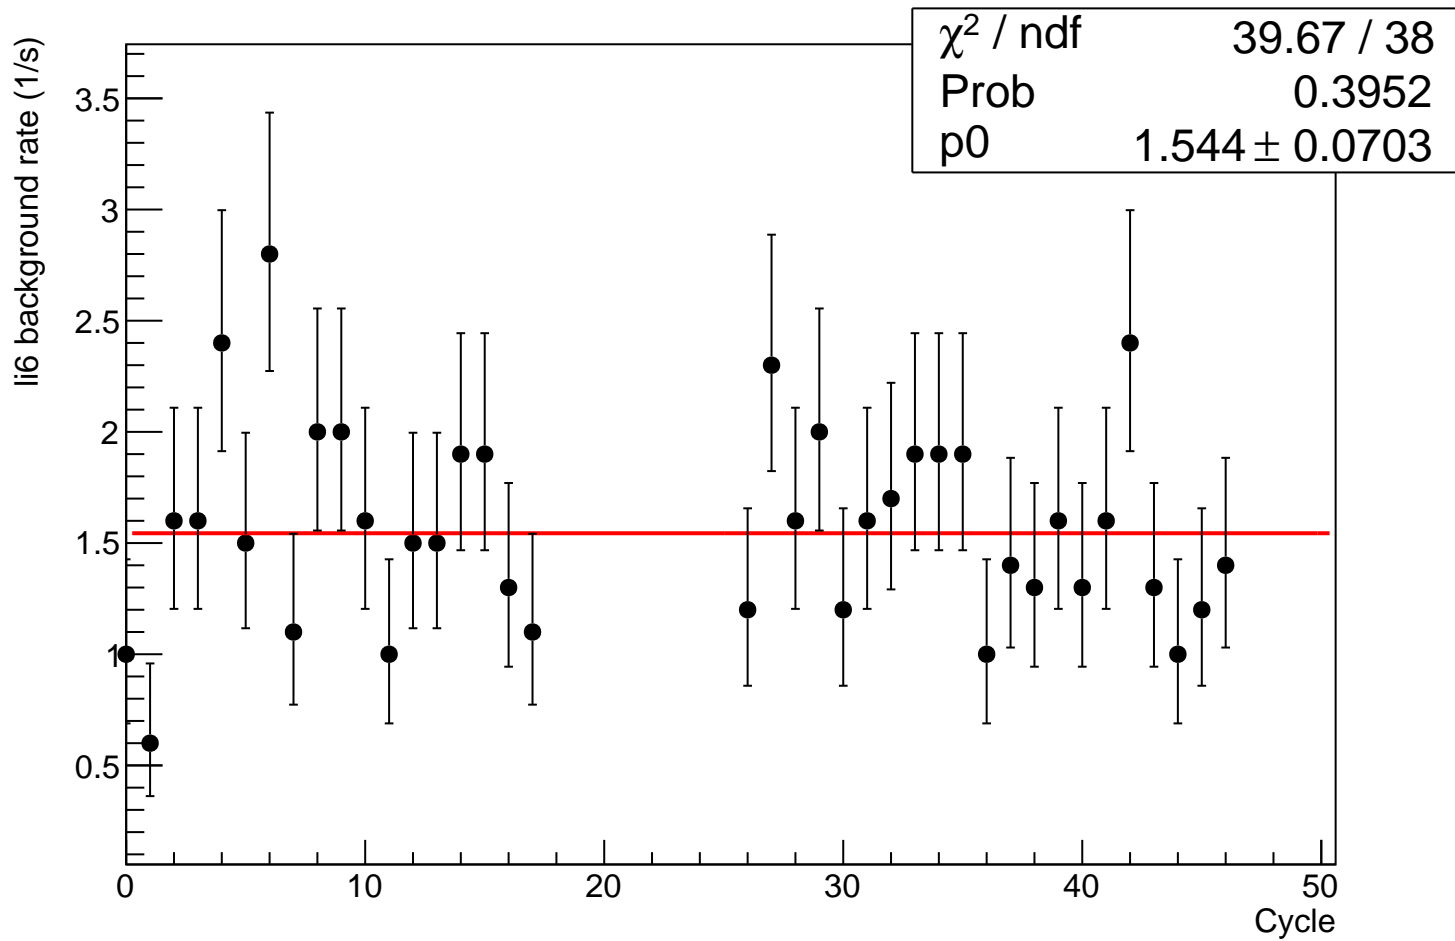

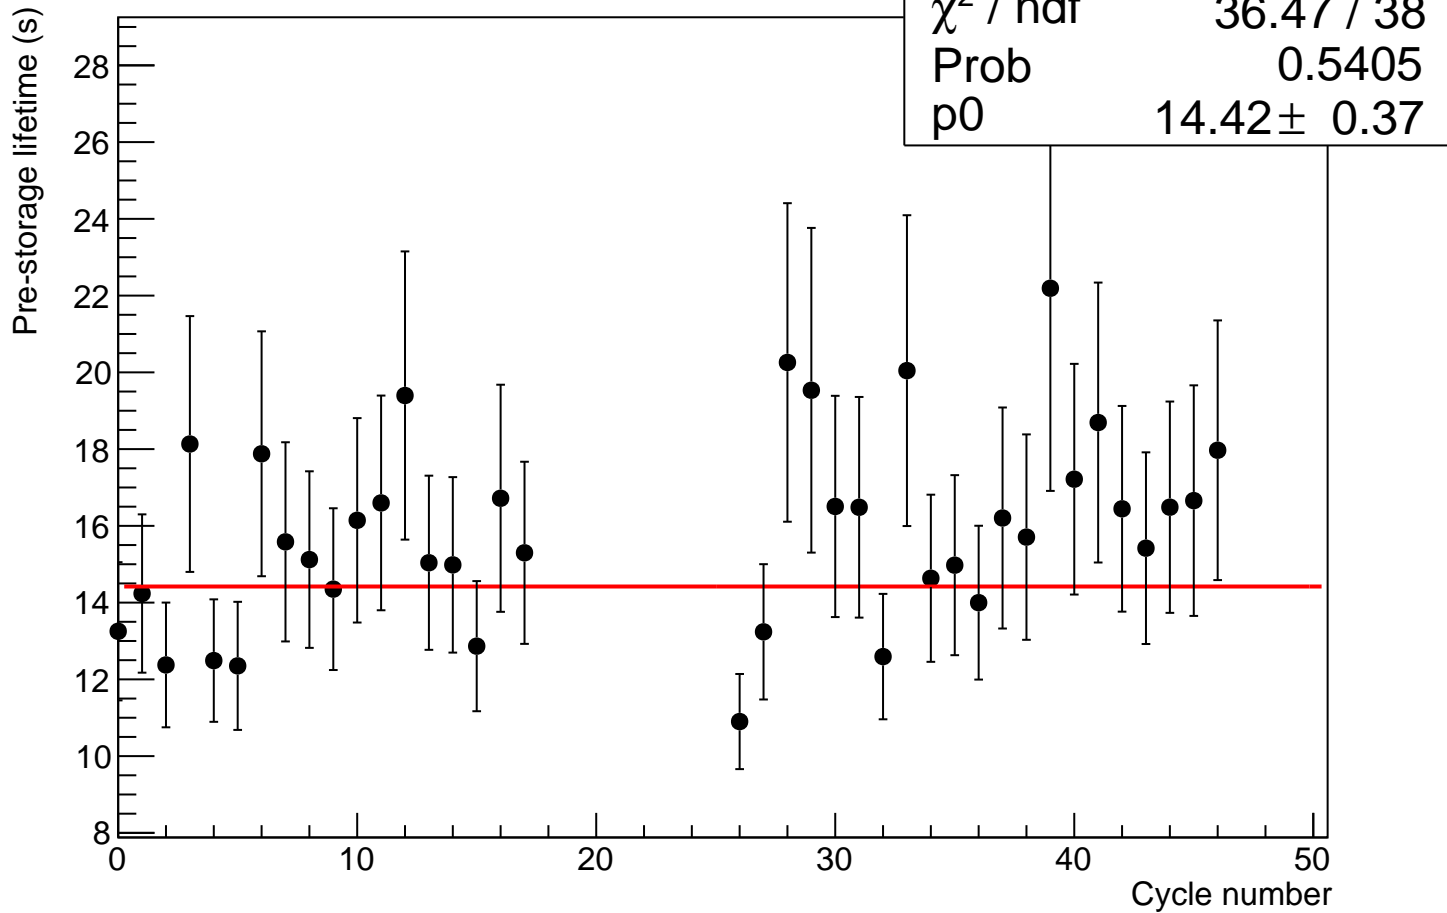


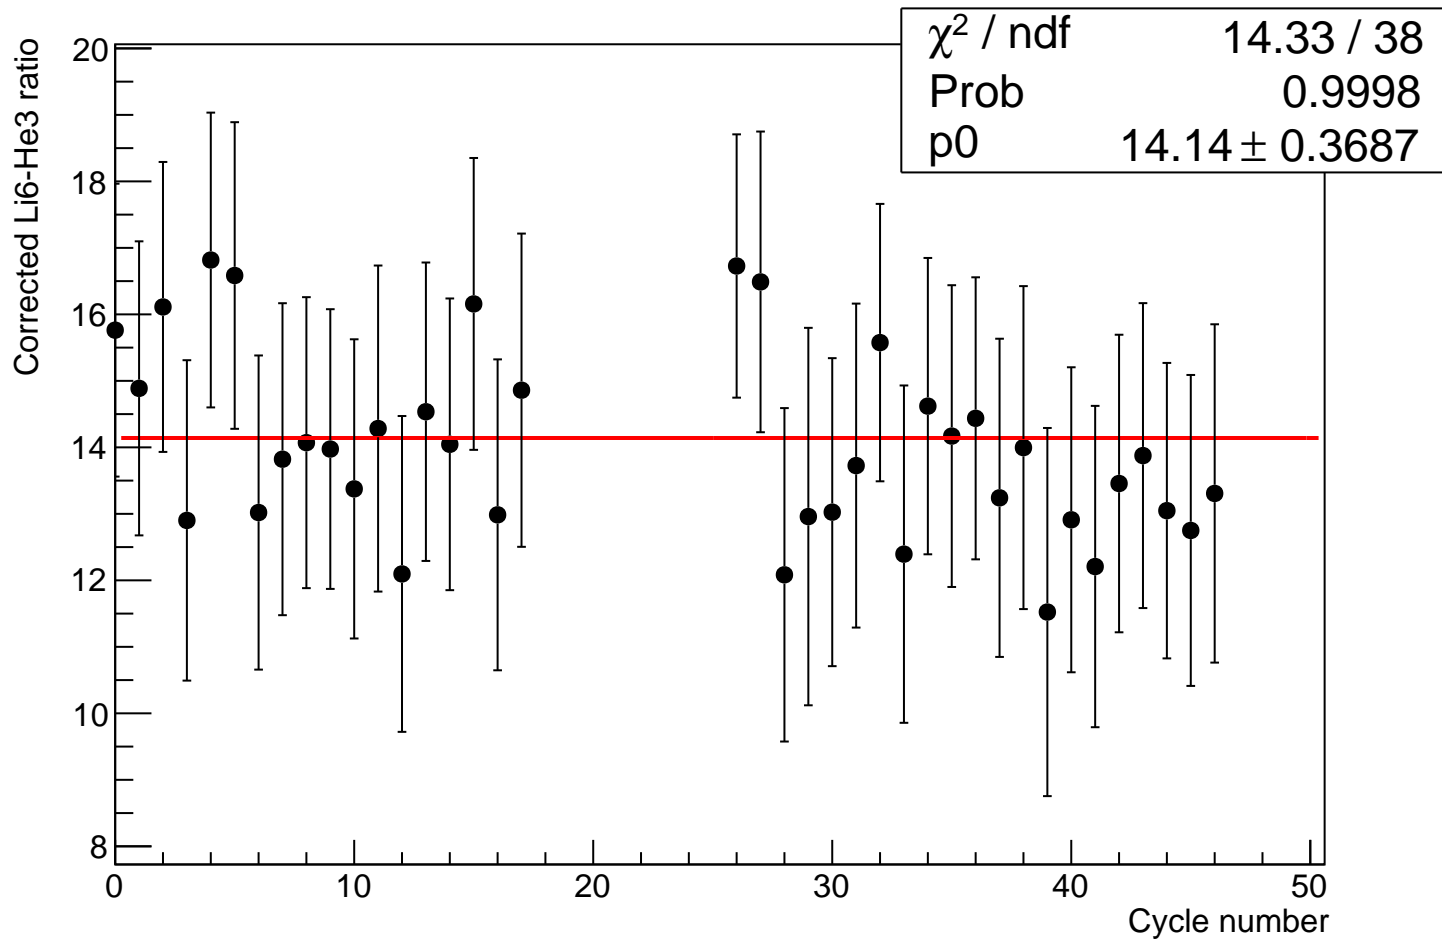

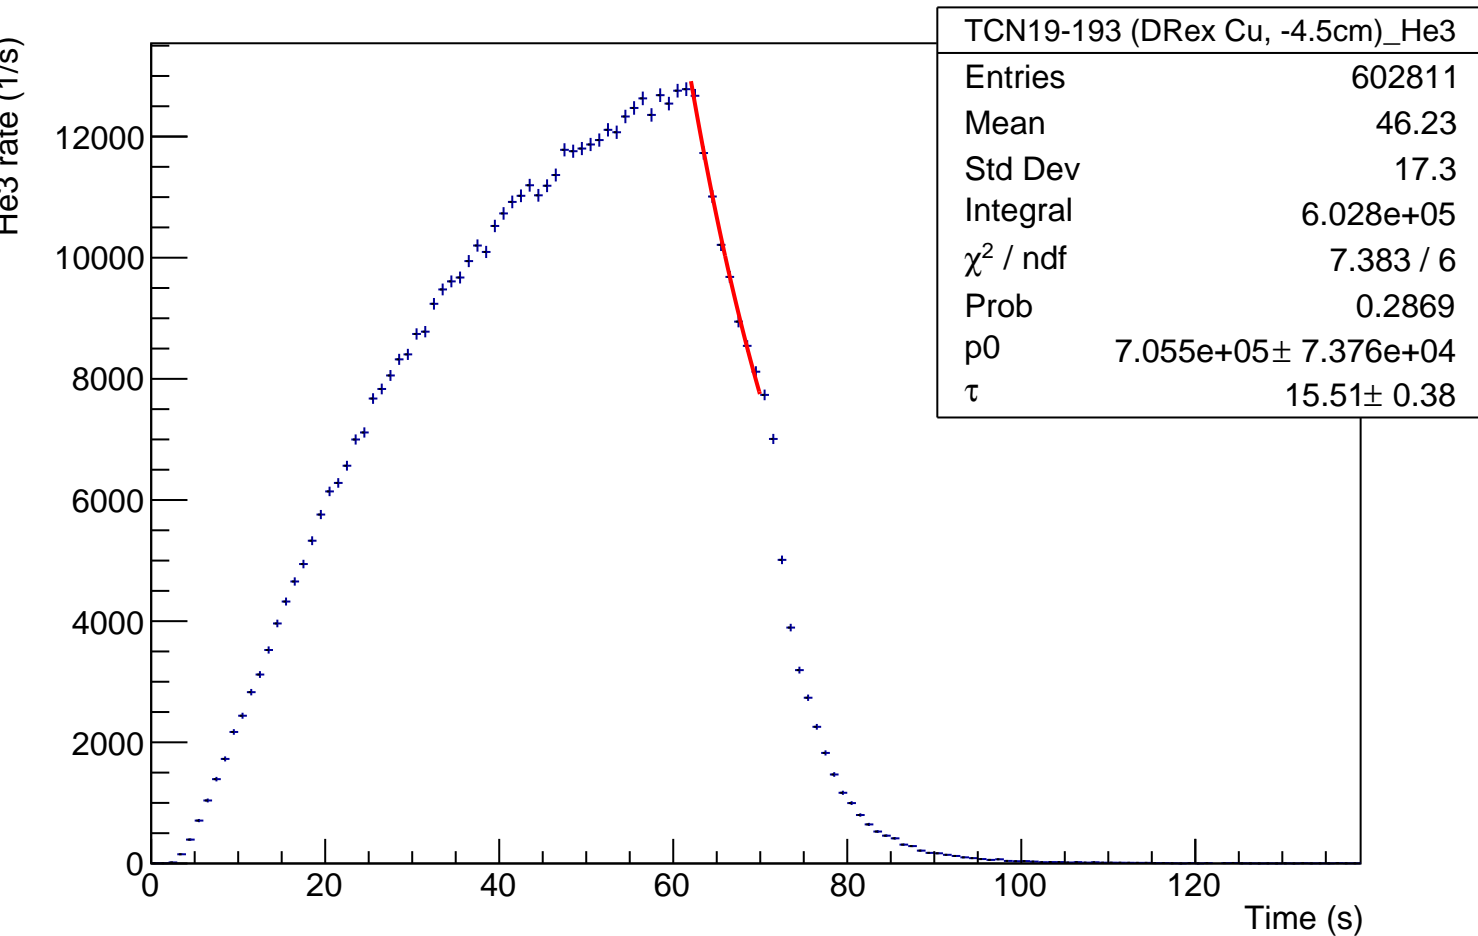

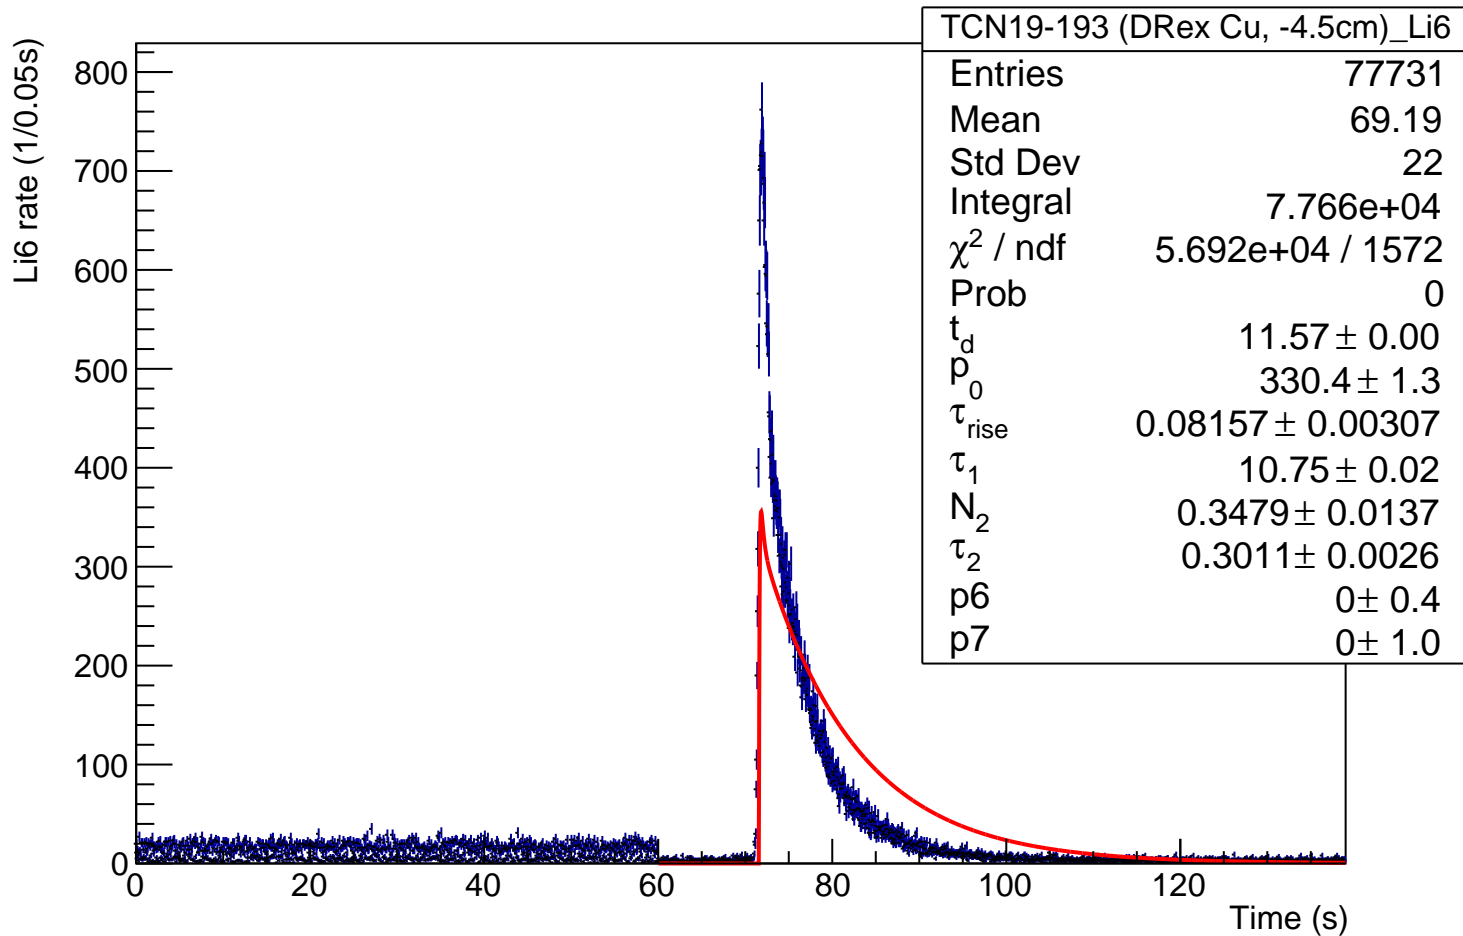


Normalized Li6 rate (1/0.05s)

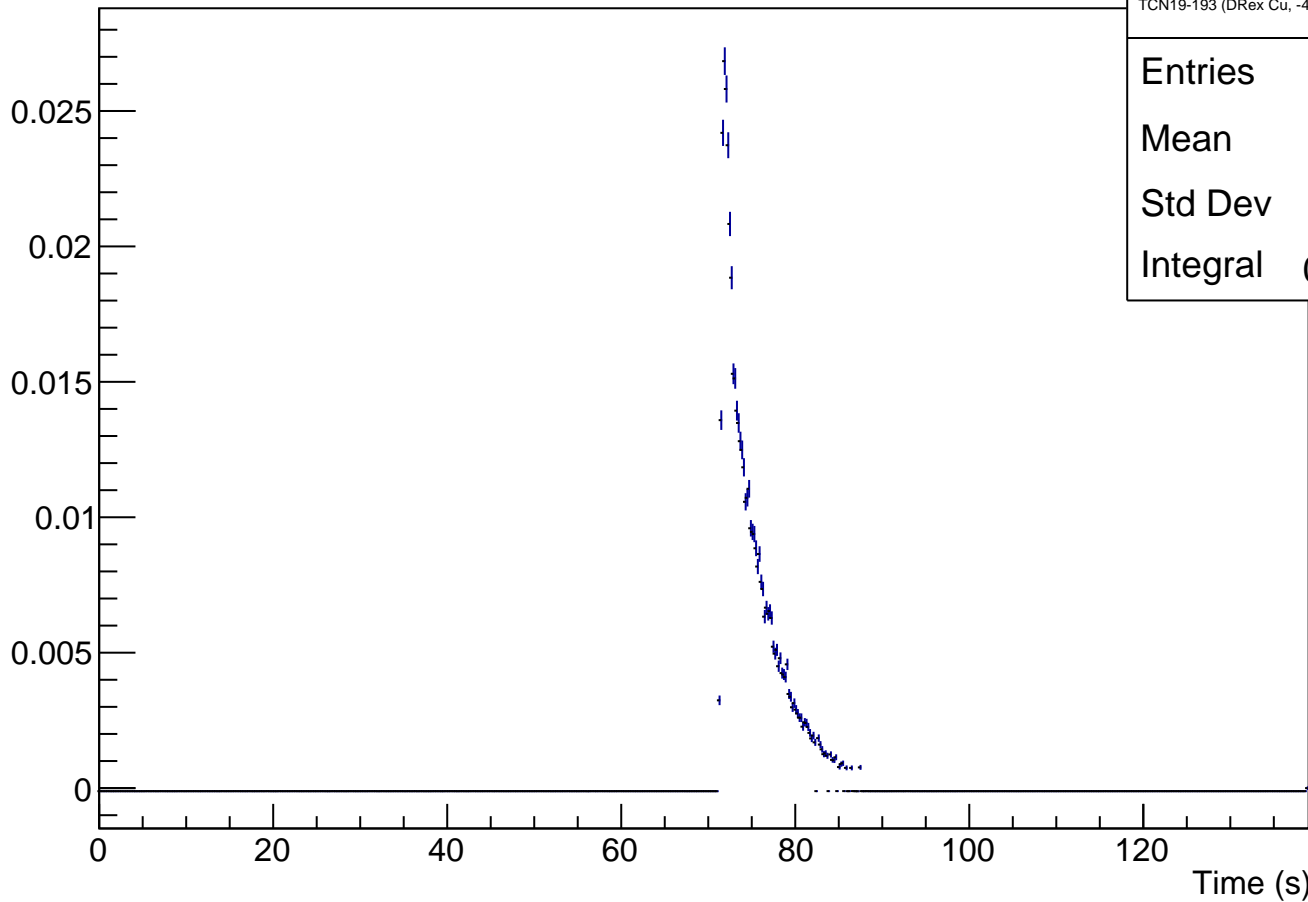


TCN19-193 (DRex Cu, -4.5cm)_Li6_norm


Entries	61243
Mean	69.15
Std Dev	18.65
Integral	0.4157

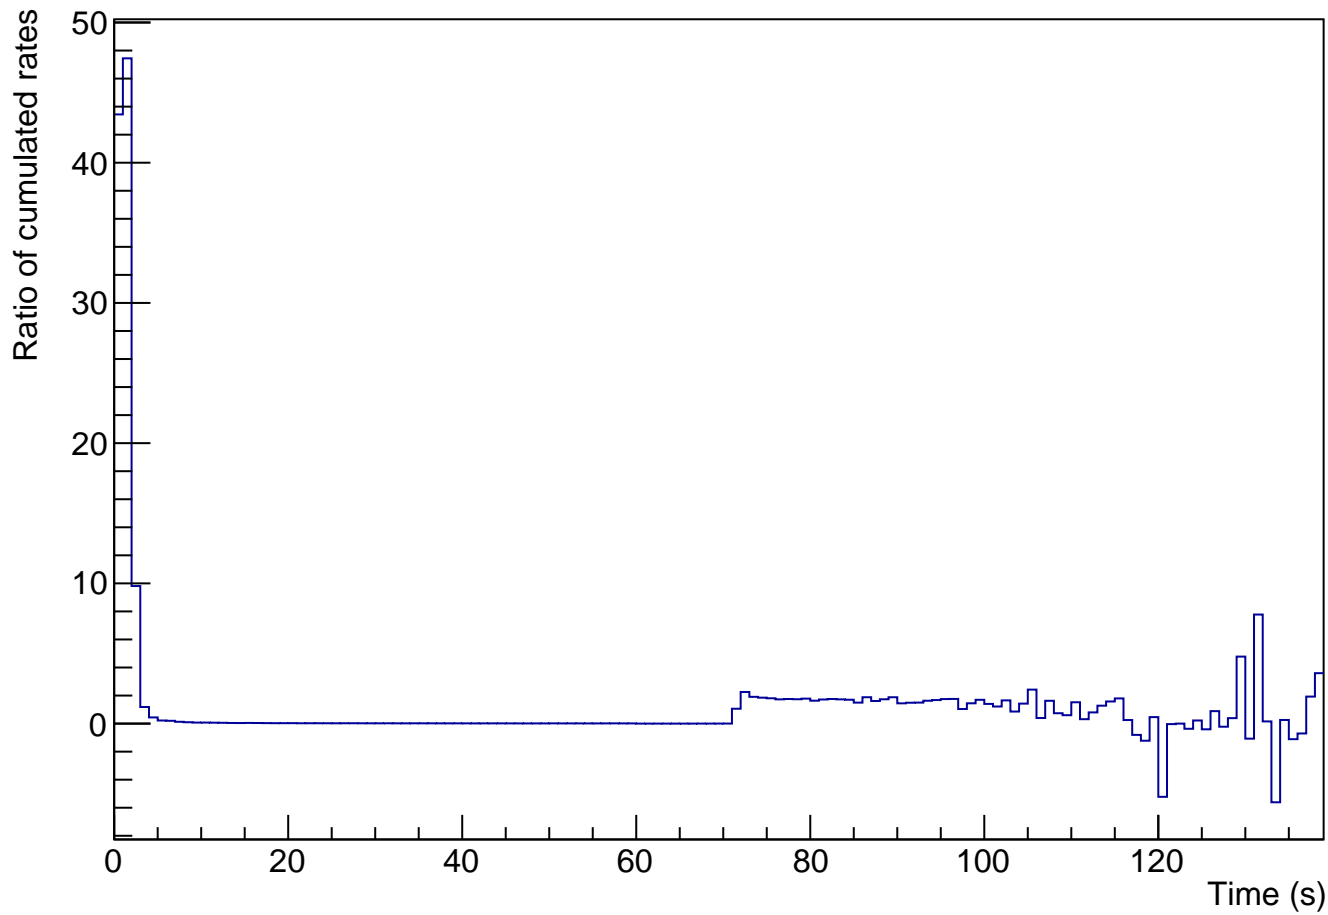

Average rate ratio

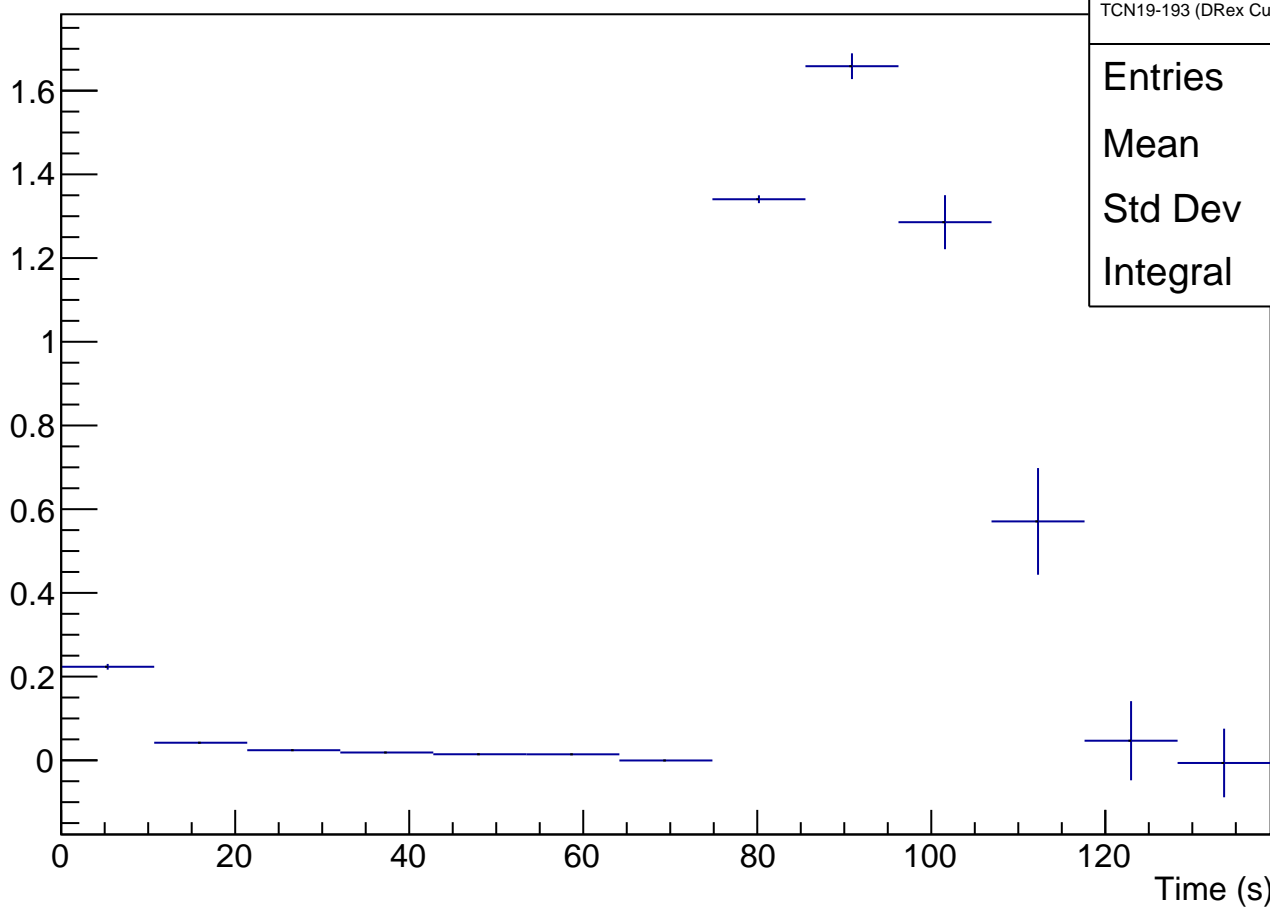

TCN19-193 (DRex Cu, -4.5cm)

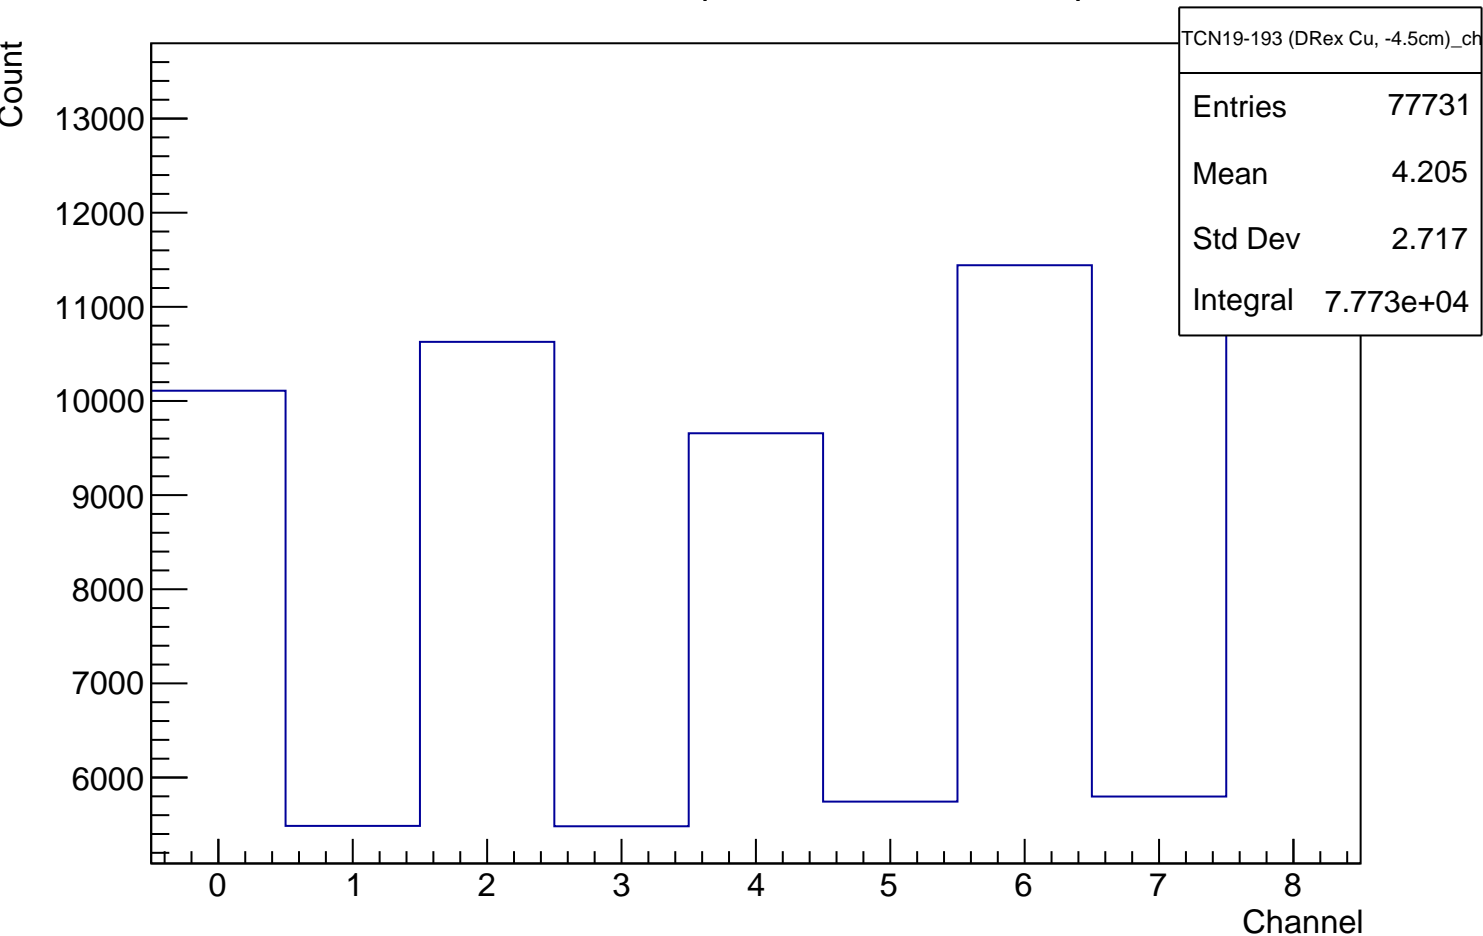

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 39

Mean 0

Std Dev 0

Integral 0