



TCN19-193 (DRex Cu, 80cm), transmission normalized during prestorage


UCN-count-to-monitor ratio

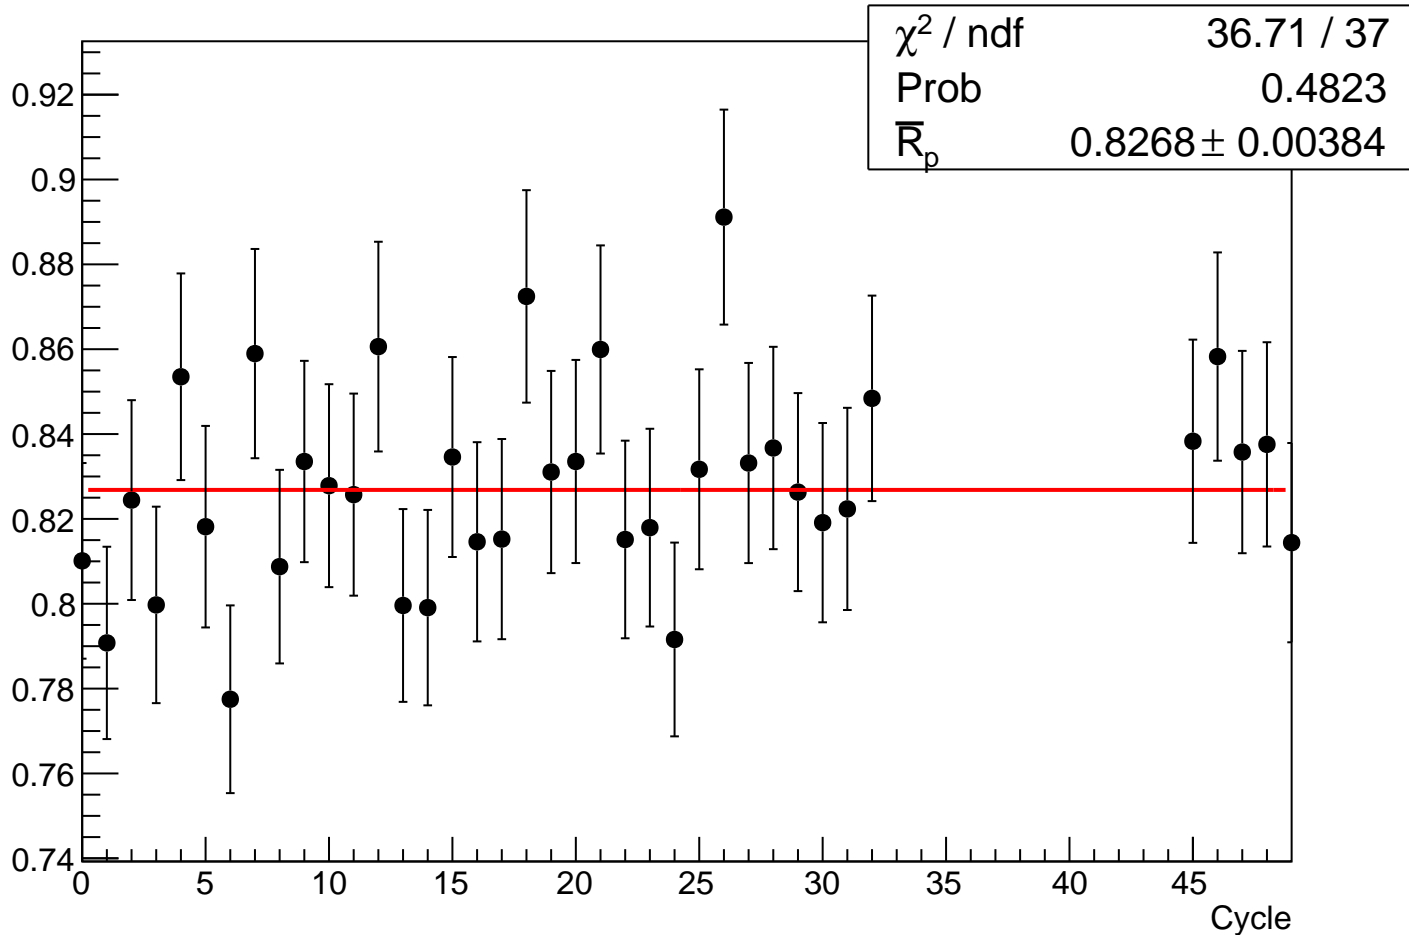

Graph

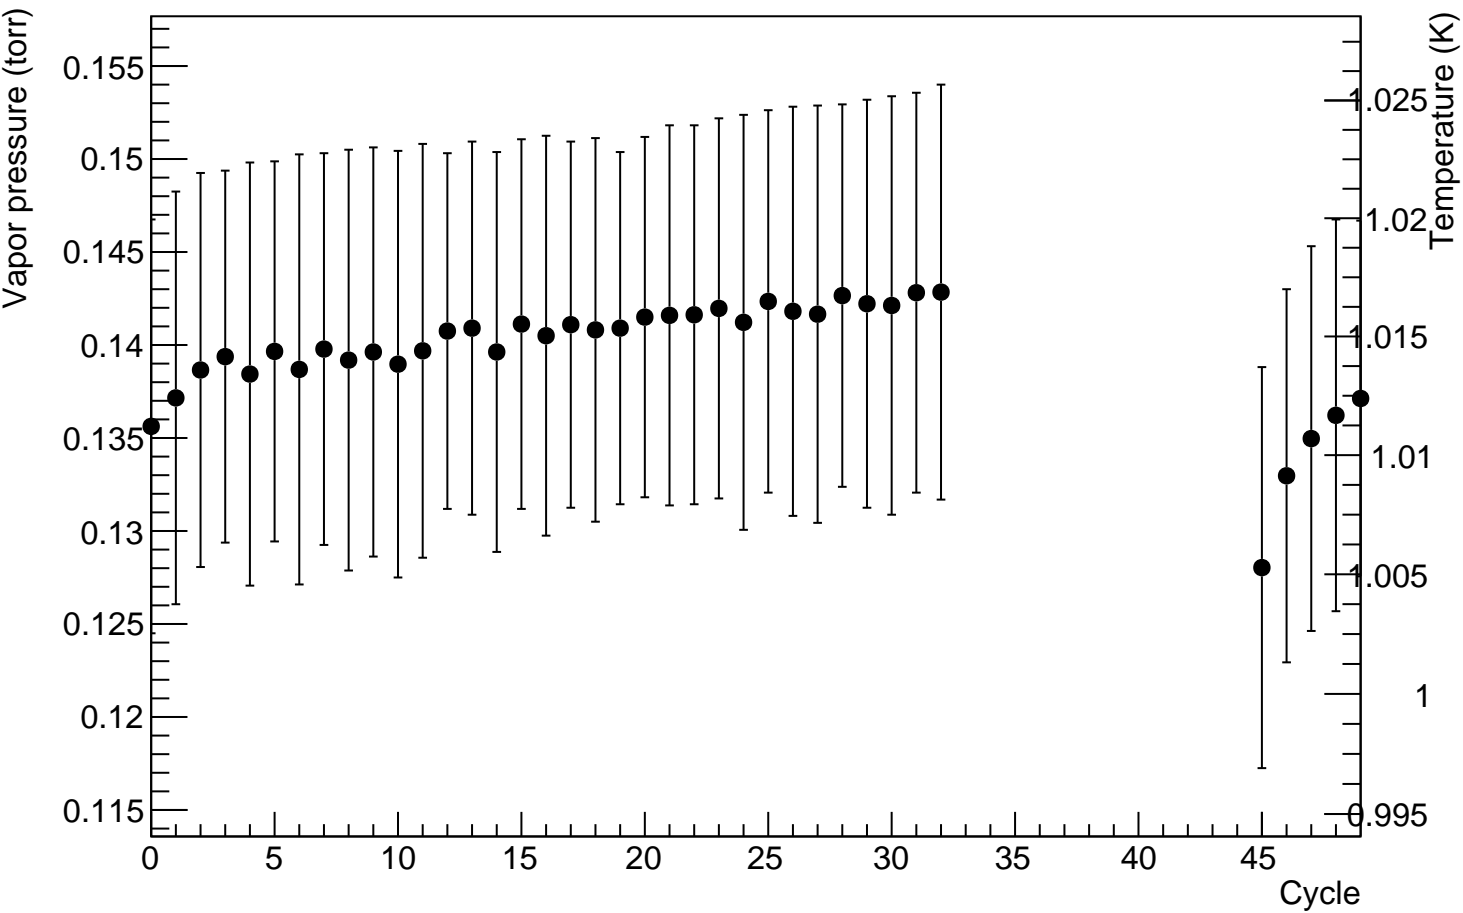

li6 background rate (1/s)

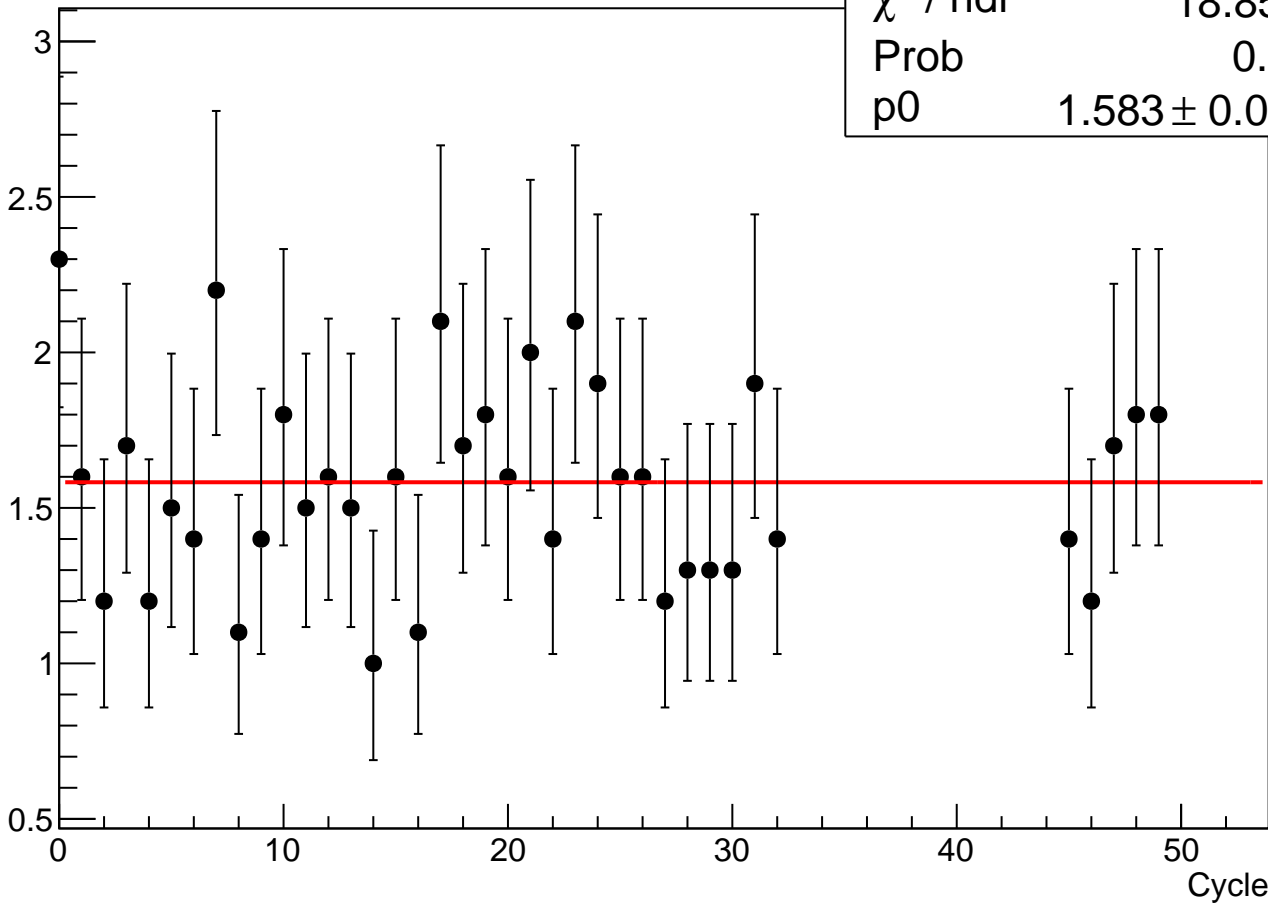

χ^2 / ndf


18.85 / 37

Prob

0.9943


p0


1.583 ± 0.07153

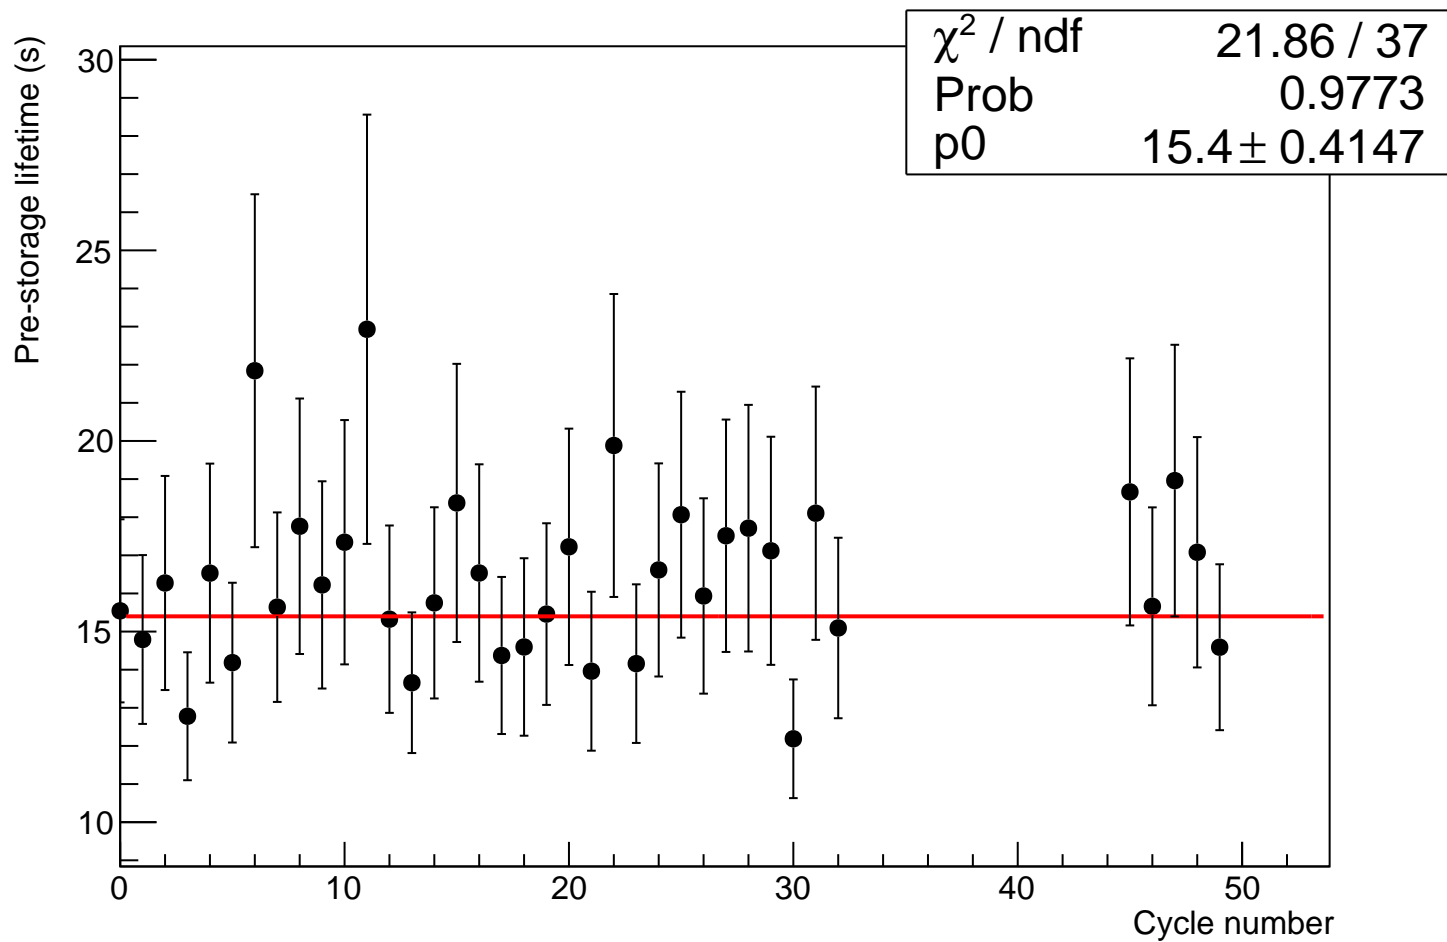


Corrected Li6-He3 ratio


χ^2 / ndf 7.331 / 37
Prob 1
p0 20.65 ± 0.5621

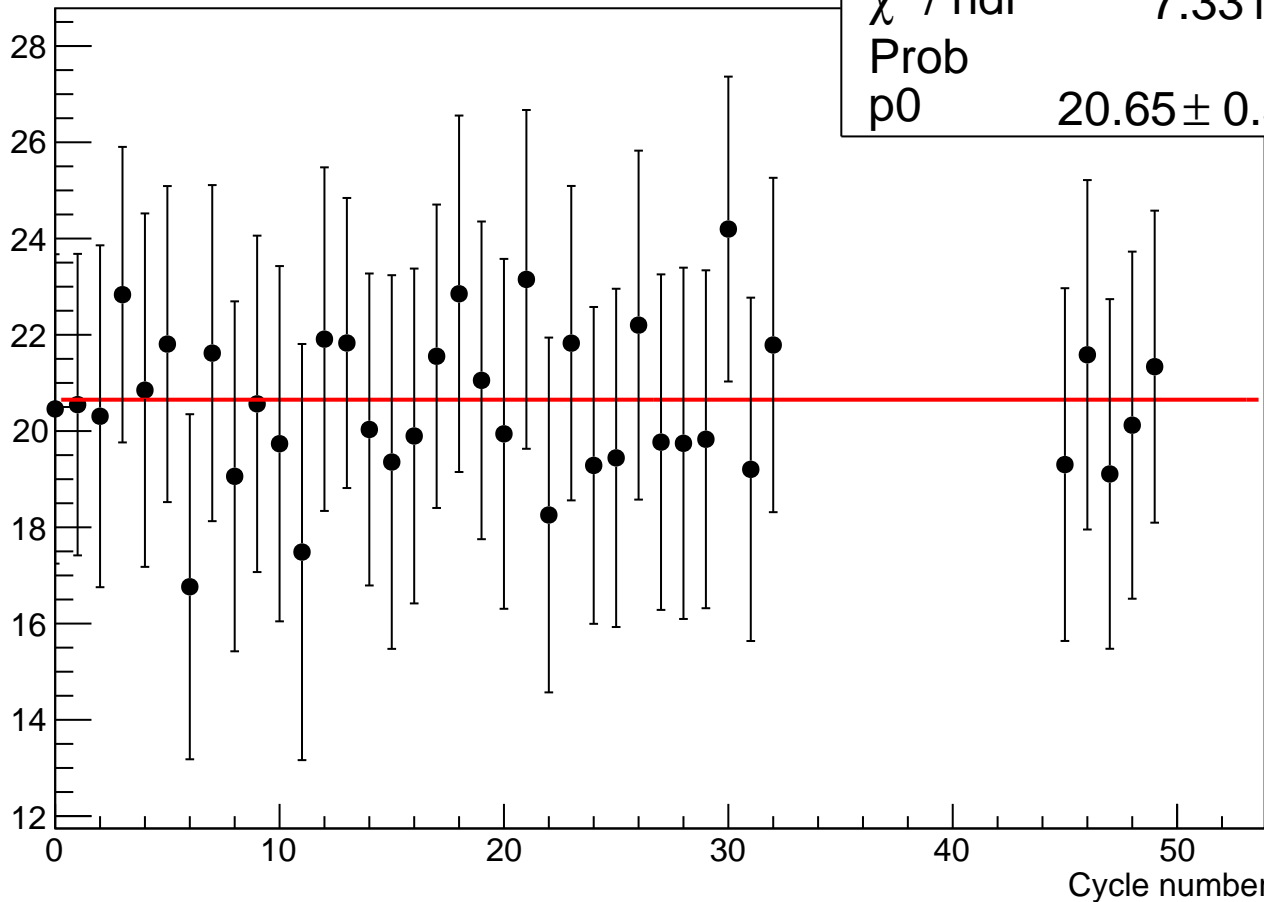

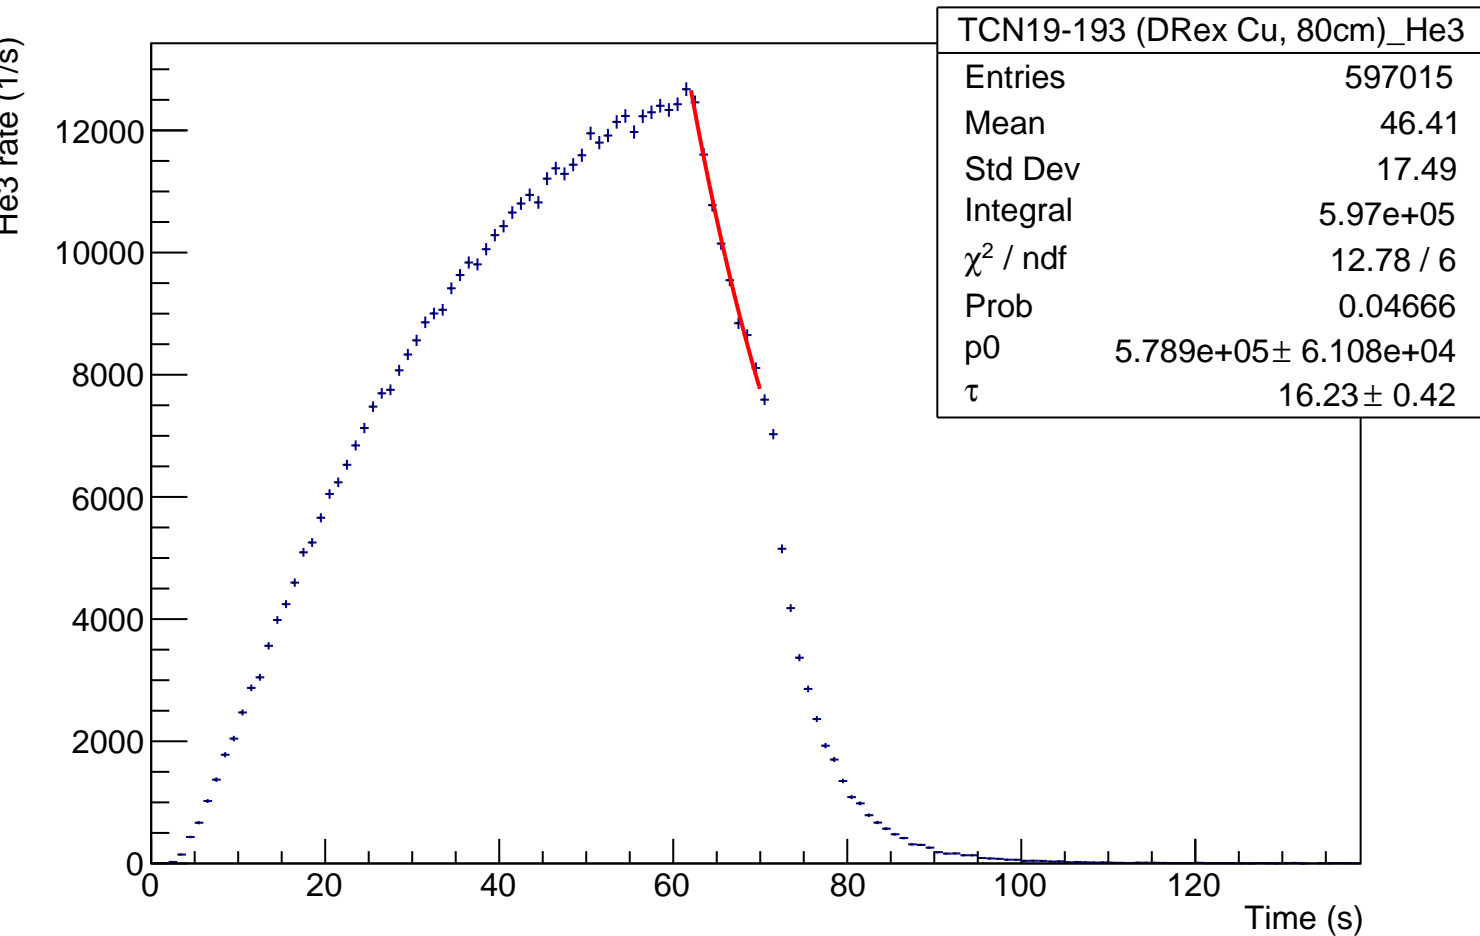

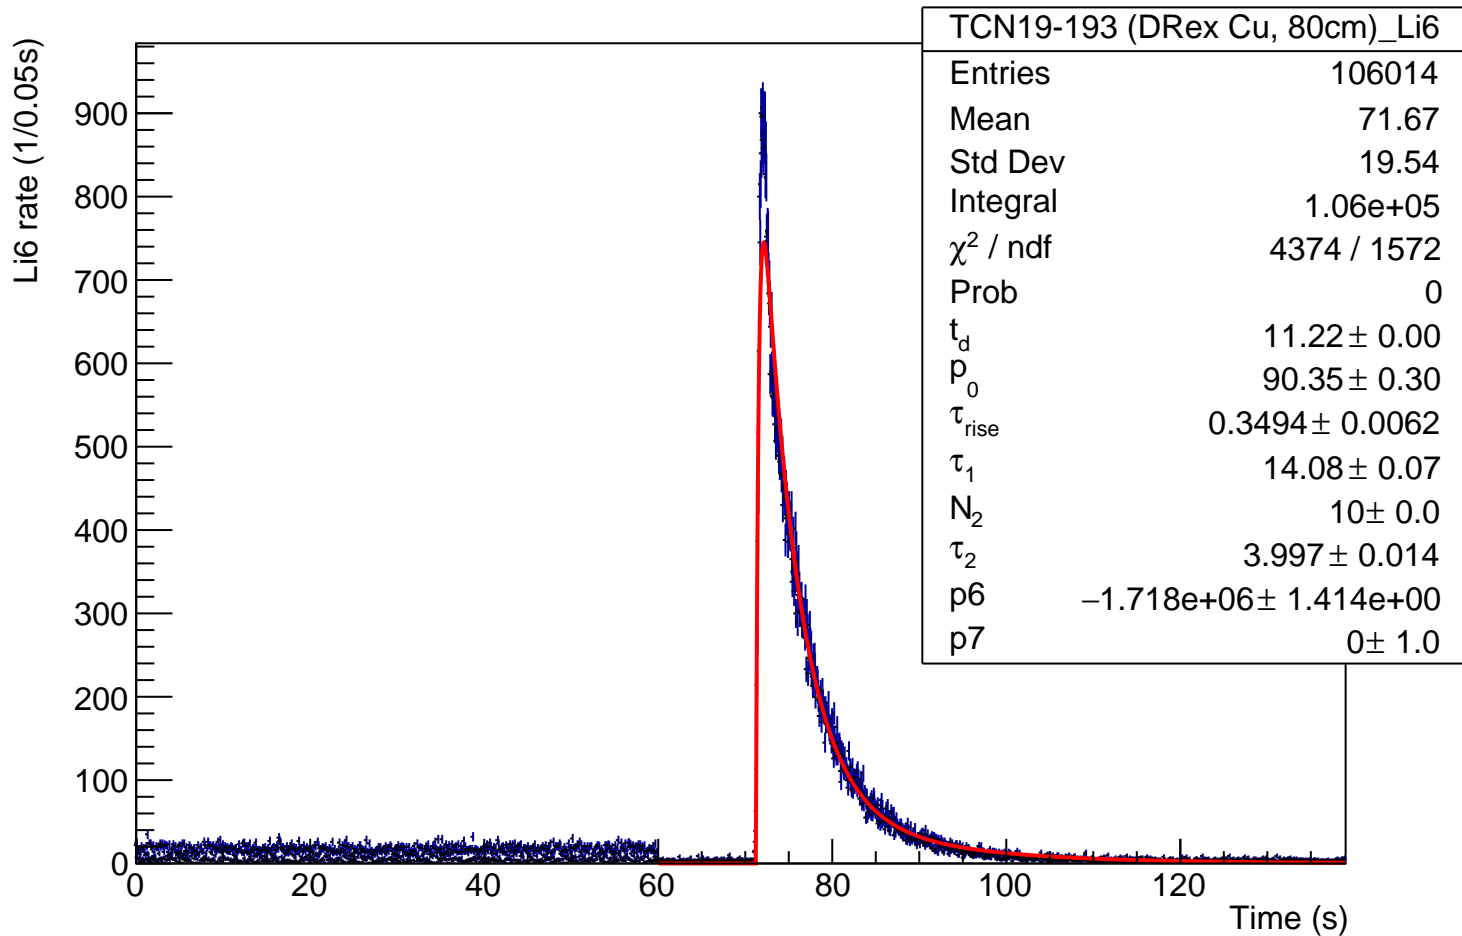


Normalized Li6 rate (1/0.05s)

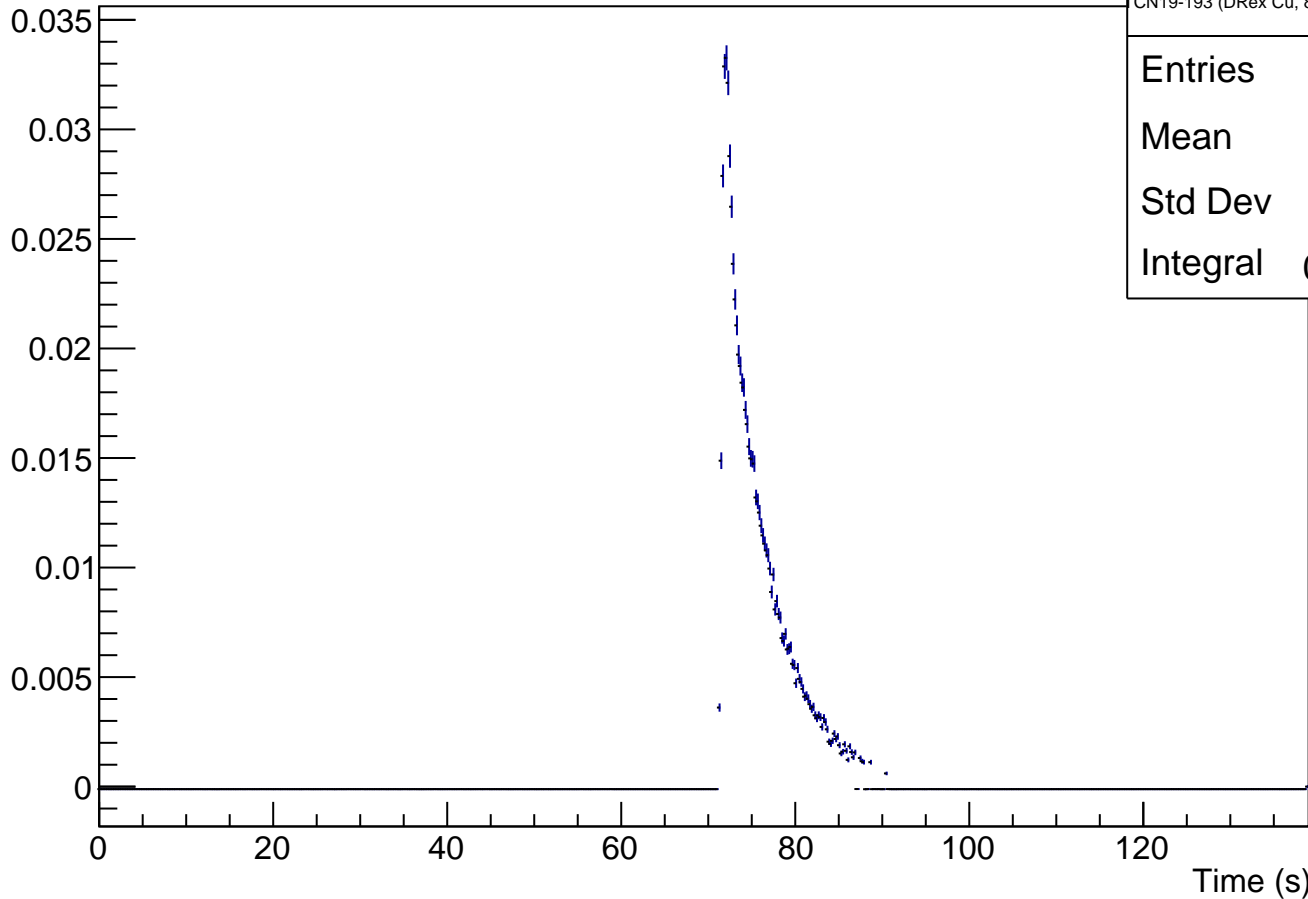


CN19-193 (DRex Cu, 80cm)_Li6_norm

Entries	88718
Mean	71.85
Std Dev	16.62
Integral	0.6788

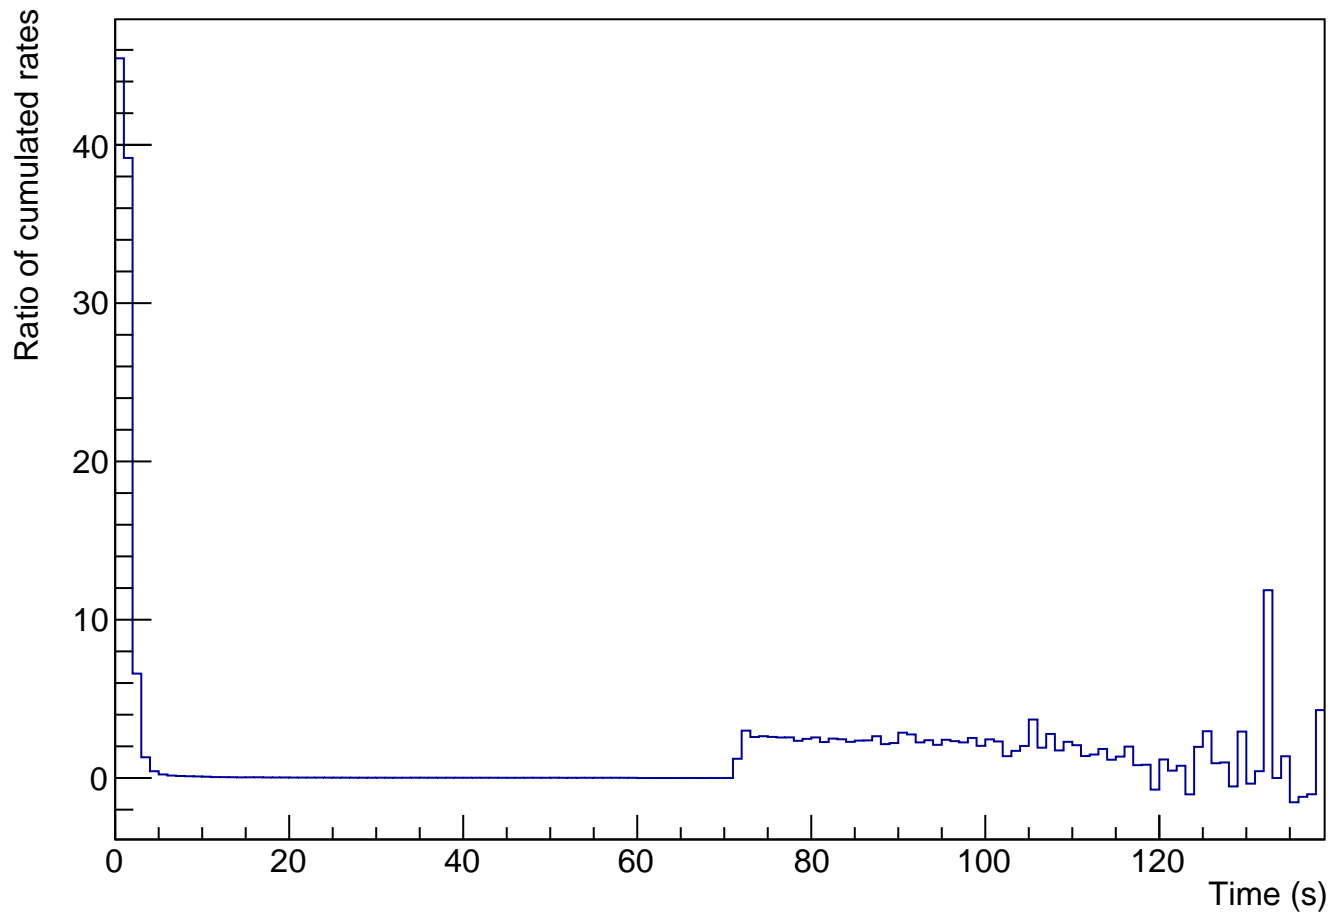


Average rate ratio

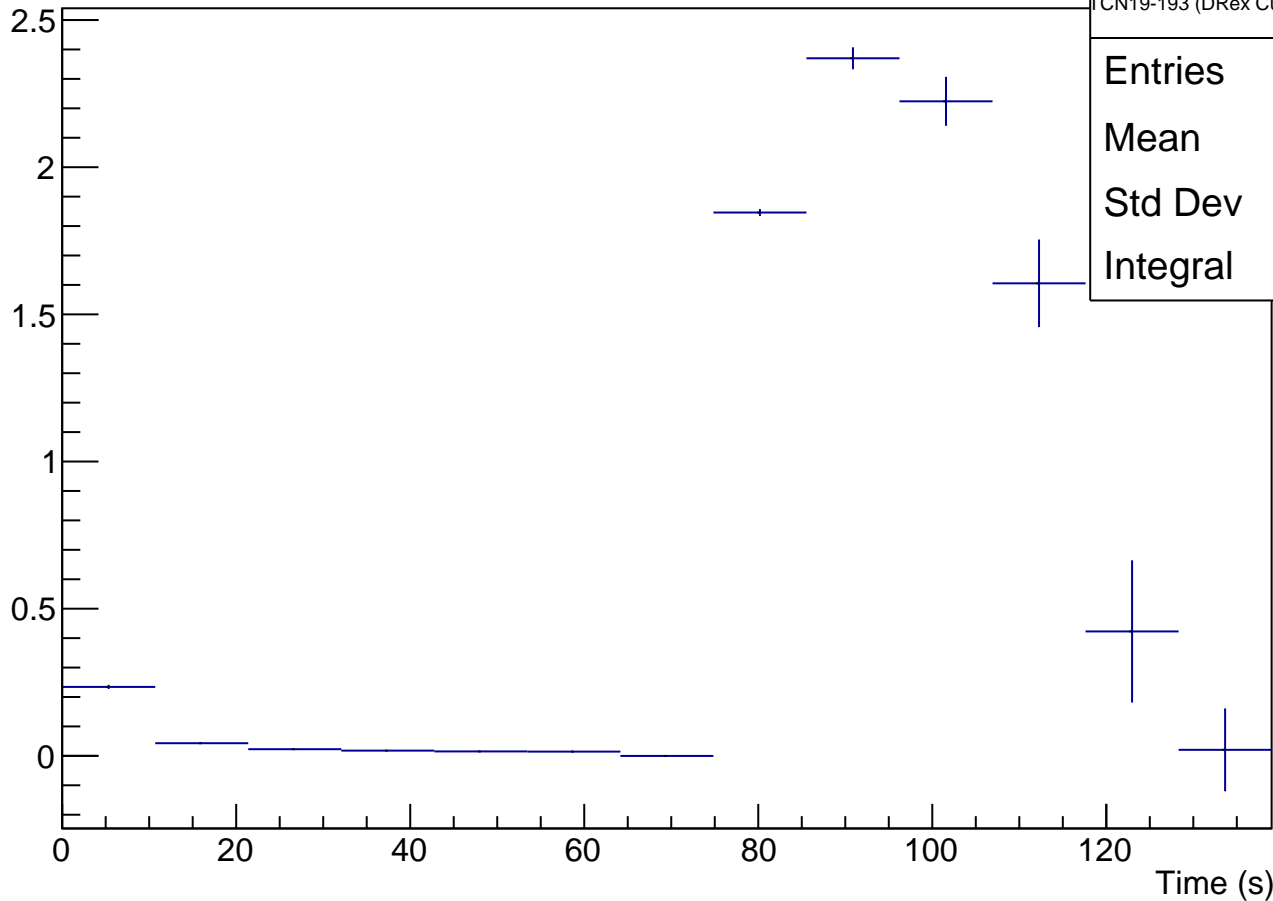

Entries	383
Mean	91.34
Std Dev	18.97
Integral	8.835

TCN19-193 (DRex Cu, 80cm)

Count

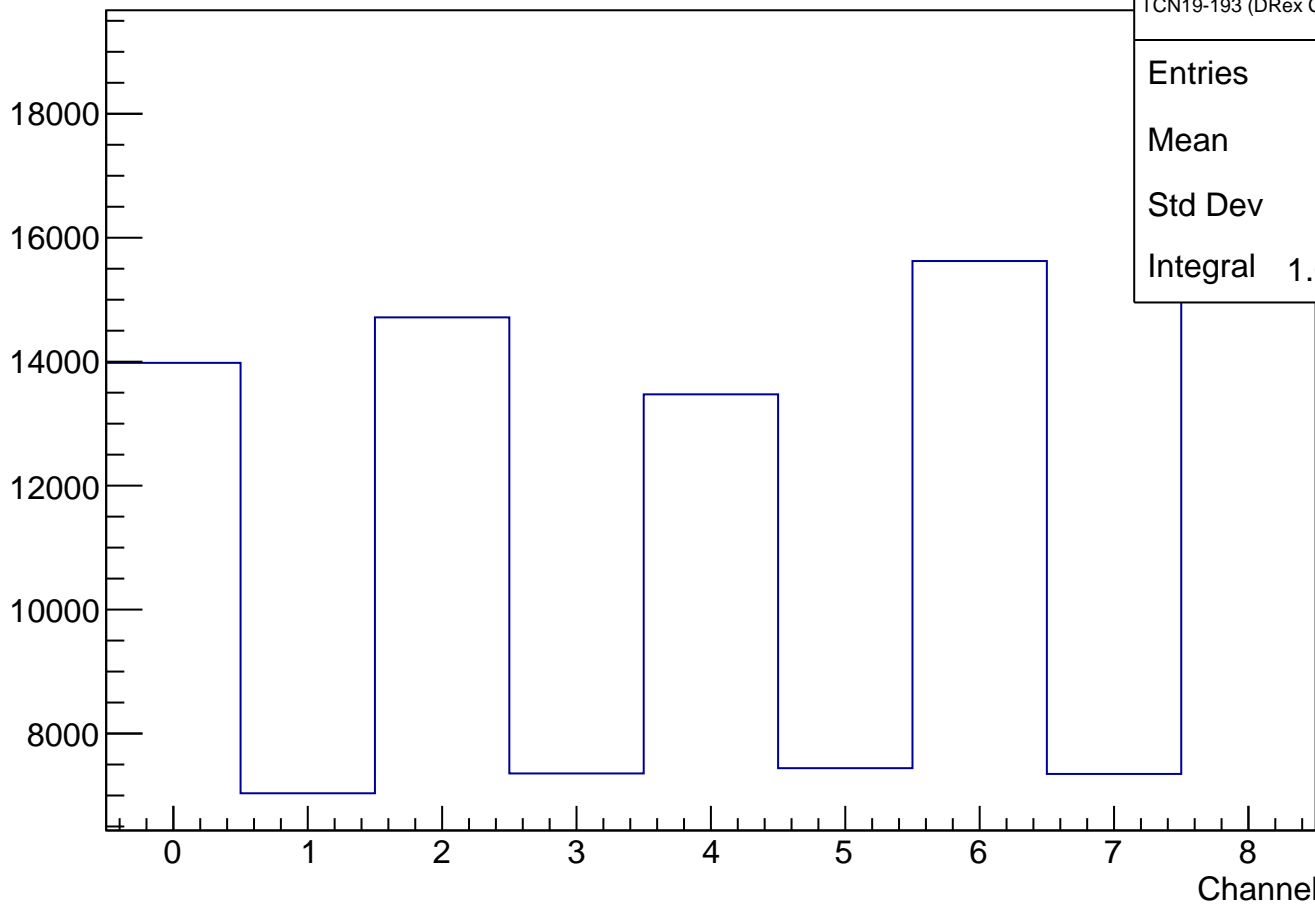

TCN19-193 (DRex Cu, 80cm)_ch

Entries 106014


Mean 4.218

Std Dev 2.728

Integral 1.06e+05

Li6 window

Frequency

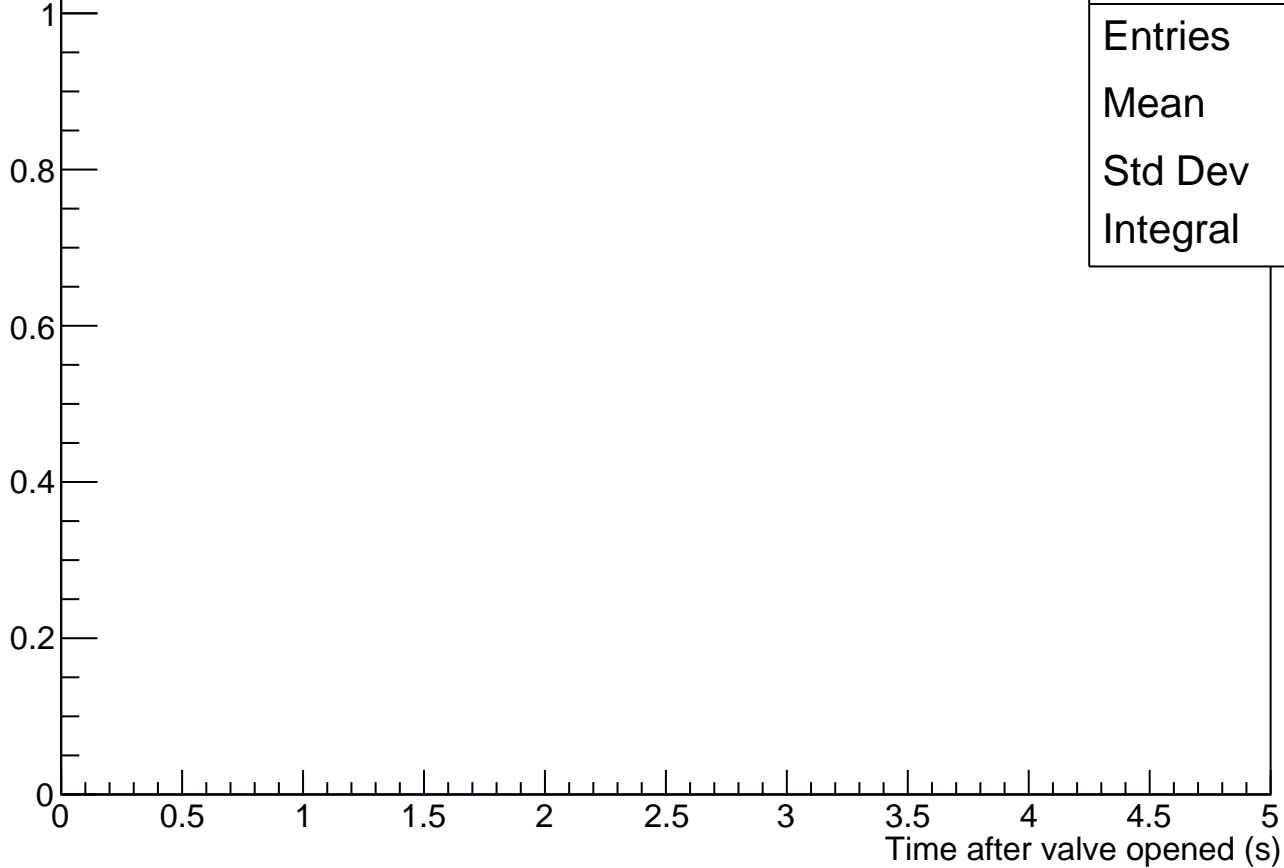

li6window

Entries 38

Mean 0

Std Dev 0

Integral 0