



TCN19-193 (DRex Cu, 80cm), transmission normalized during prestorage


UCN-count-to-monitor ratio

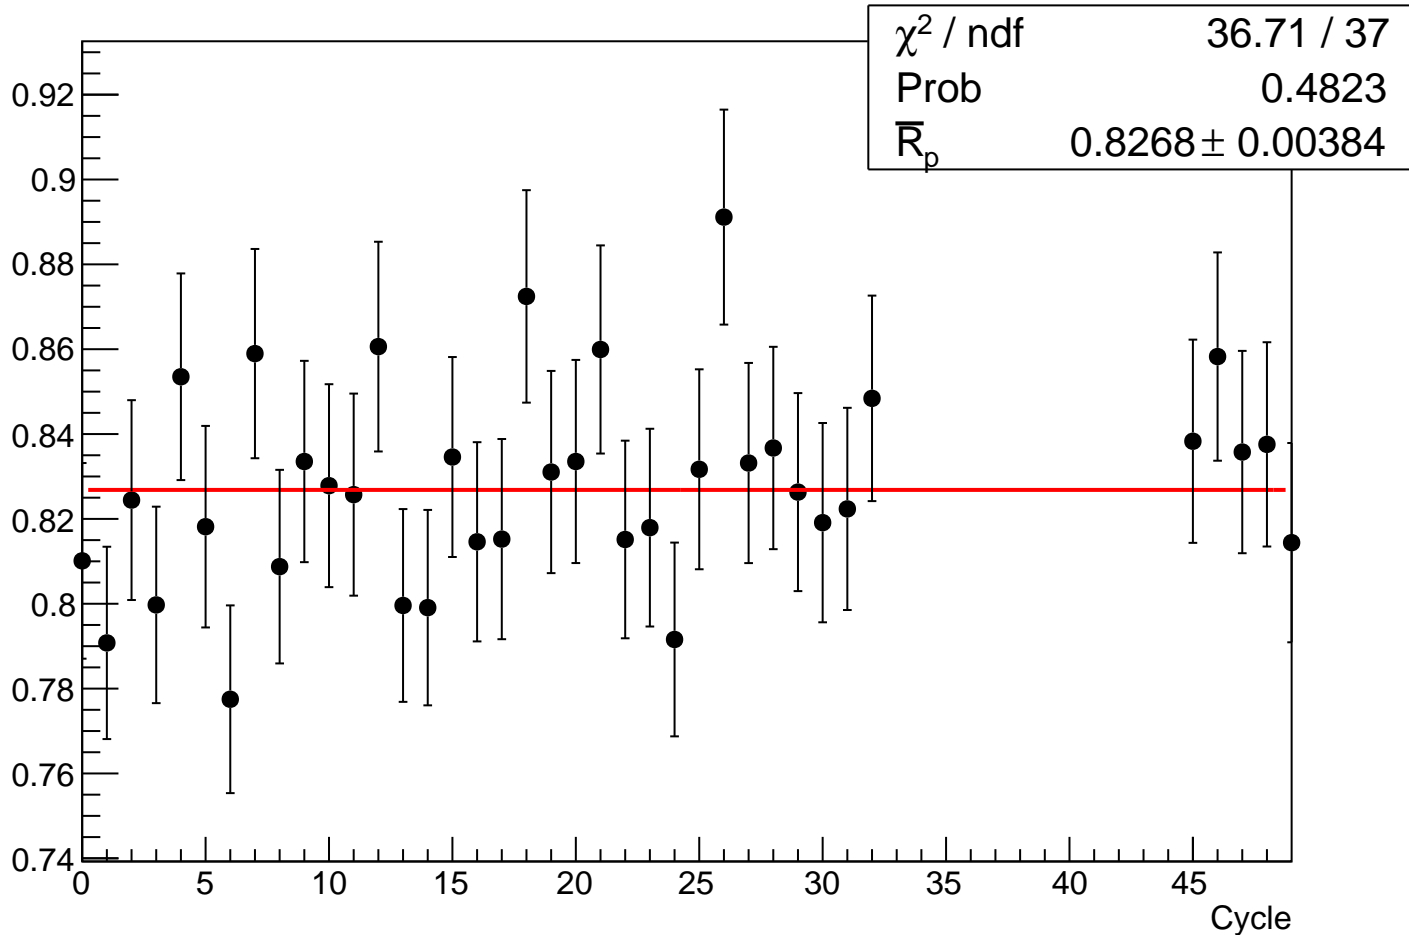


Graph

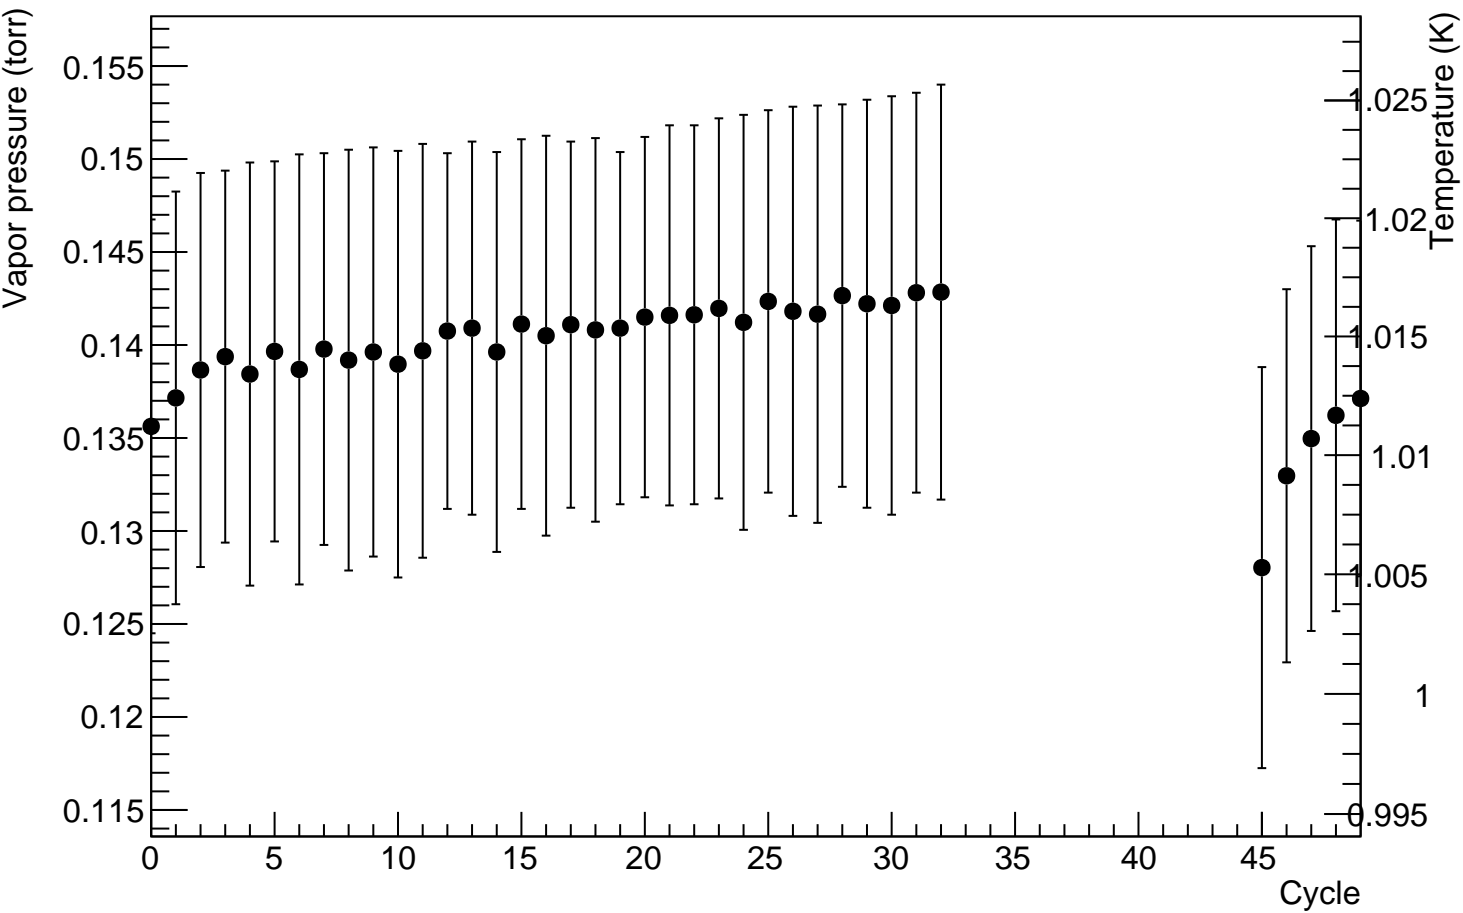


li6 background rate (1/s)

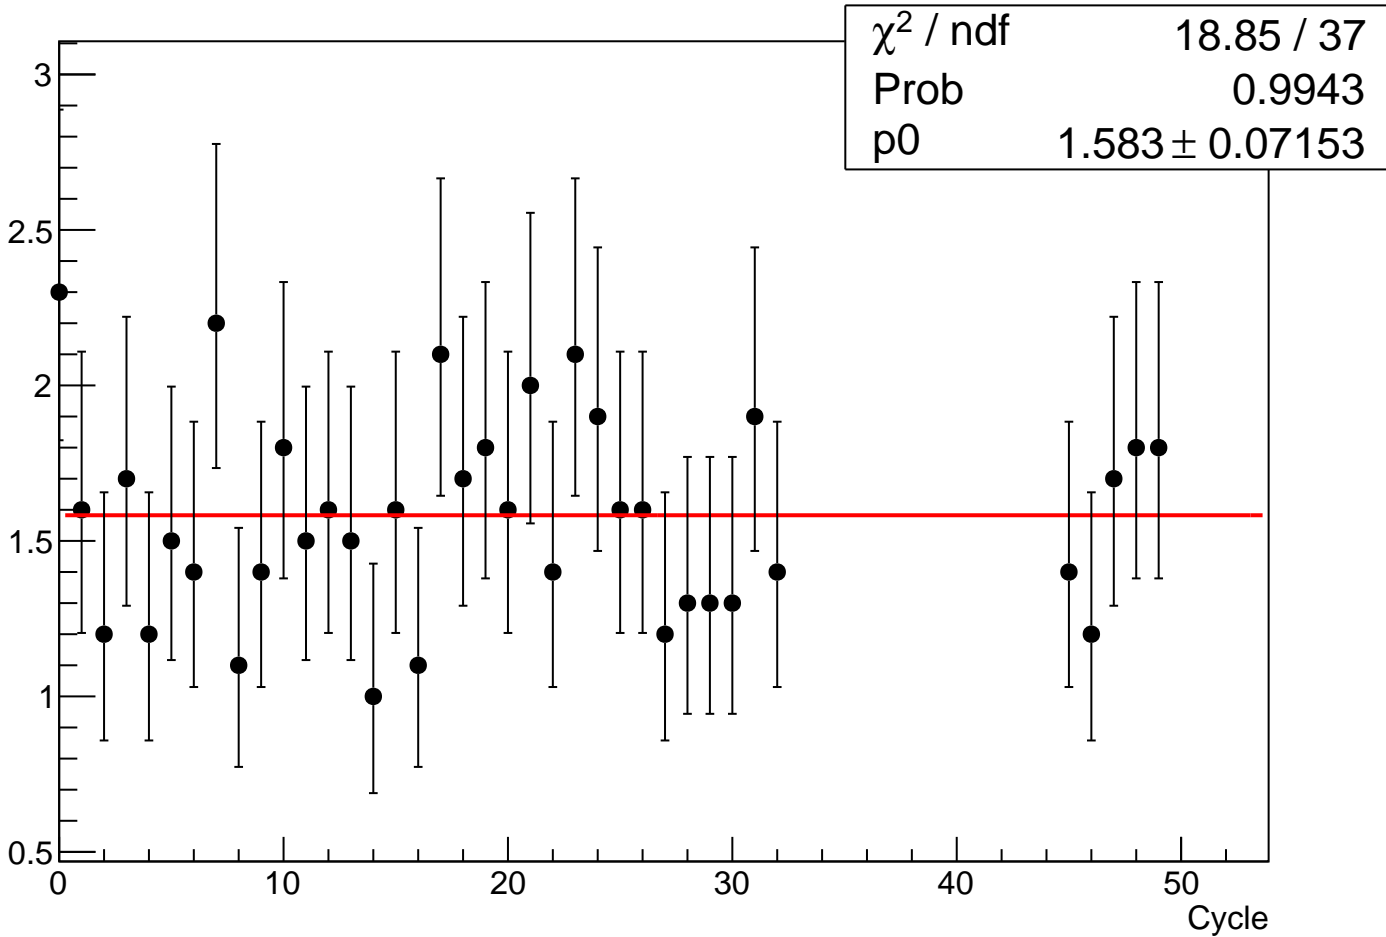


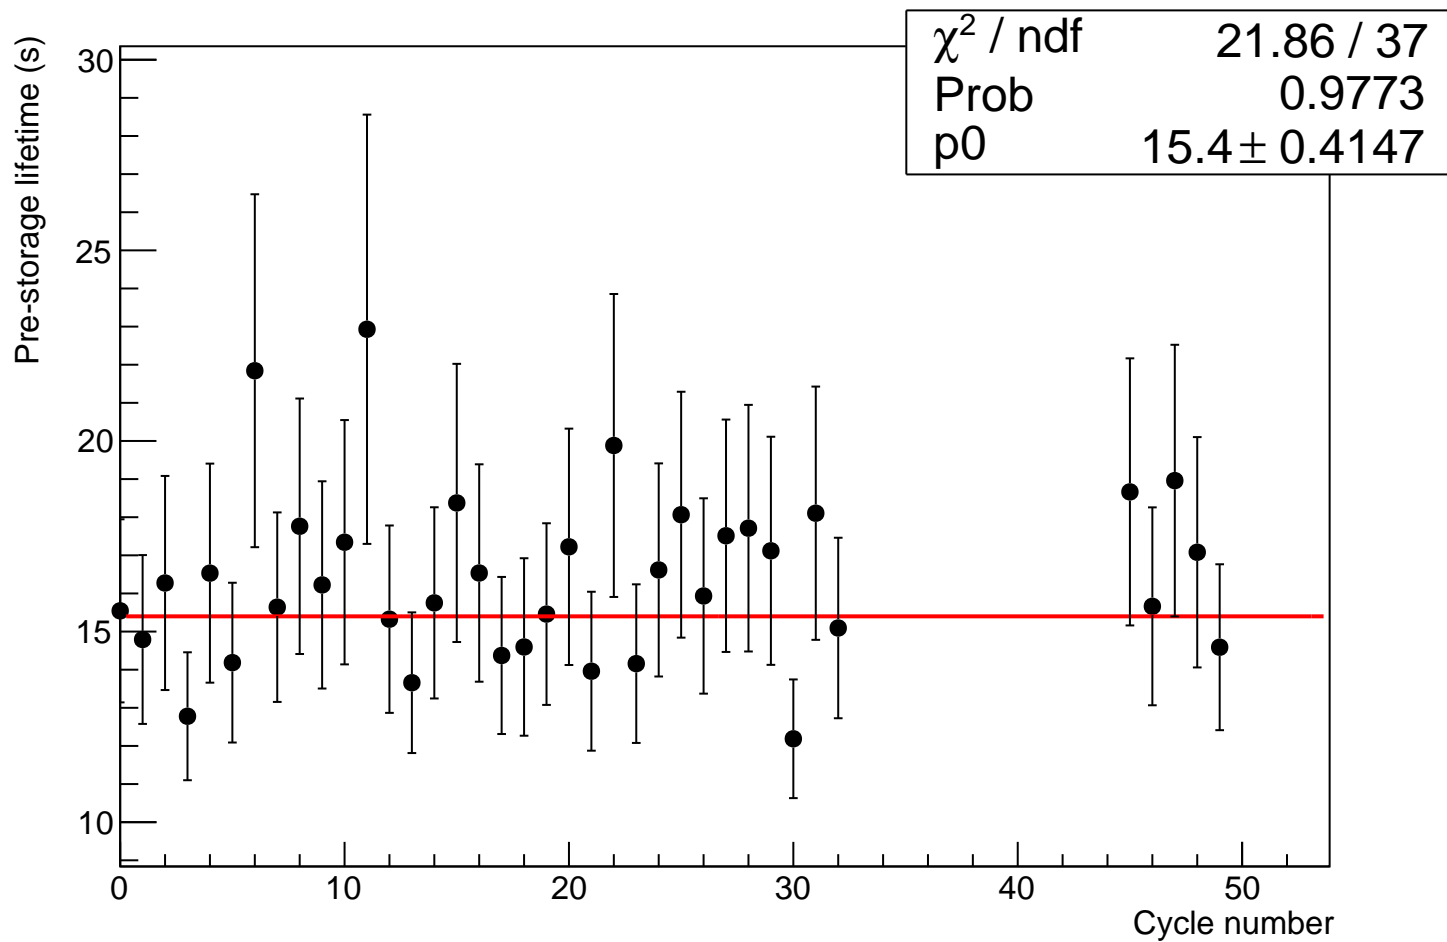


Corrected Li6-He3 ratio


χ^2 / ndf 7.331 / 37
Prob 1
p0 20.65 ± 0.5621

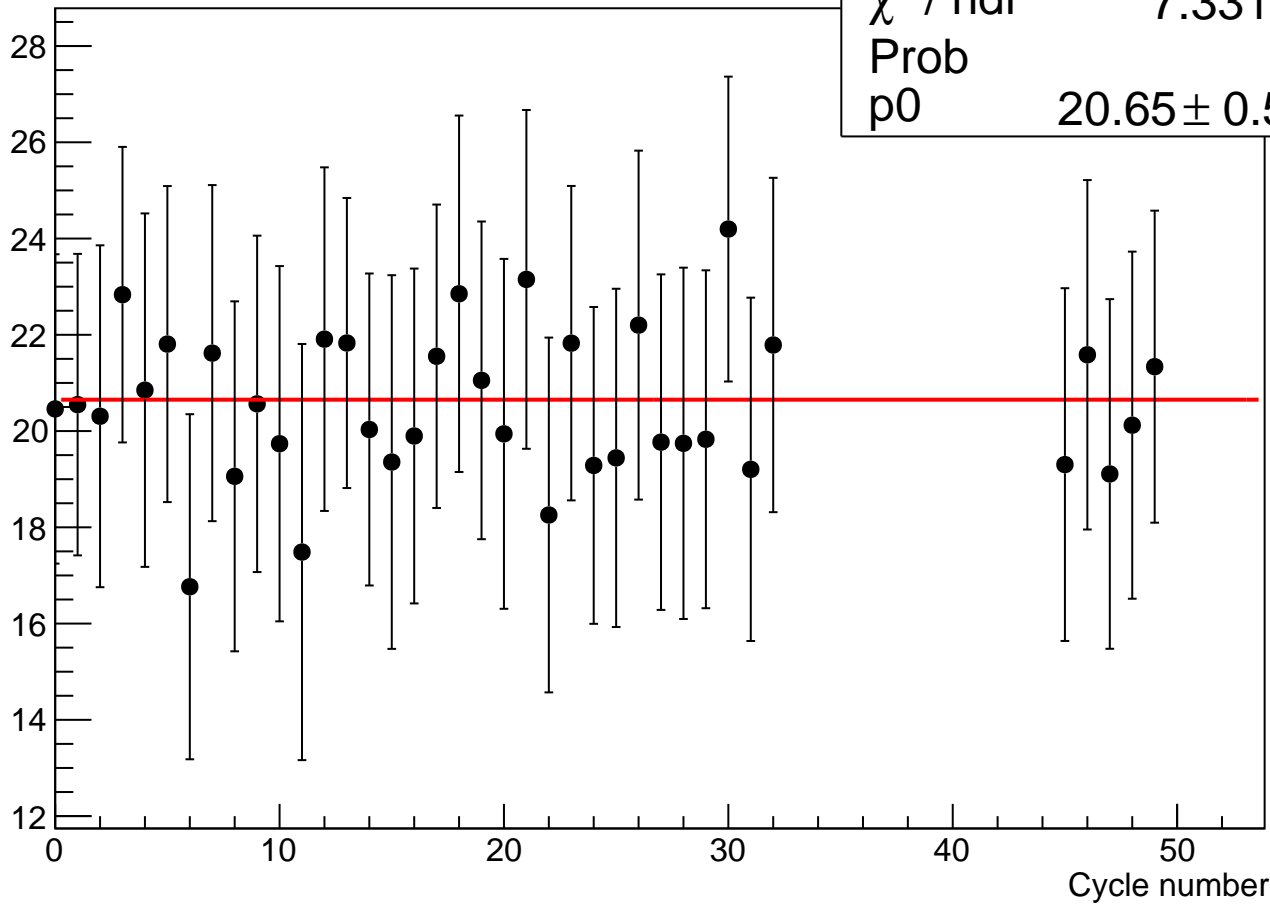

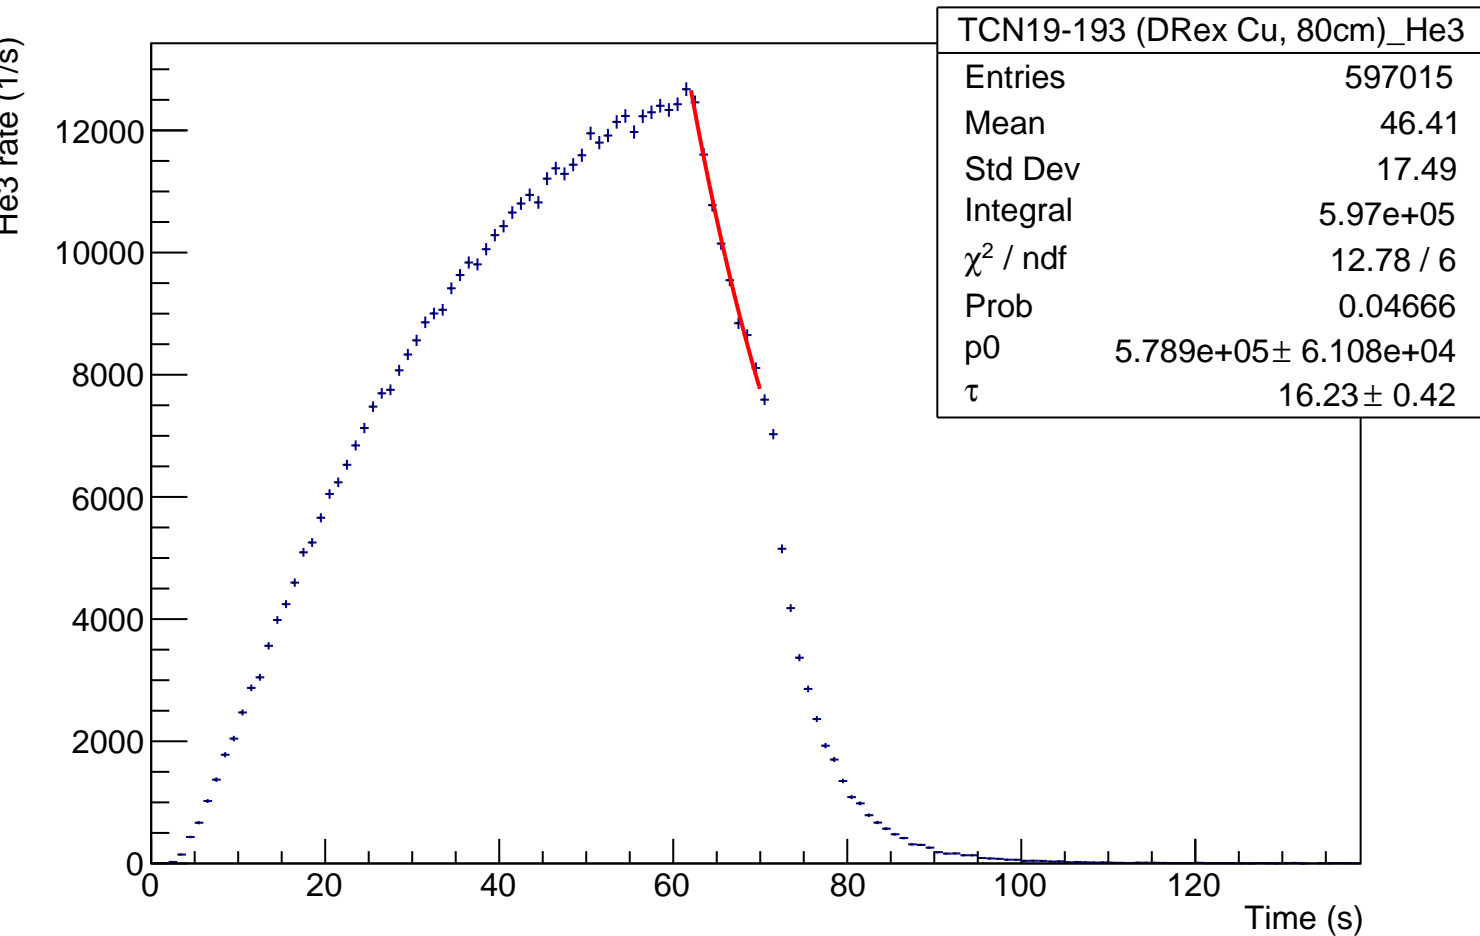

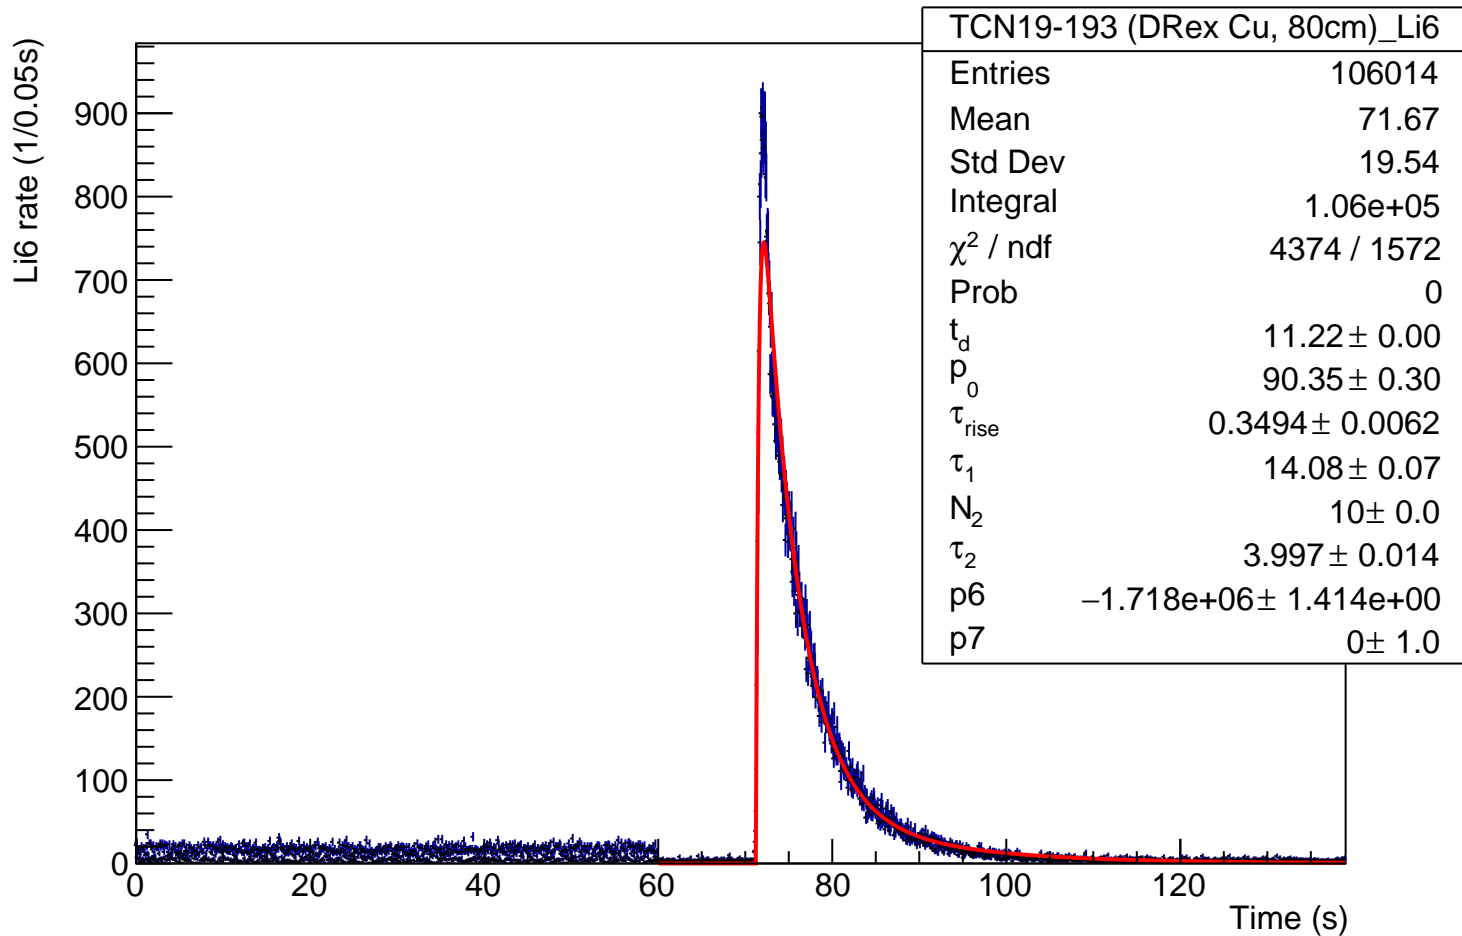


Normalized Li6 rate (1/0.05s)

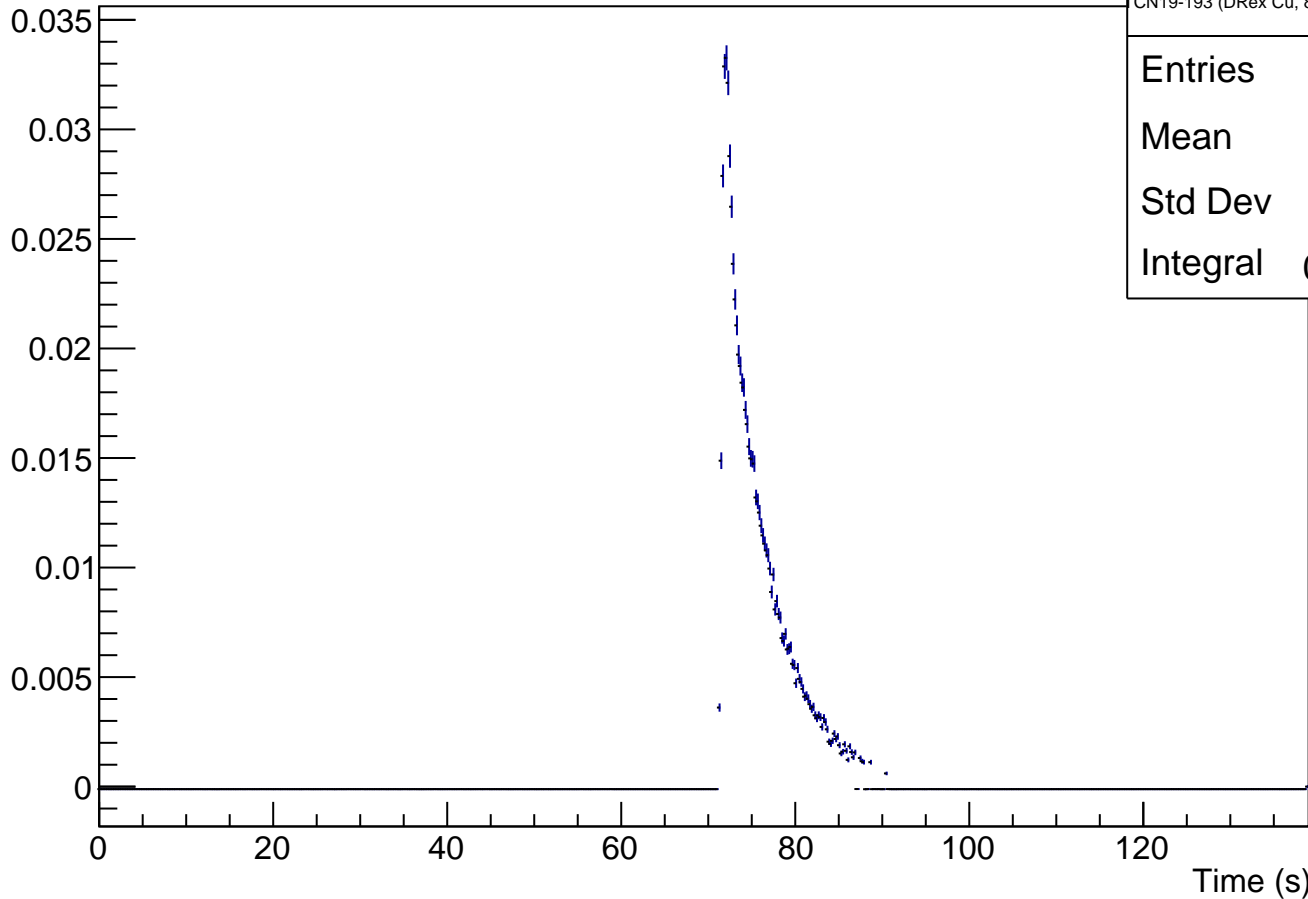


CN19-193 (DRex Cu, 80cm)_Li6_norm


Entries	88718
Mean	71.85
Std Dev	16.62
Integral	0.6788

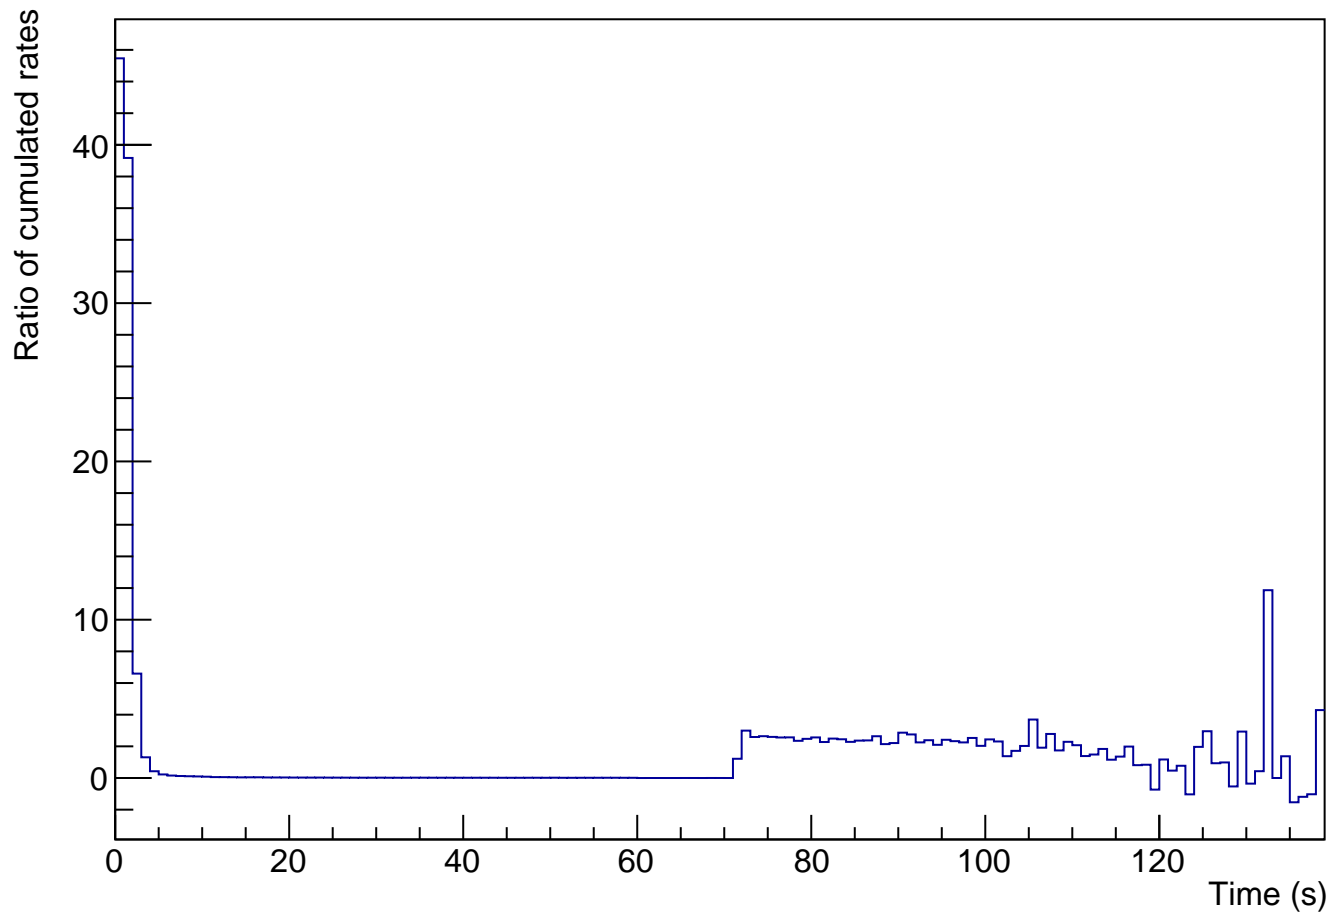

Average rate ratio

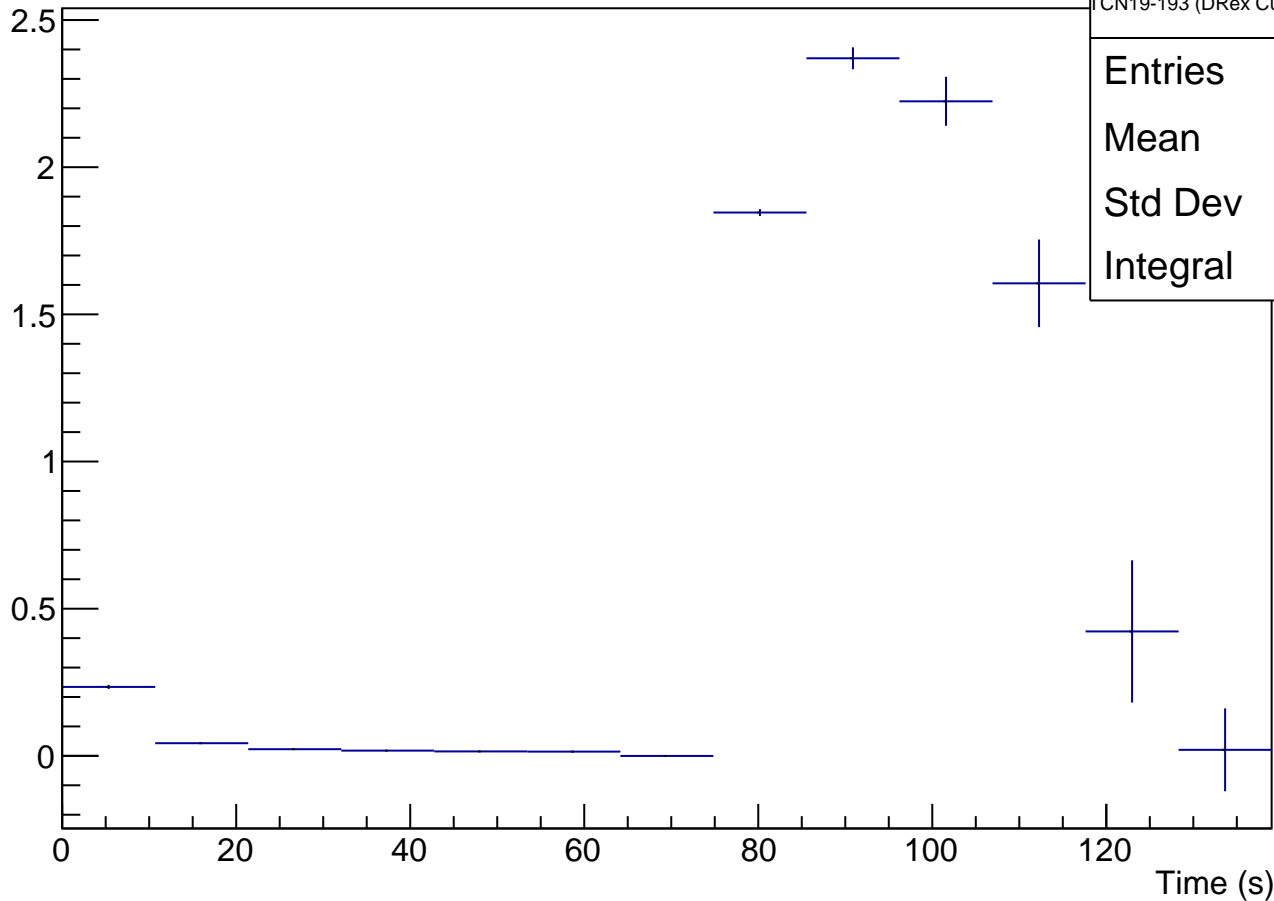

TCN19-193 (DRex Cu, 80cm)

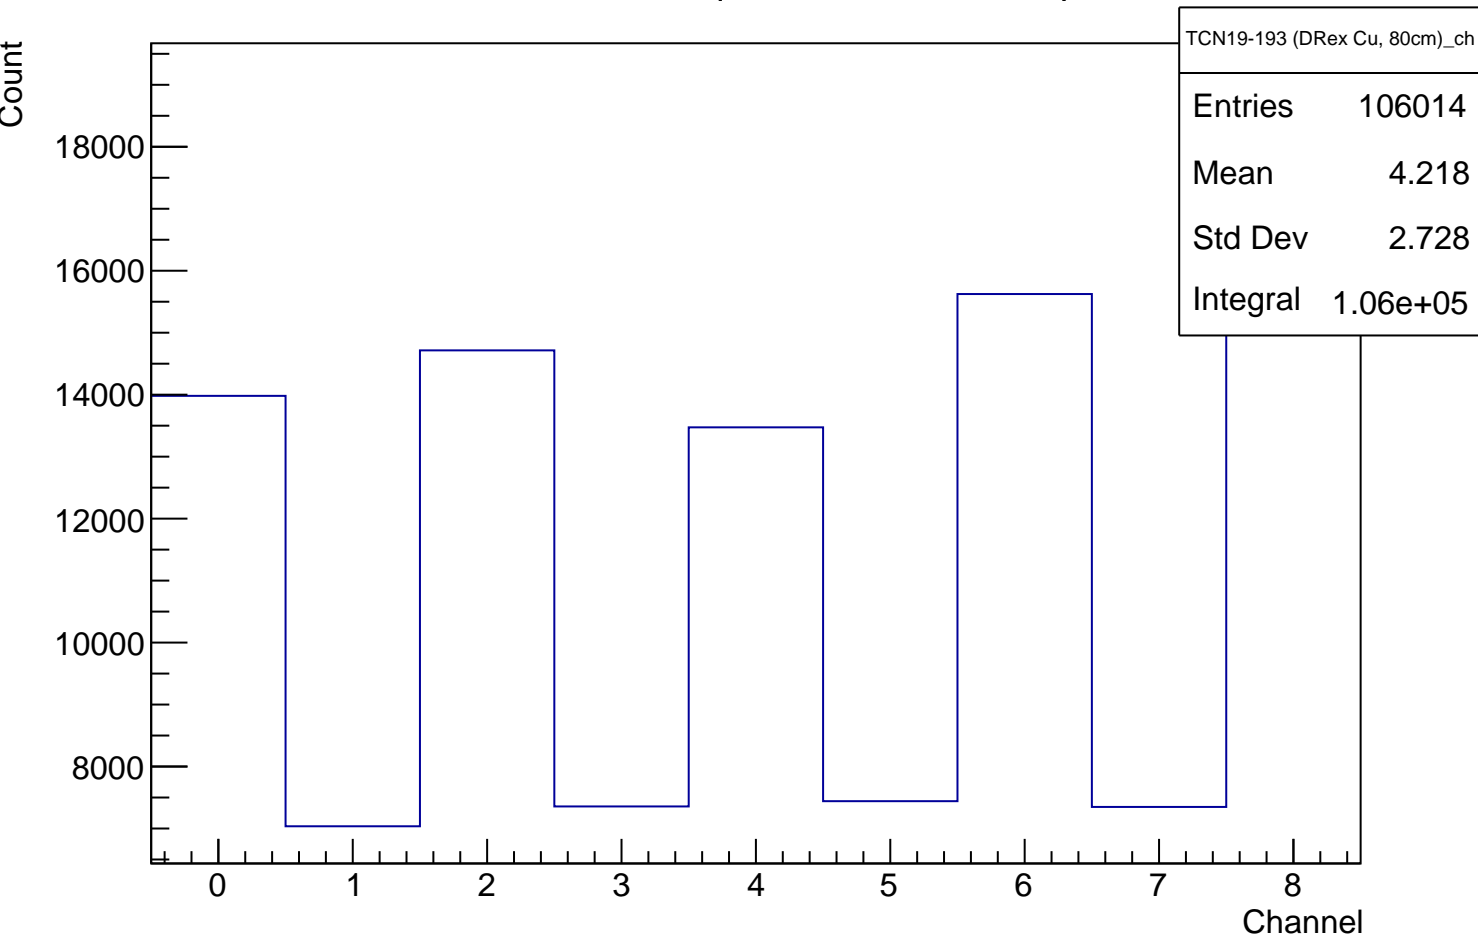

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 38

Mean 0

Std Dev 0

Integral 0