





TCN19-123, transmission normalized during prestorage

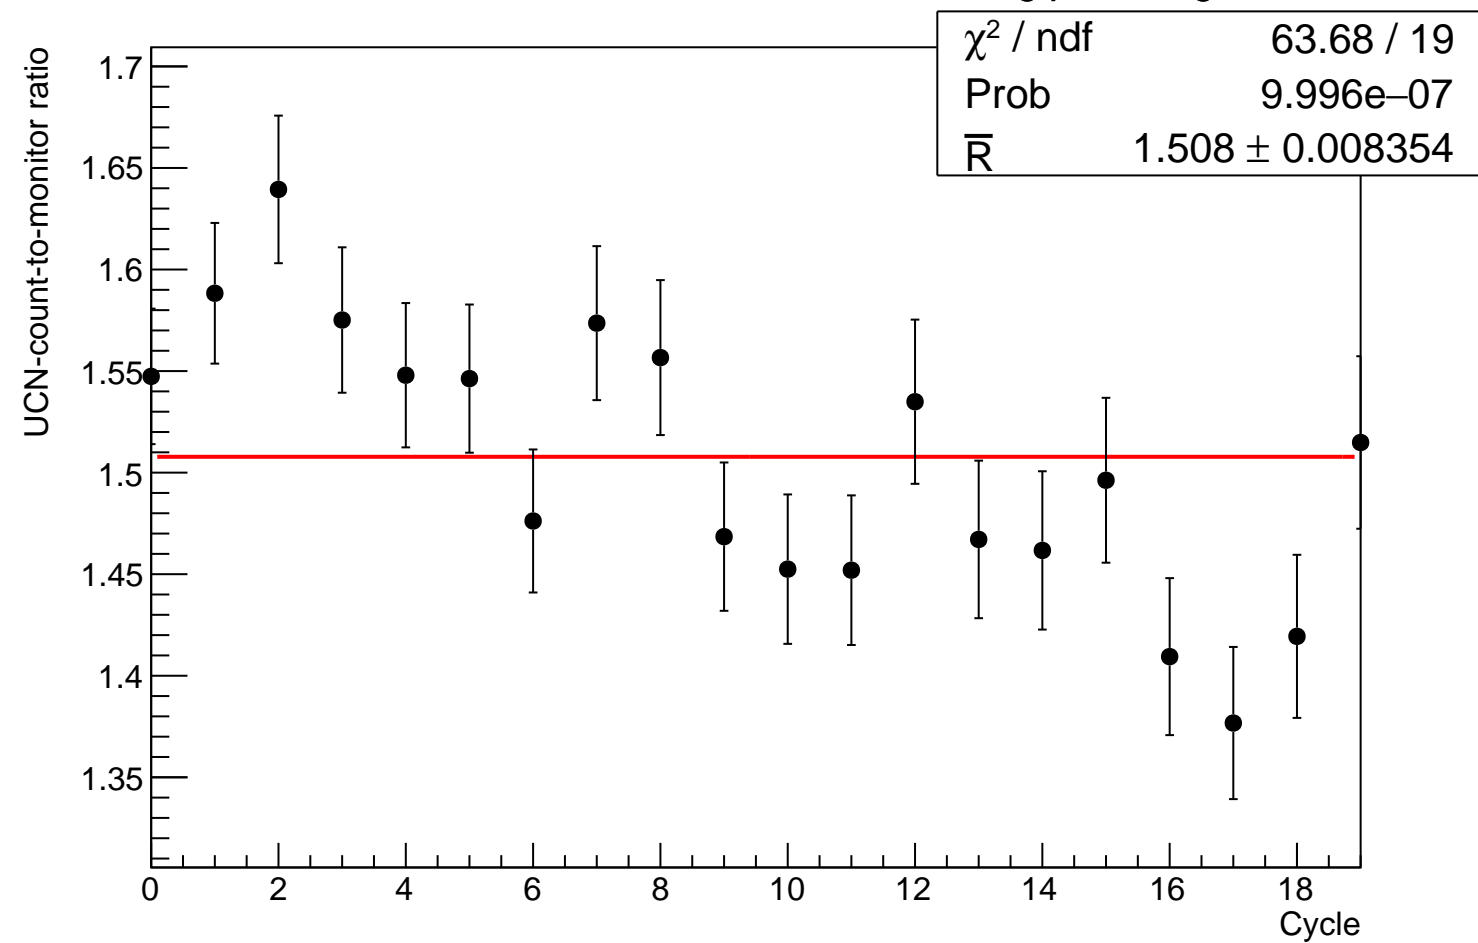


# Graph

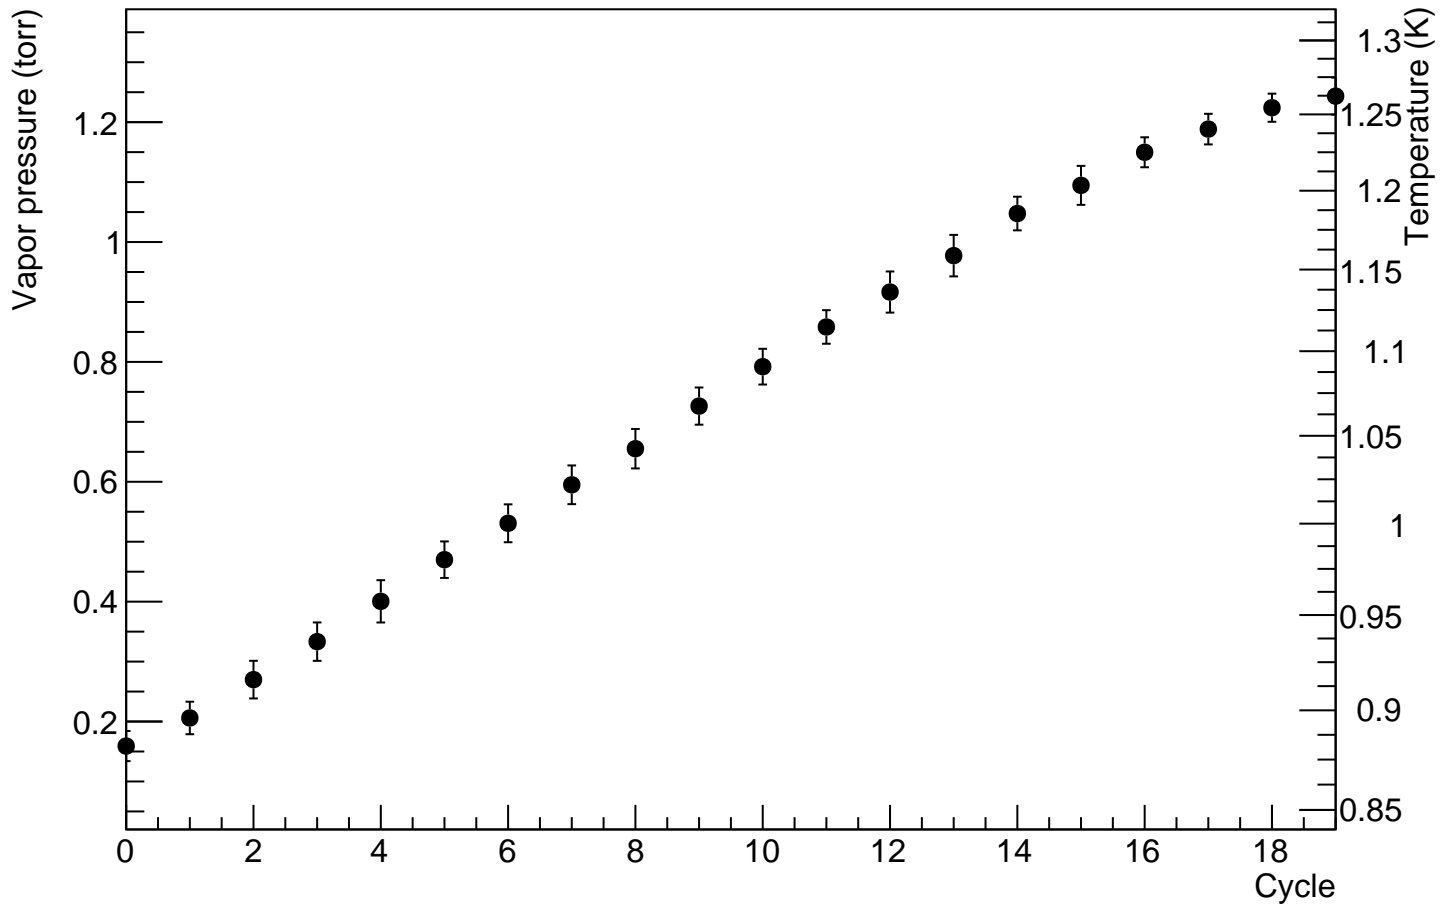


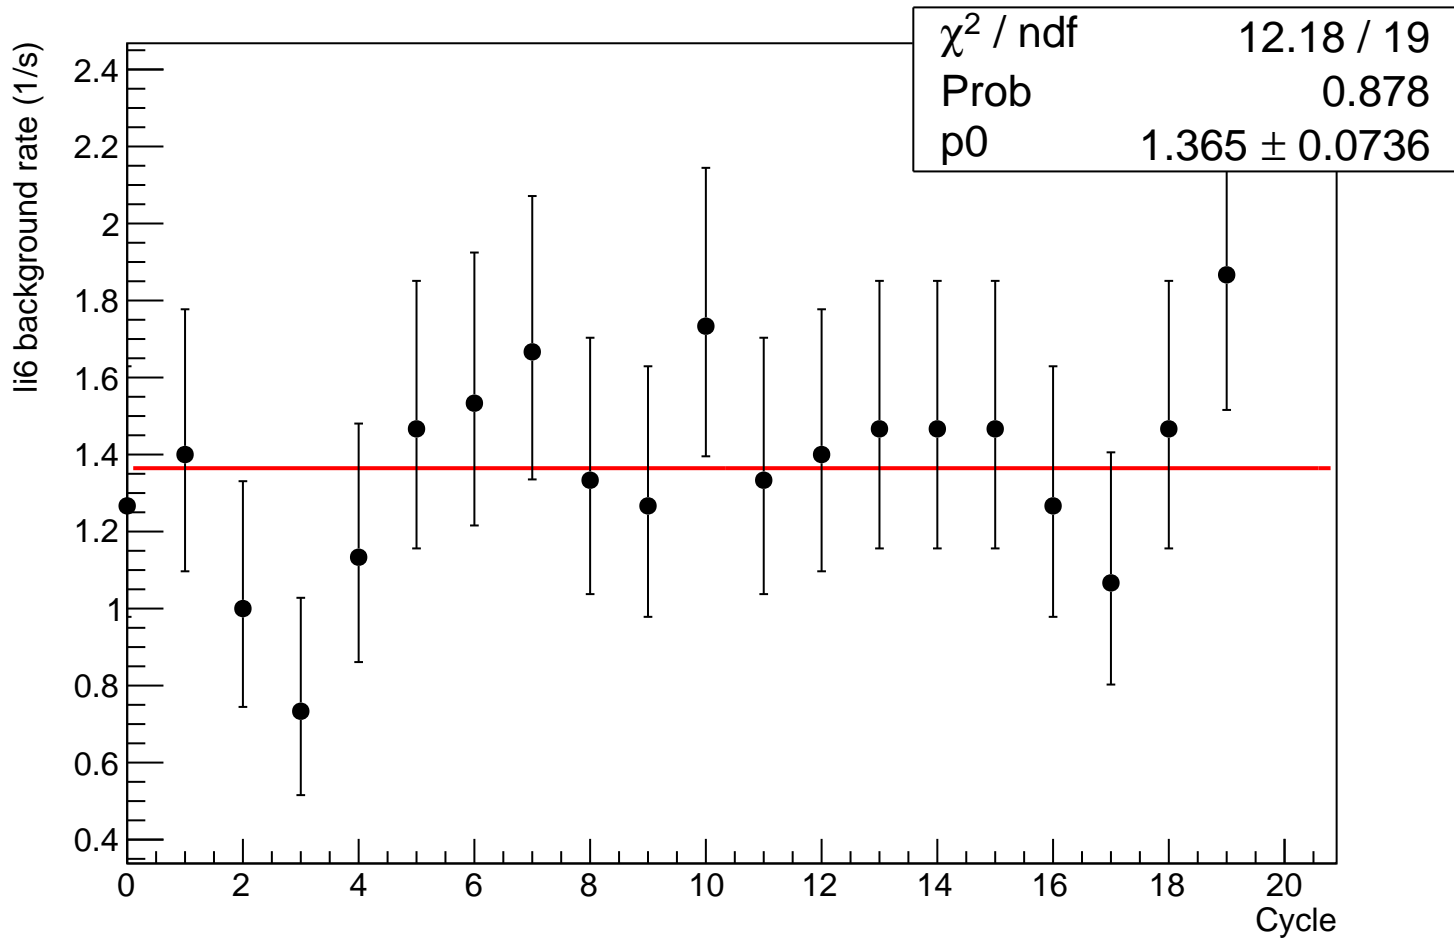

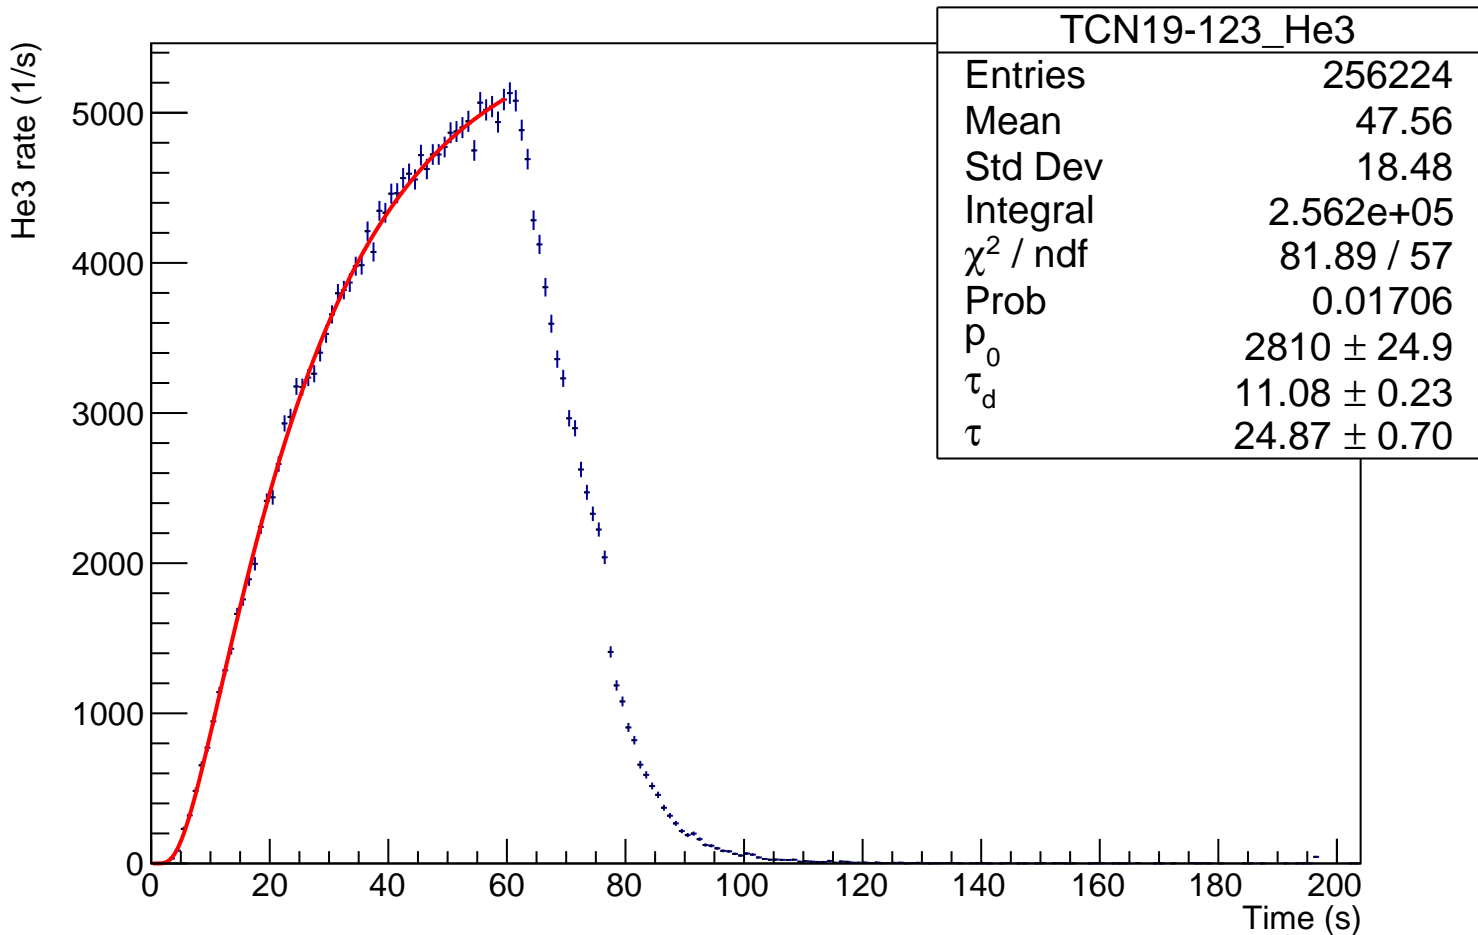


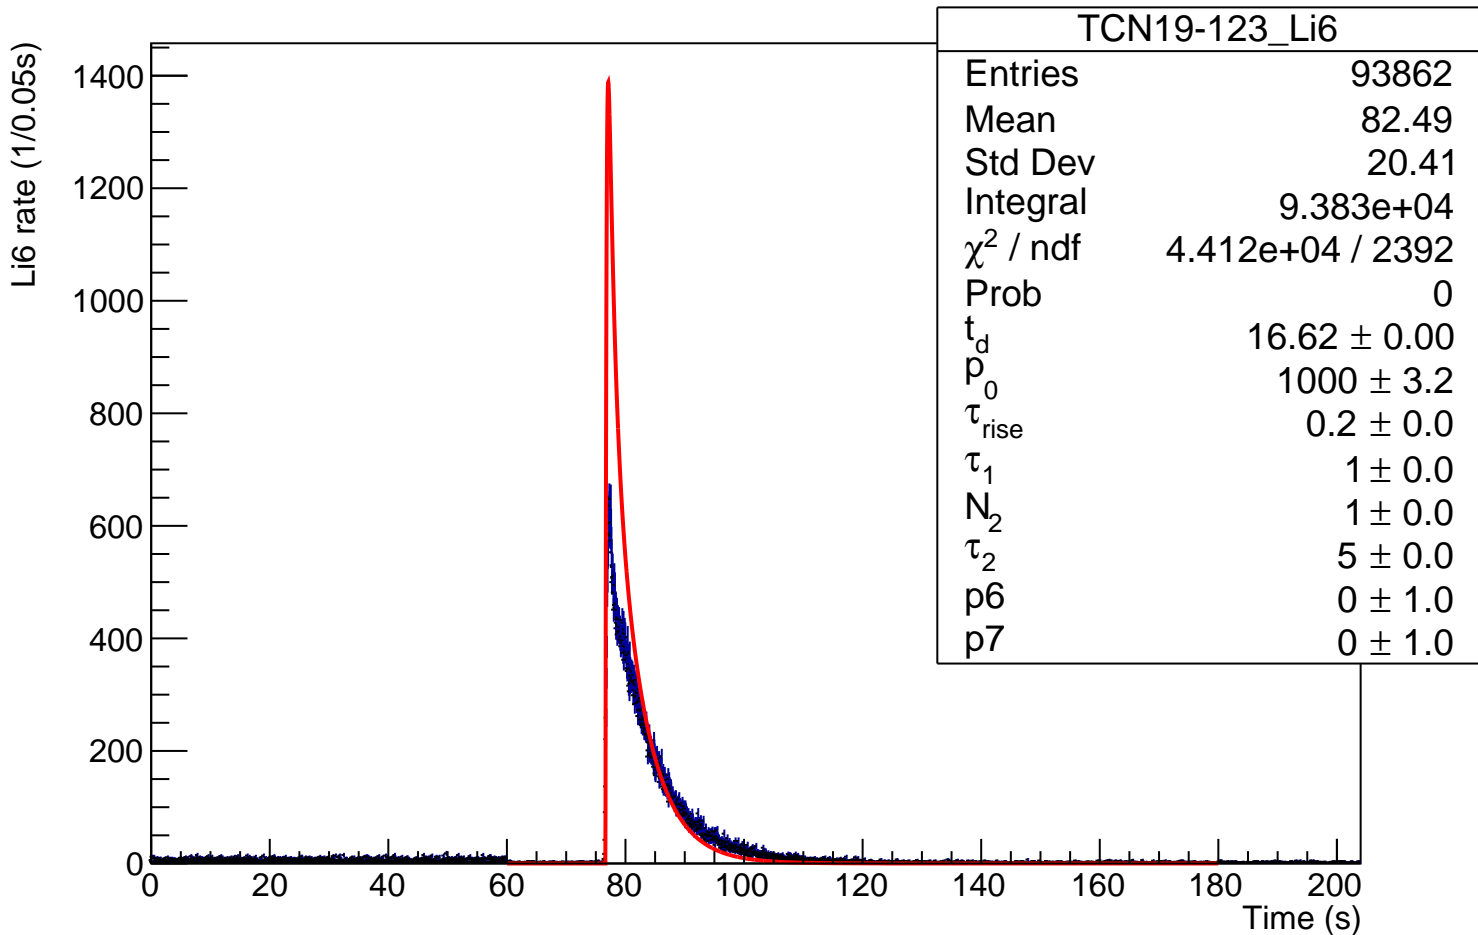


Normalized Li6 rate (1/0.05s)

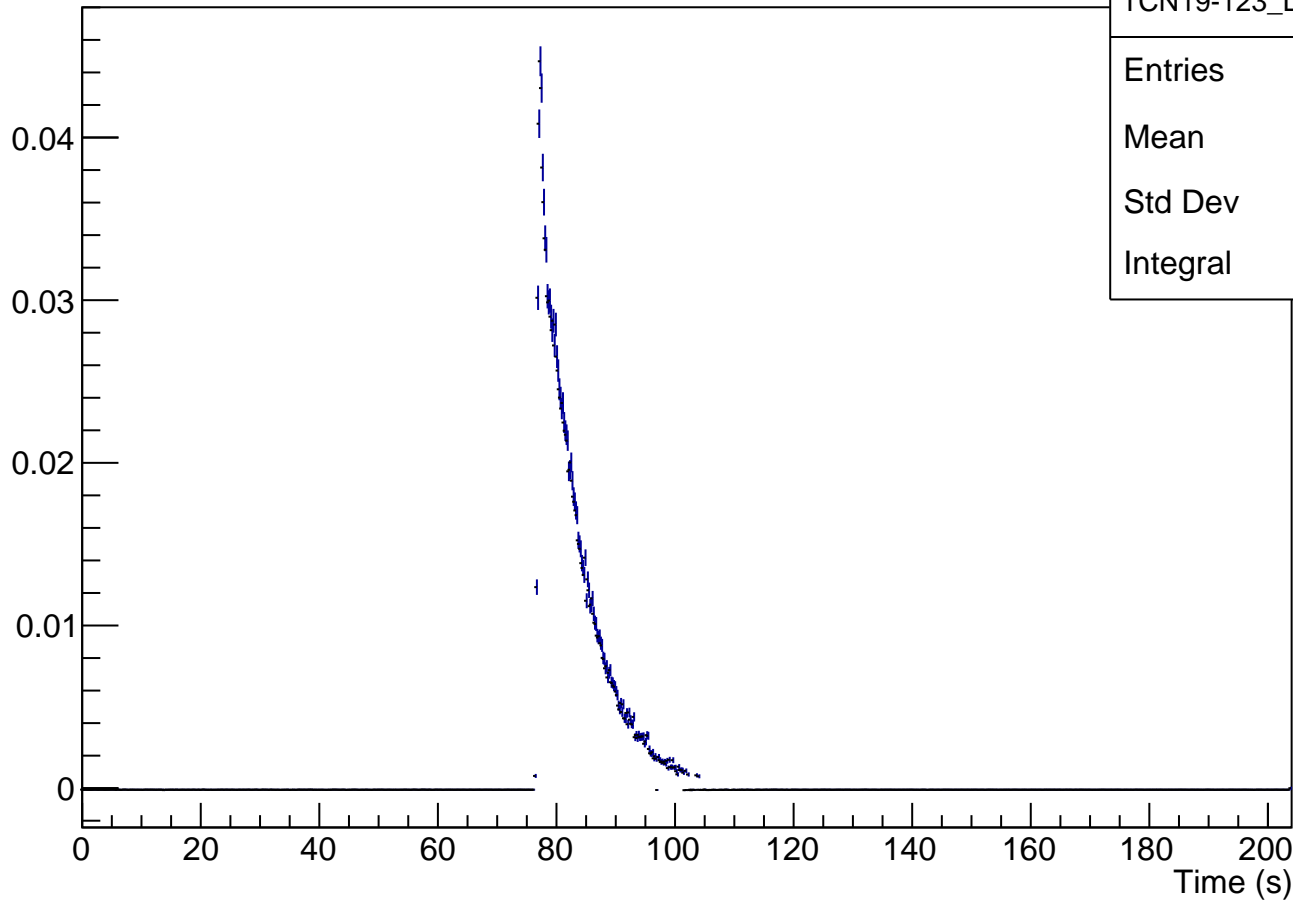

| TCN19-123_Li6_norm |       |
|--------------------|-------|
| Entries            | 81468 |
| Mean               | 81.18 |
| Std Dev            | 14.27 |
| Integral           | 1.327 |

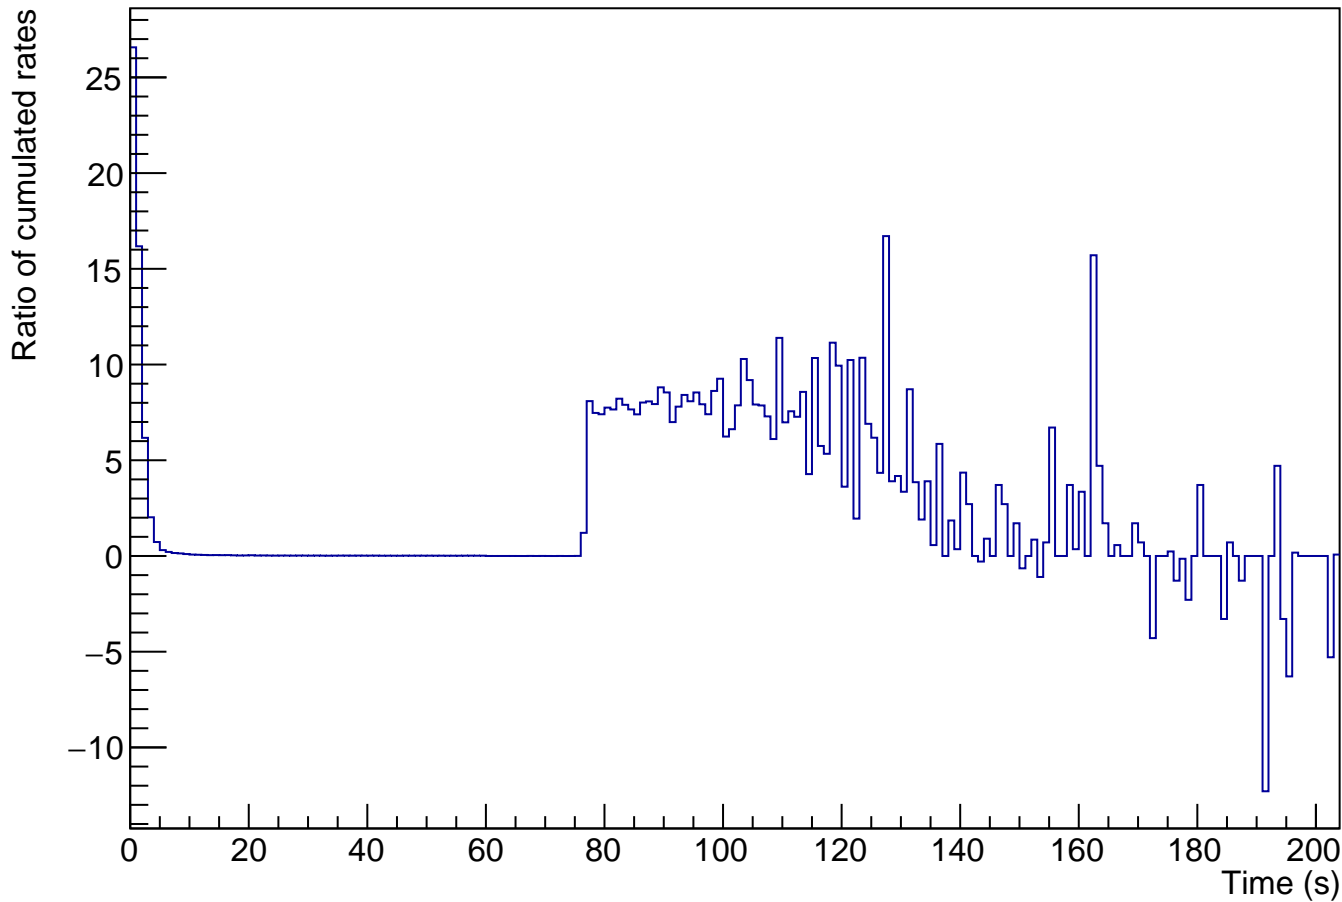


Average rate ratio

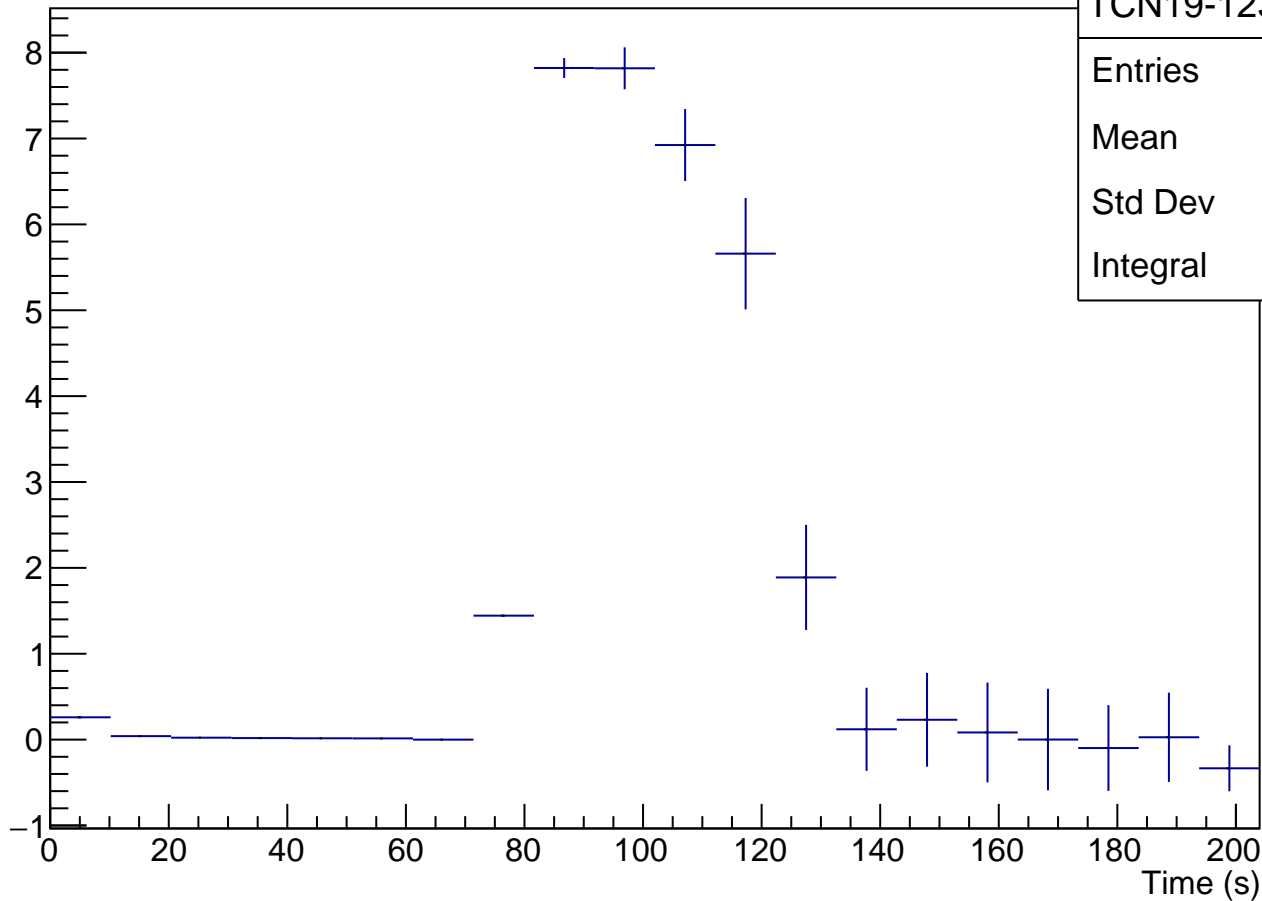

| TCN19-123_ratio |       |
|-----------------|-------|
| Entries         | 296   |
| Mean            | 104.8 |
| Std Dev         | 18.68 |
| Integral        | 31.96 |



# TCN19-123

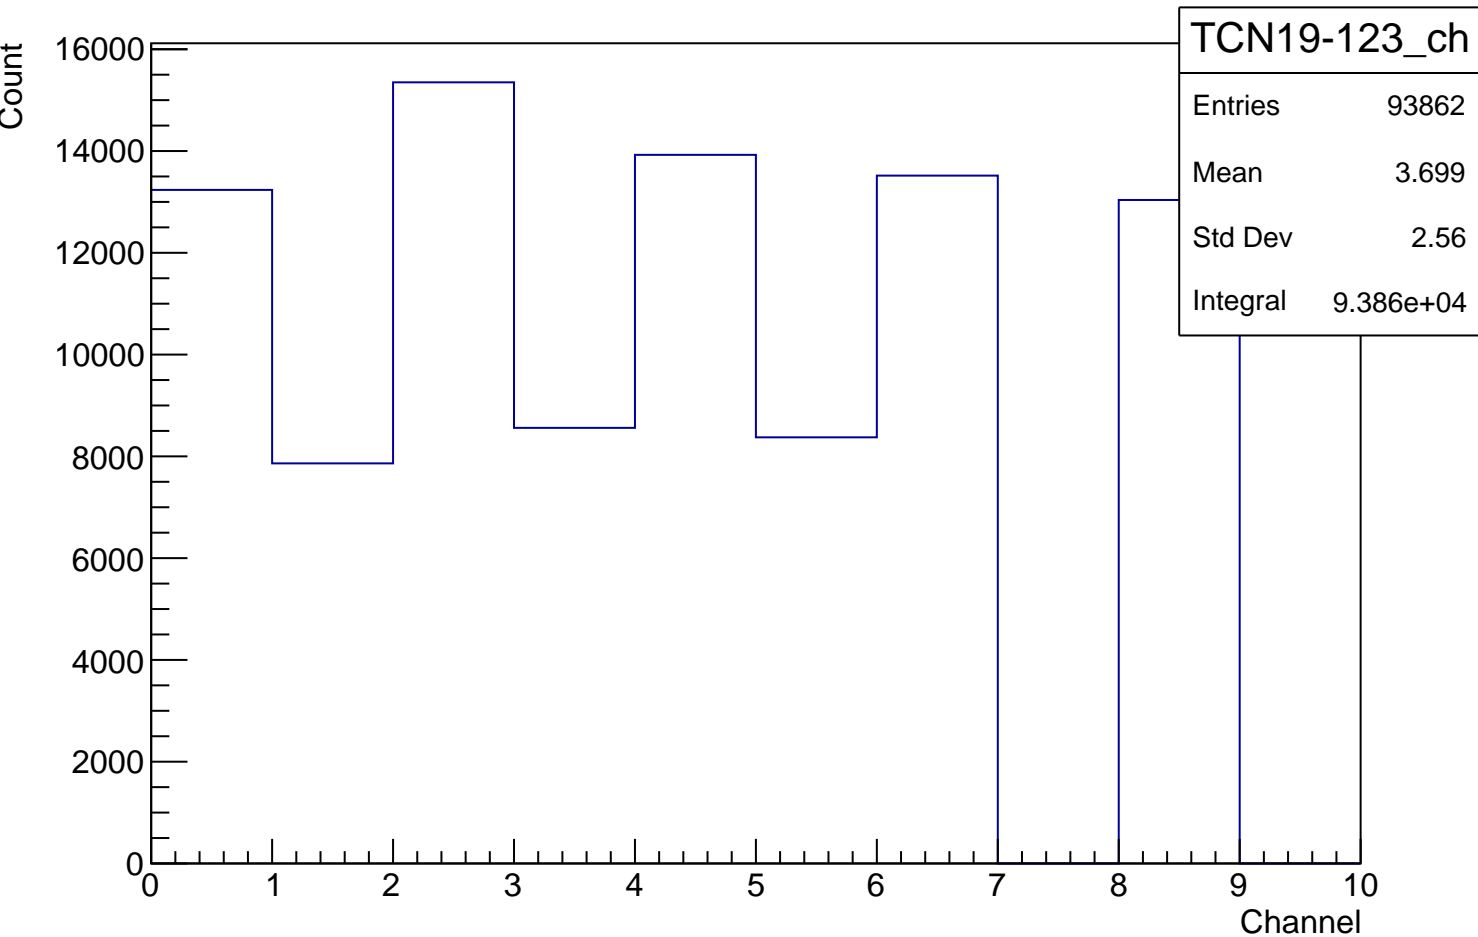

# Li6 window

Frequency

1  
0.8  
0.6  
0.4  
0.2  
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 20

Mean 0

Std Dev 0

Integral 0