





TCN19-010B, transmission normalized during prestorage

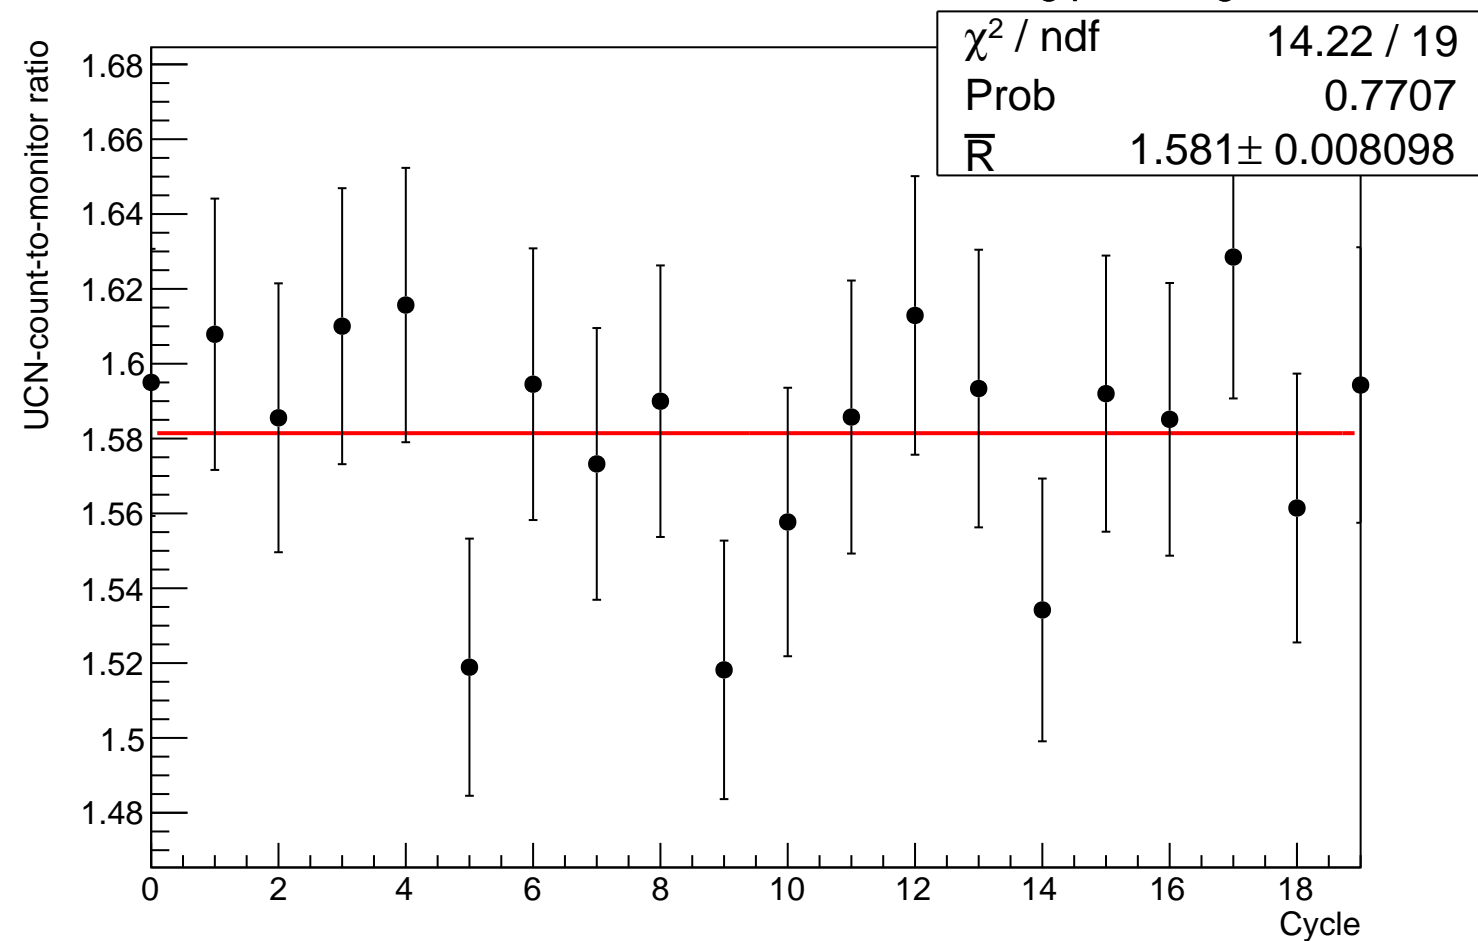


Graph

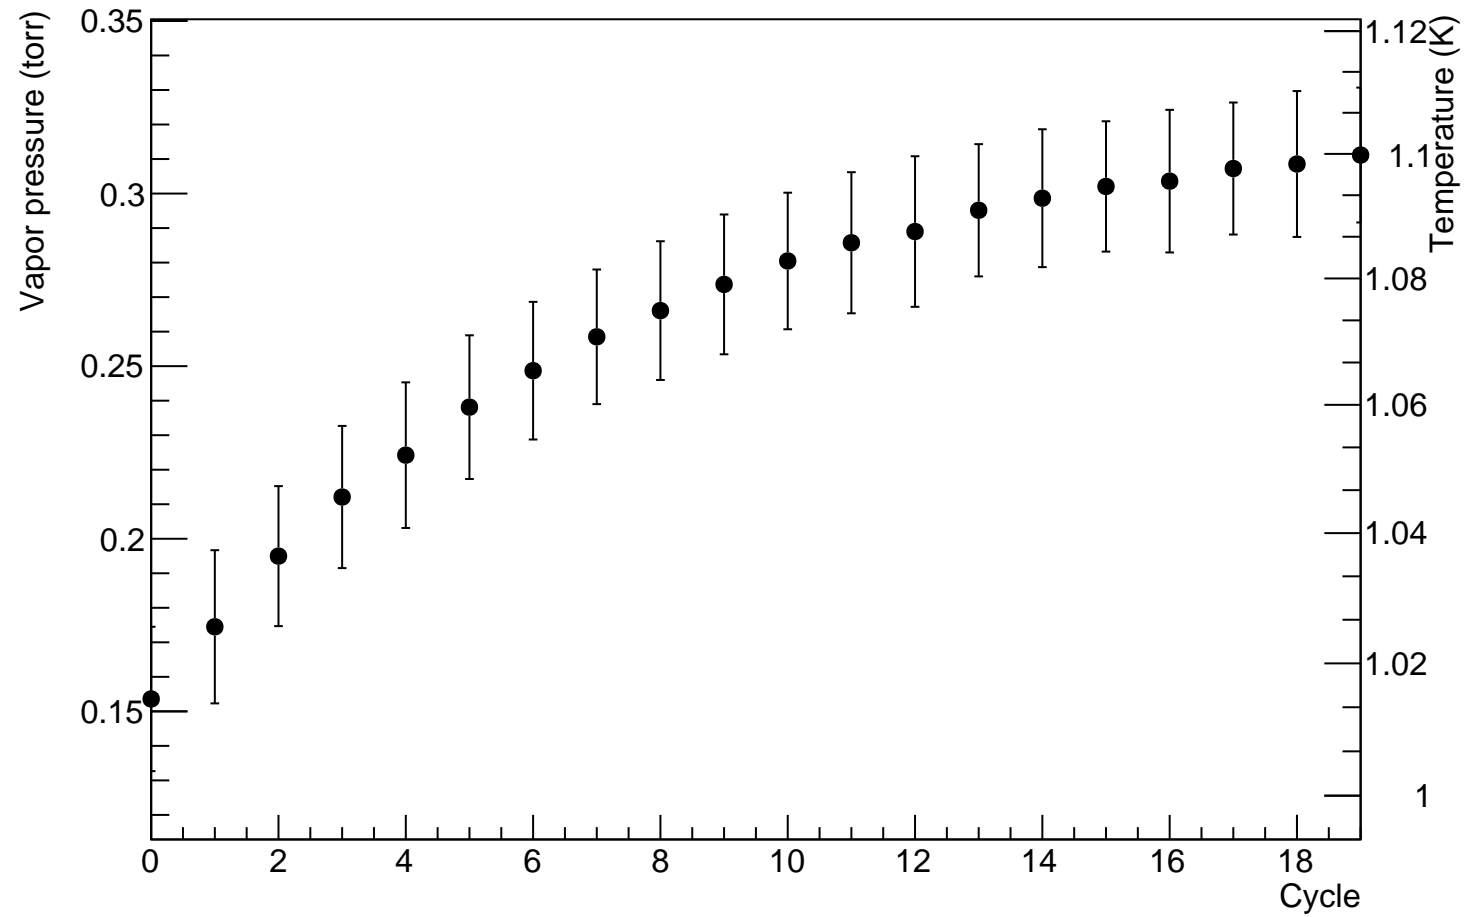

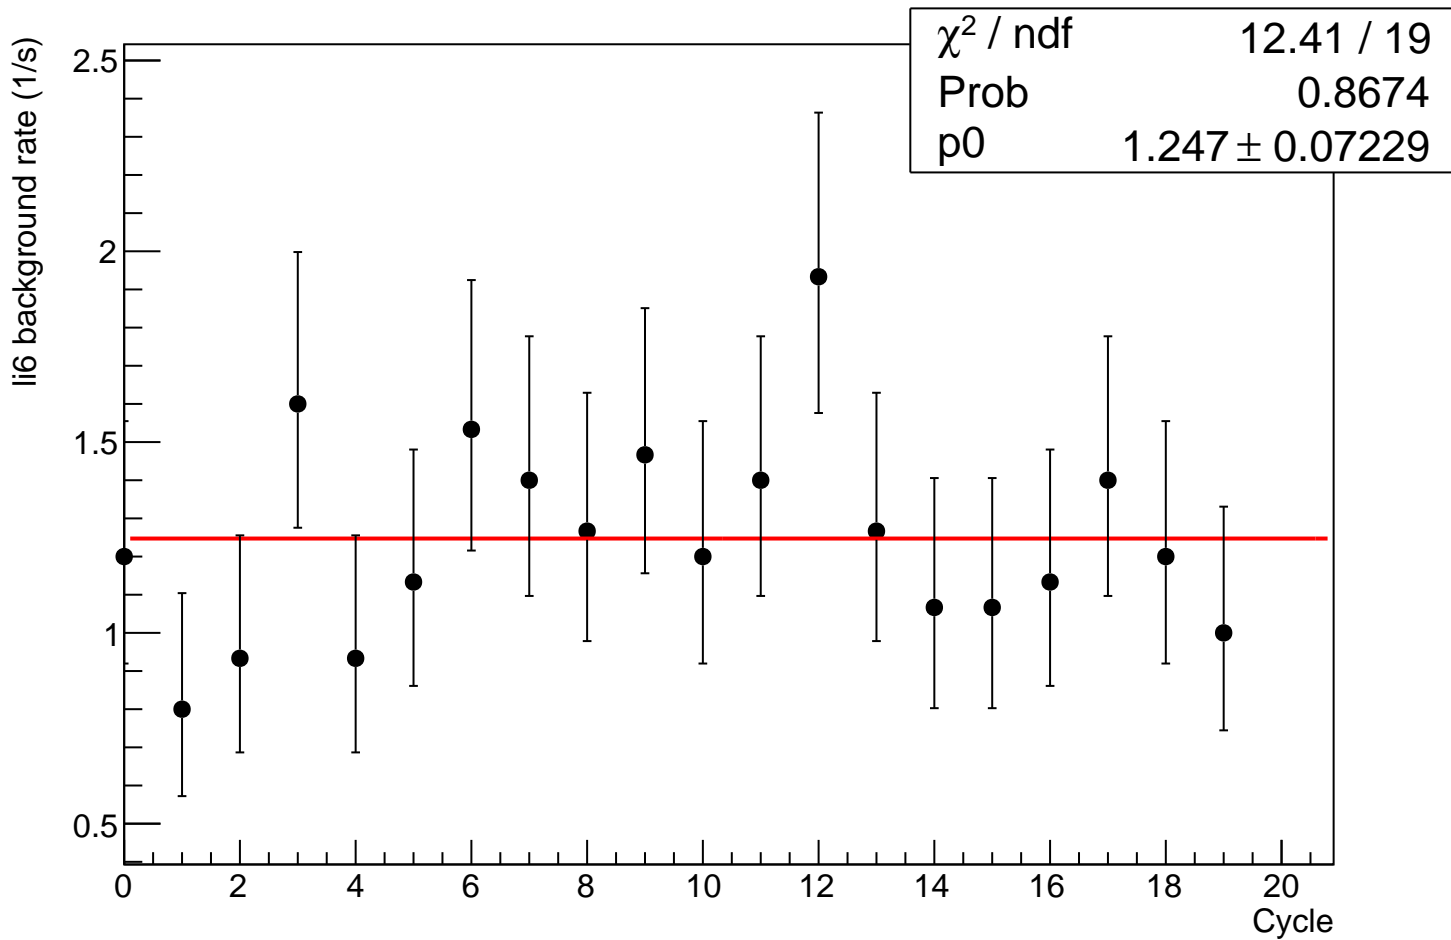

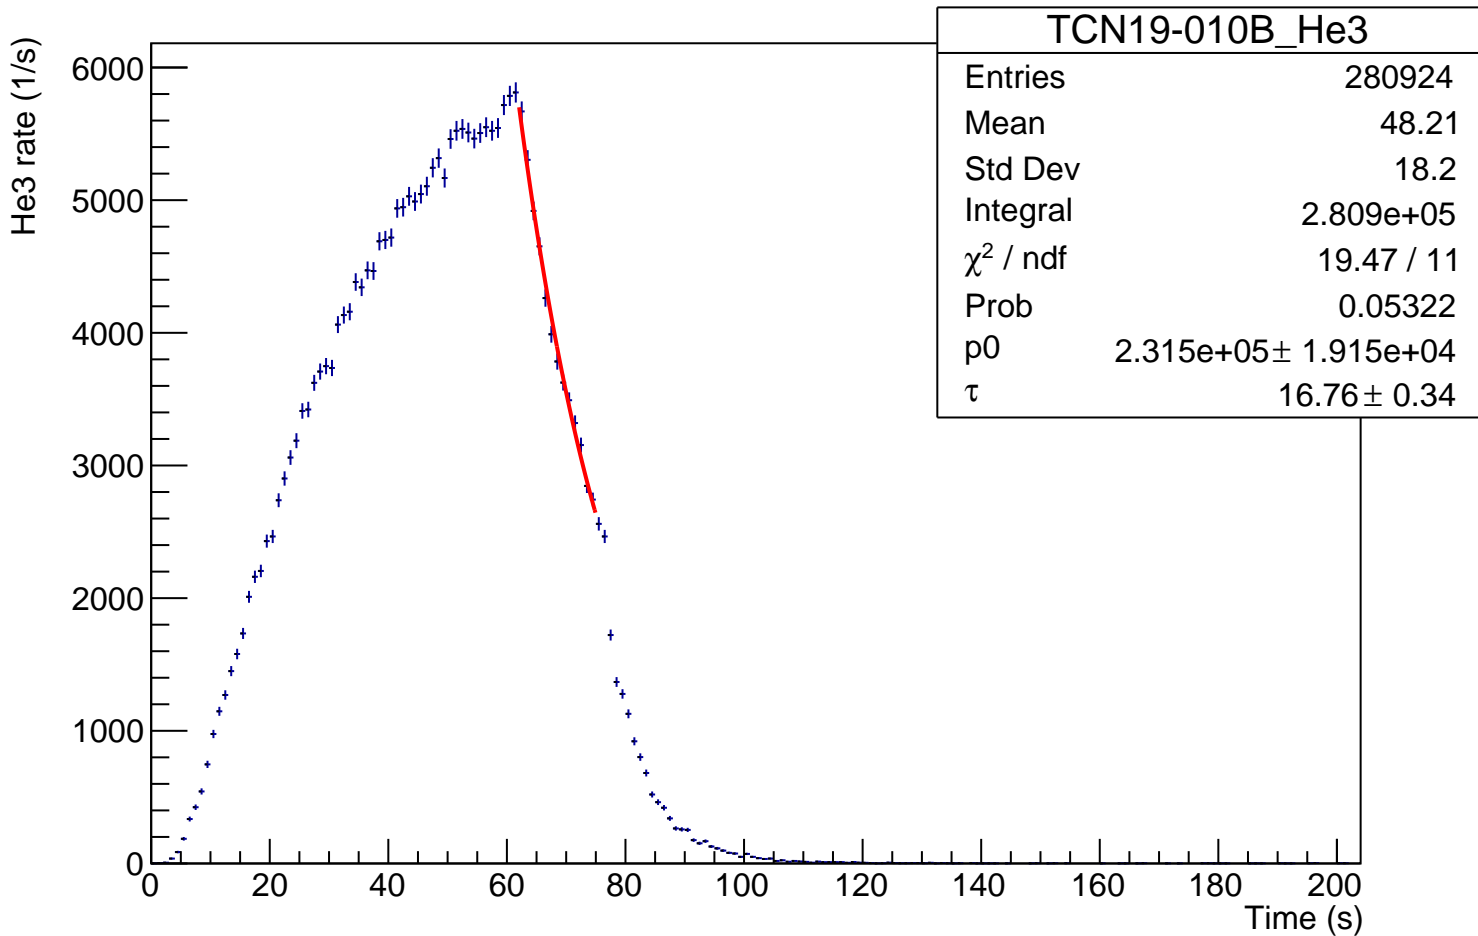


Li6 rate (1/0.05s)

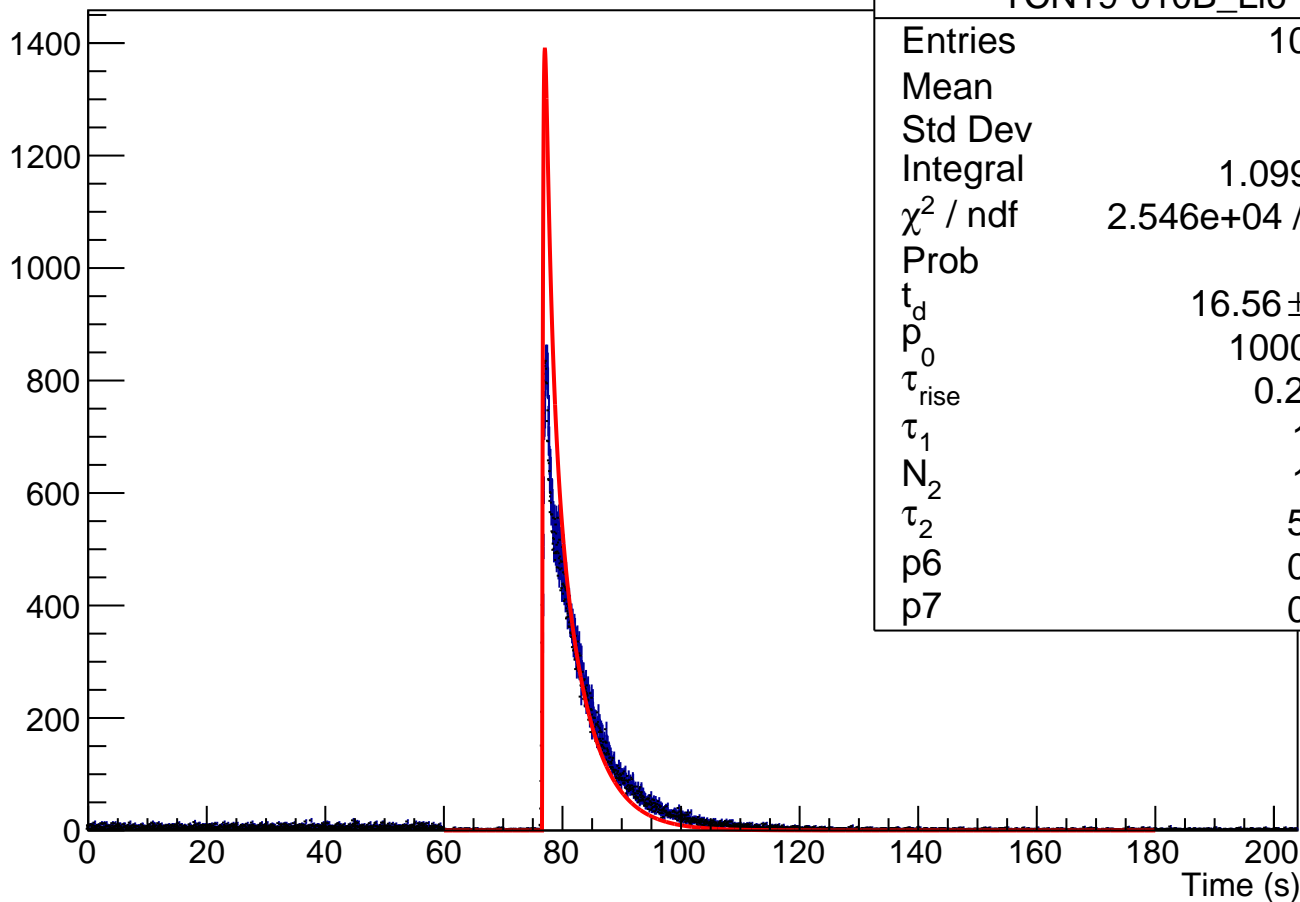

Normalized Li6 rate (1/0.05s)

0.05
0.04
0.03
0.02
0.01
0

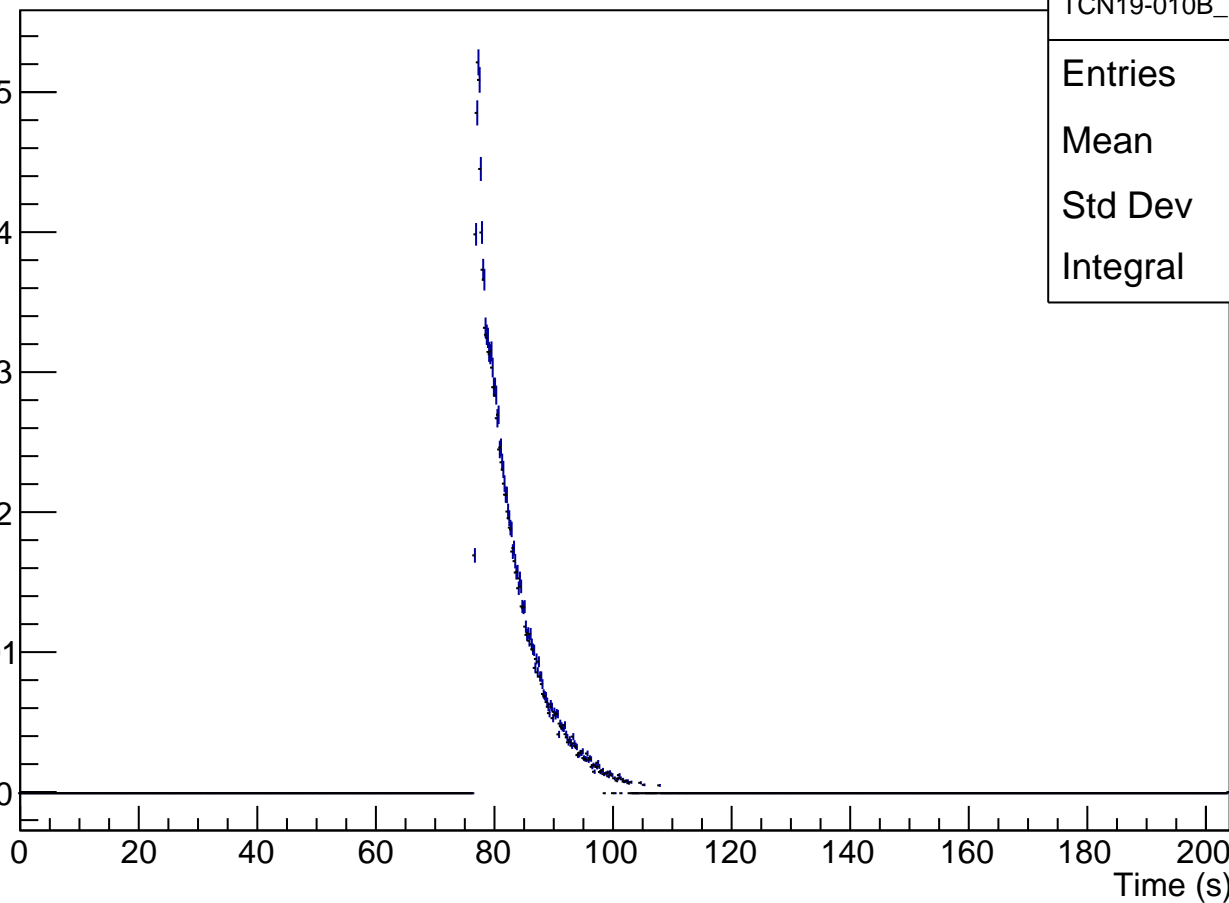


TCN19-010B_Li6_norm

Entries 97743


Mean 81.32

Std Dev 13.94

Integral 1.424

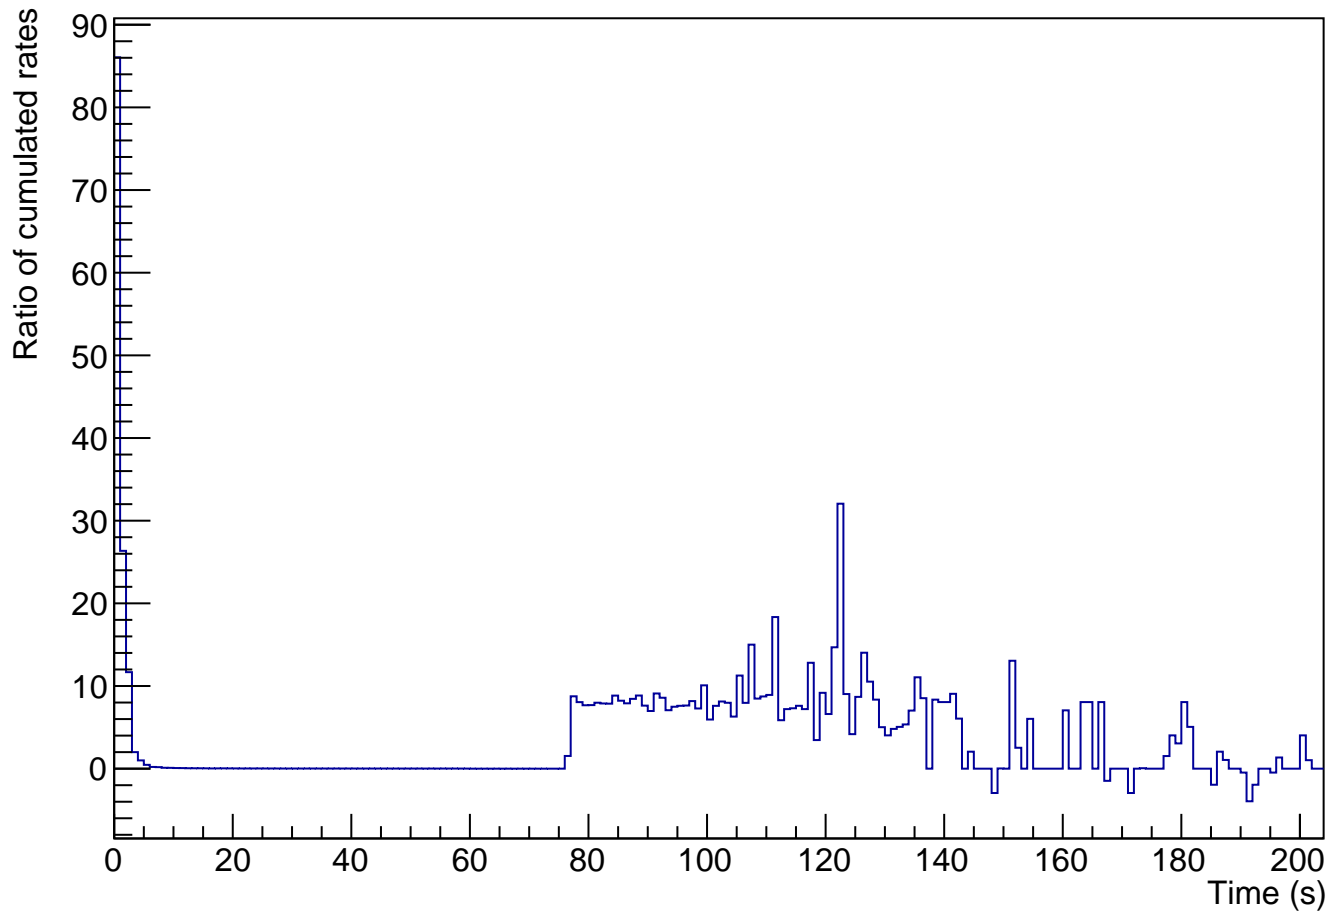

Average rate ratio

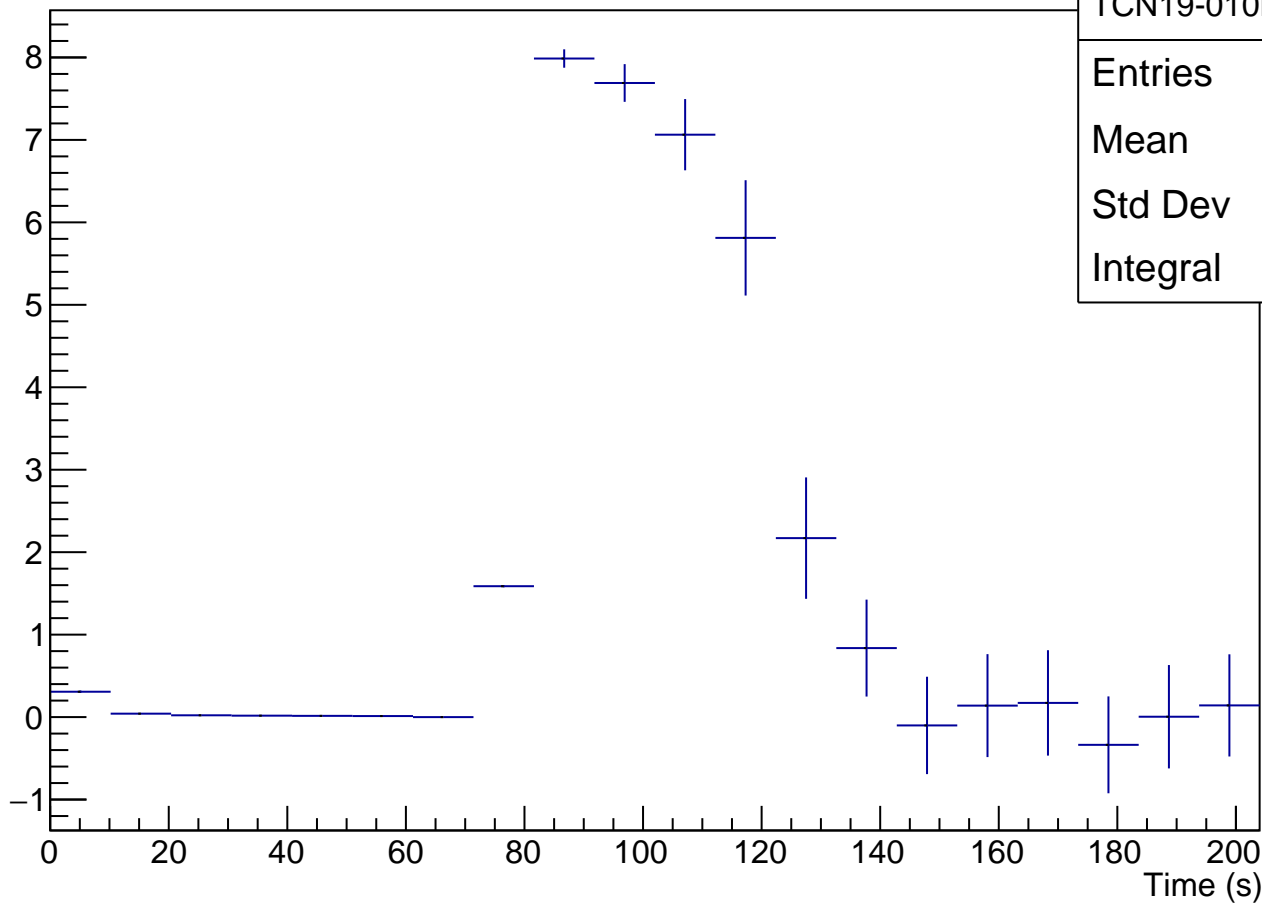

TCN19-010B_ratio


Entries 299

Mean 105.5

Std Dev 18.63

Integral 33.58

TCN19-010B

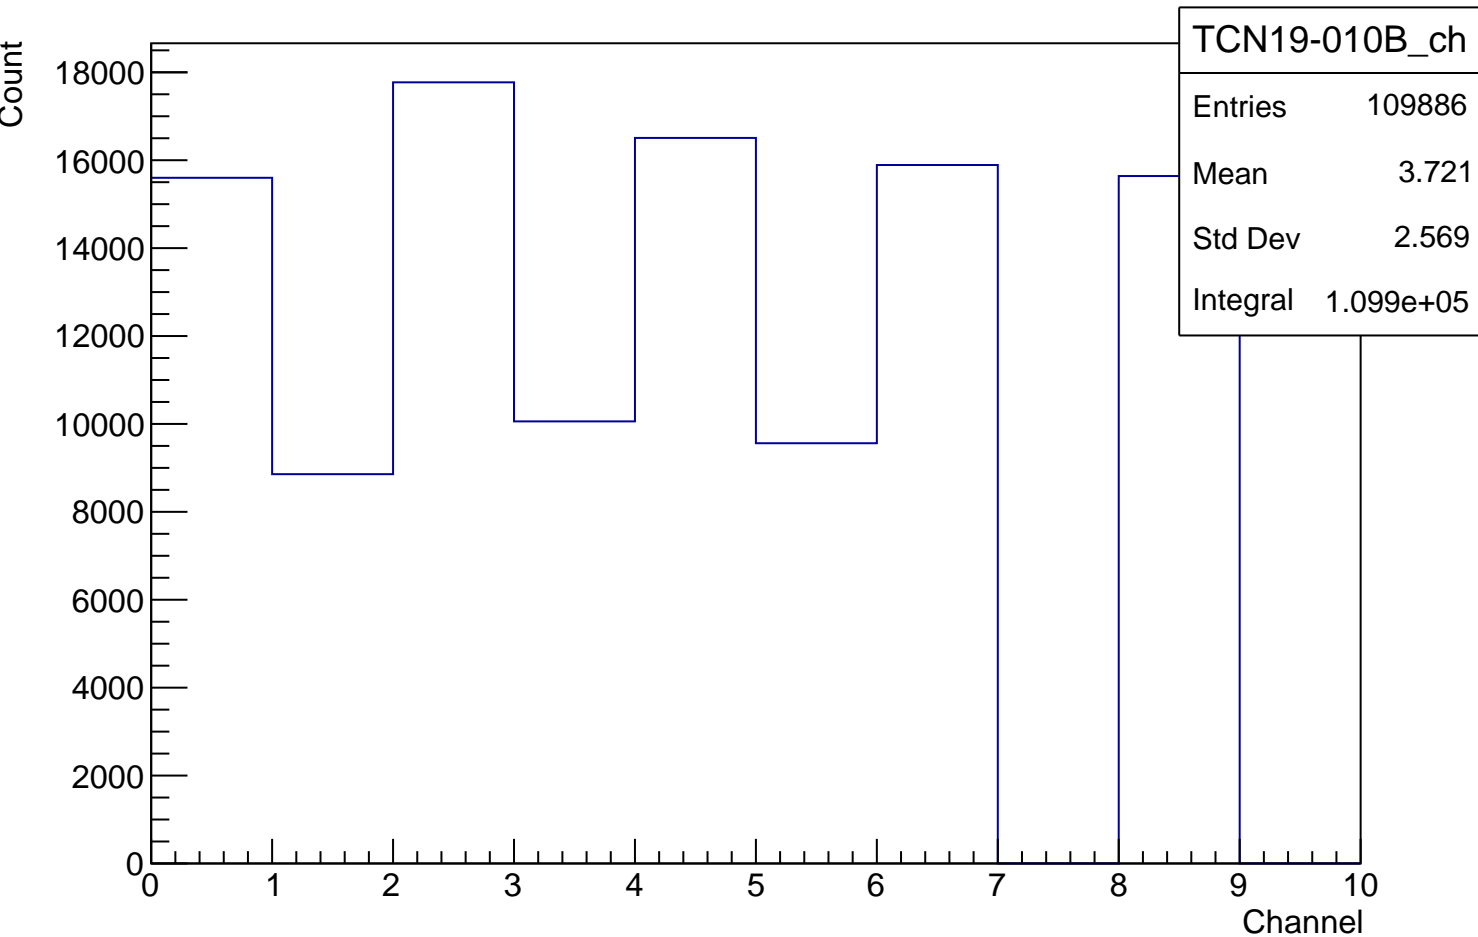

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 20

Mean 0

Std Dev 0

Integral 0