



TCN19-193 (DRex Cu, 0cm), transmission normalized during prestorage


UCN-count-to-monitor ratio

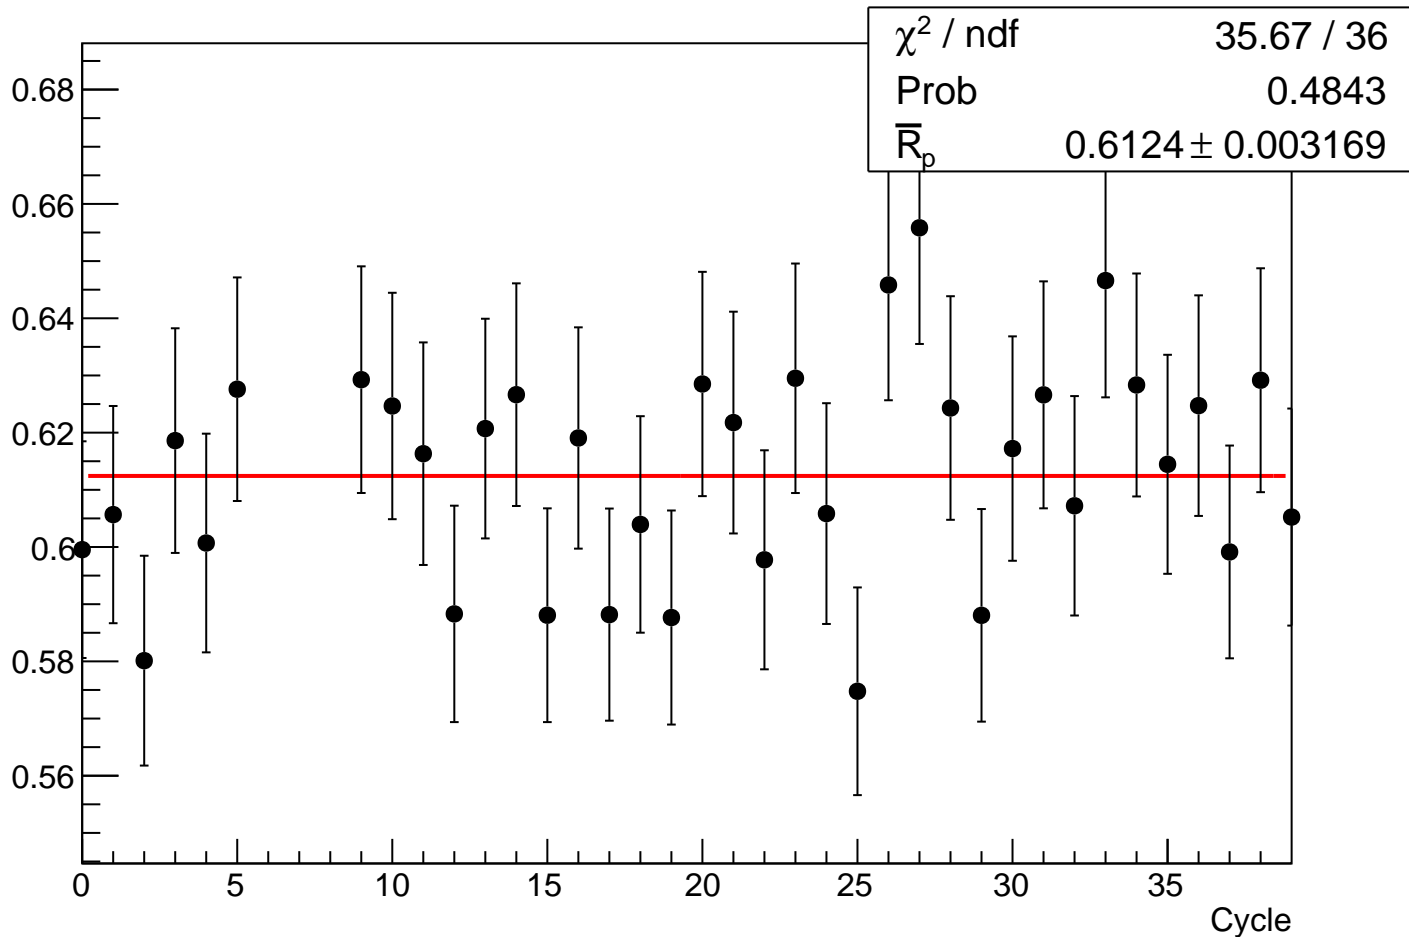


# Graph

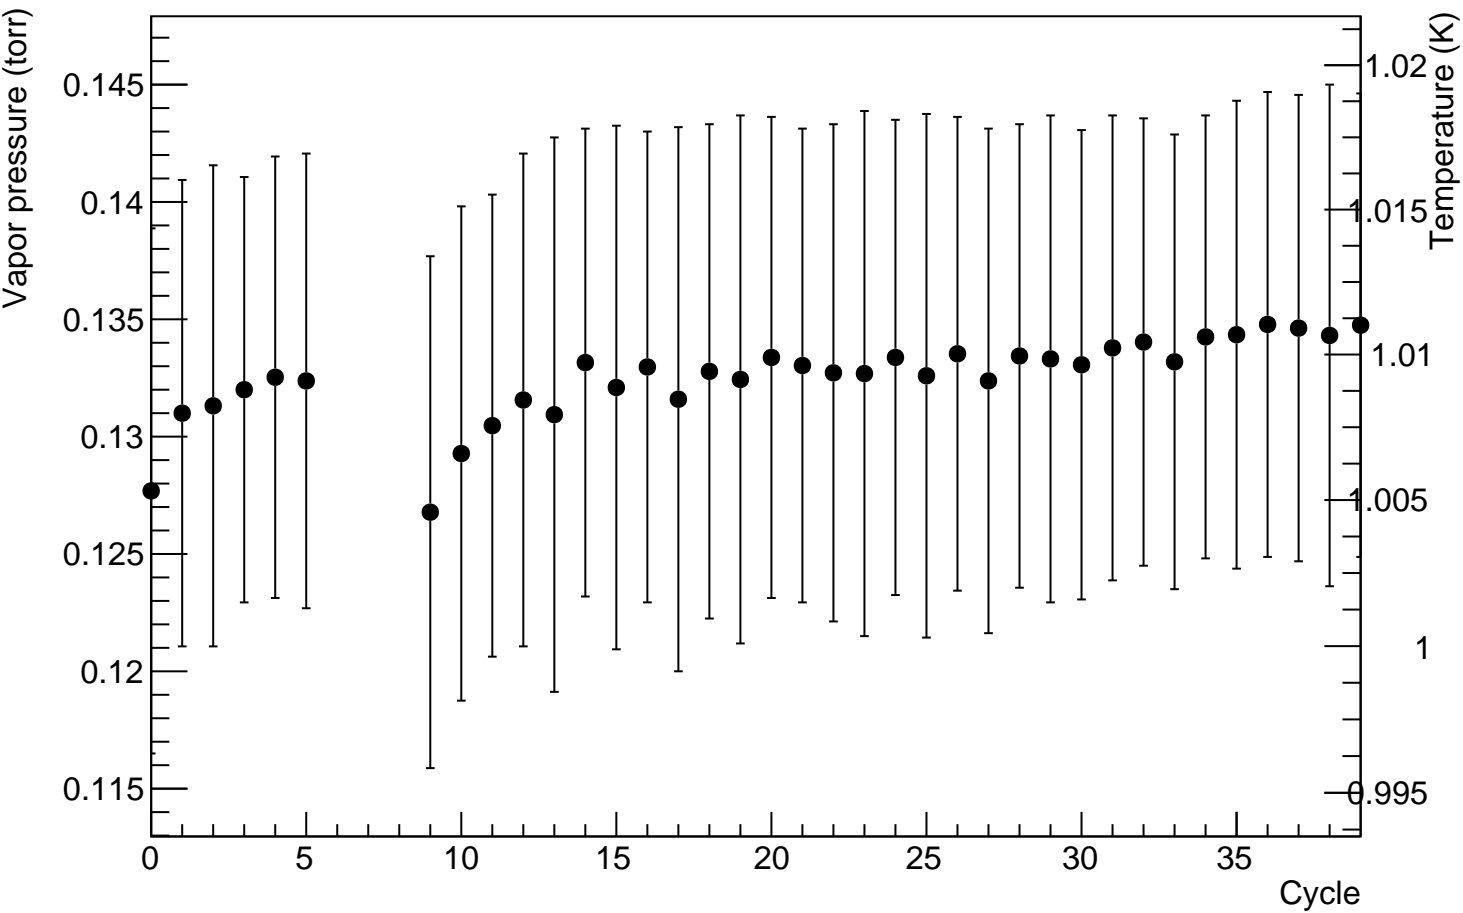


li6 background rate (1/s)

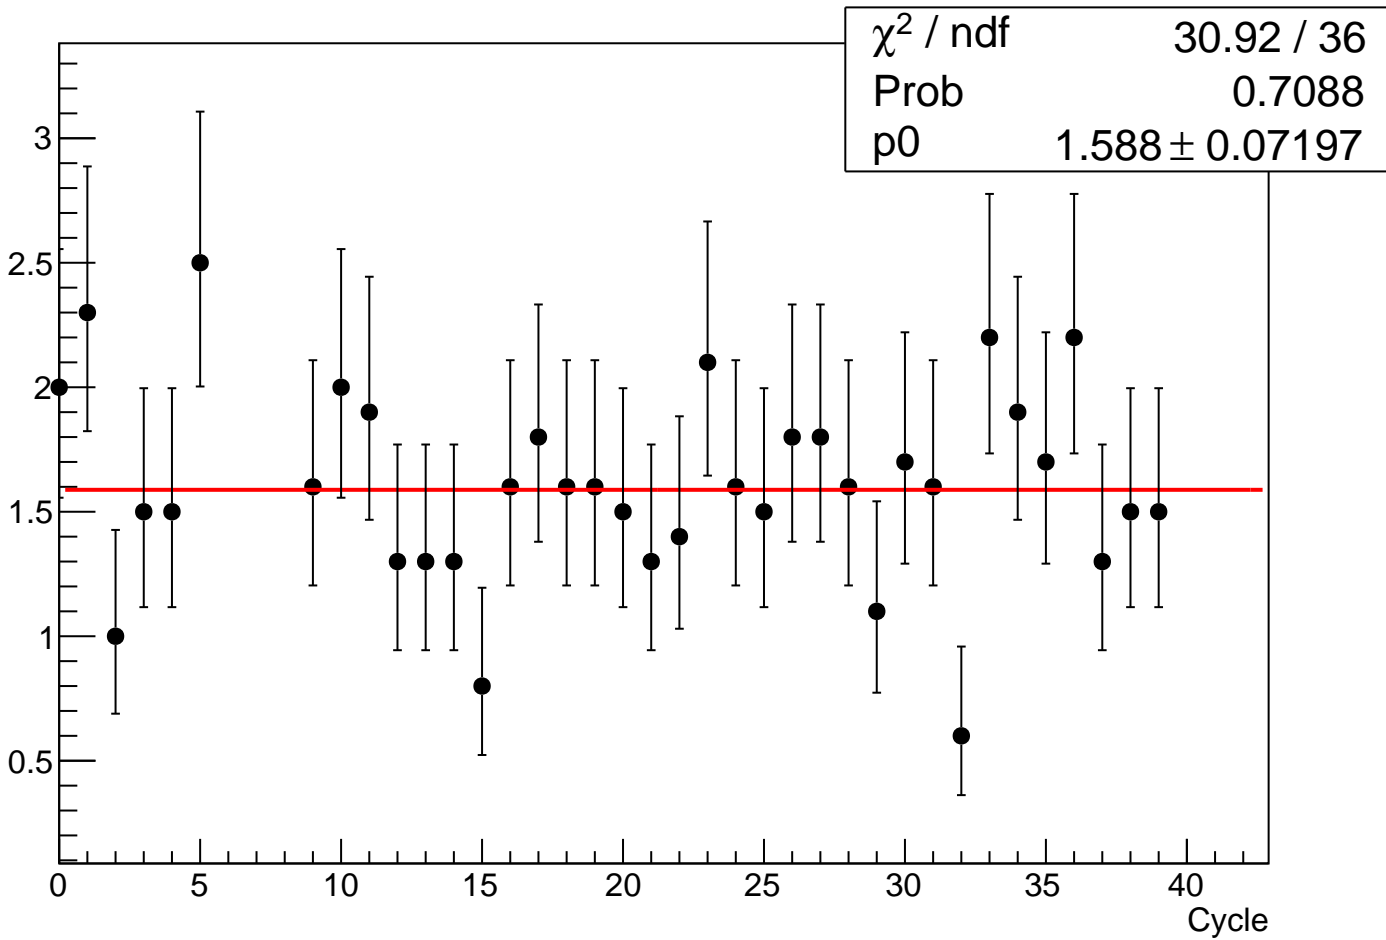


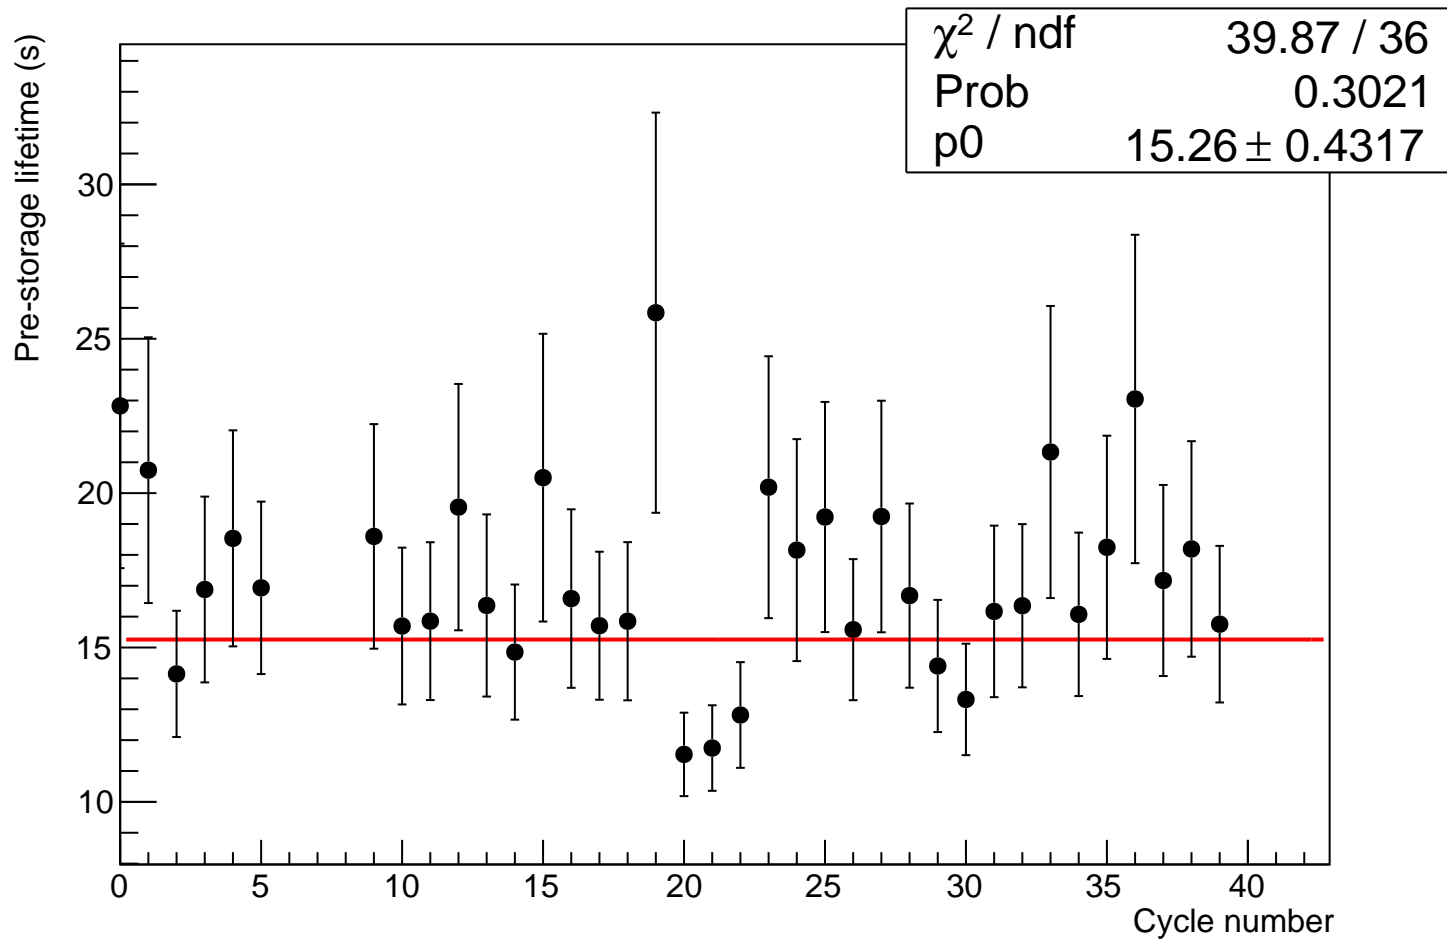


Corrected Li6-He3 ratio


$\chi^2 / \text{ndf}$	12.96 / 36
Prob	0.9999
p0	$15.14 \pm 0.4322$

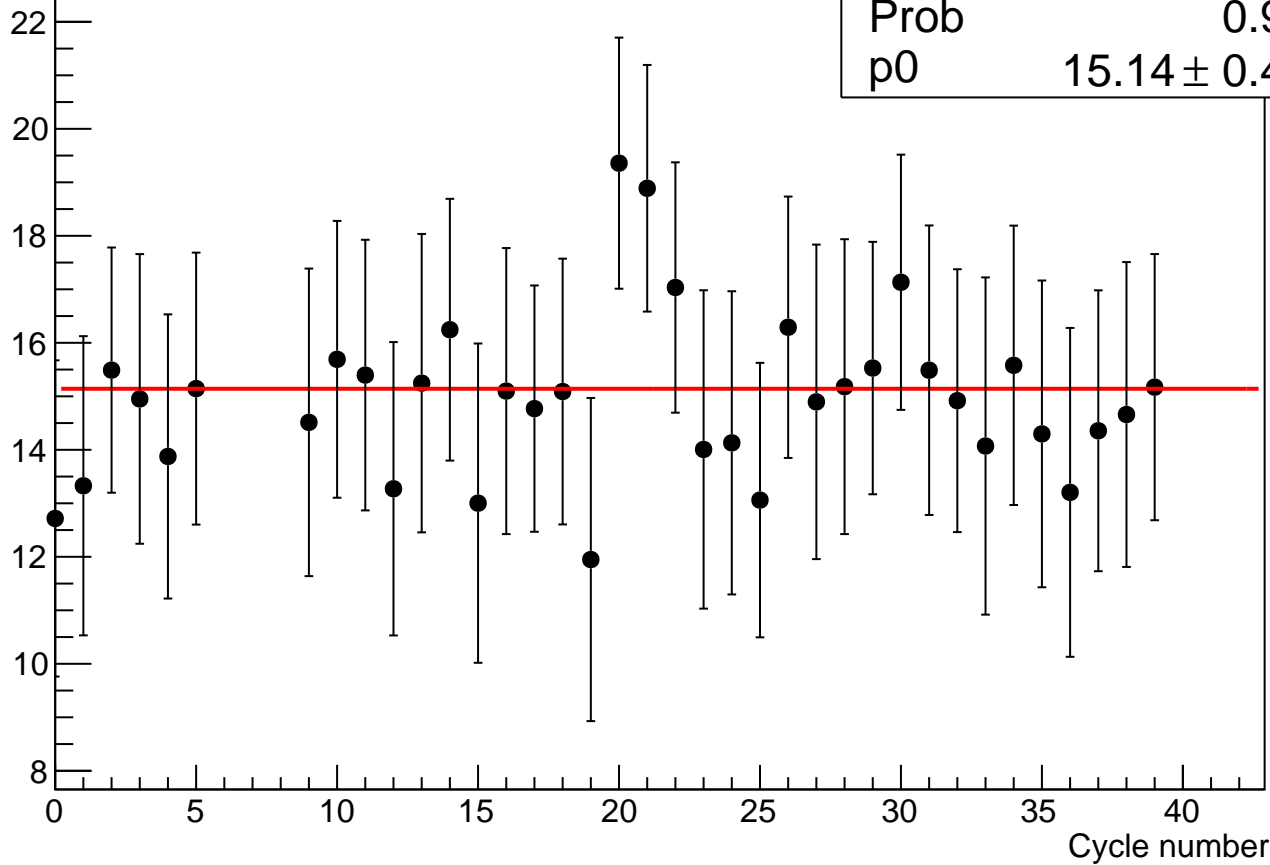

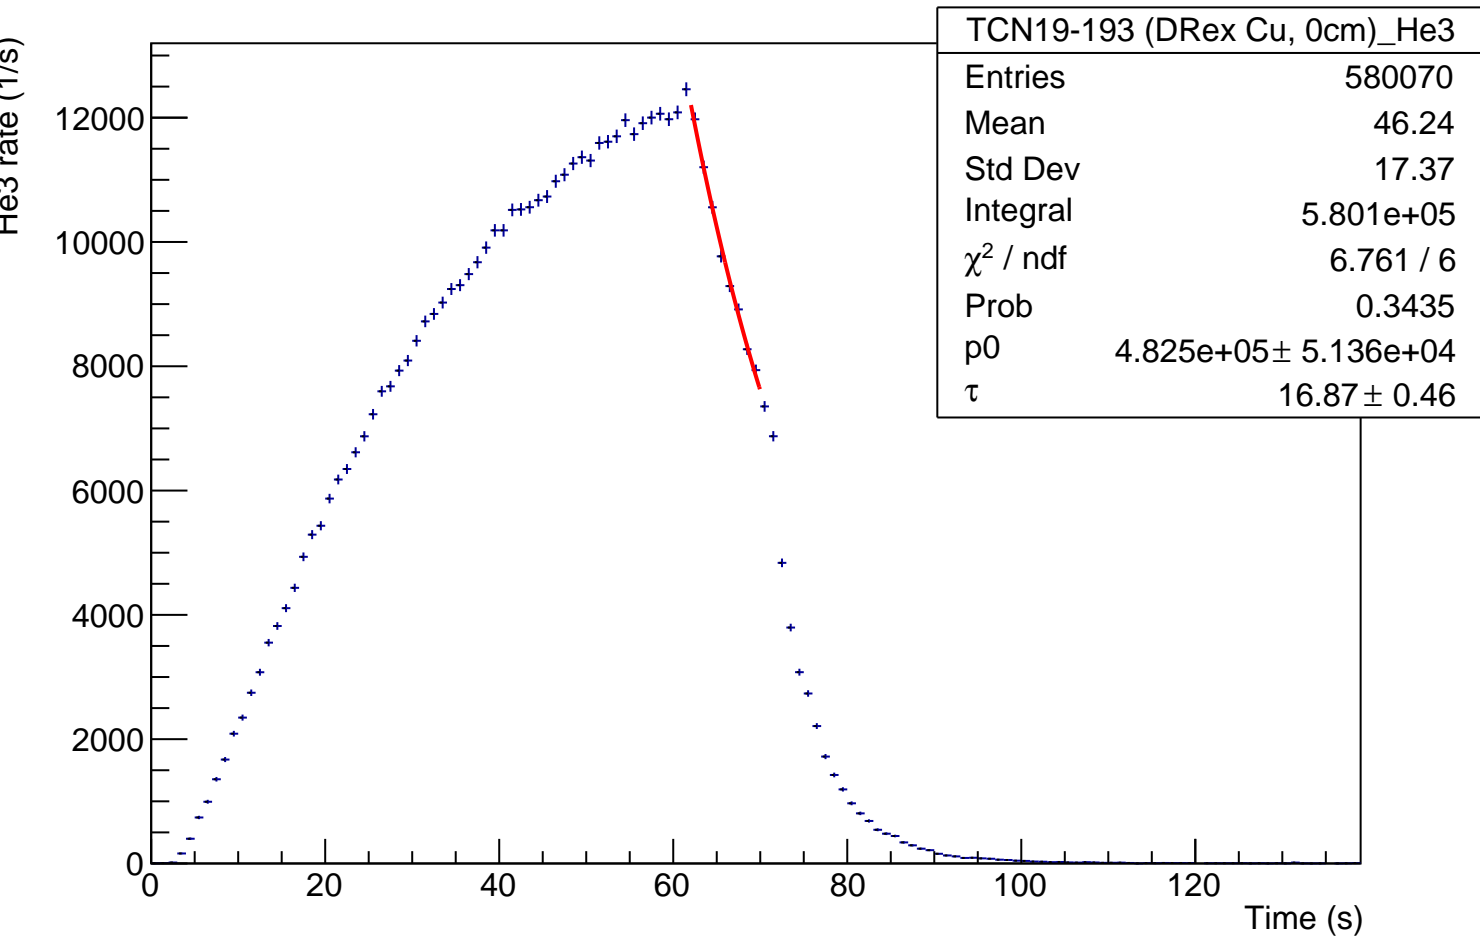


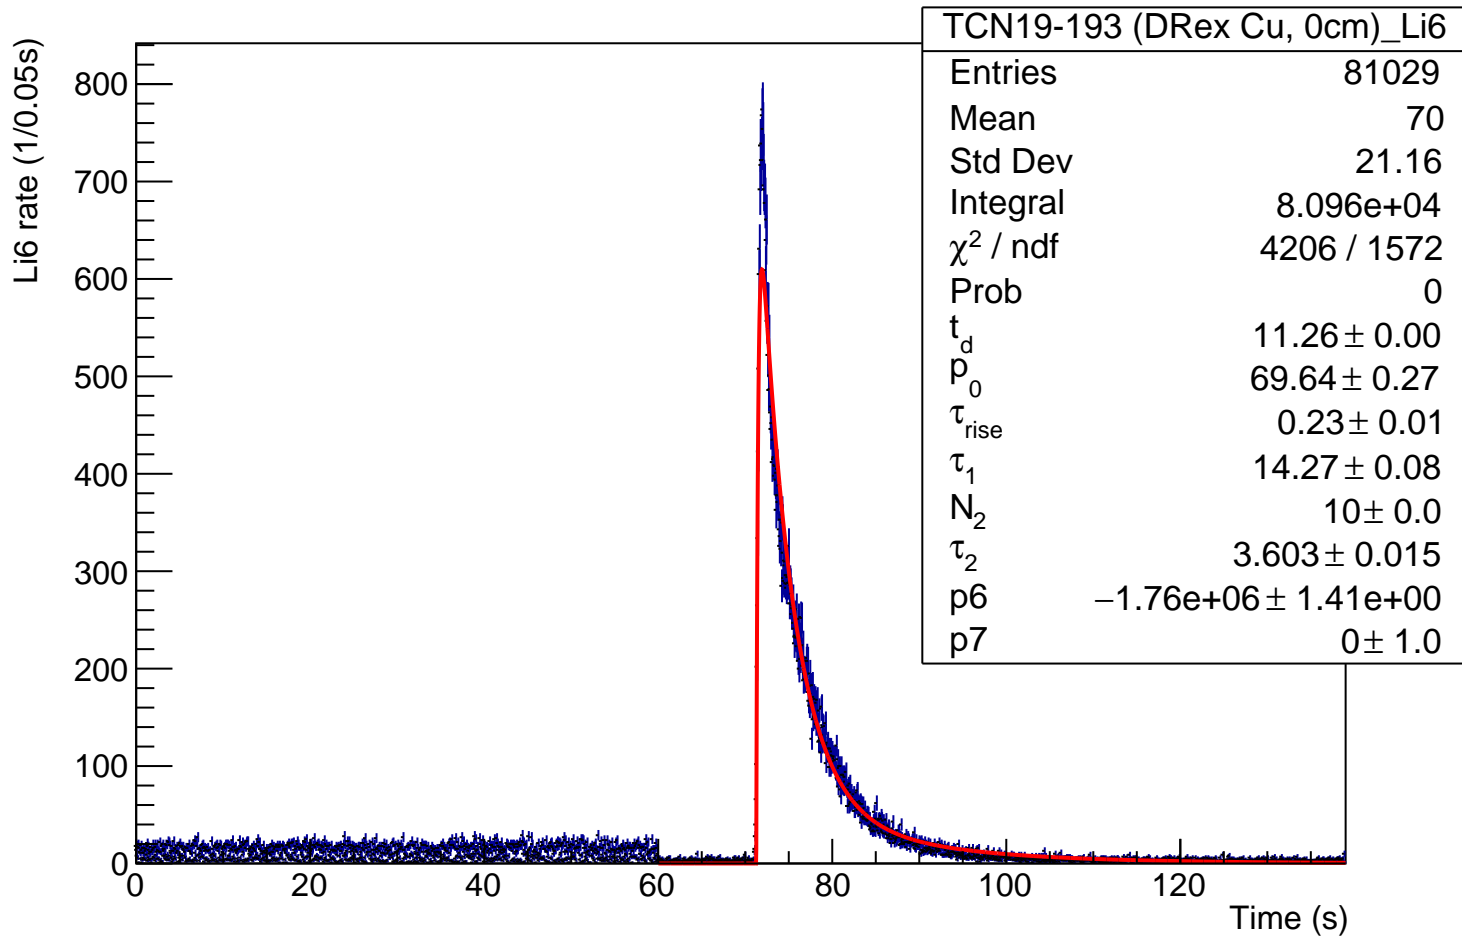


Normalized Li6 rate (1/0.05s)

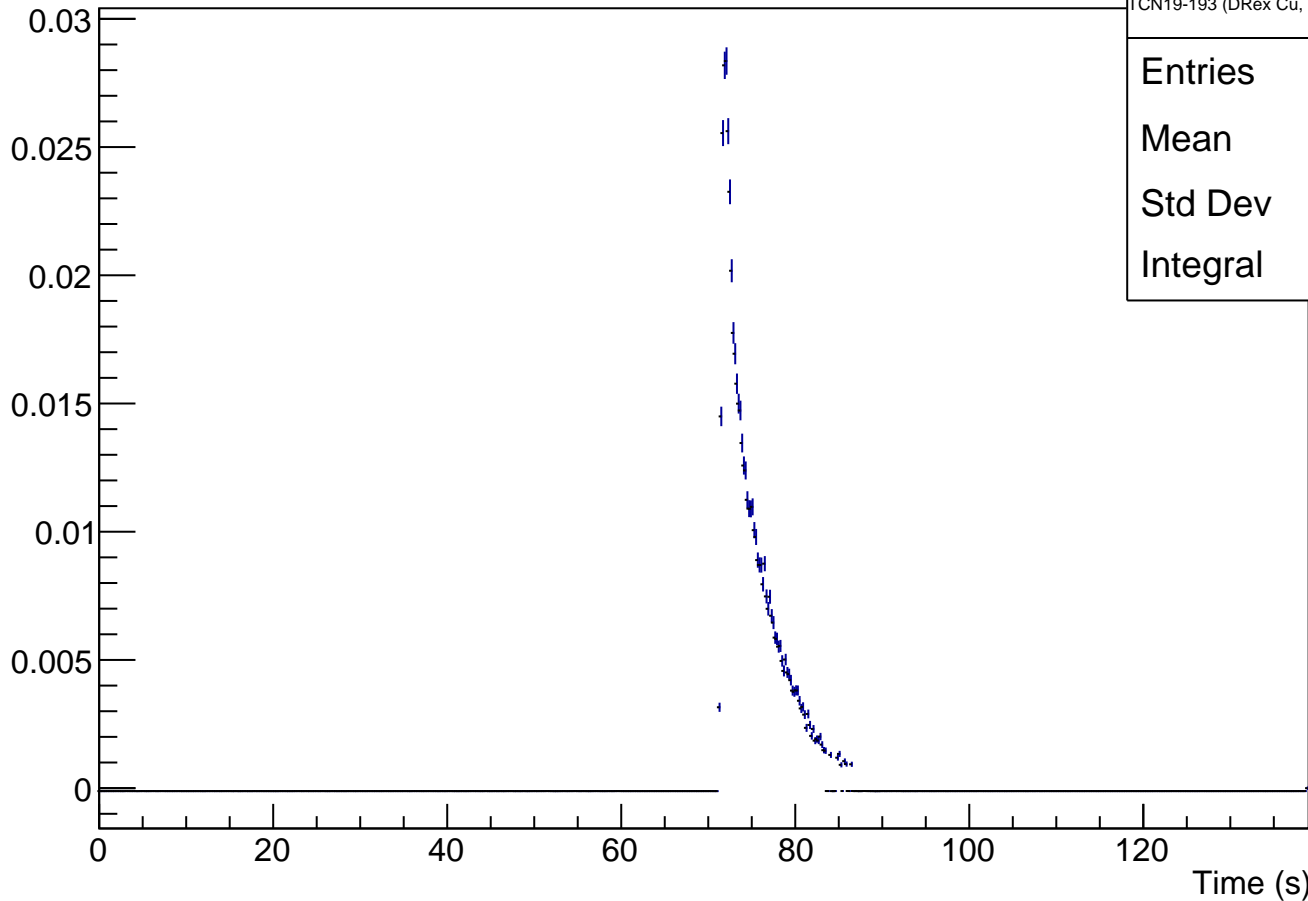




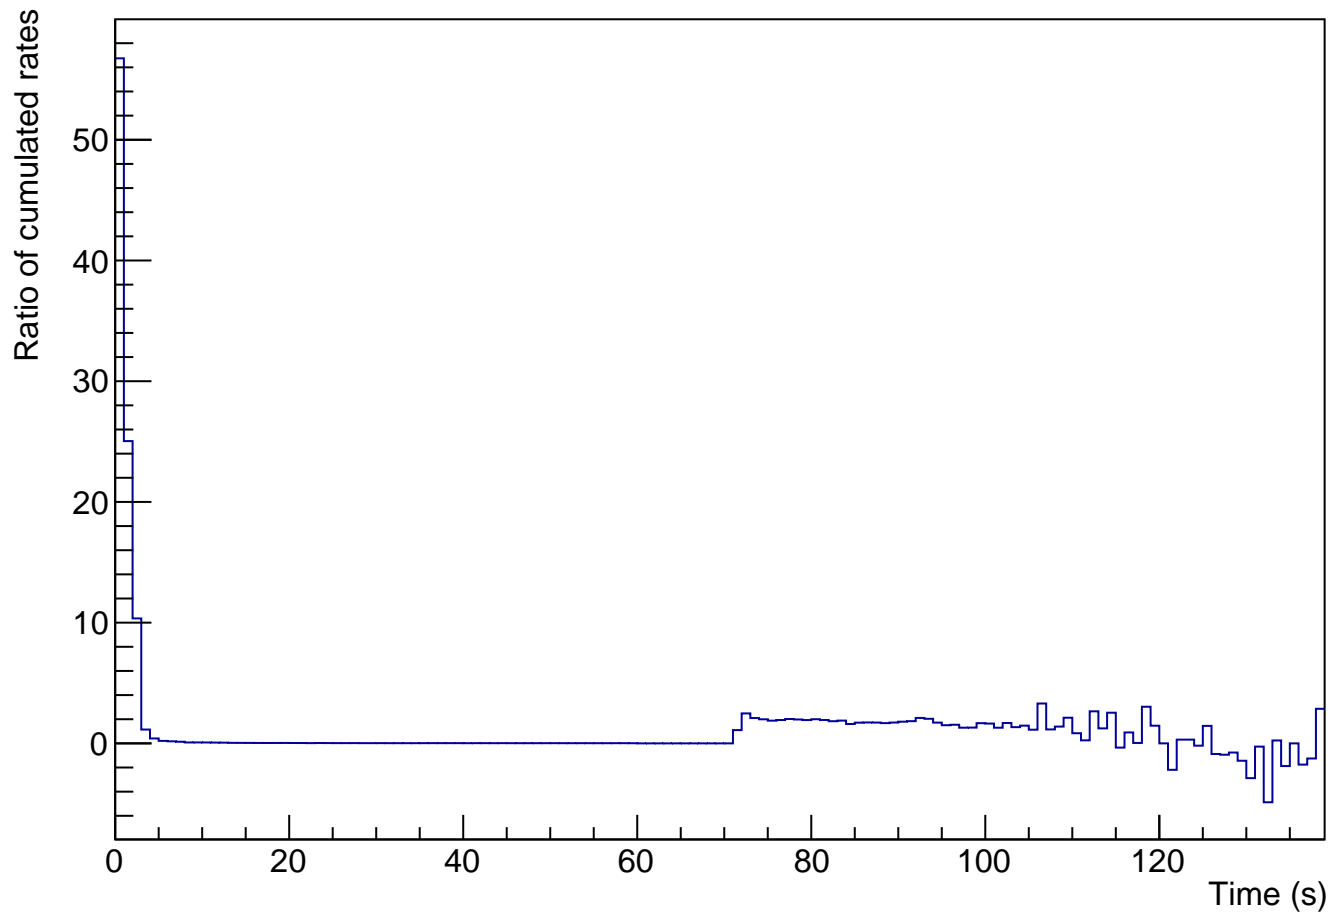

Average rate ratio

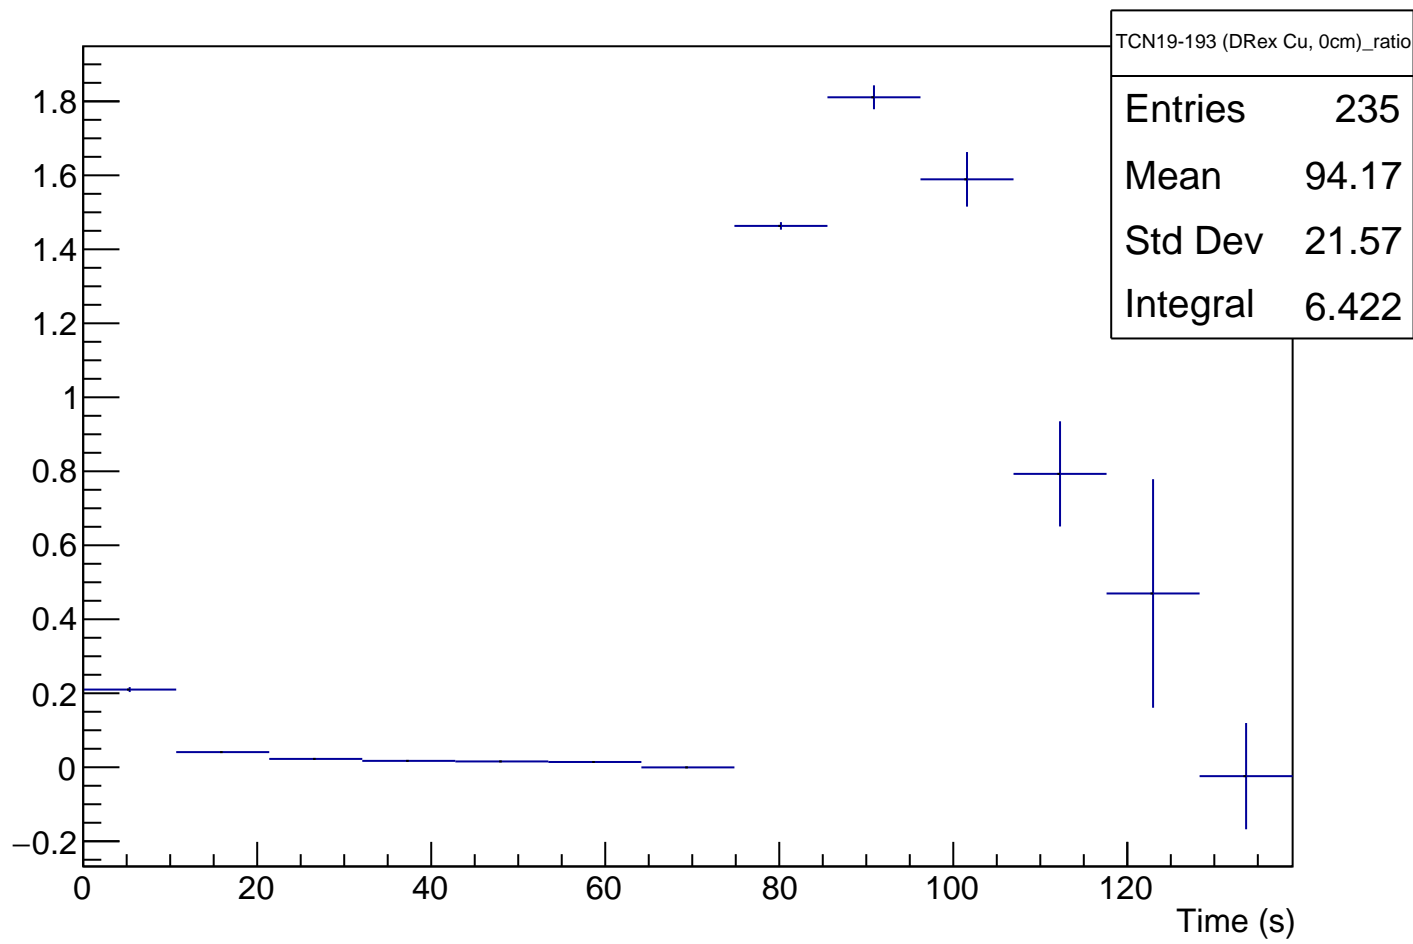

# TCN19-193 (DRex Cu, 0cm)

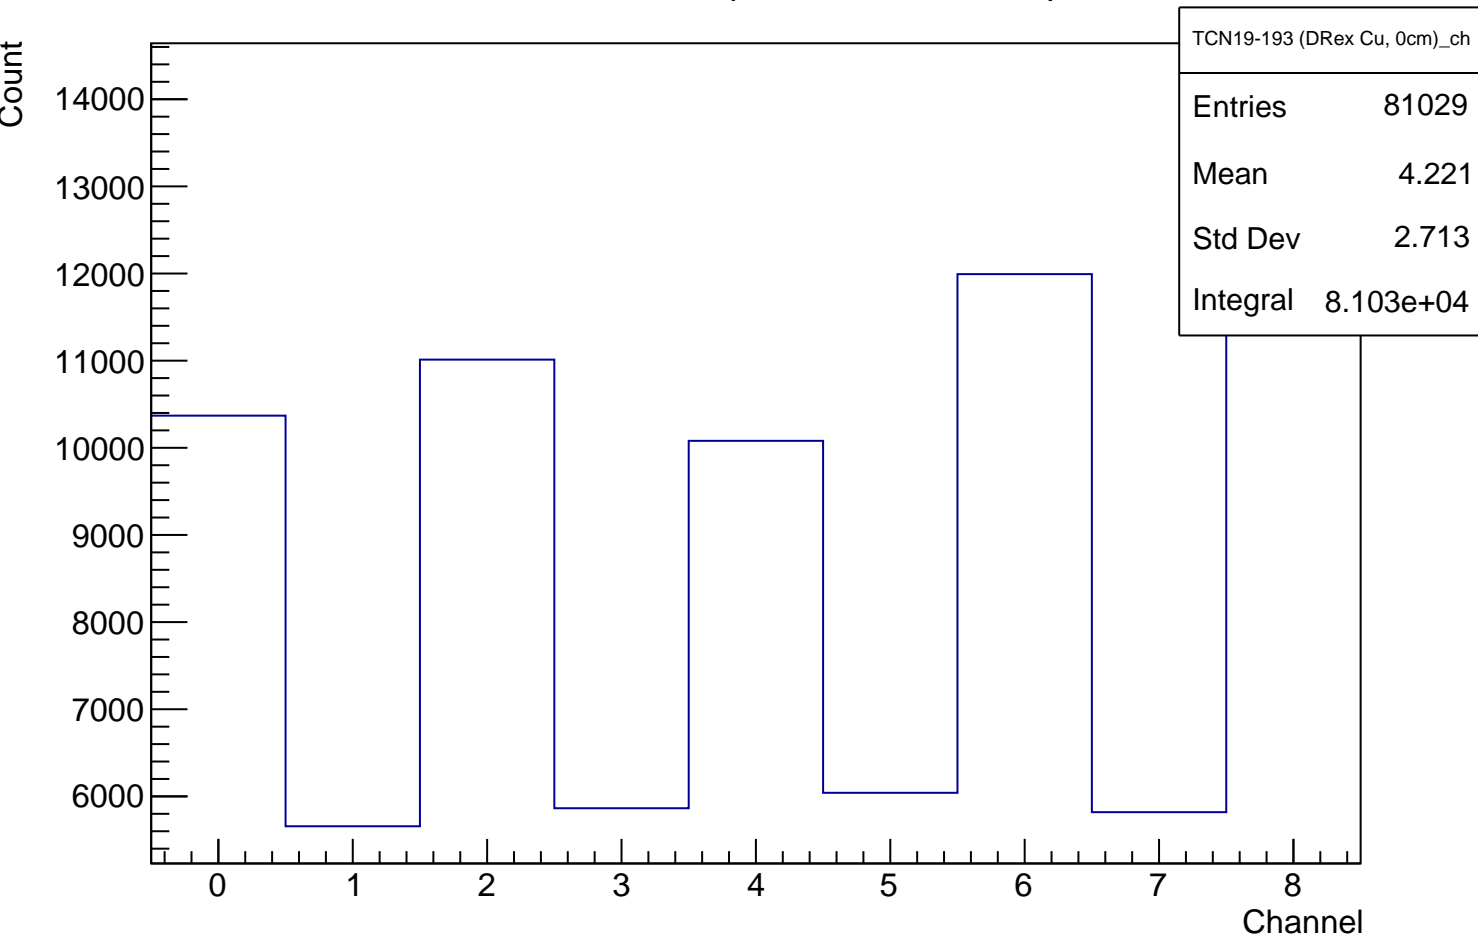

# Li6 window

Frequency

1  
0.8  
0.6  
0.4  
0.2  
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 37

Mean 0

Std Dev 0

Integral 0