





TCN19-280 (spider v2), transmission normalized during prestorage

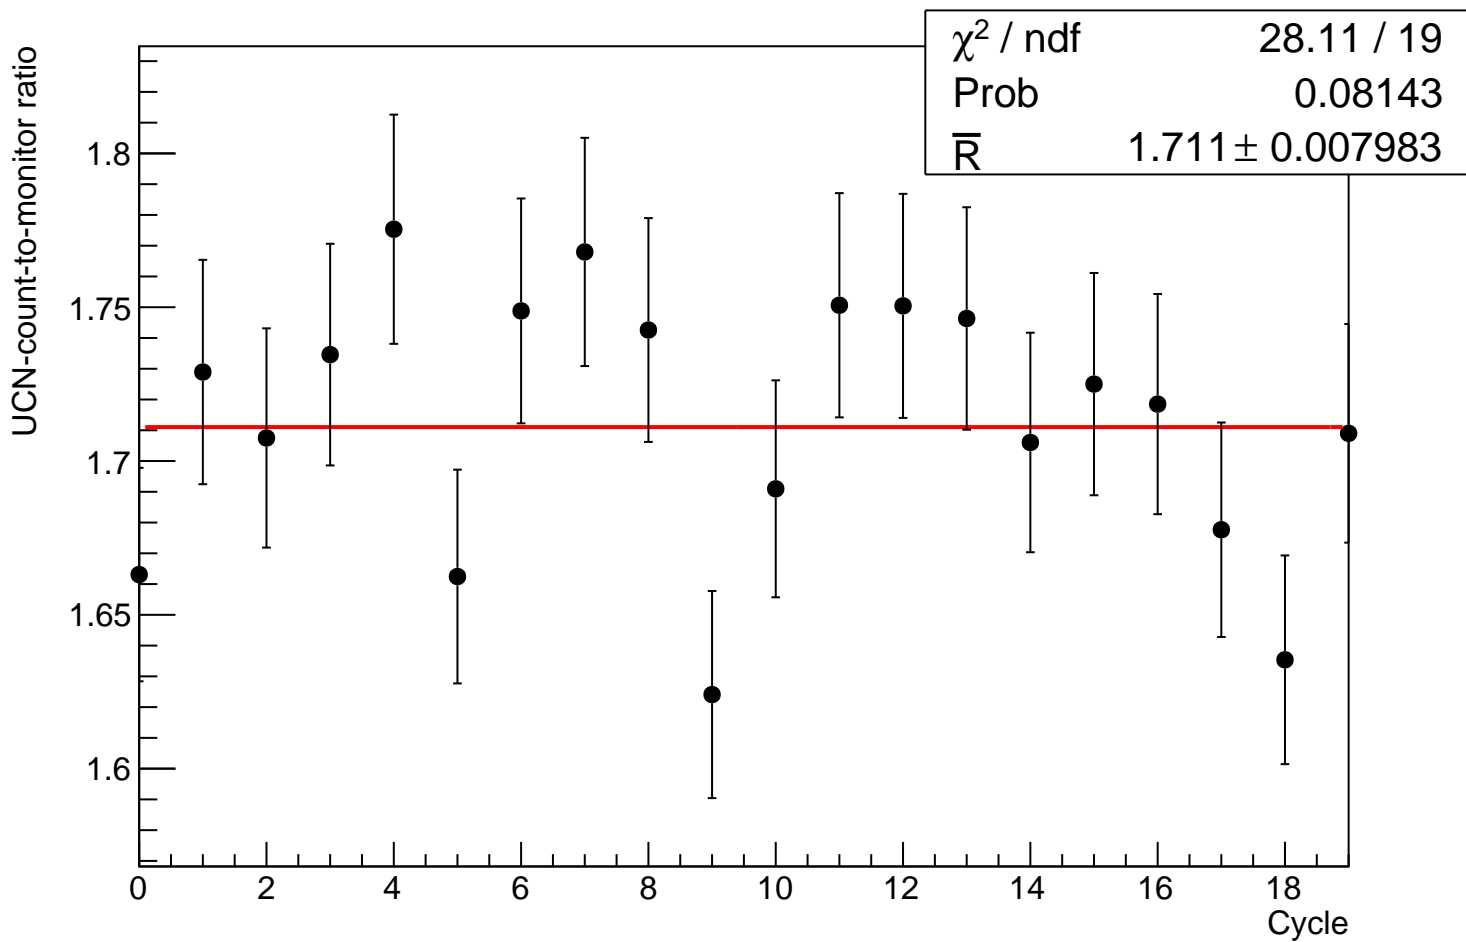


Graph

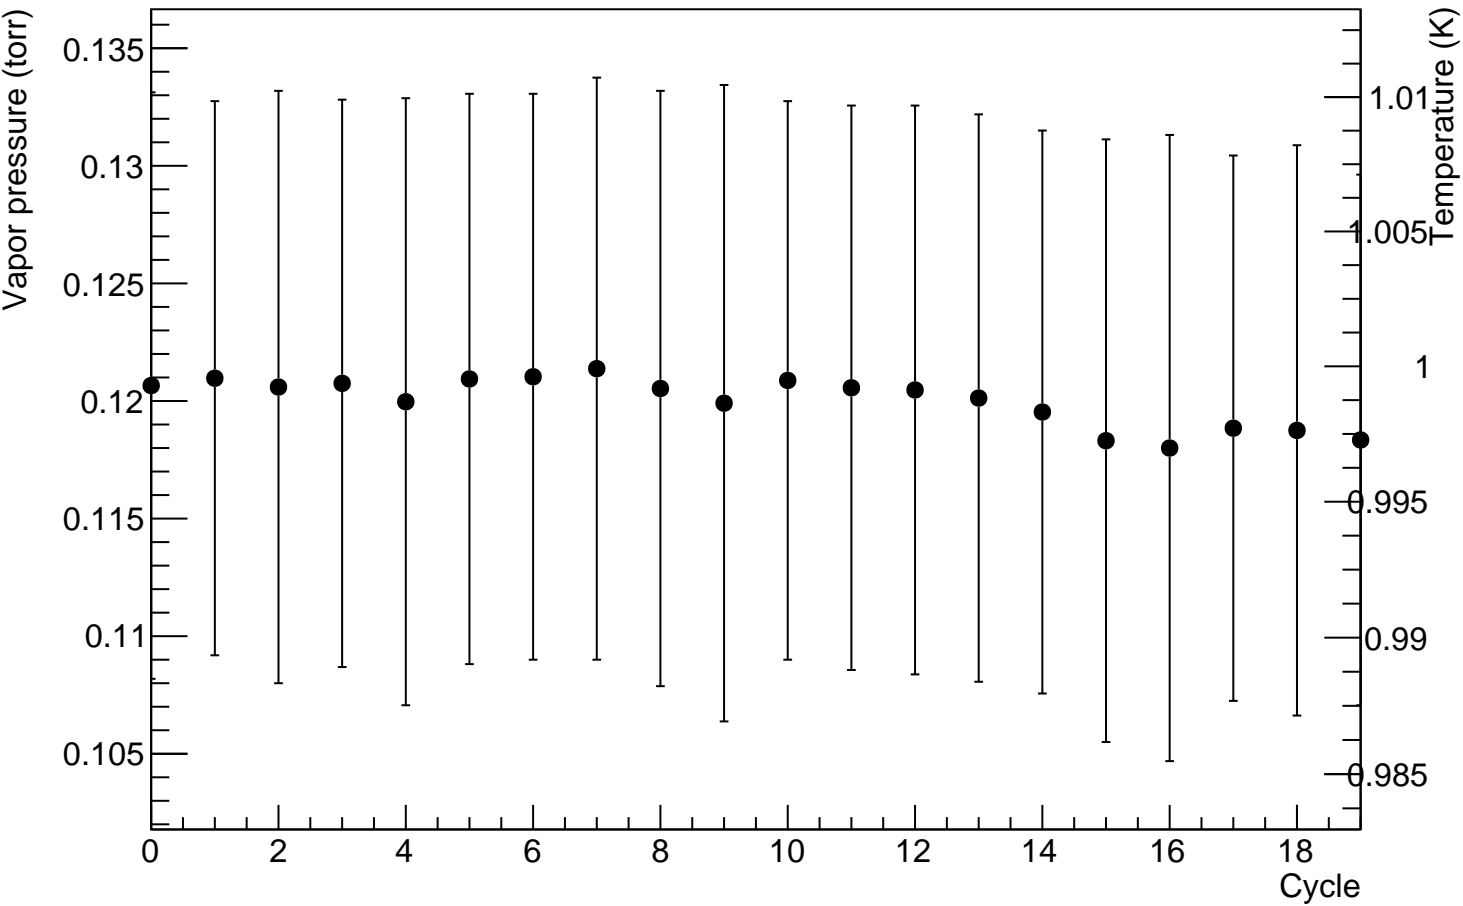


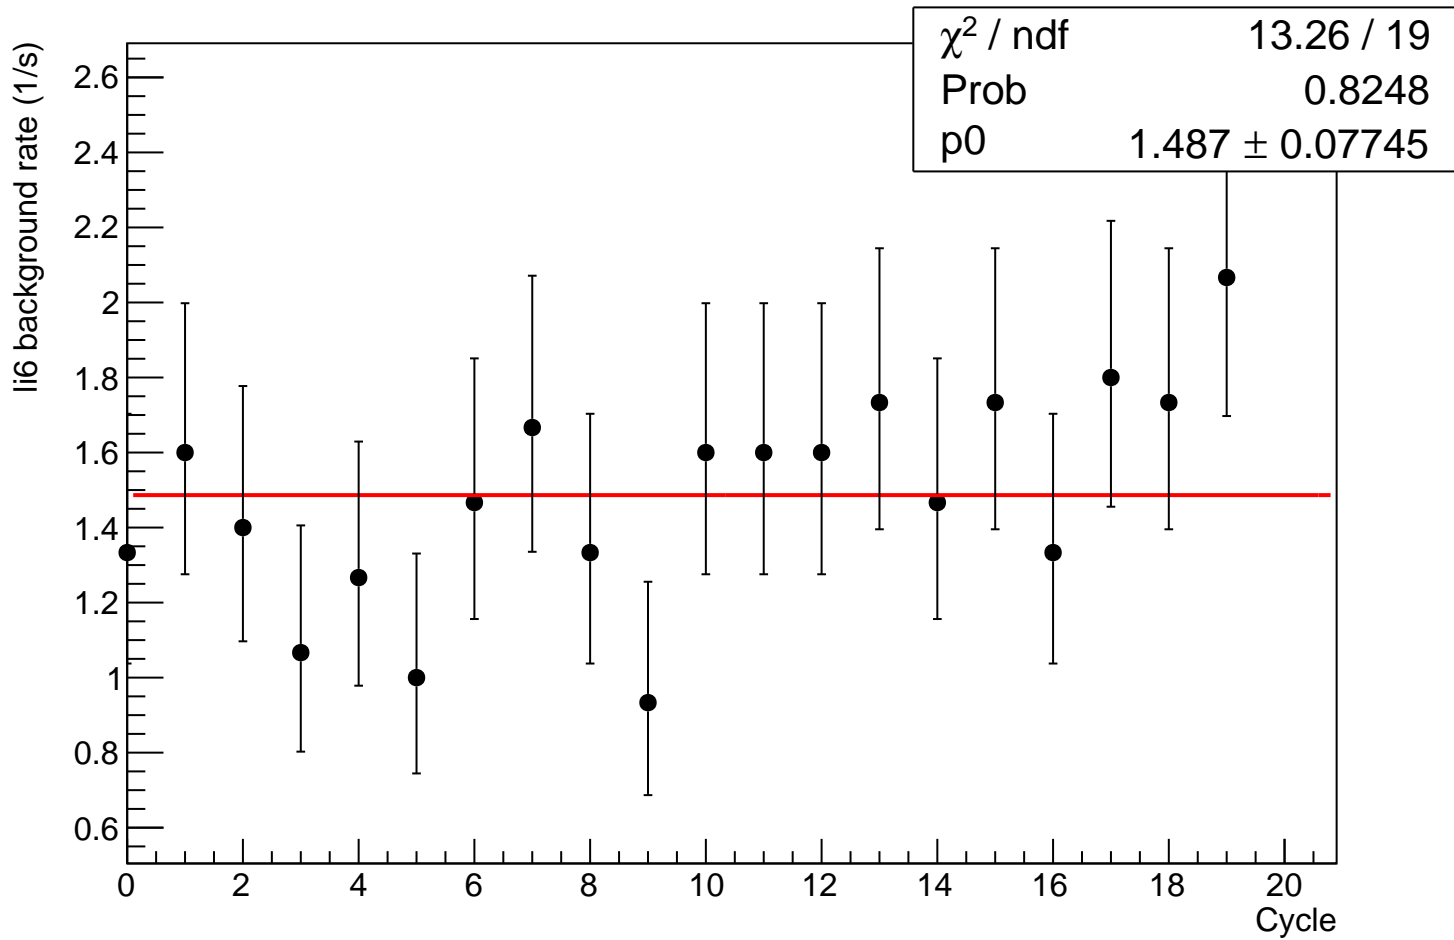

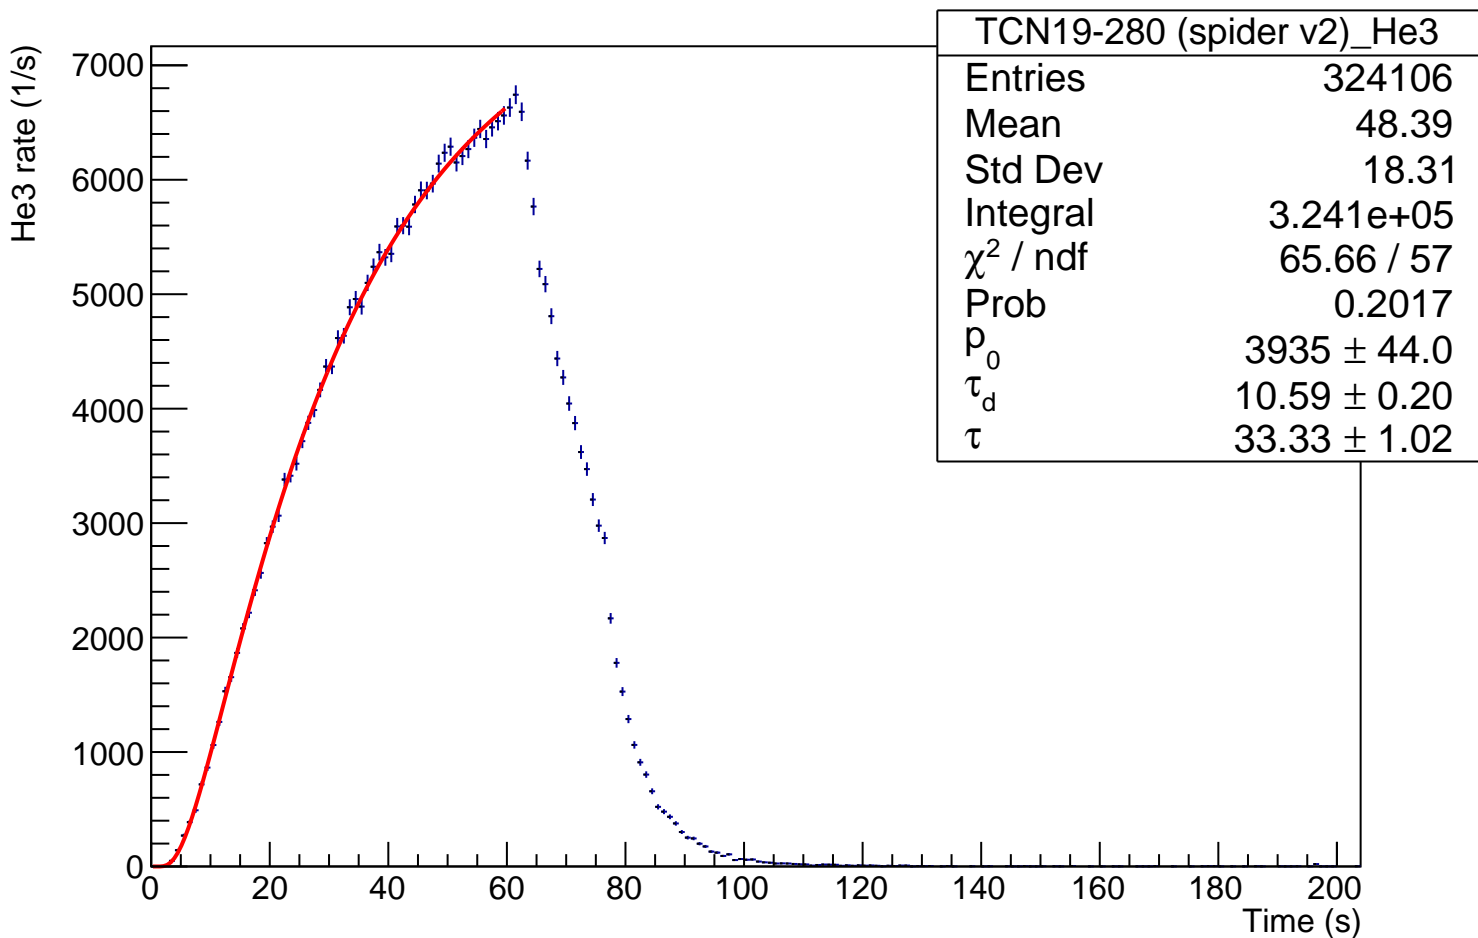

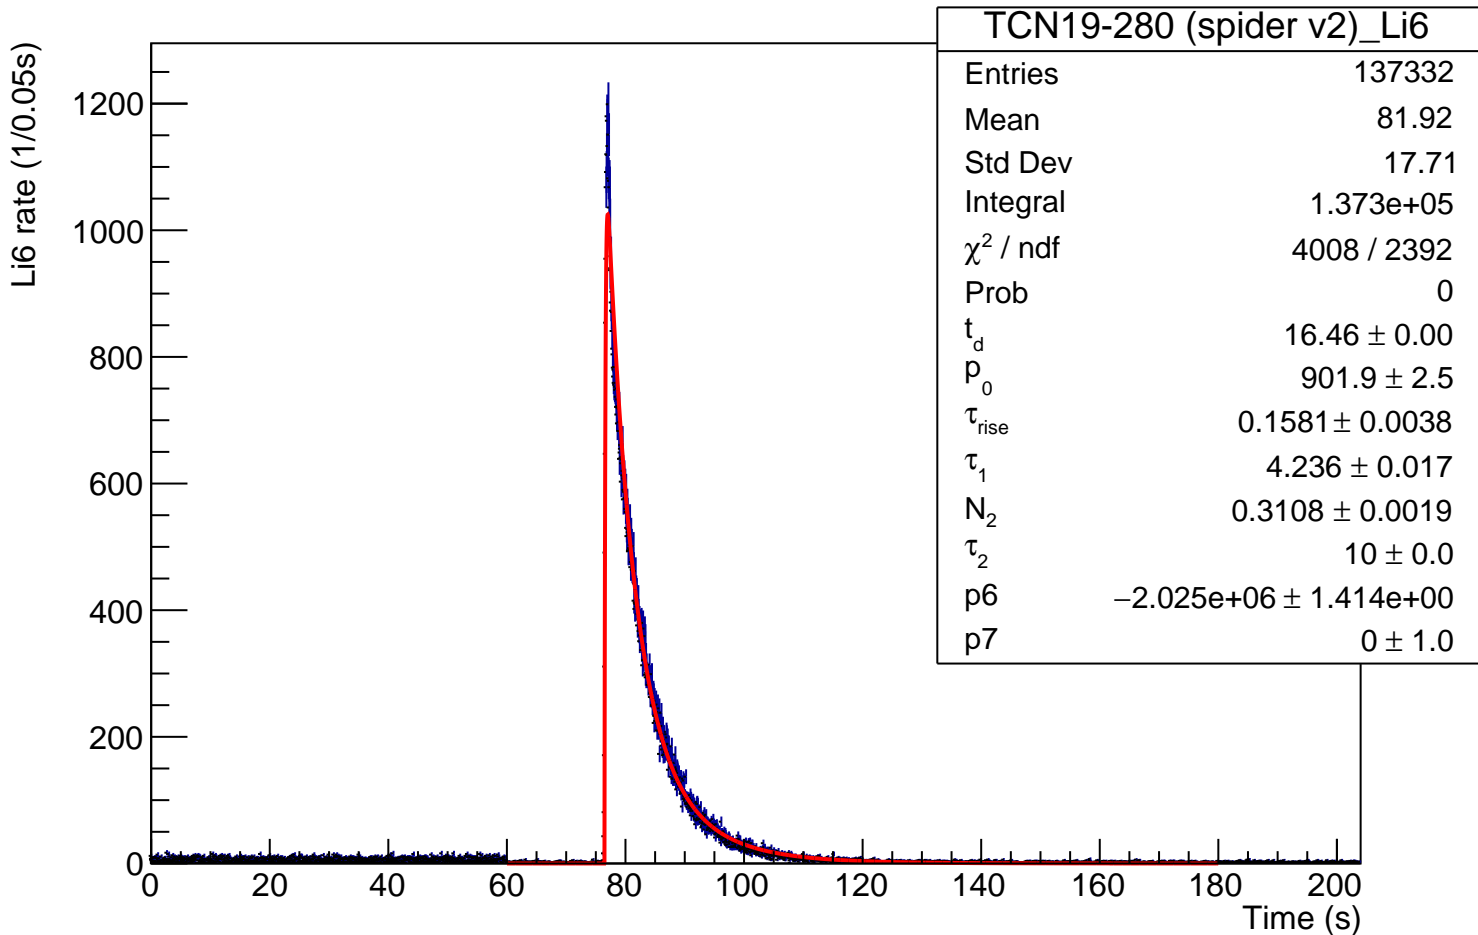

Normalized Li6 rate (1/0.05s)

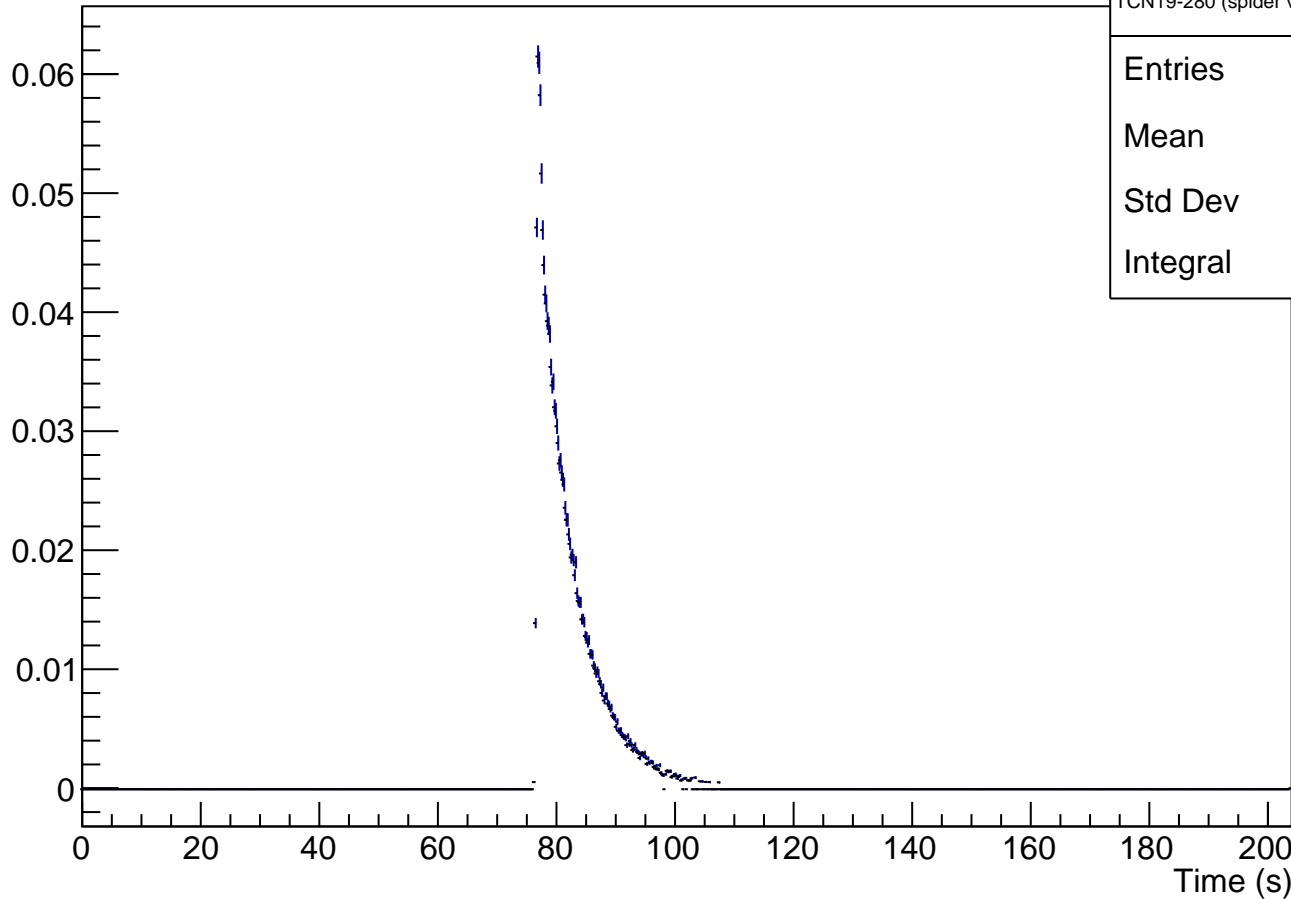


TCN19-280 (spider v2)_Li6_norm

Entries 122235


Mean 80.99

Std Dev 12.17

Integral 1.569

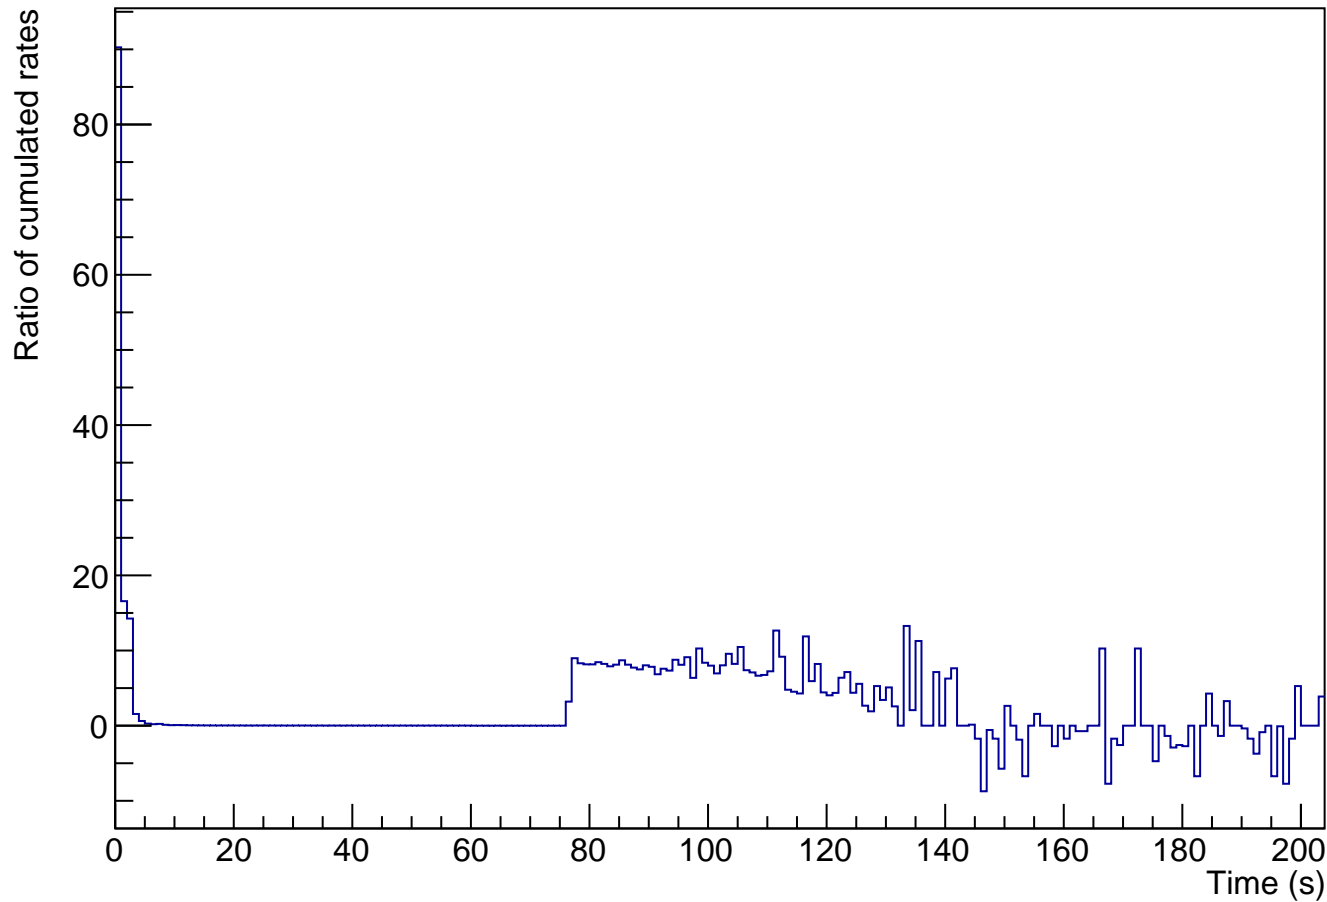

Average rate ratio

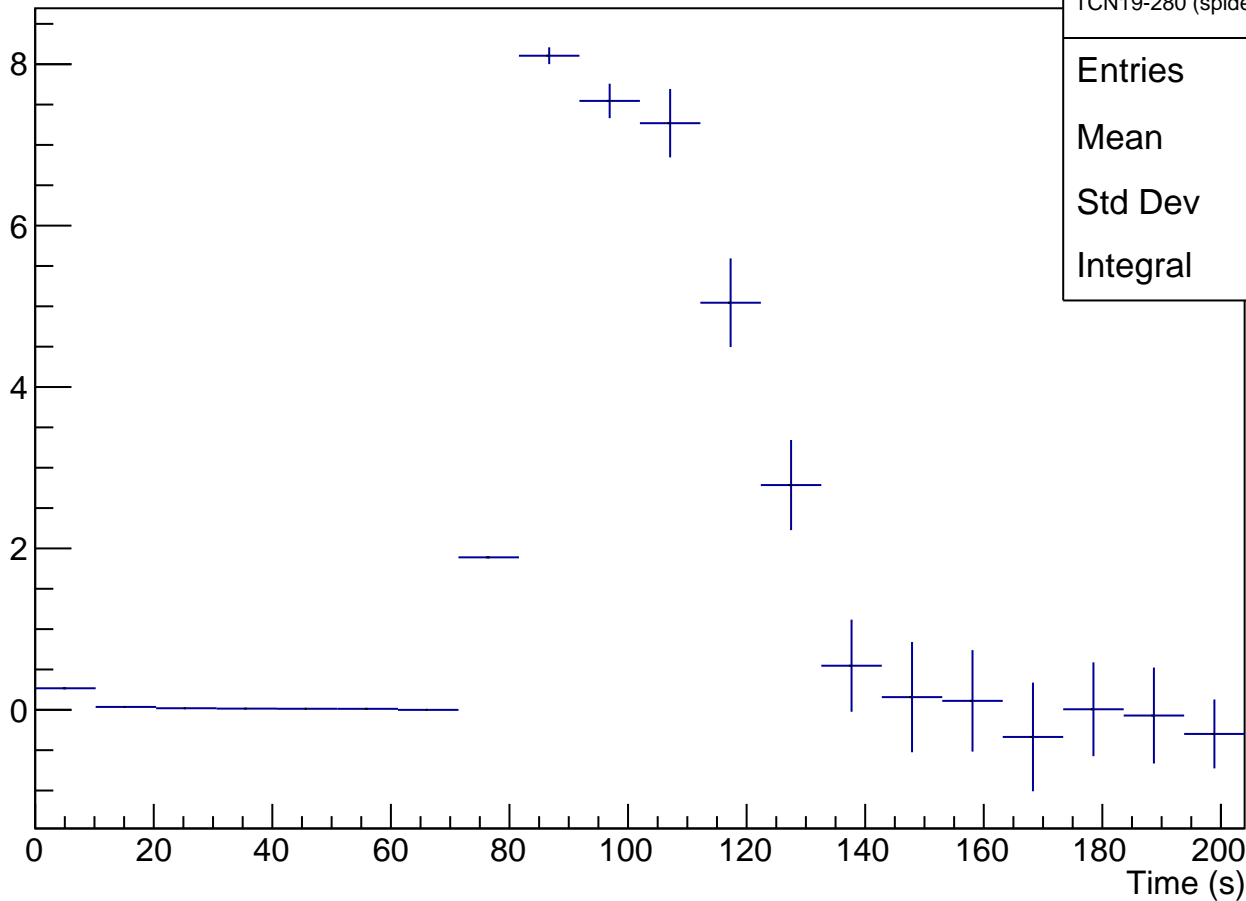

TCN19-280 (spider v2)_ratio

Entries 280


Mean 103.3

Std Dev 17.55

Integral 33.12

TCN19-280 (spider v2)

Count

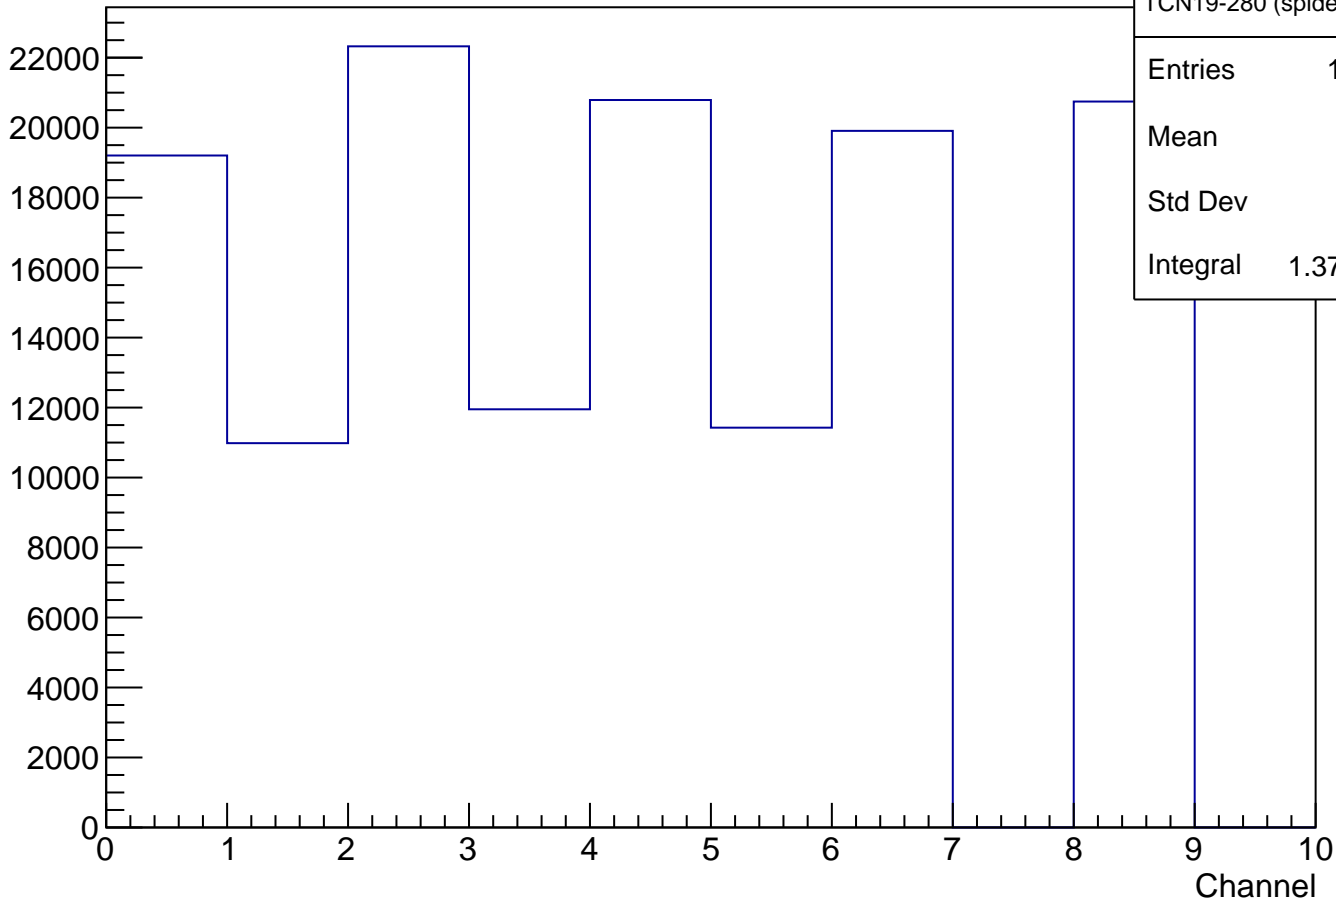

TCN19-280 (spider v2)_ch

Entries 137332

Mean 3.766

Std Dev 2.592

Integral 1.373e+05

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 20

Mean 0

Std Dev 0

Integral 0