





TCN19-280 (spider v4), transmission normalized during prestorage

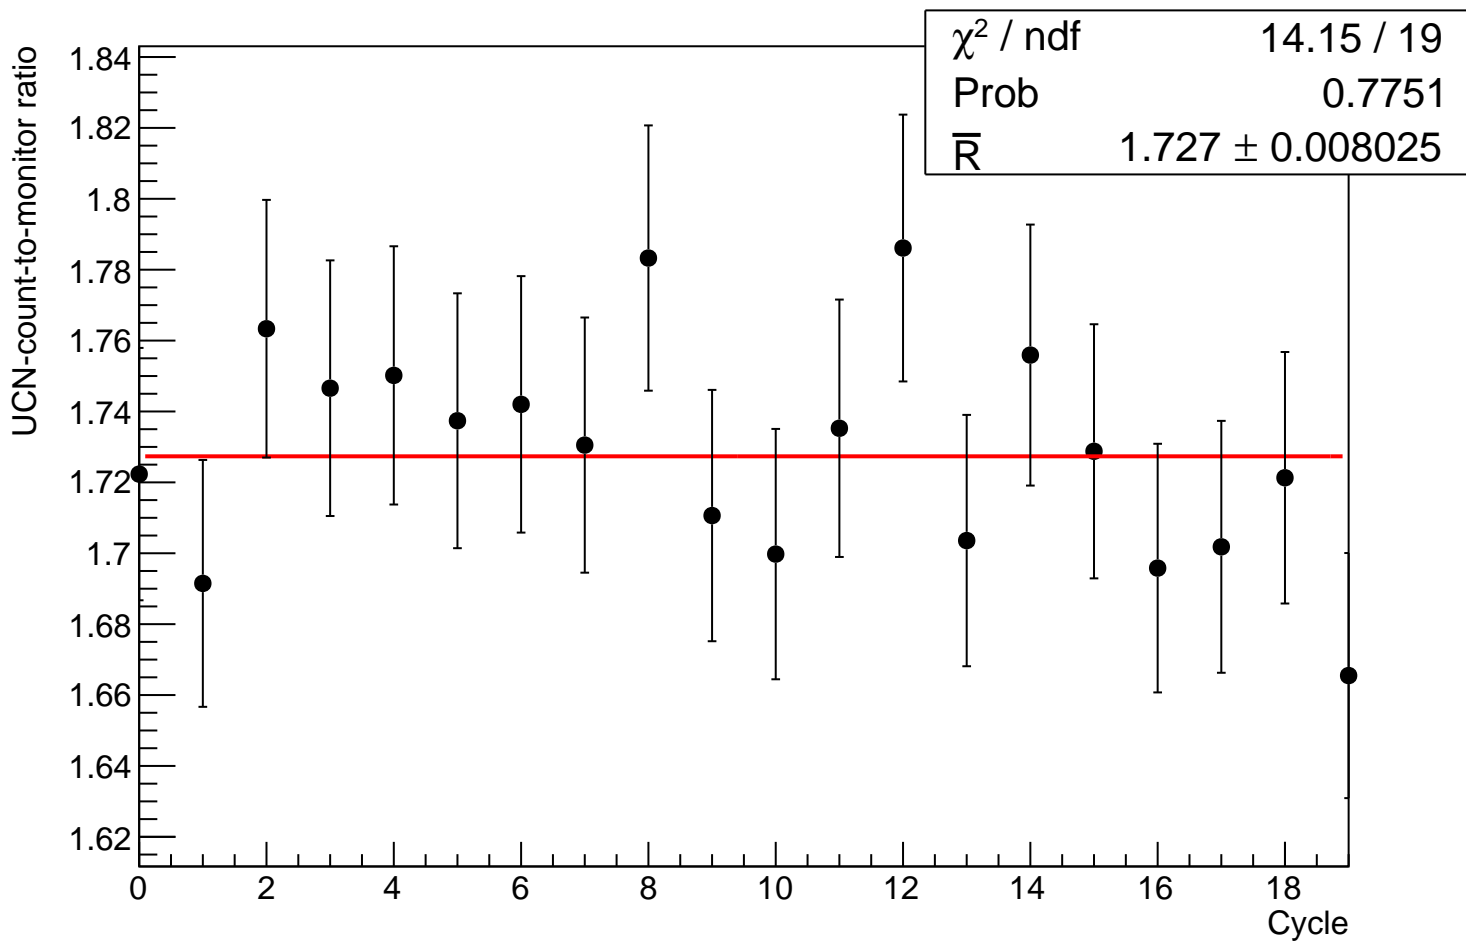


Graph

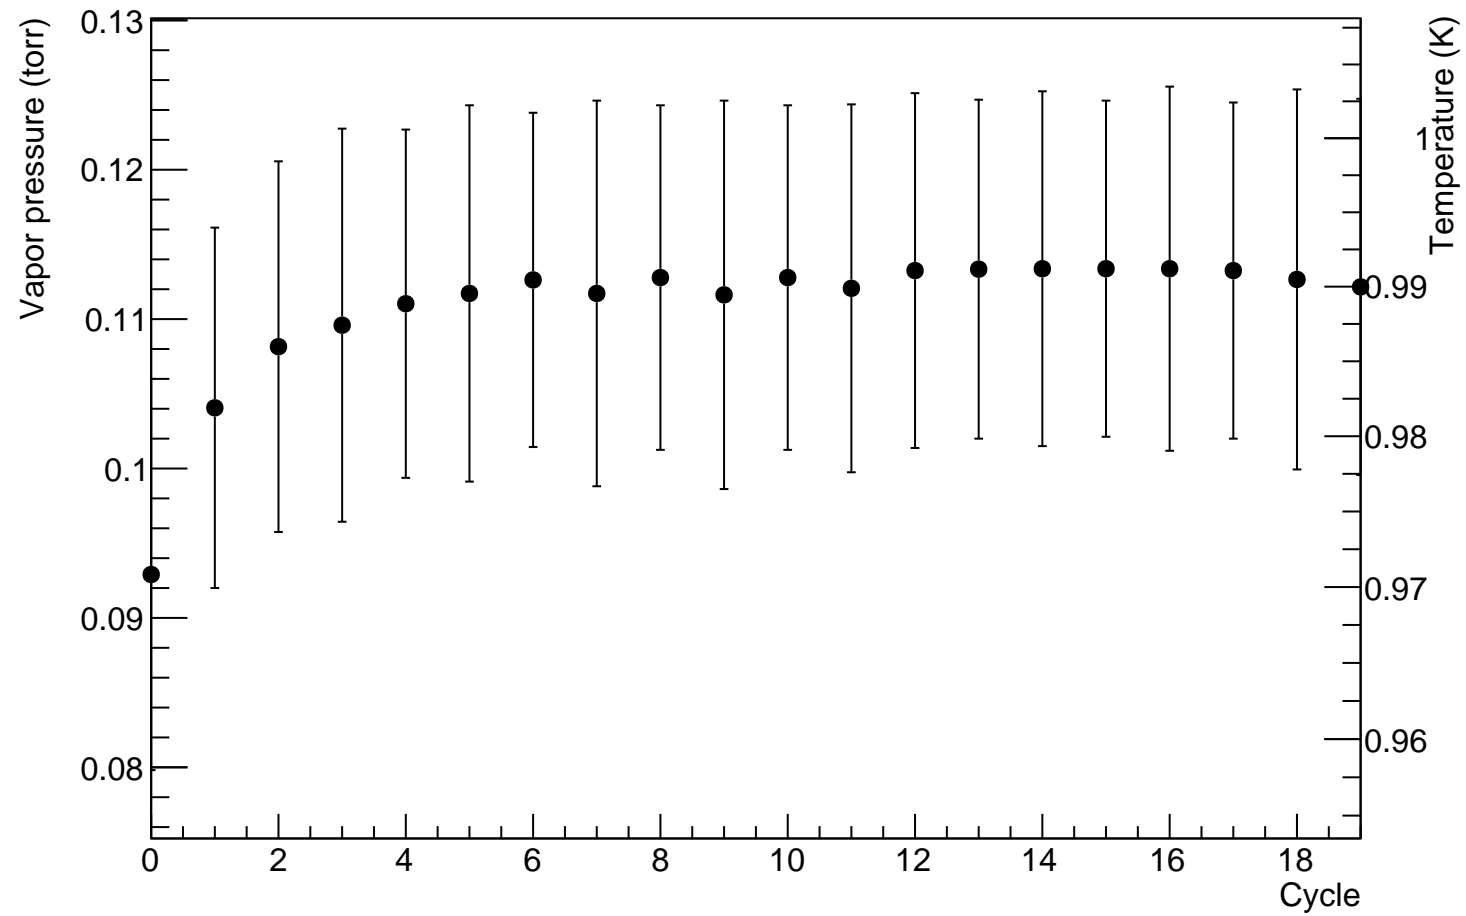


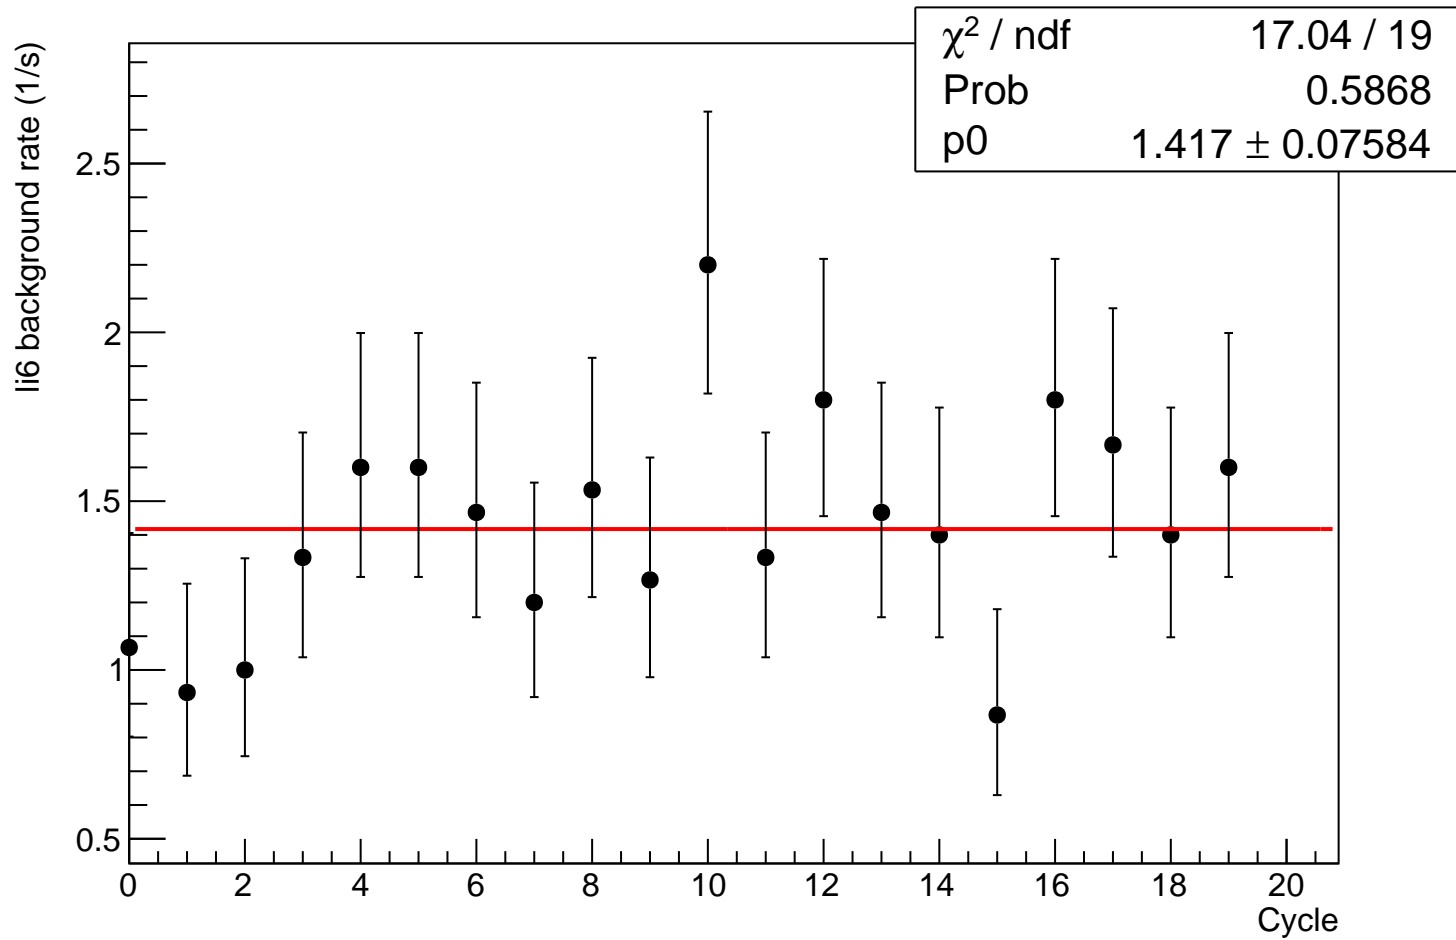

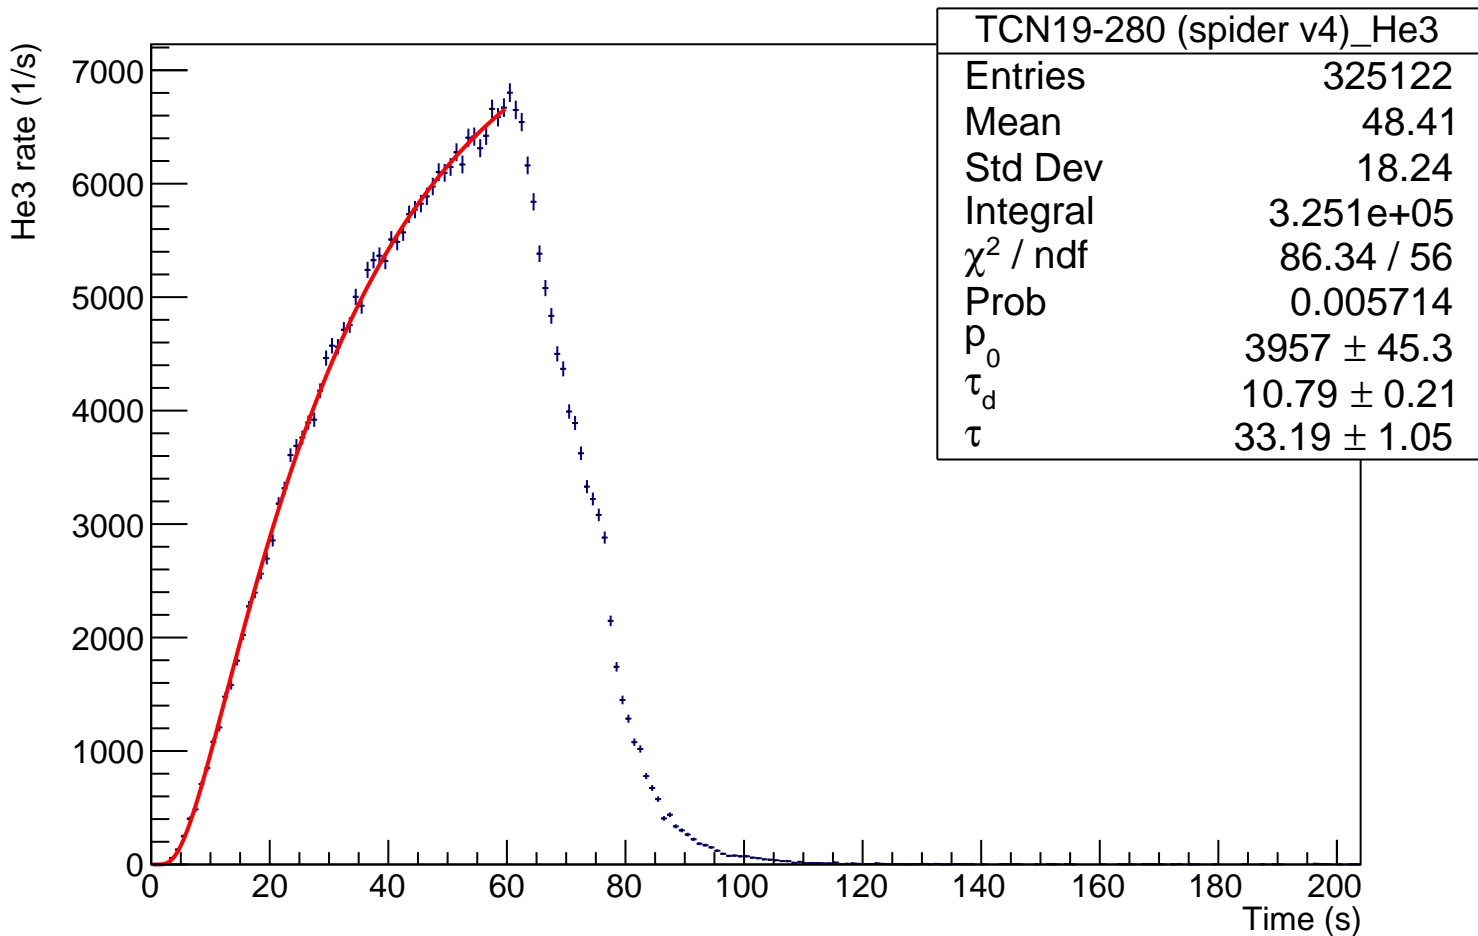

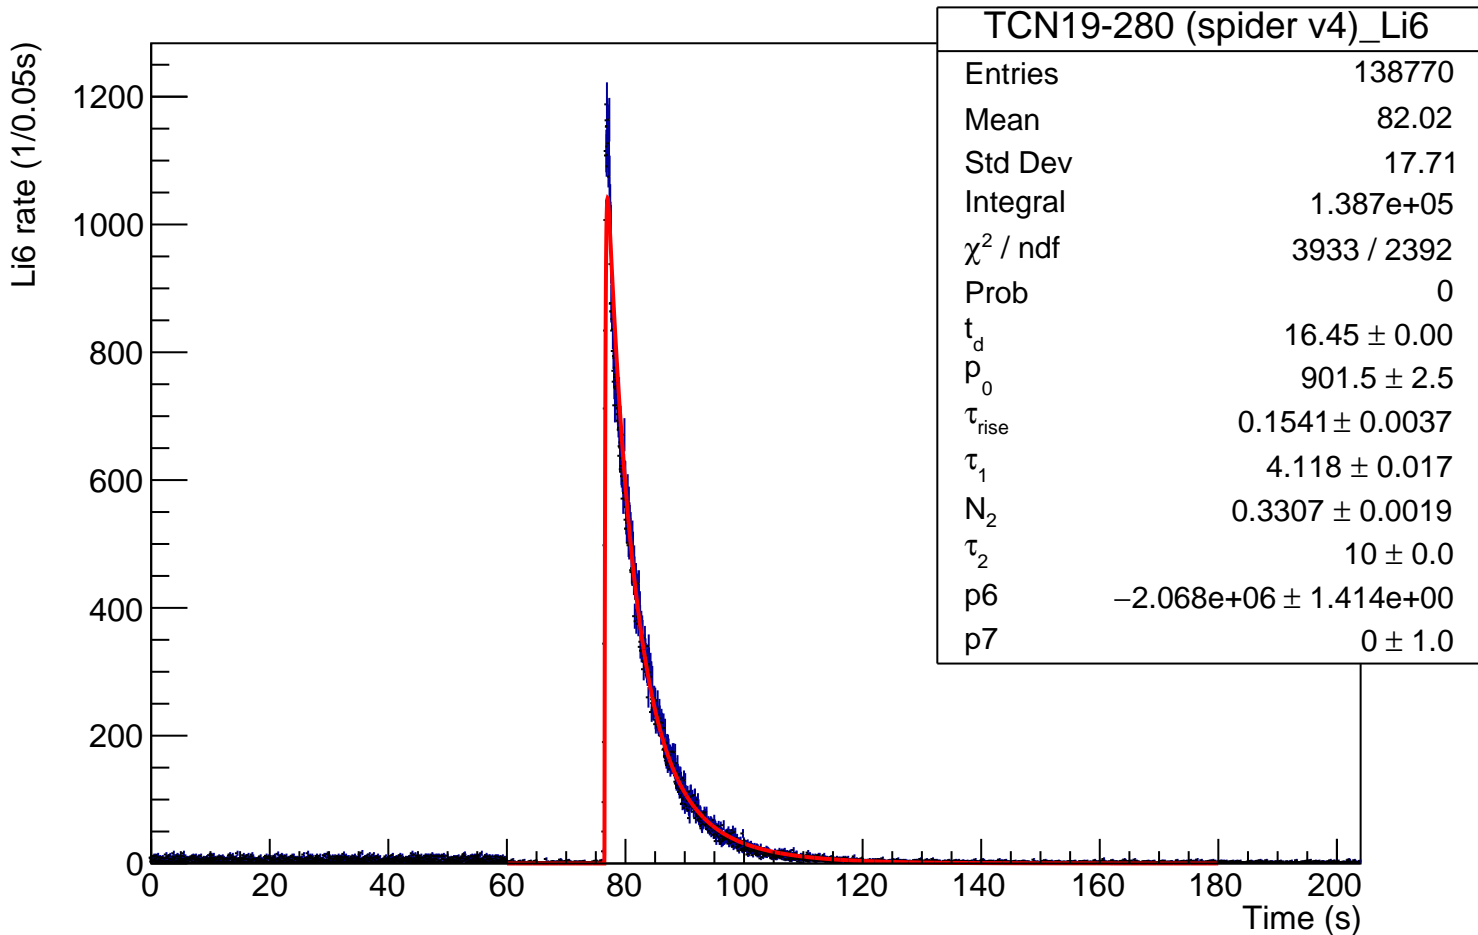

Normalized Li6 rate (1/0.05s)

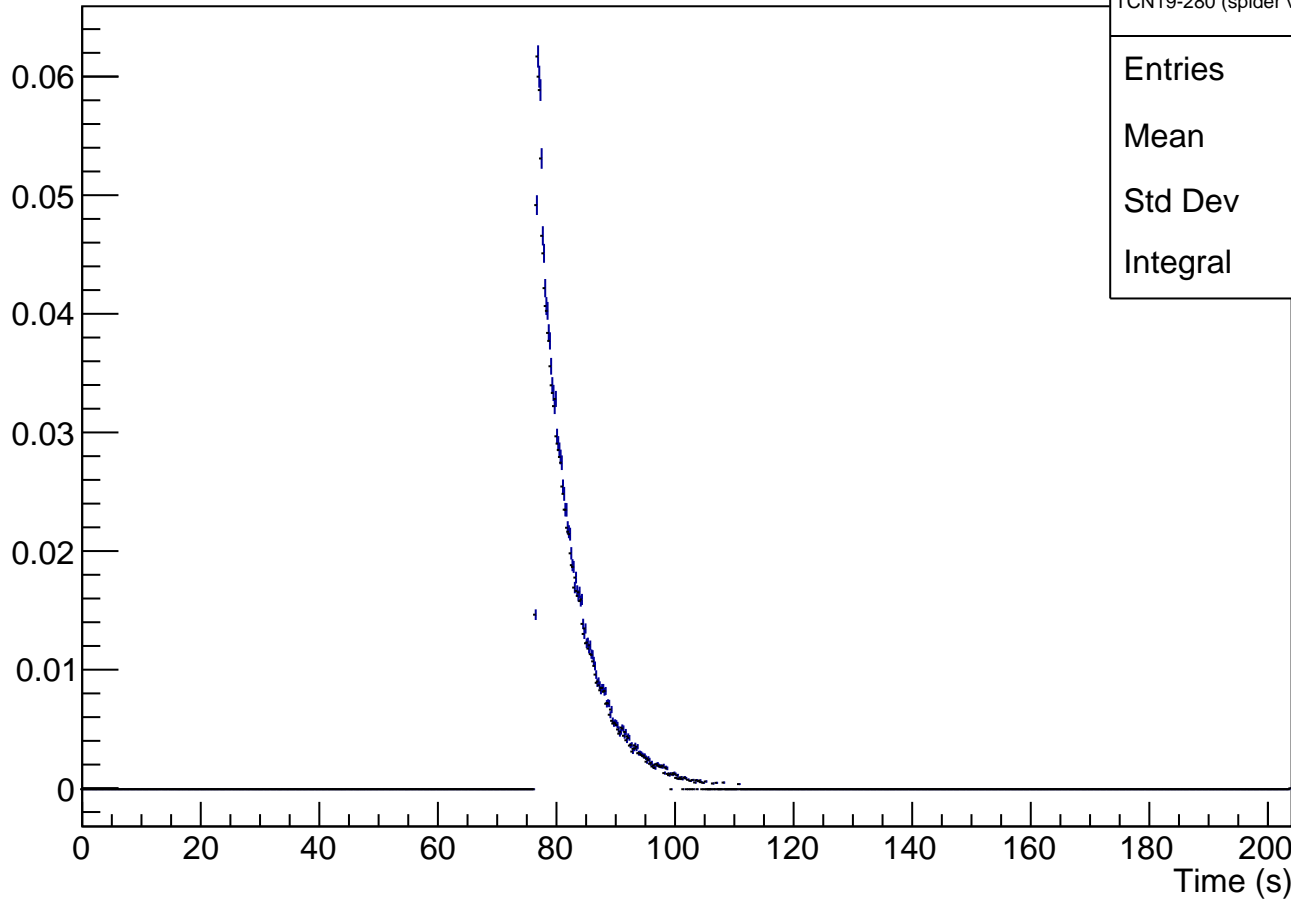


TCN19-280 (spider v4)_Li6_norm

Entries 124133


Mean 81.15

Std Dev 12.57

Integral 1.586

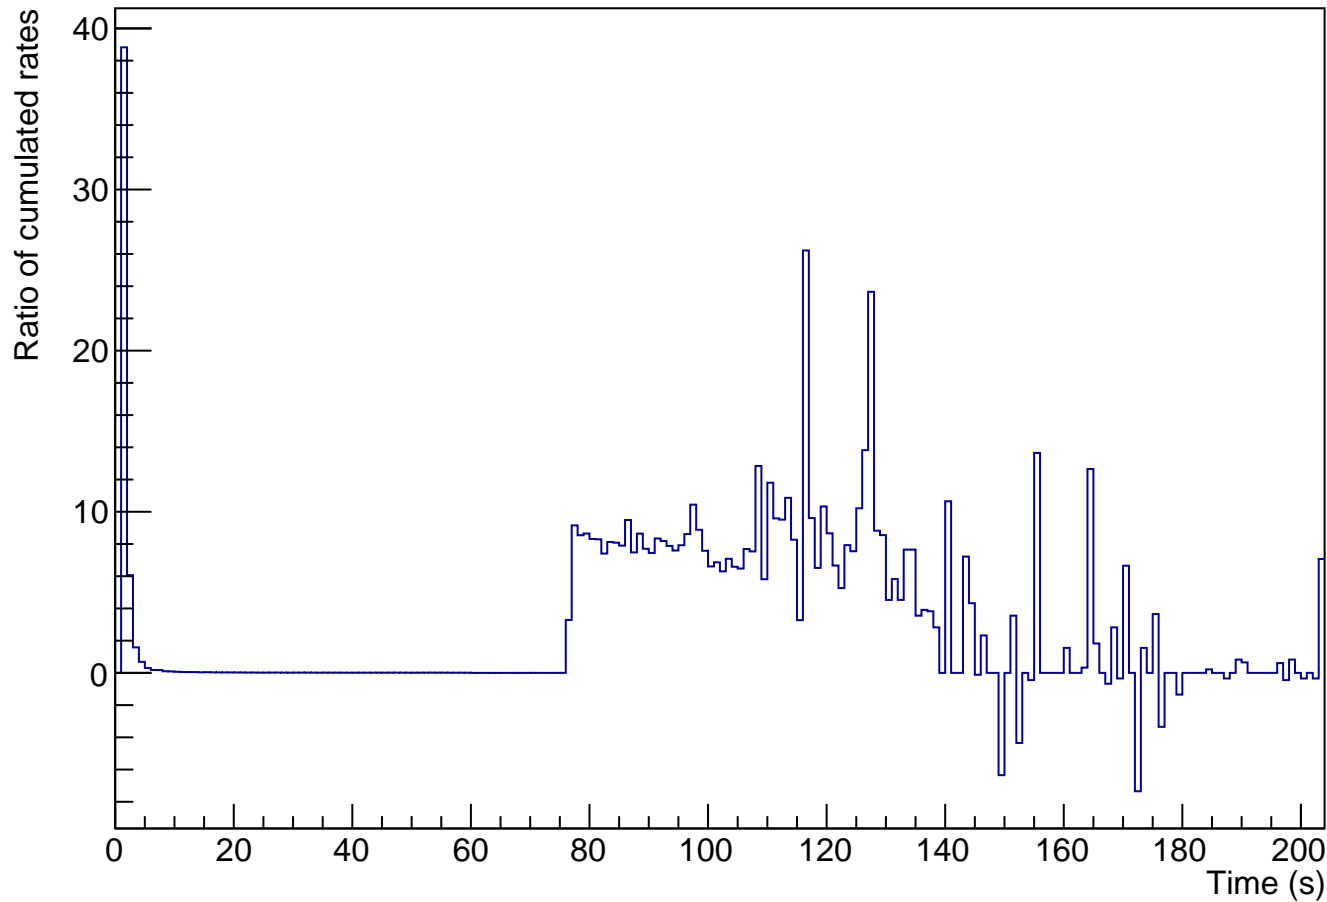

Average rate ratio

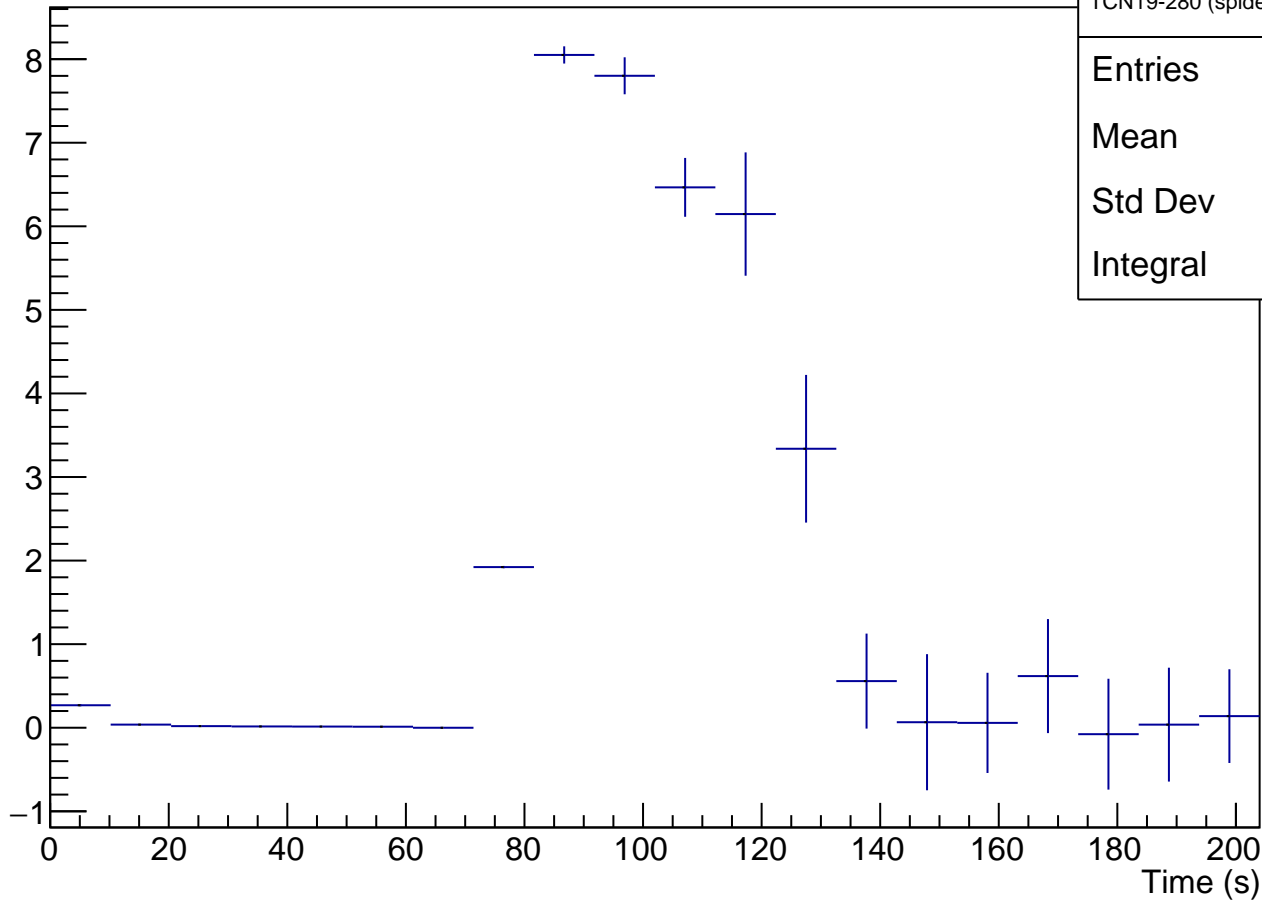

TCN19-280 (spider v4)_ratio

Entries 264


Mean 108.9

Std Dev 20.9

Integral 35.49

TCN19-280 (spider v4)

Count

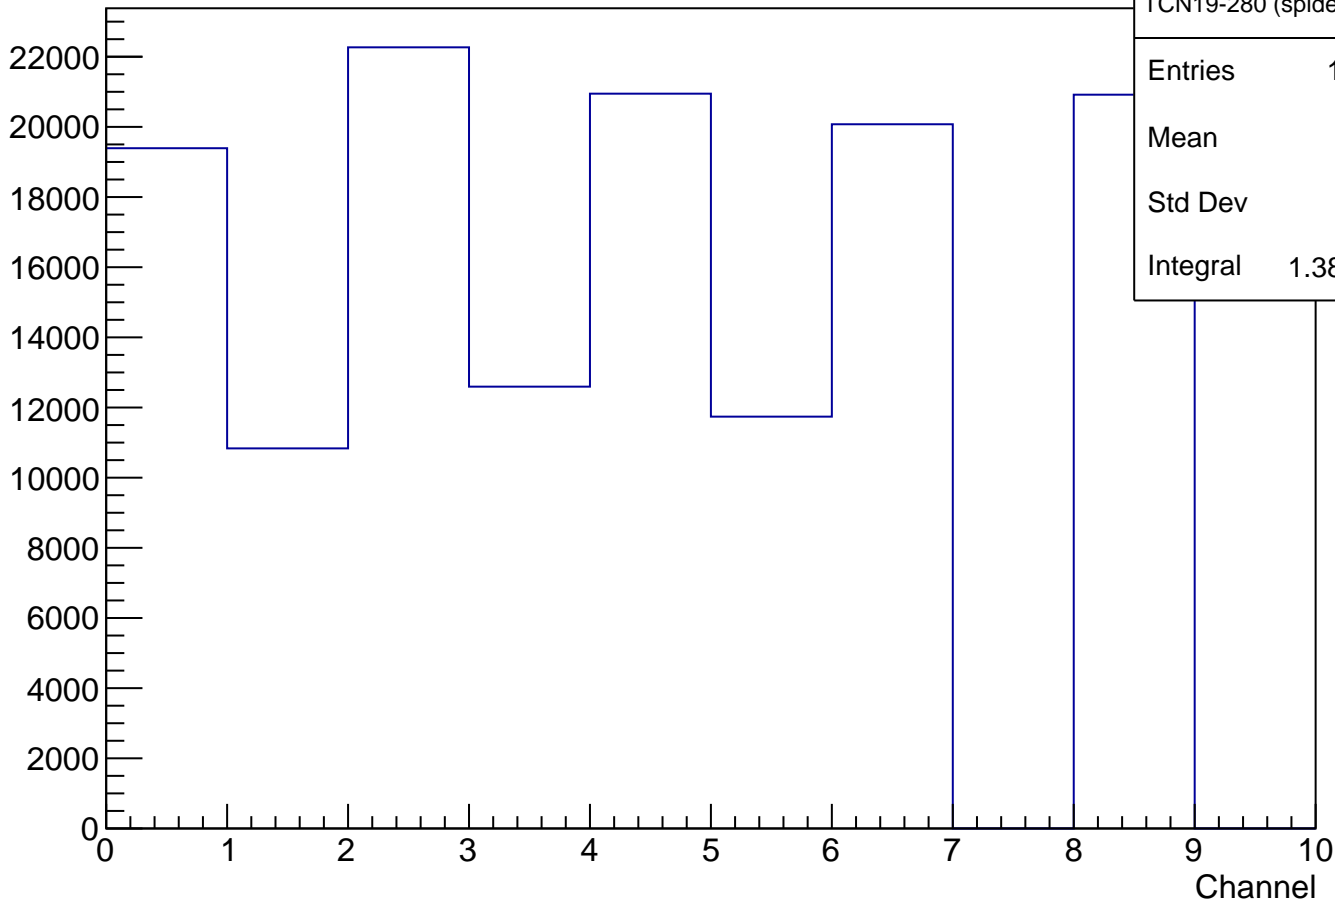

TCN19-280 (spider v4)_ch

Entries 138770

Mean 3.772

Std Dev 2.587

Integral 1.388e+05

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 20

Mean 0

Std Dev 0

Integral 0