




TCN19-280 (spider v3), transmission normalized during prestorage


UCN-count-to-monitor ratio

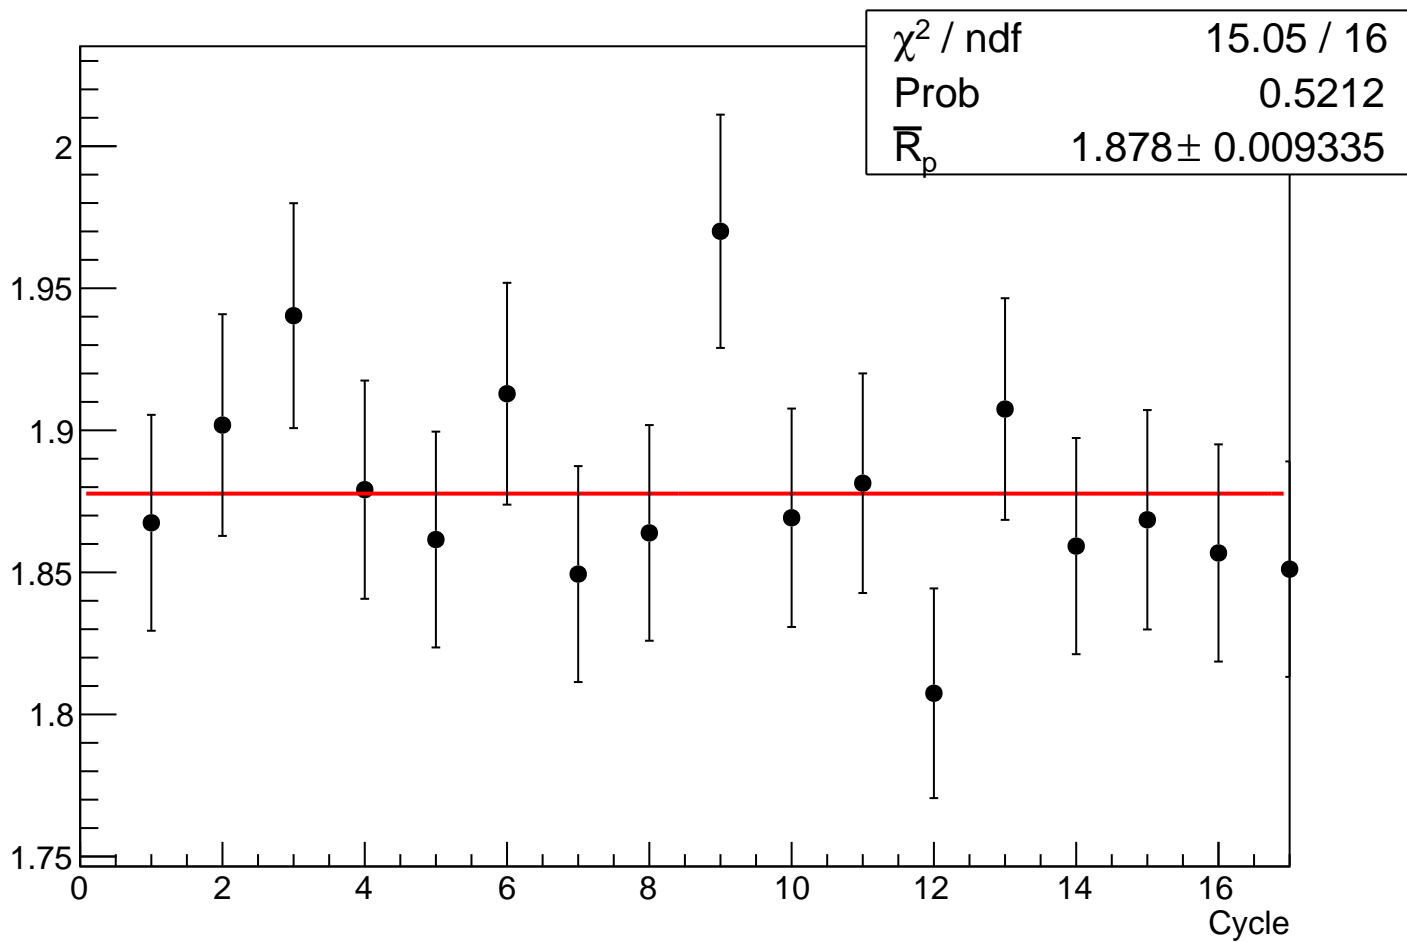

# Graph

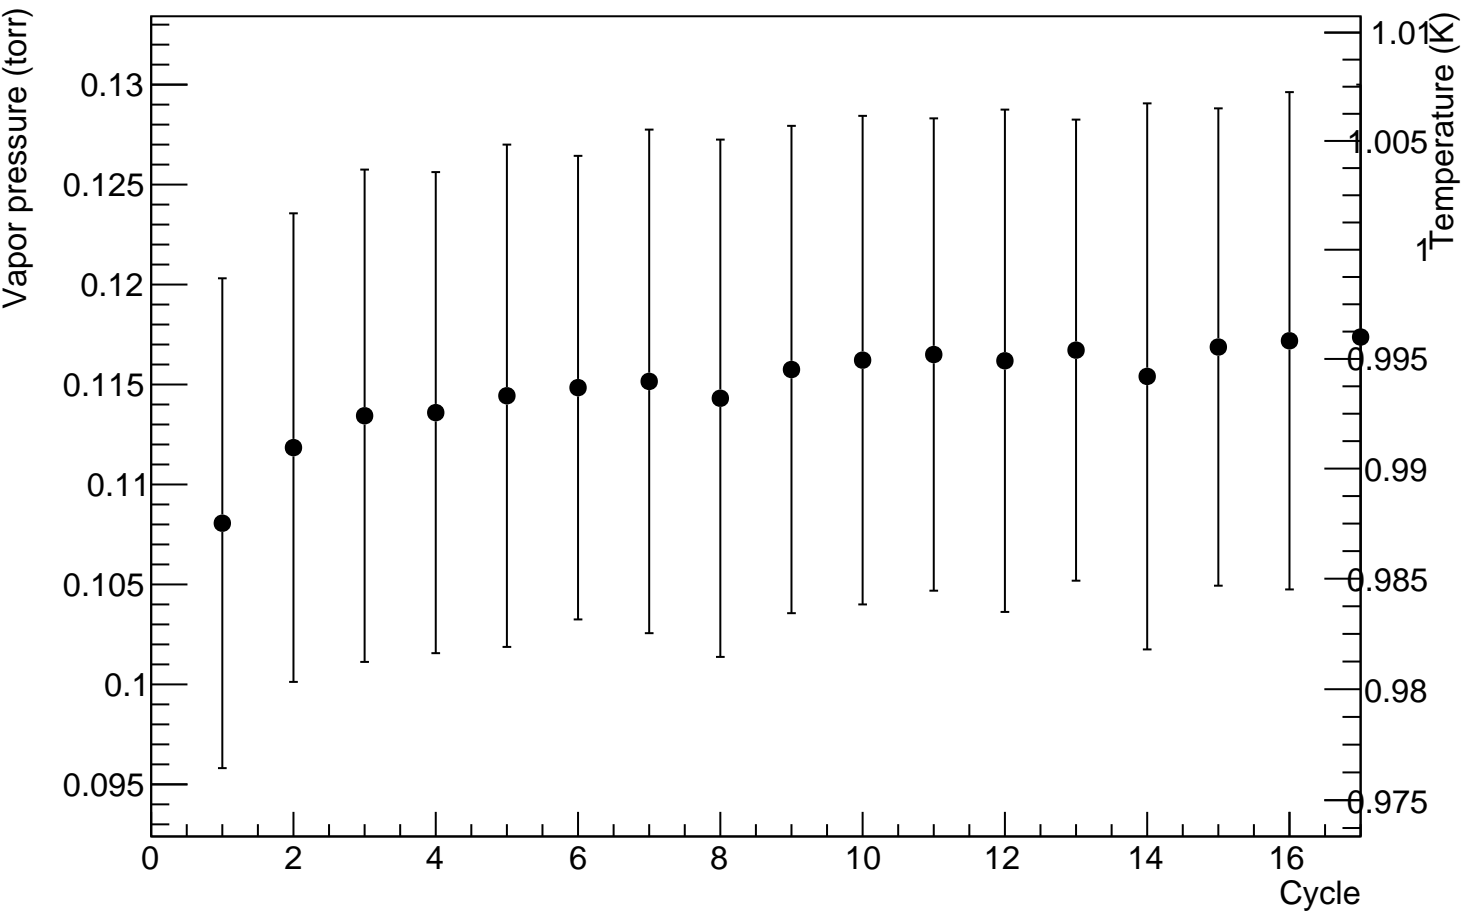


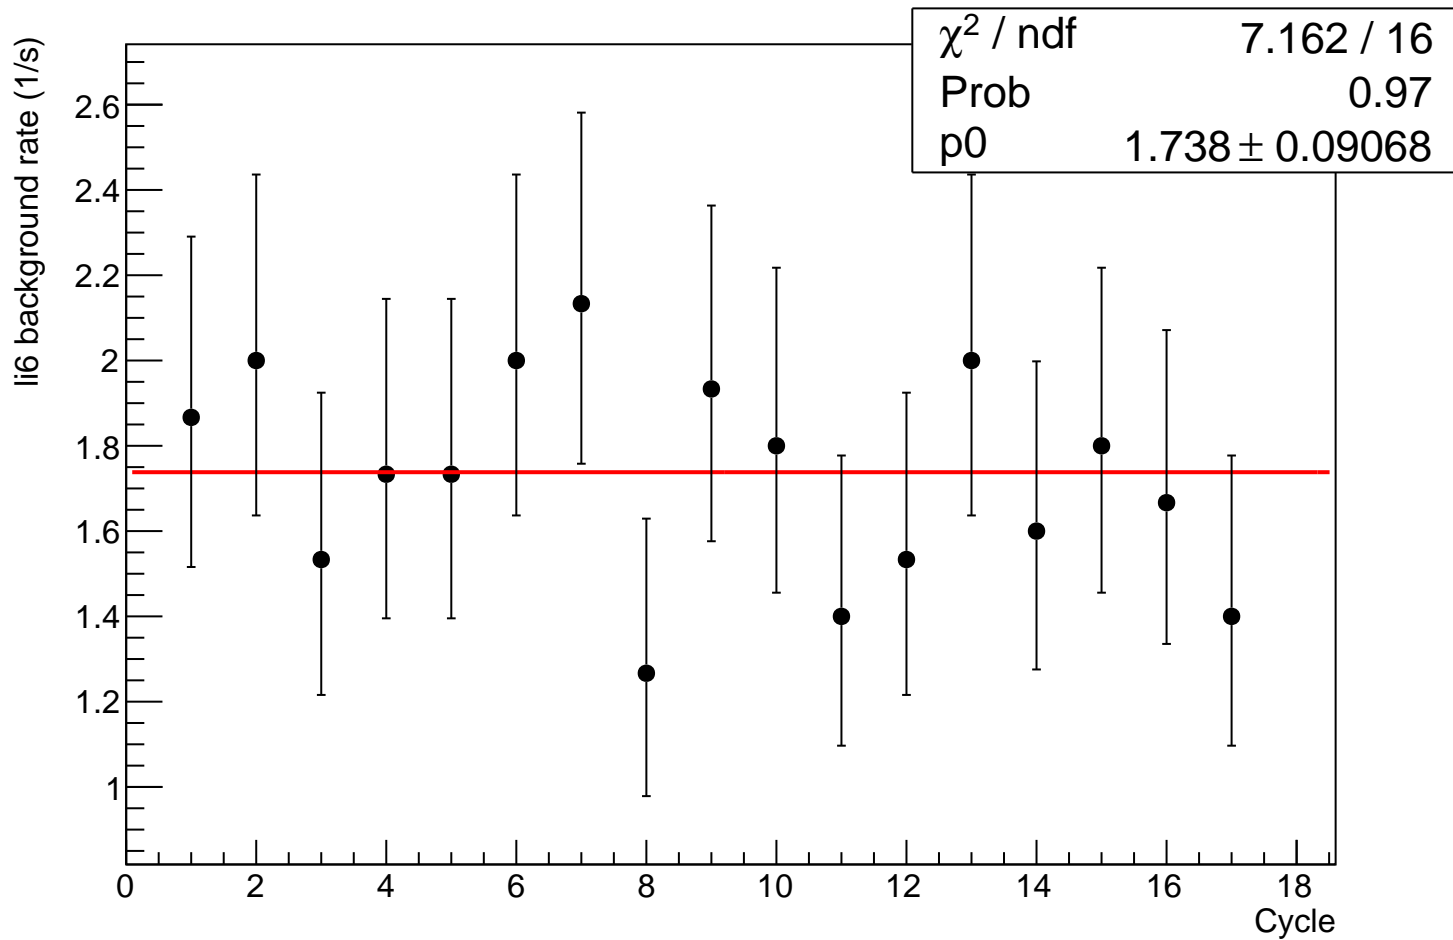


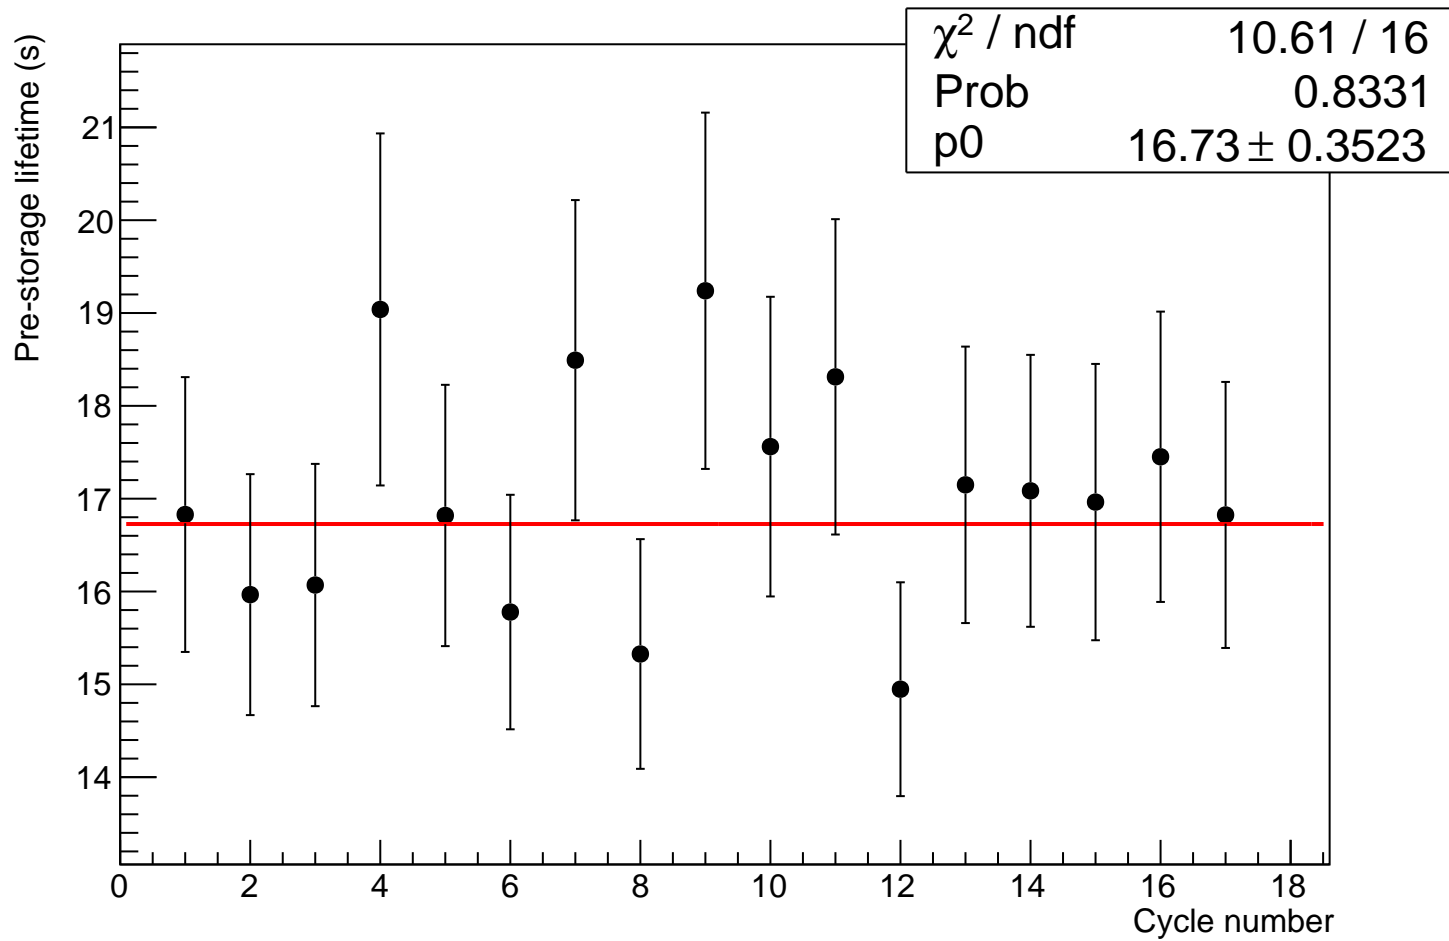


Corrected Li6-He3 ratio


$\chi^2 / \text{ndf}$  2.665 / 16  
Prob 0.9999  
p0  $45.39 \pm 0.9813$

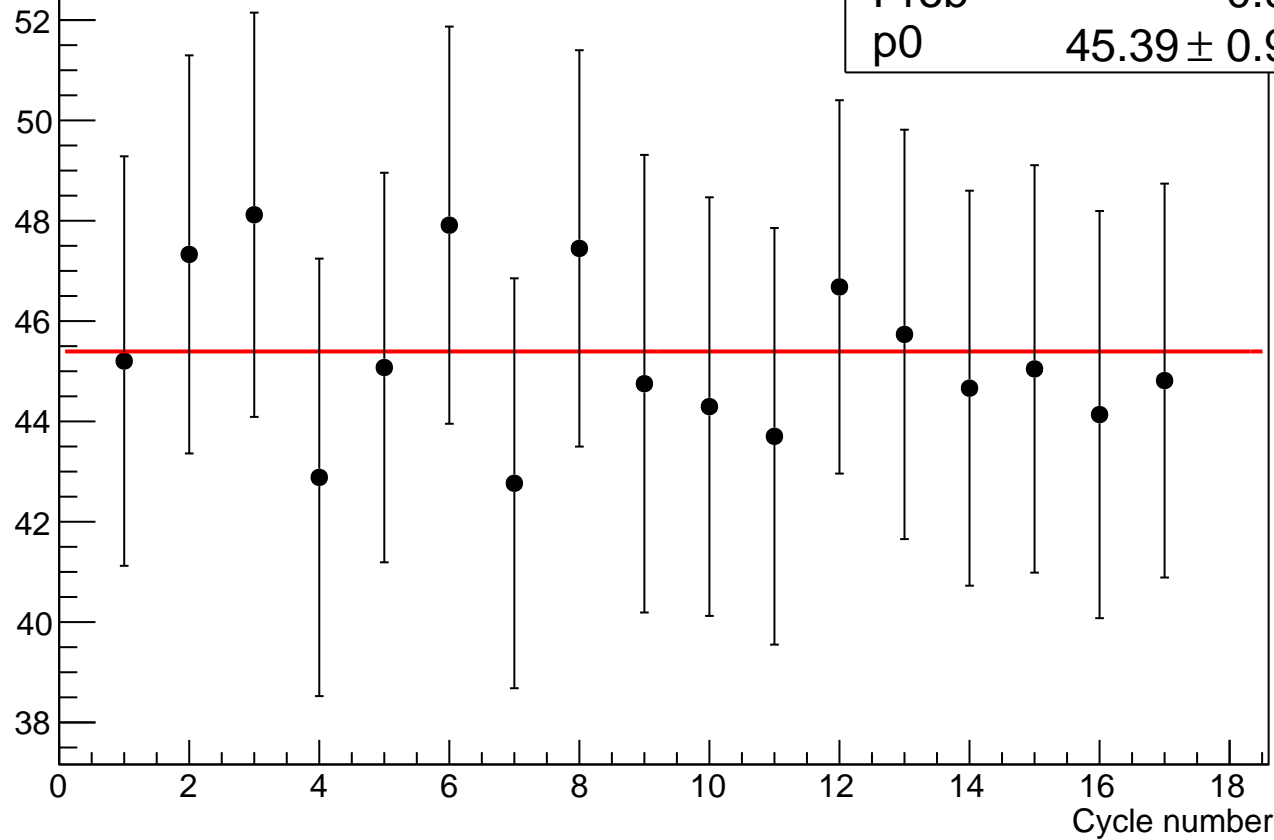

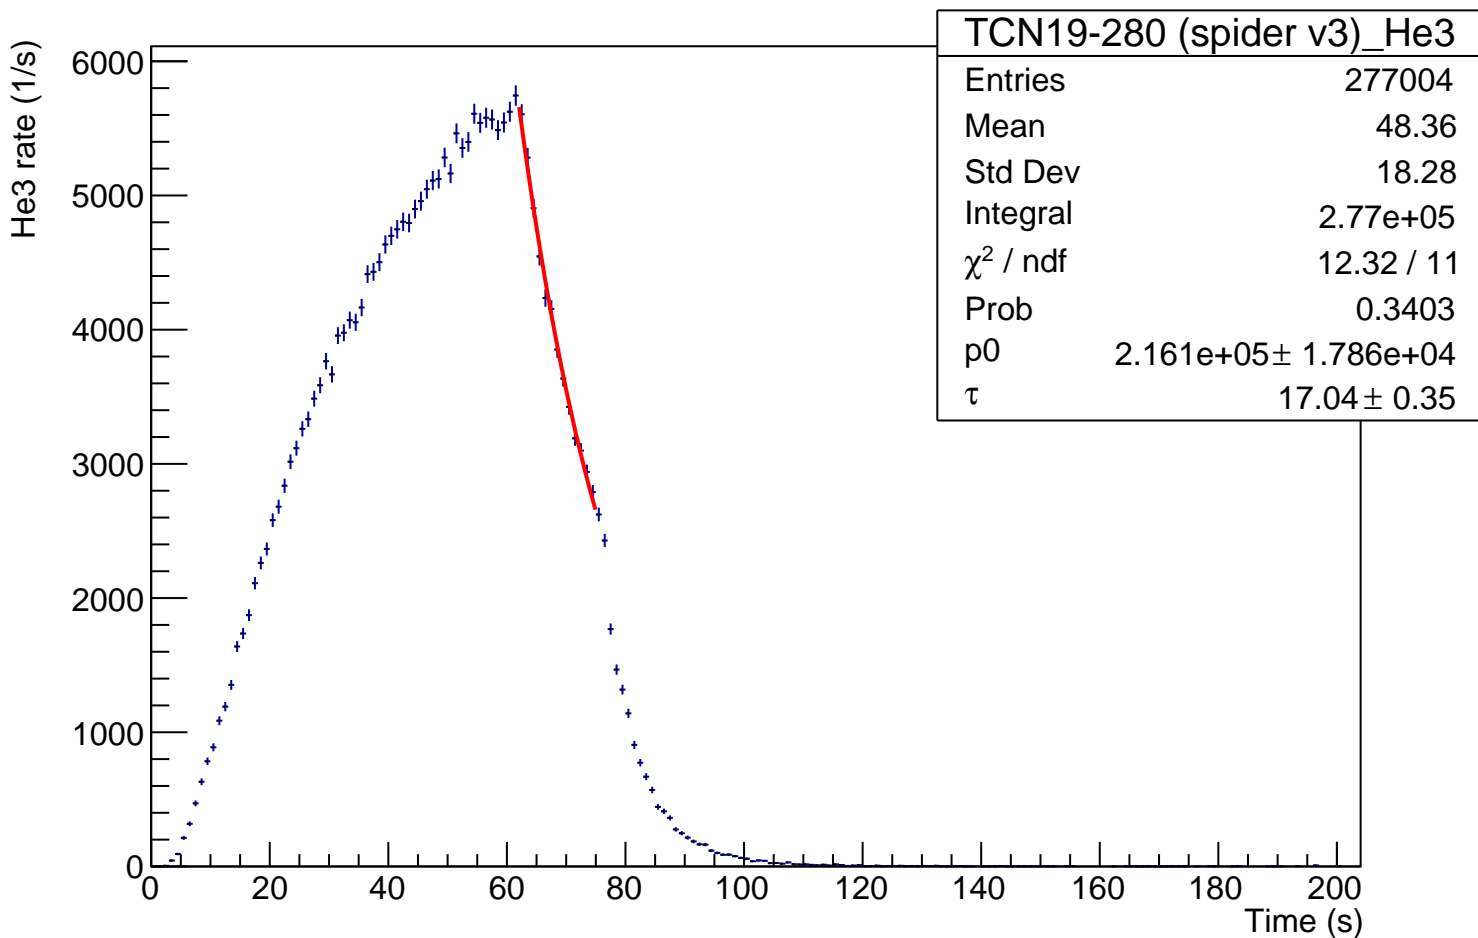

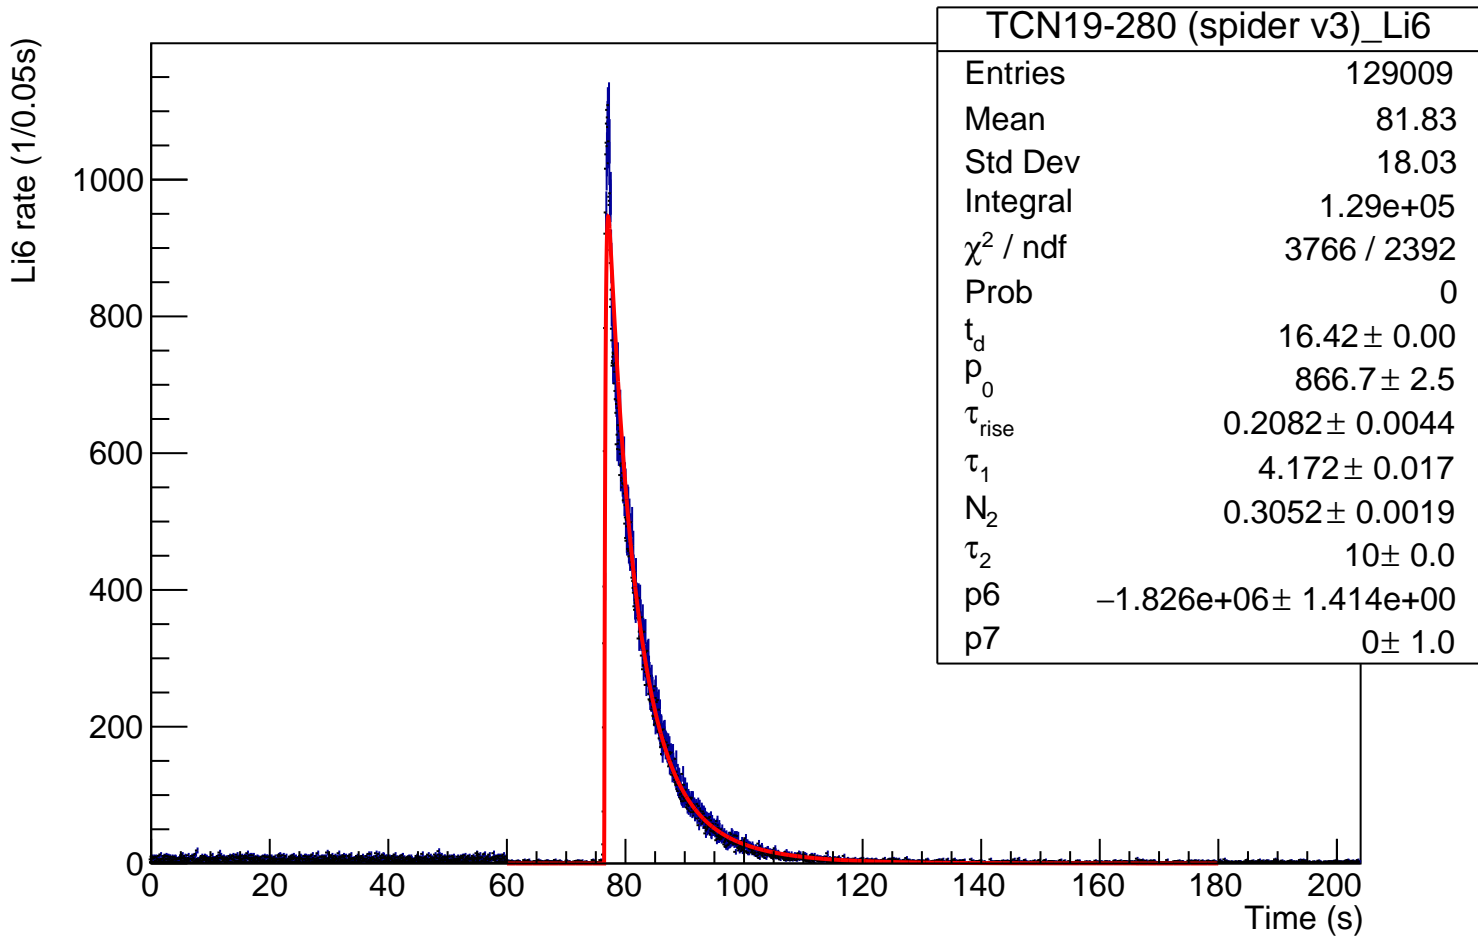


Normalized Li6 rate (1/0.05s)

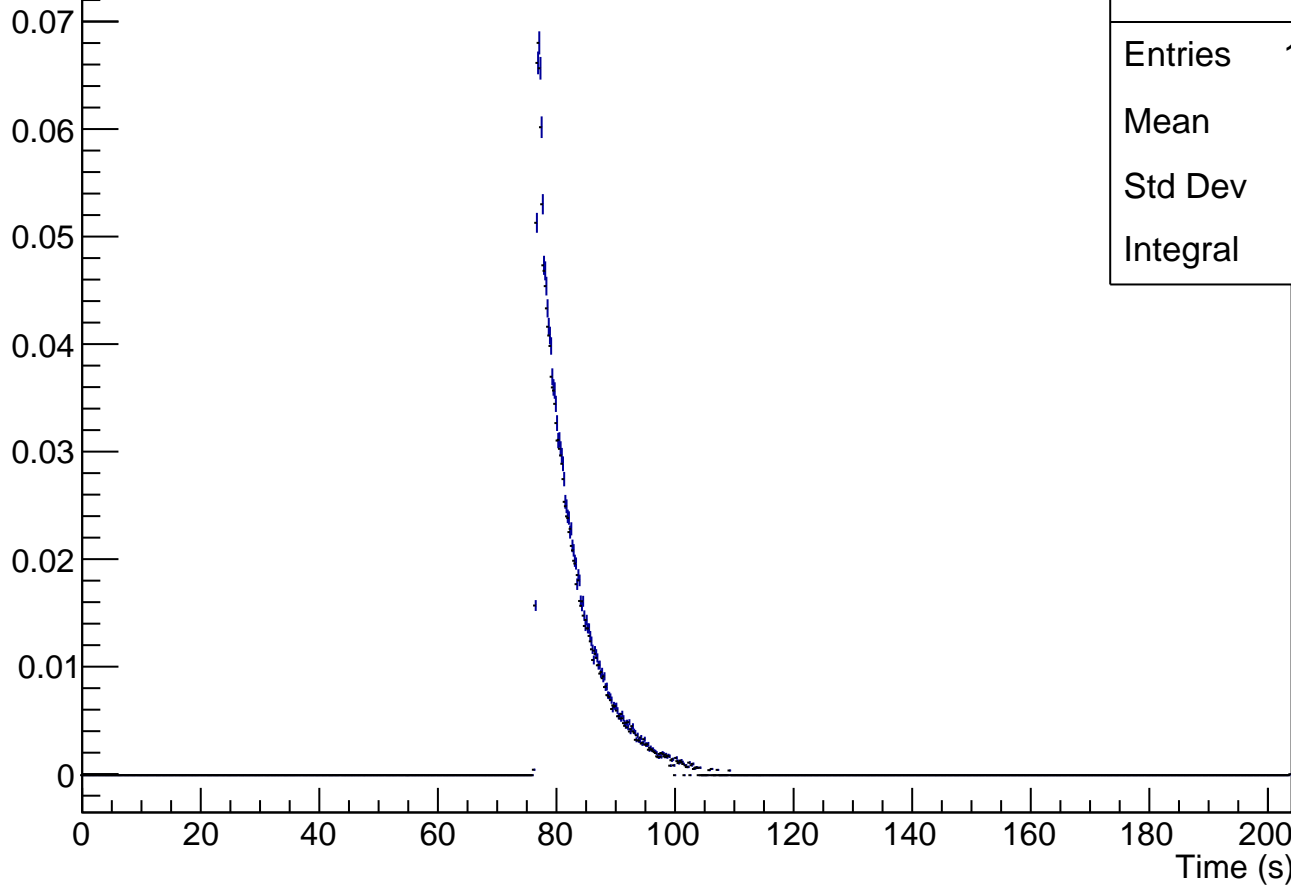




Ratio of cumulated rates

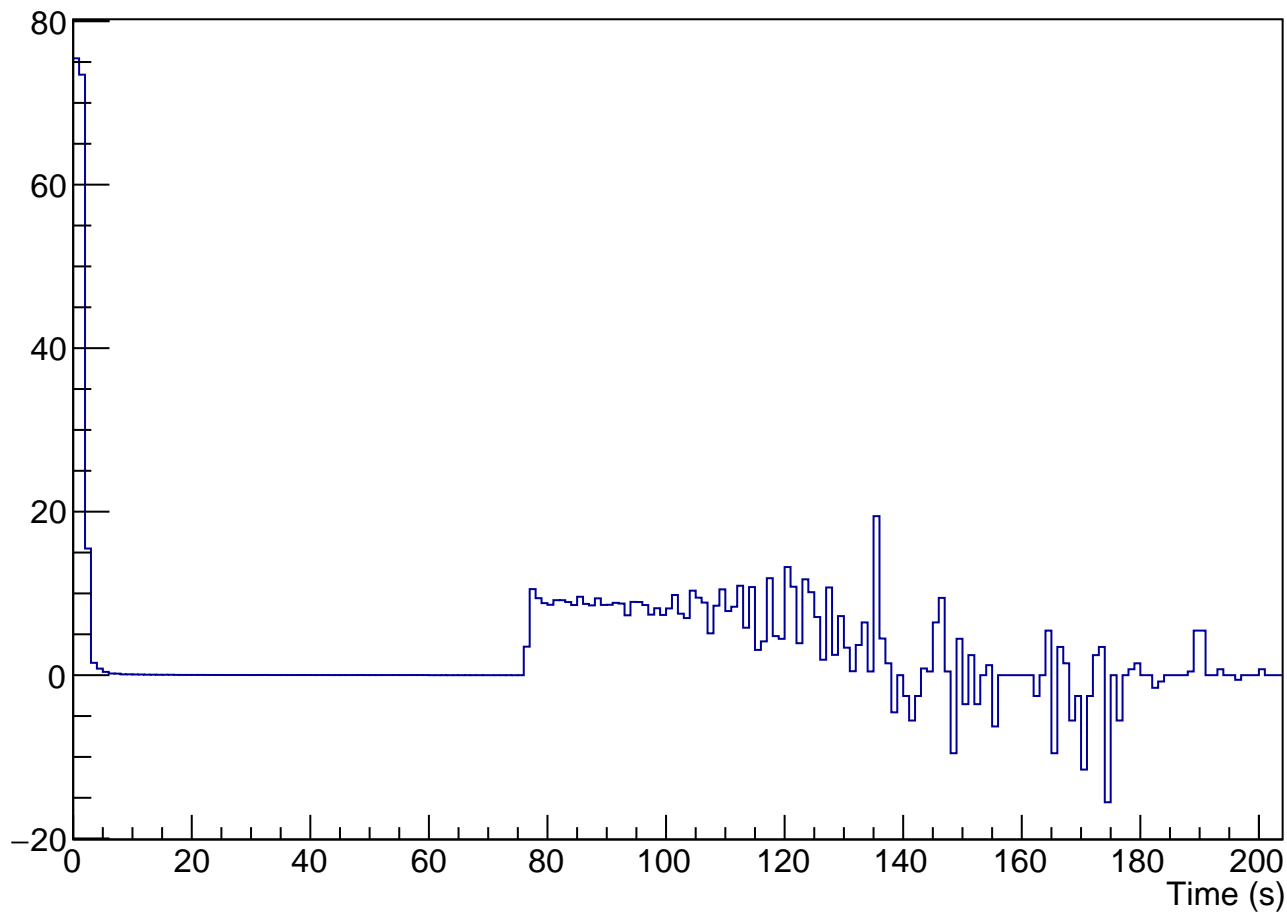


Average rate ratio

TCN19-280 (spider v3)\_ratio

Entries	227
Mean	98.14
Std Dev	7.542
Integral	34.55

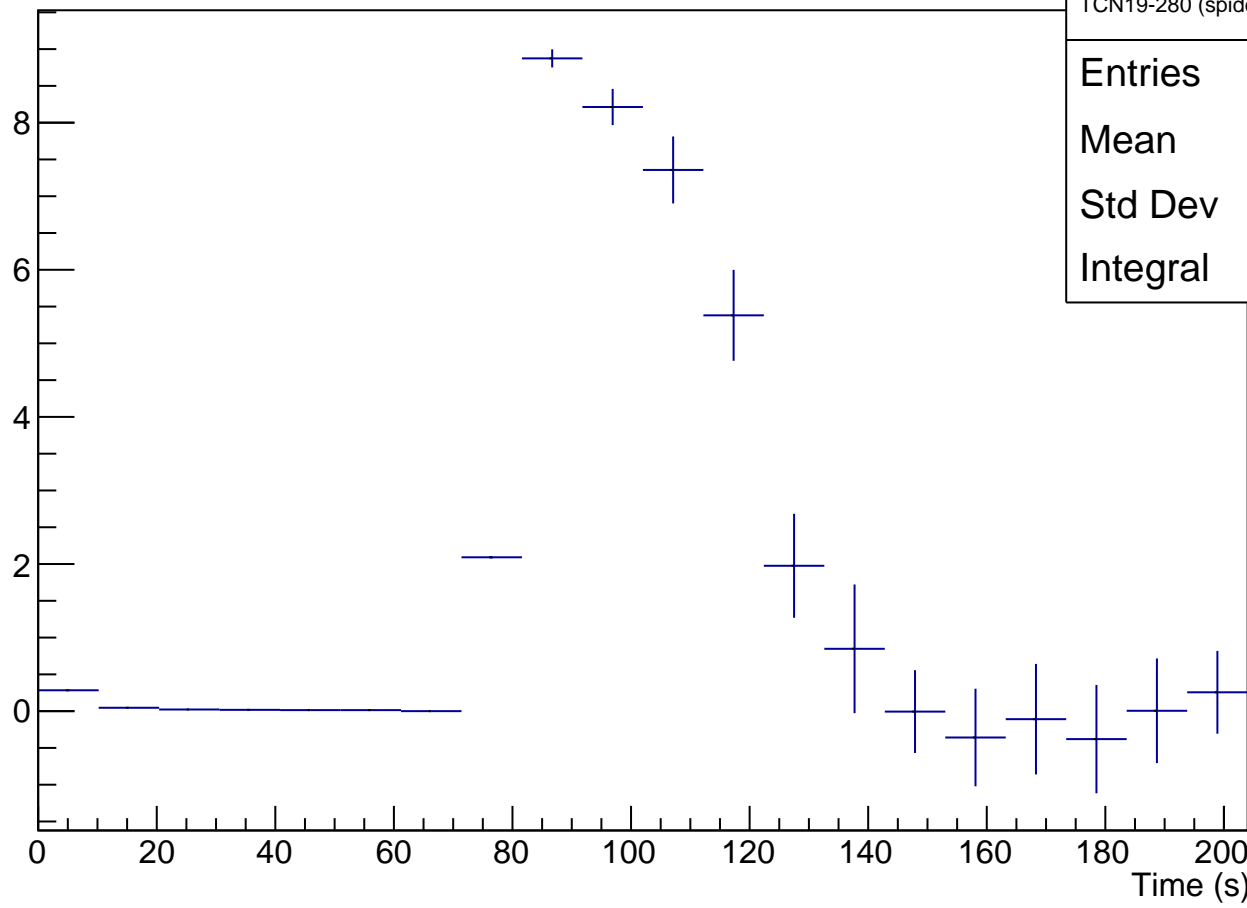

# TCN19-280 (spider v3)

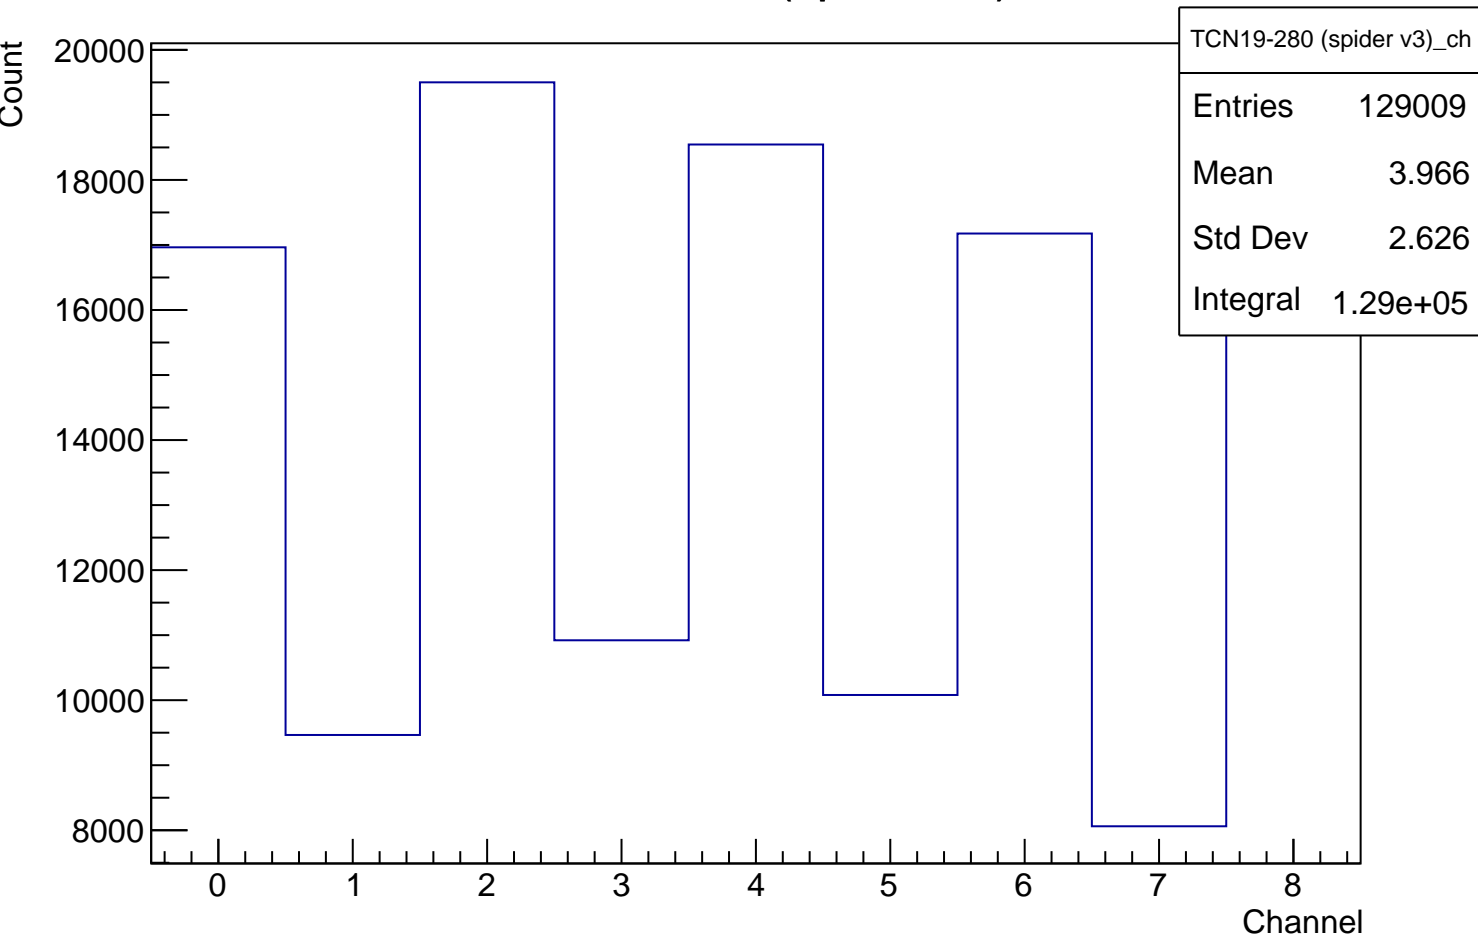

# Li6 window

Frequency

1  
0.8  
0.6  
0.4  
0.2  
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries	17
Mean	0
Std Dev	0
Integral	0