




TCN19-201 (DRex black, 20cm), transmission normalized during prestorage


UCN-count-to-monitor ratio

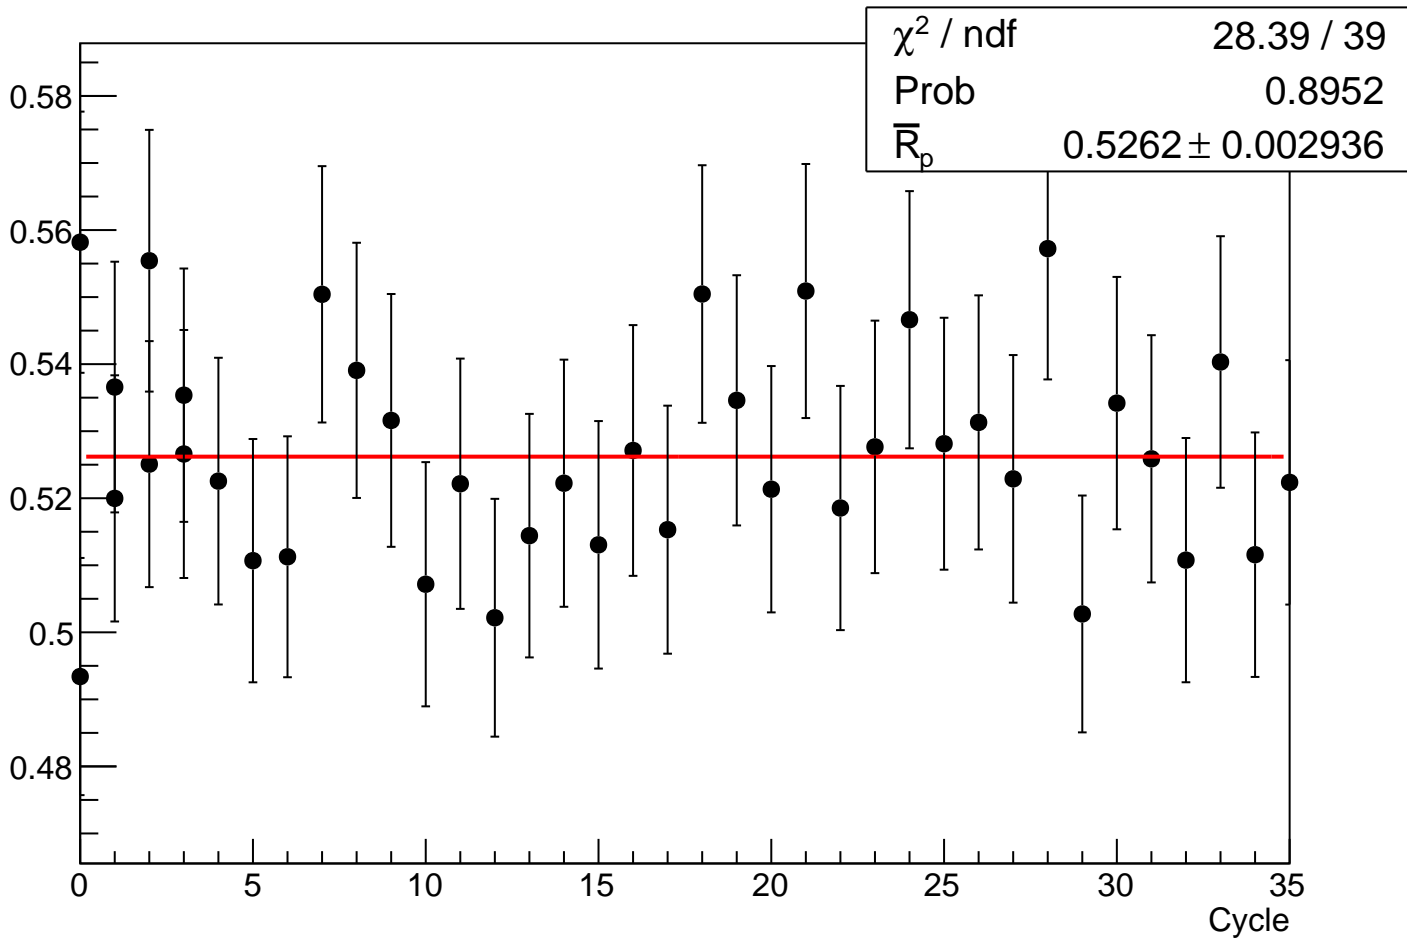

Graph

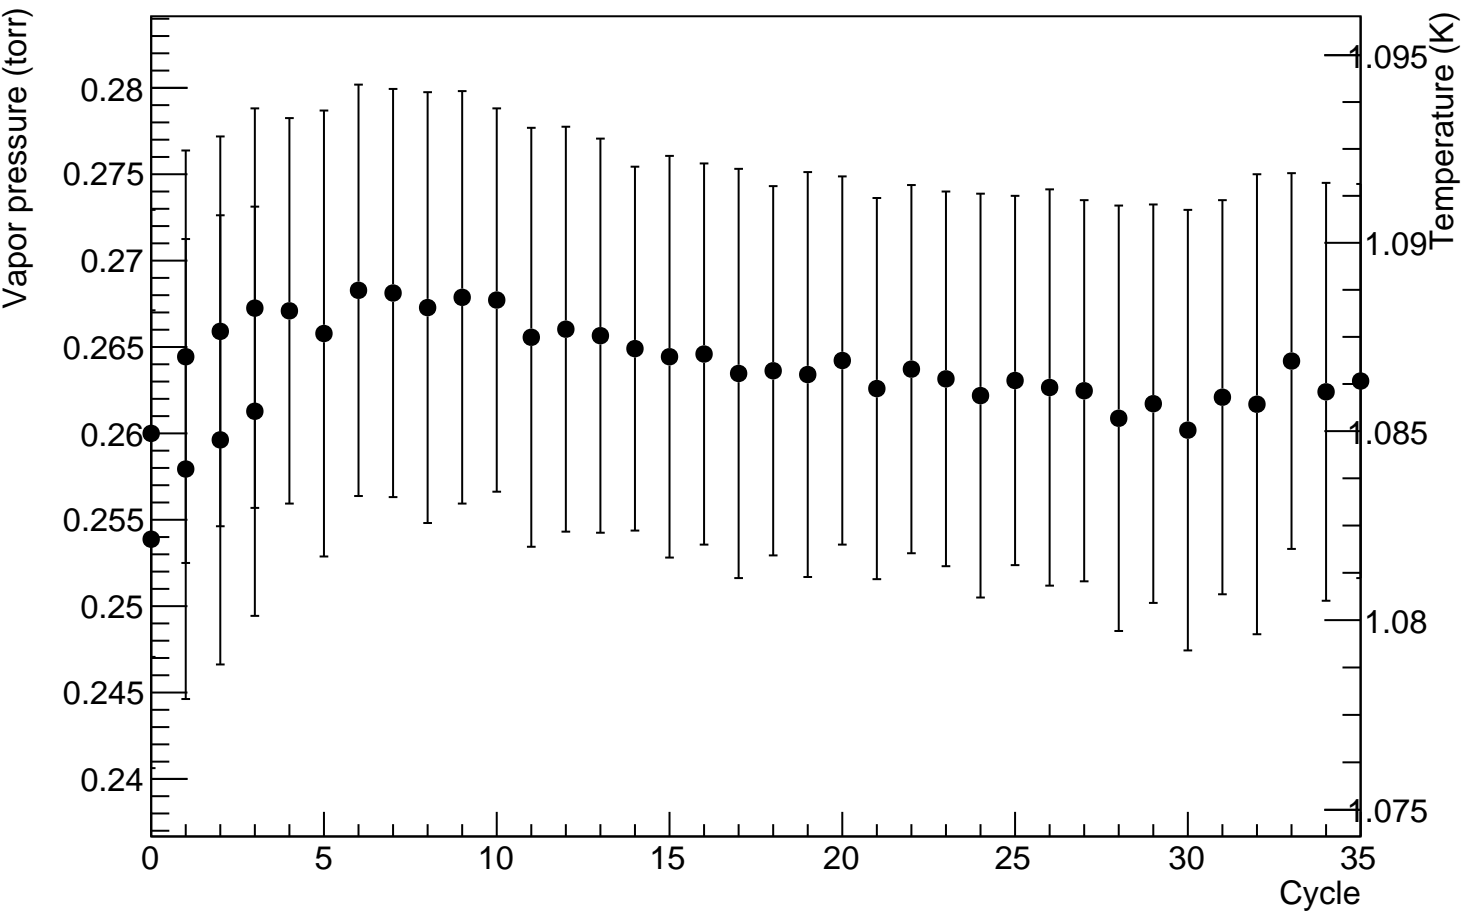


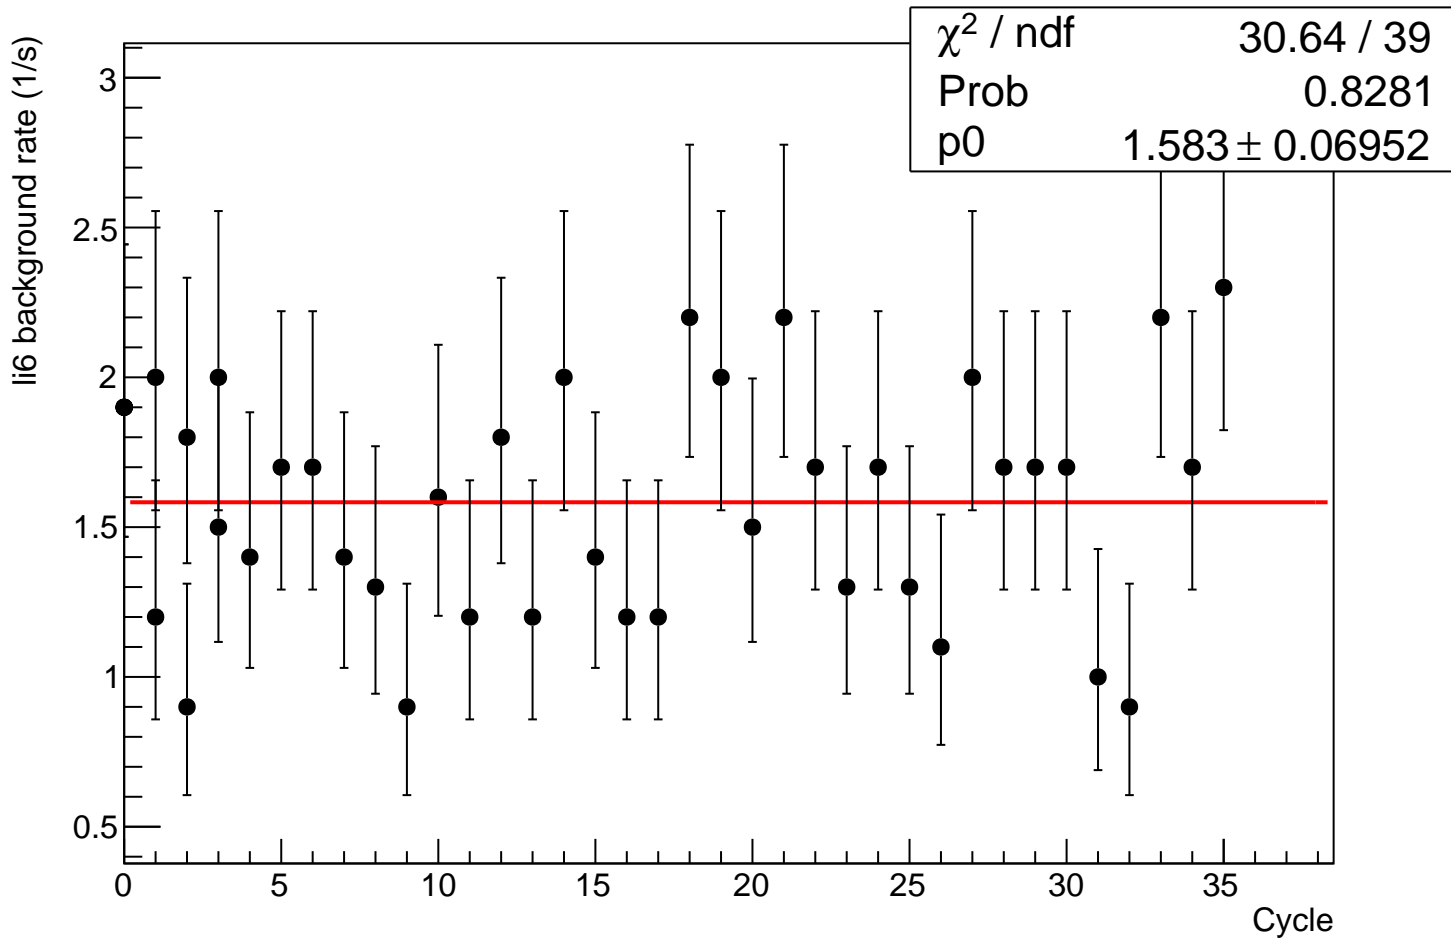


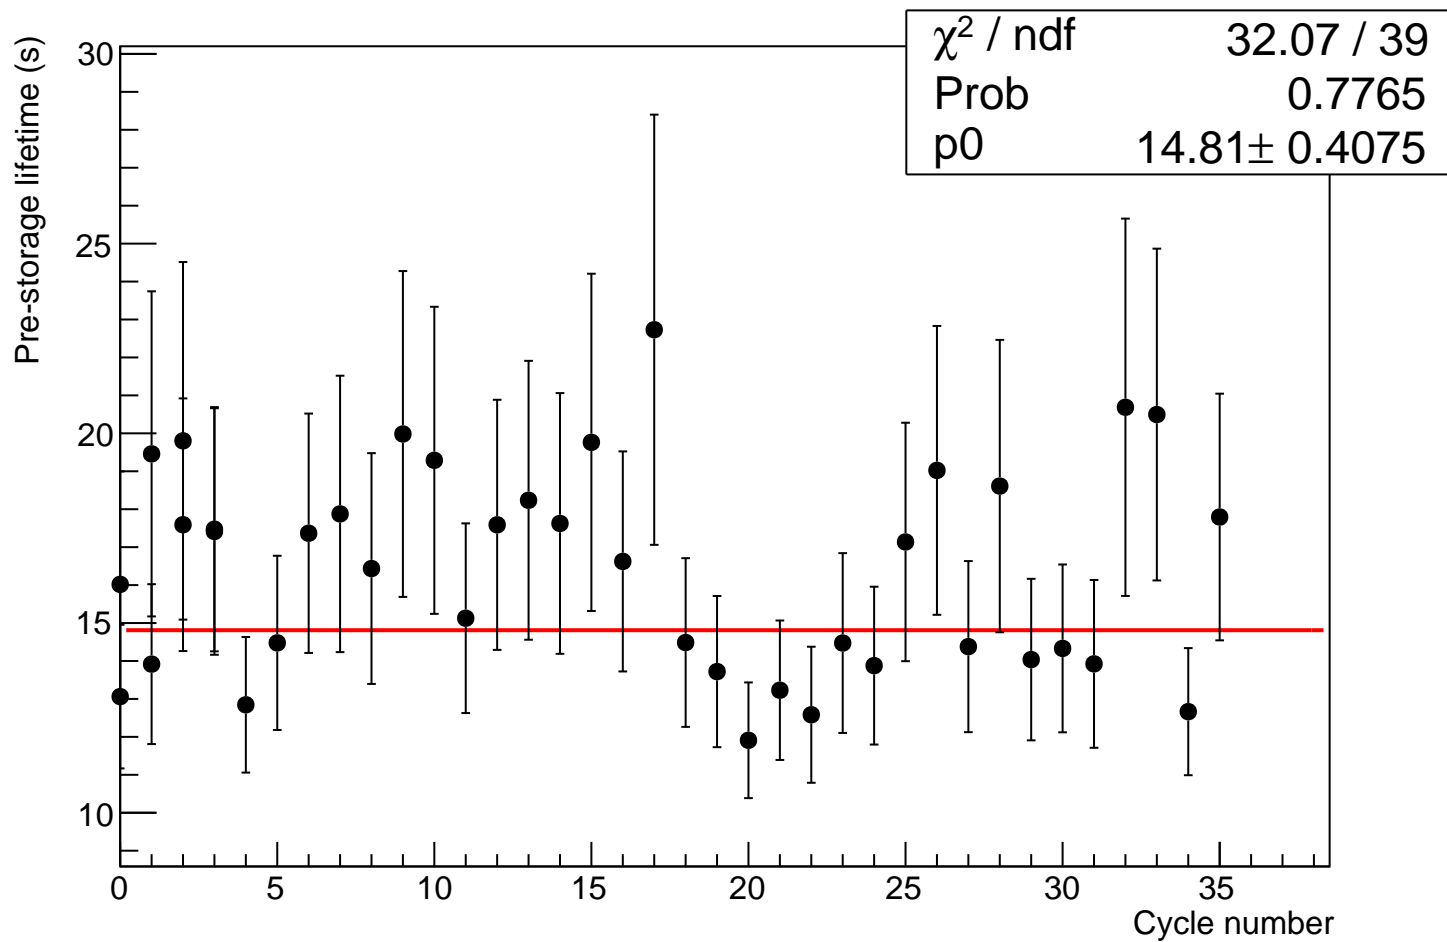


Corrected Li6-He3 ratio


χ^2 / ndf 11.65 / 39
Prob 1
p0 13.31 ± 0.3718

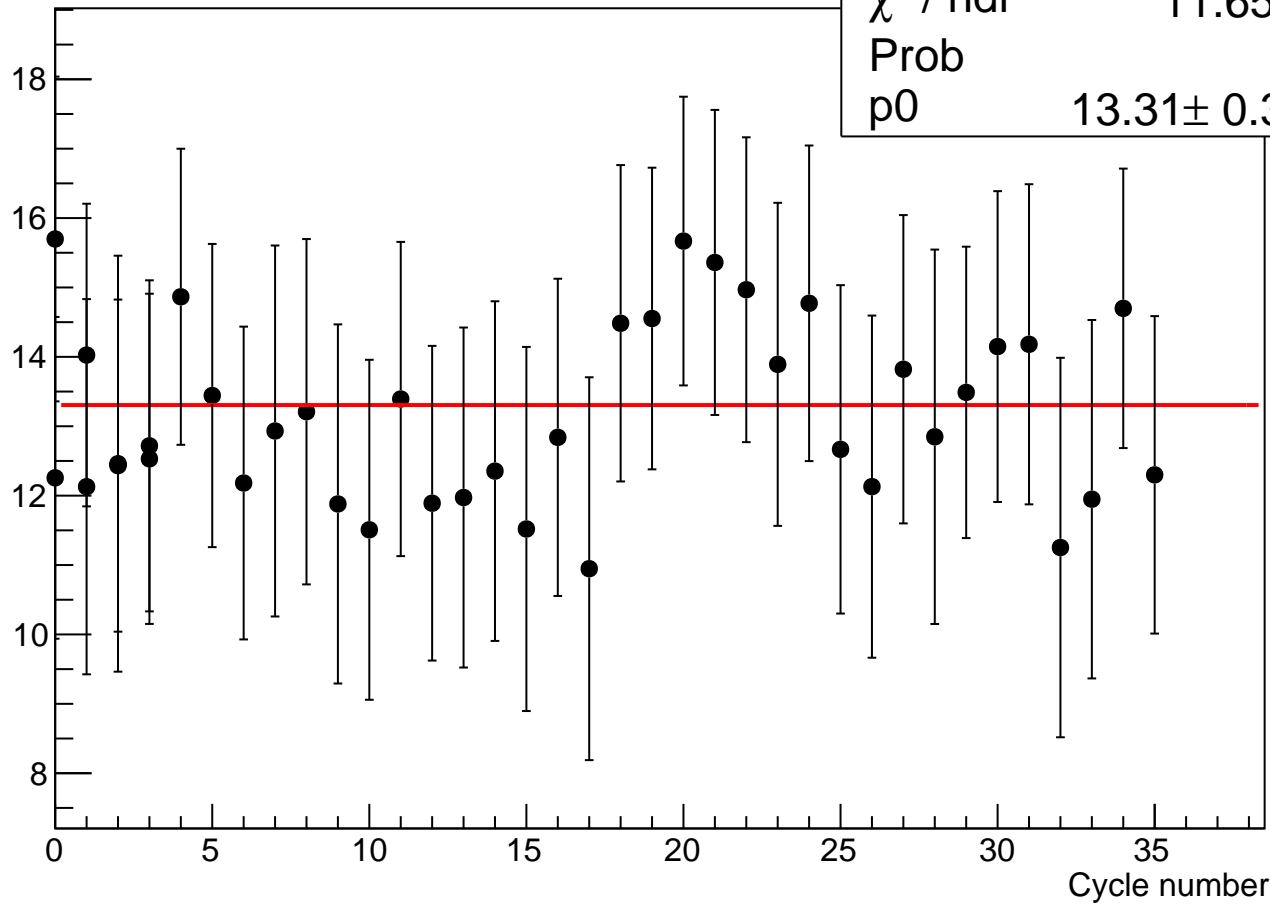

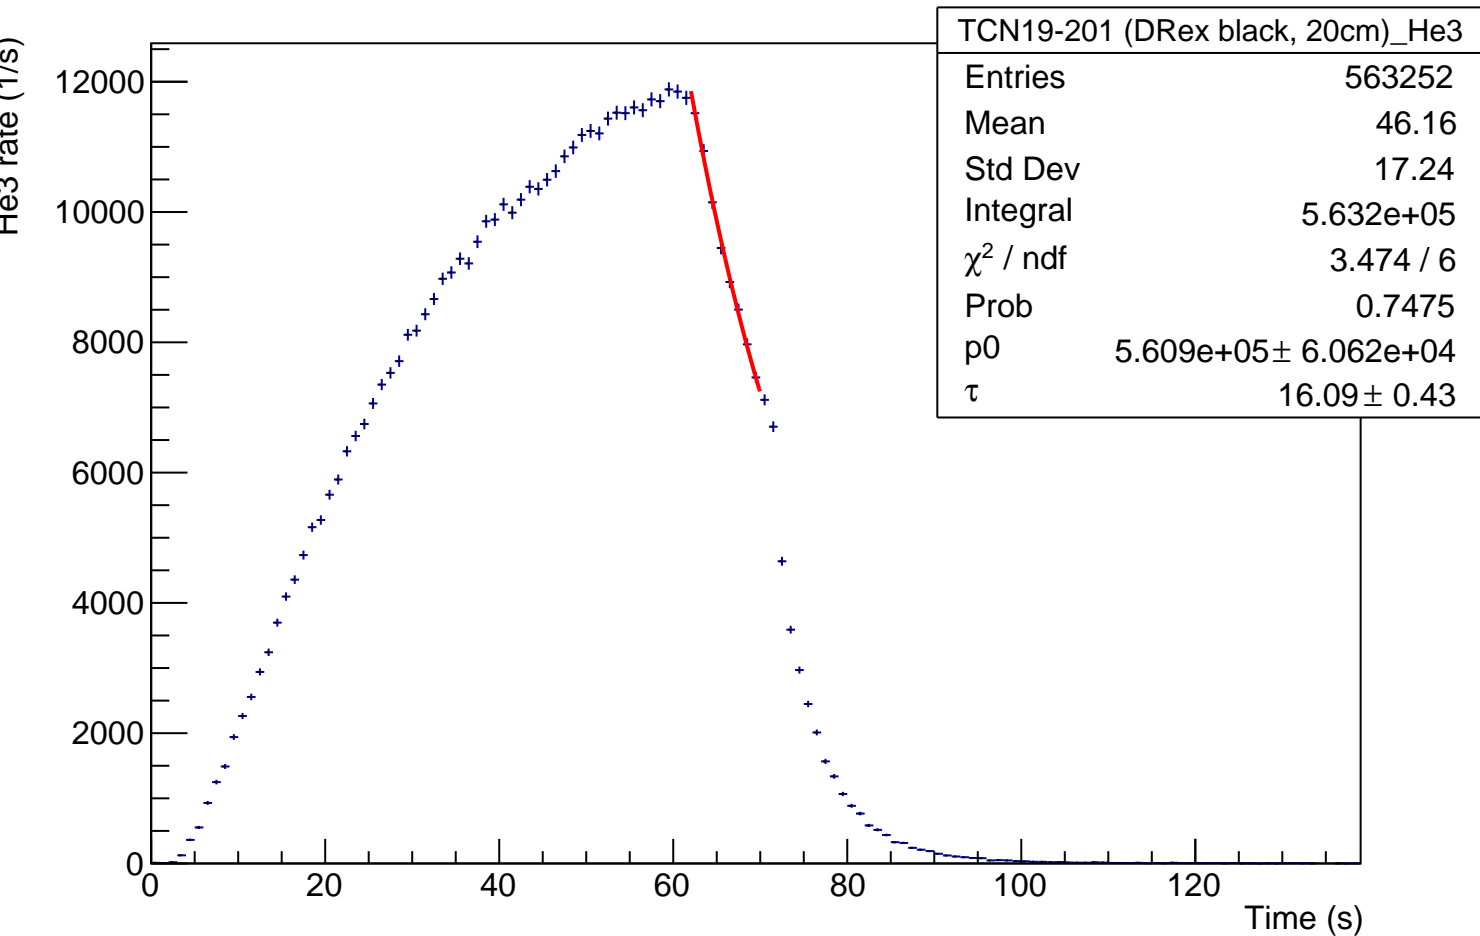

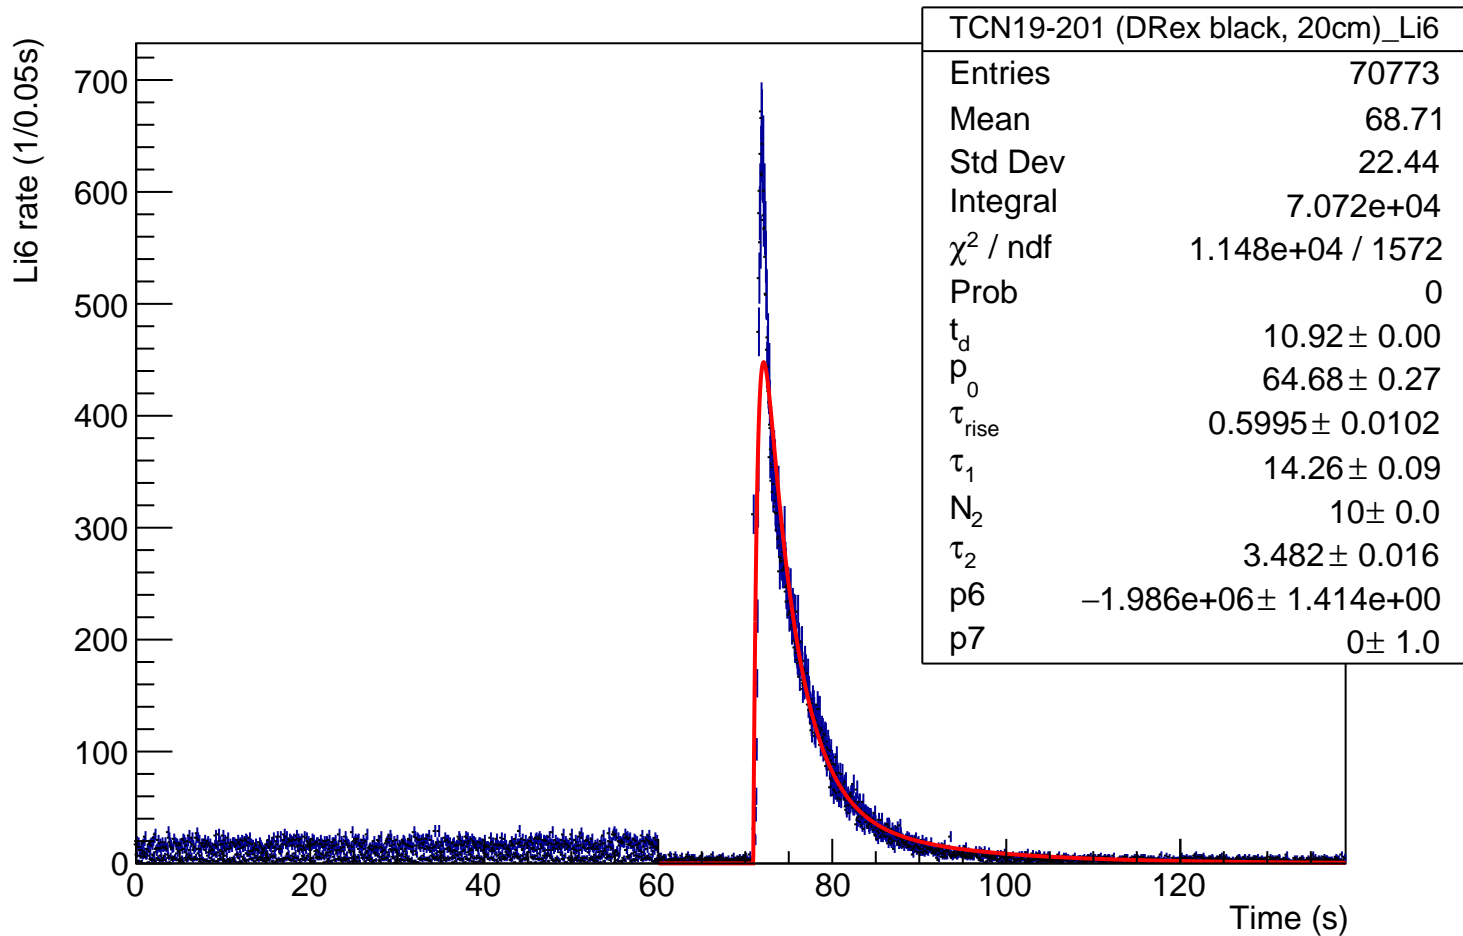

Normalized Li6 rate (1/0.05s)

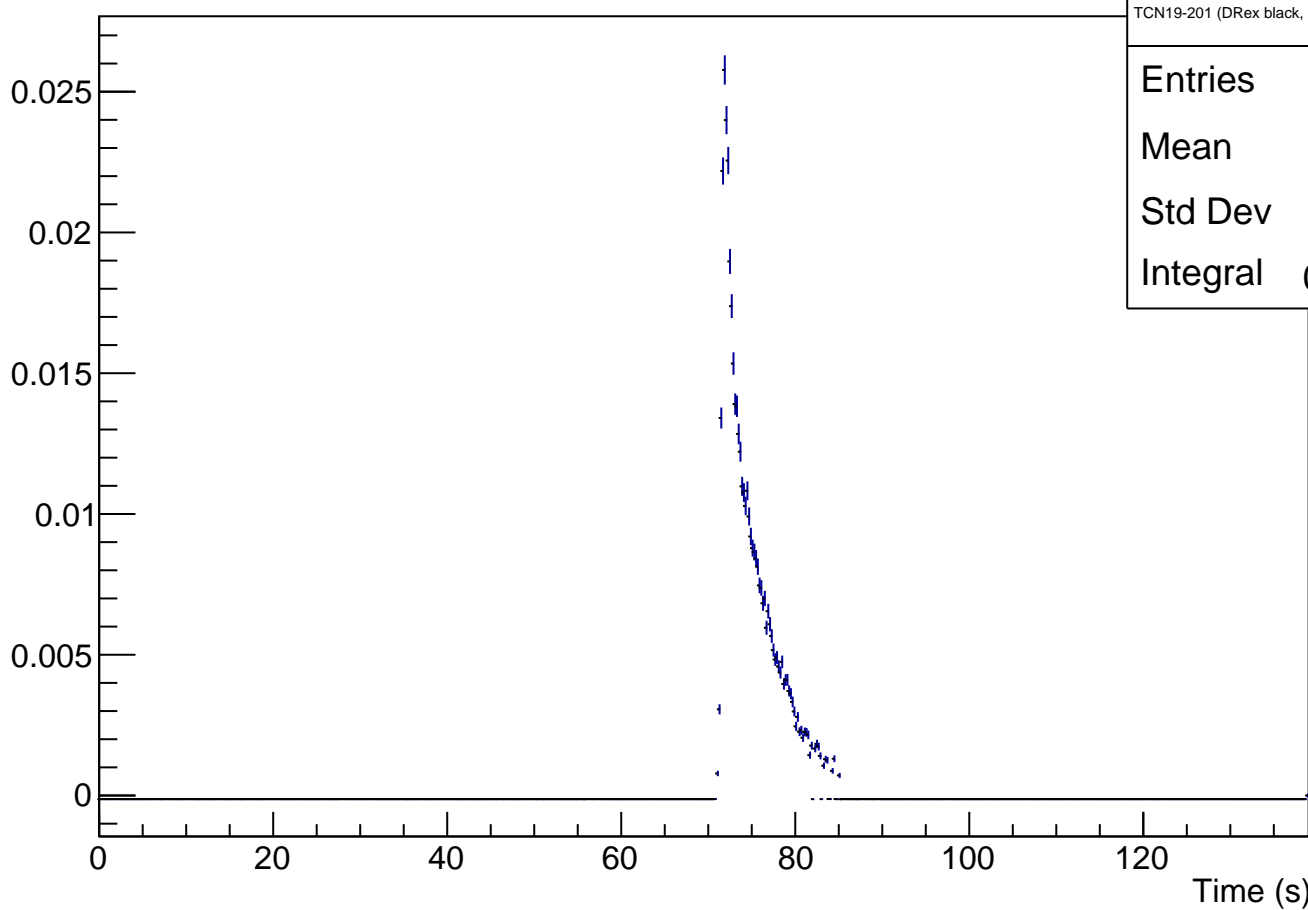

TCN19-201 (DRex black, 20cm)_Li6_norm


Entries 53743

Mean 68.6


Std Dev 18.6

Integral 0.3736

Ratio of cumulated rates

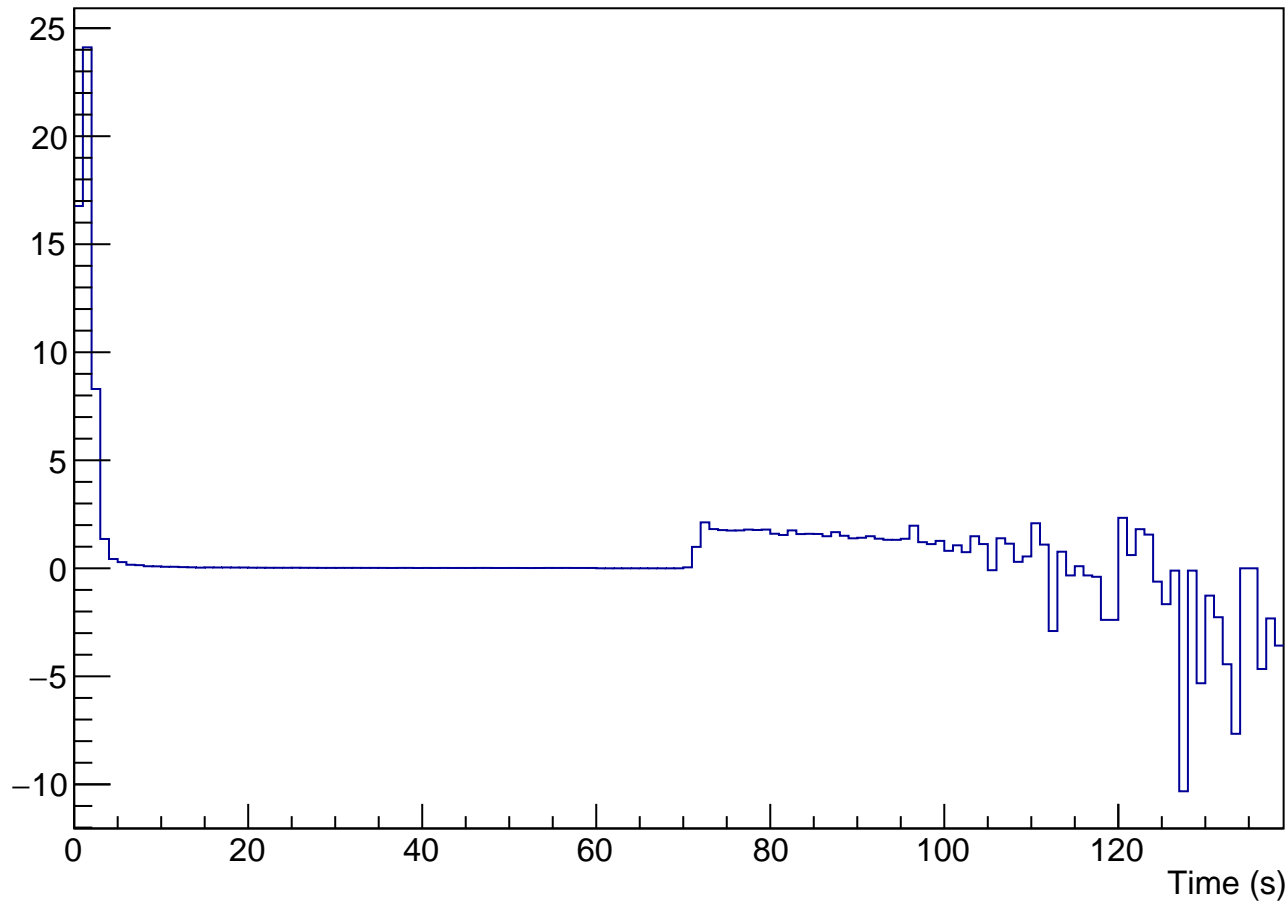


Average rate ratio

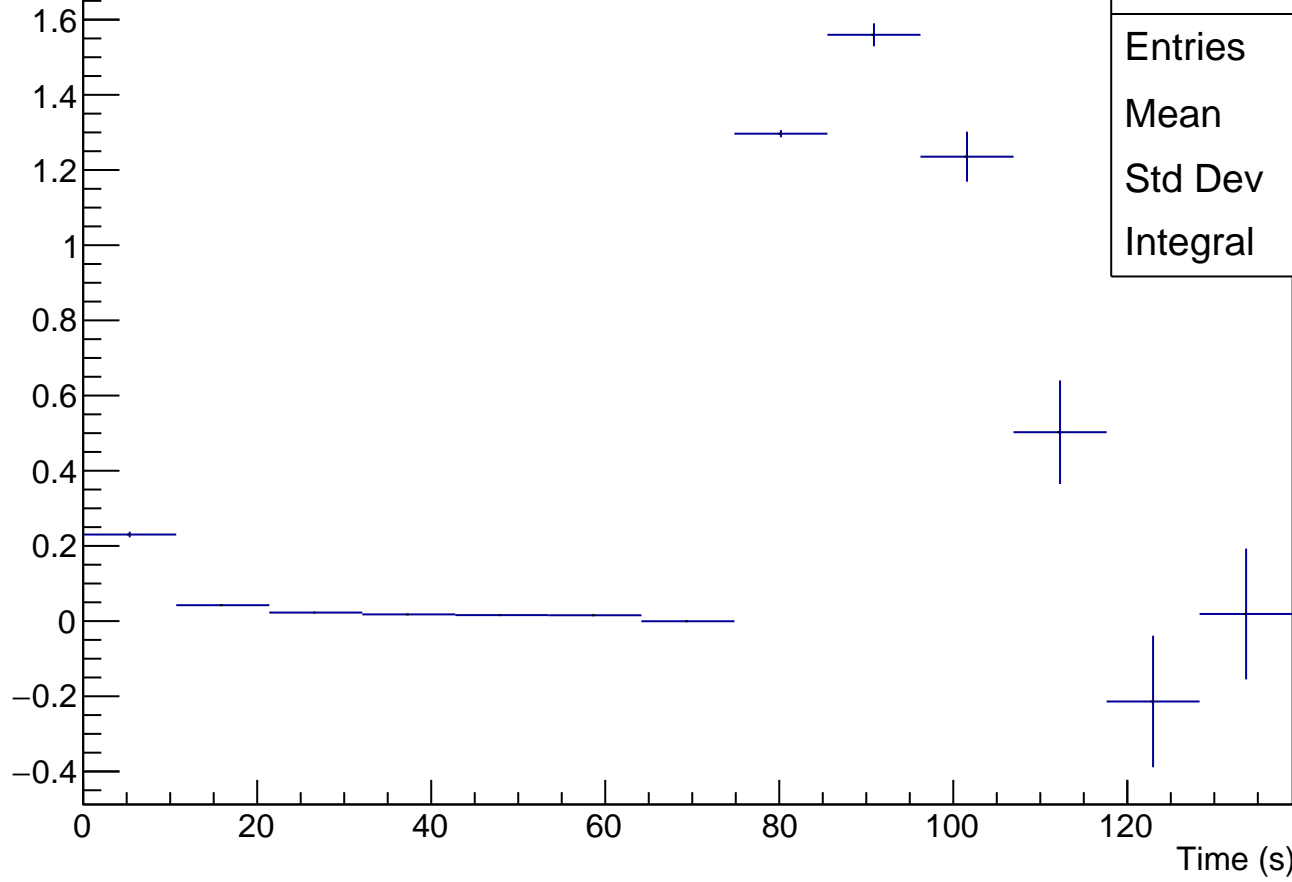

TCN19-201 (DRex black, 20cm)_ratio	
Entries	153
Mean	84.37
Std Dev	21.86
Integral	4.744

TCN19-201 (DRex black, 20cm)

Count

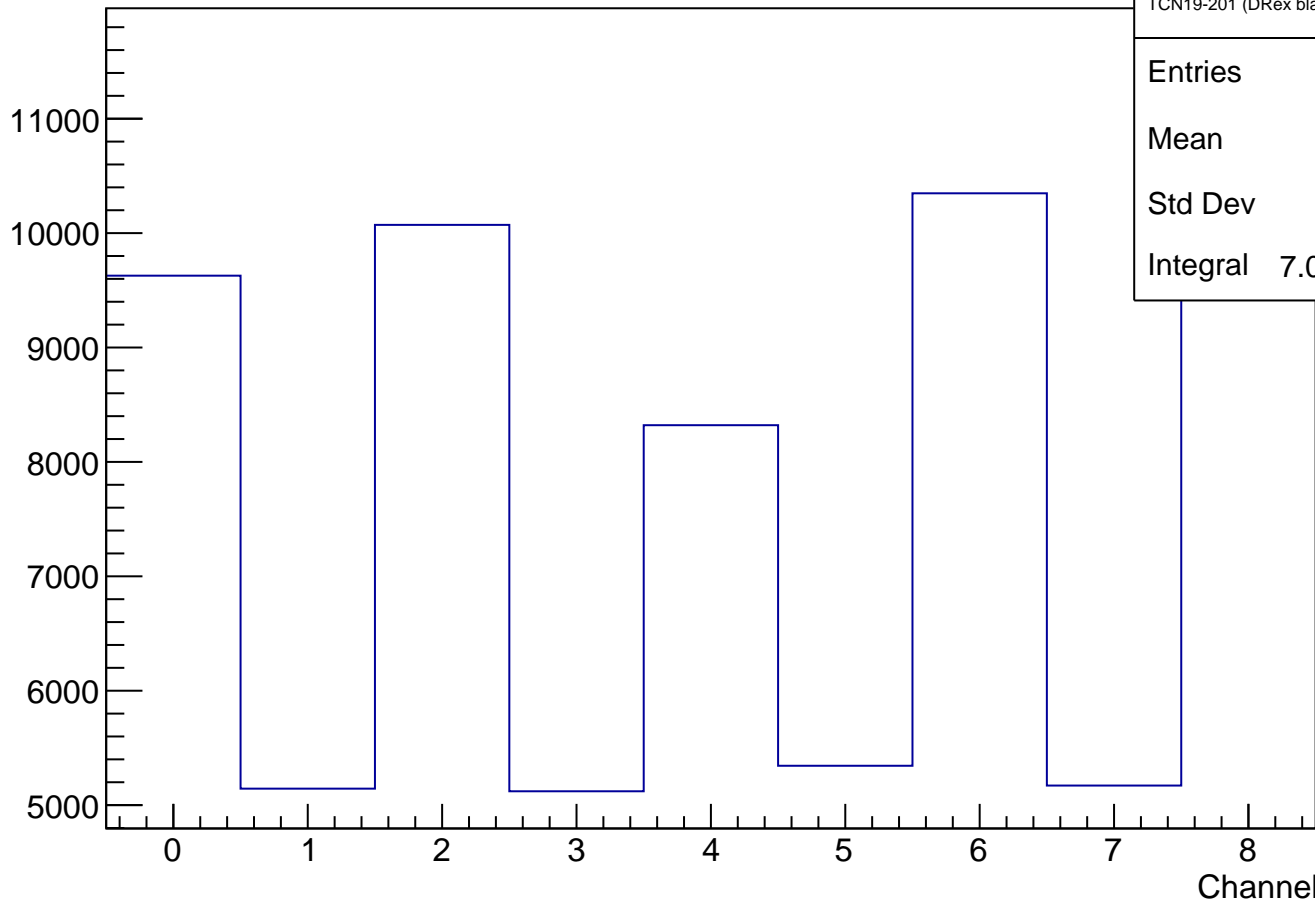

TCN19-201 (DRex black, 20cm)_ch

Entries 70773

Mean 4.125

Std Dev 2.721

Integral 7.077e+04

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 40

Mean 0

Std Dev 0

Integral 0