




TCN19-201 (DRex black, 60cm v2), transmission normalized during prestorage

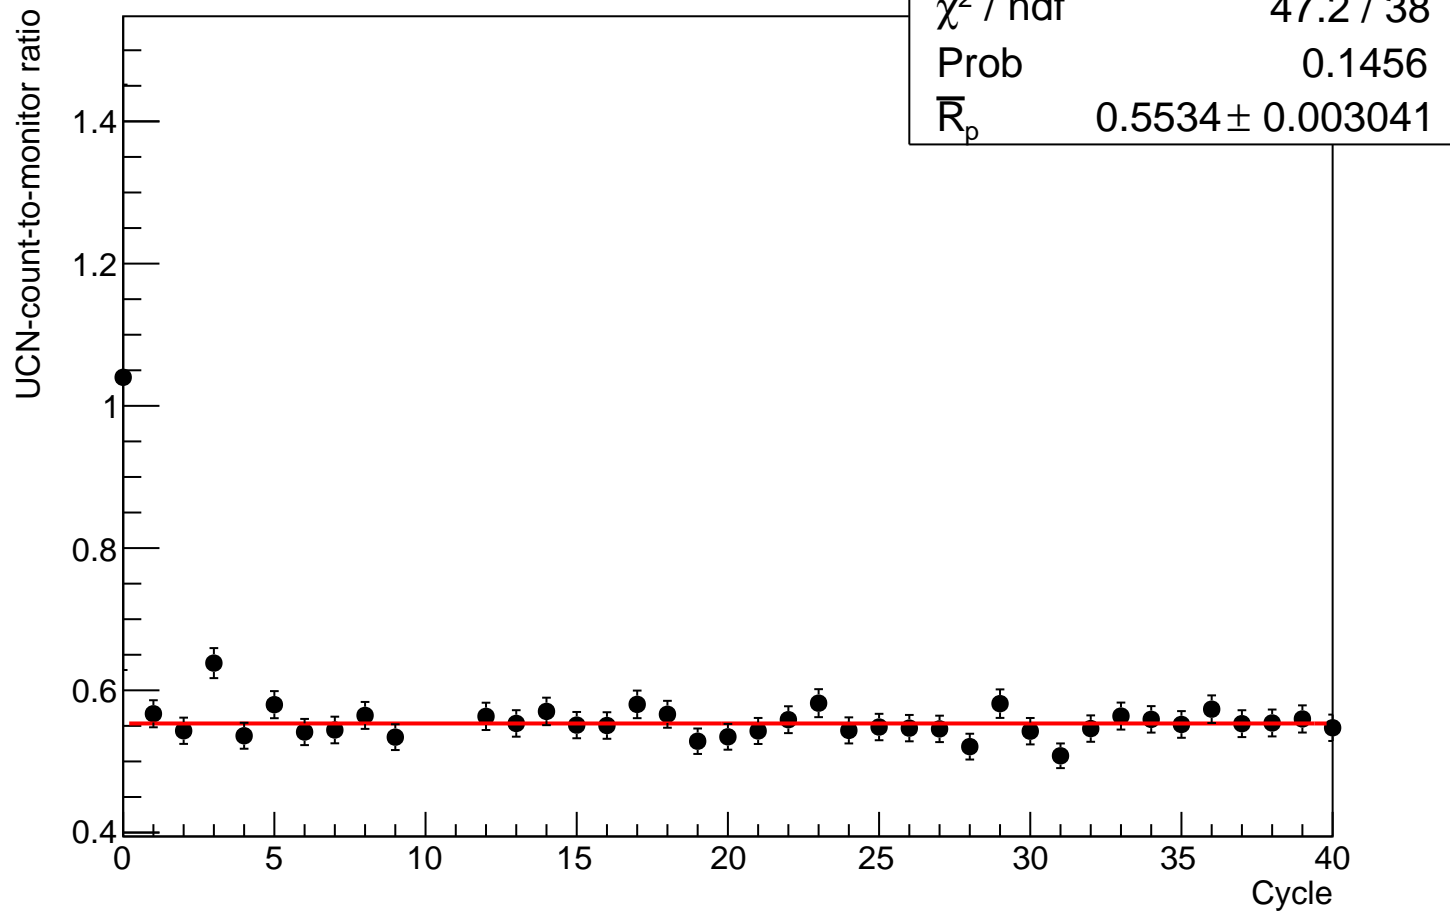


Graph

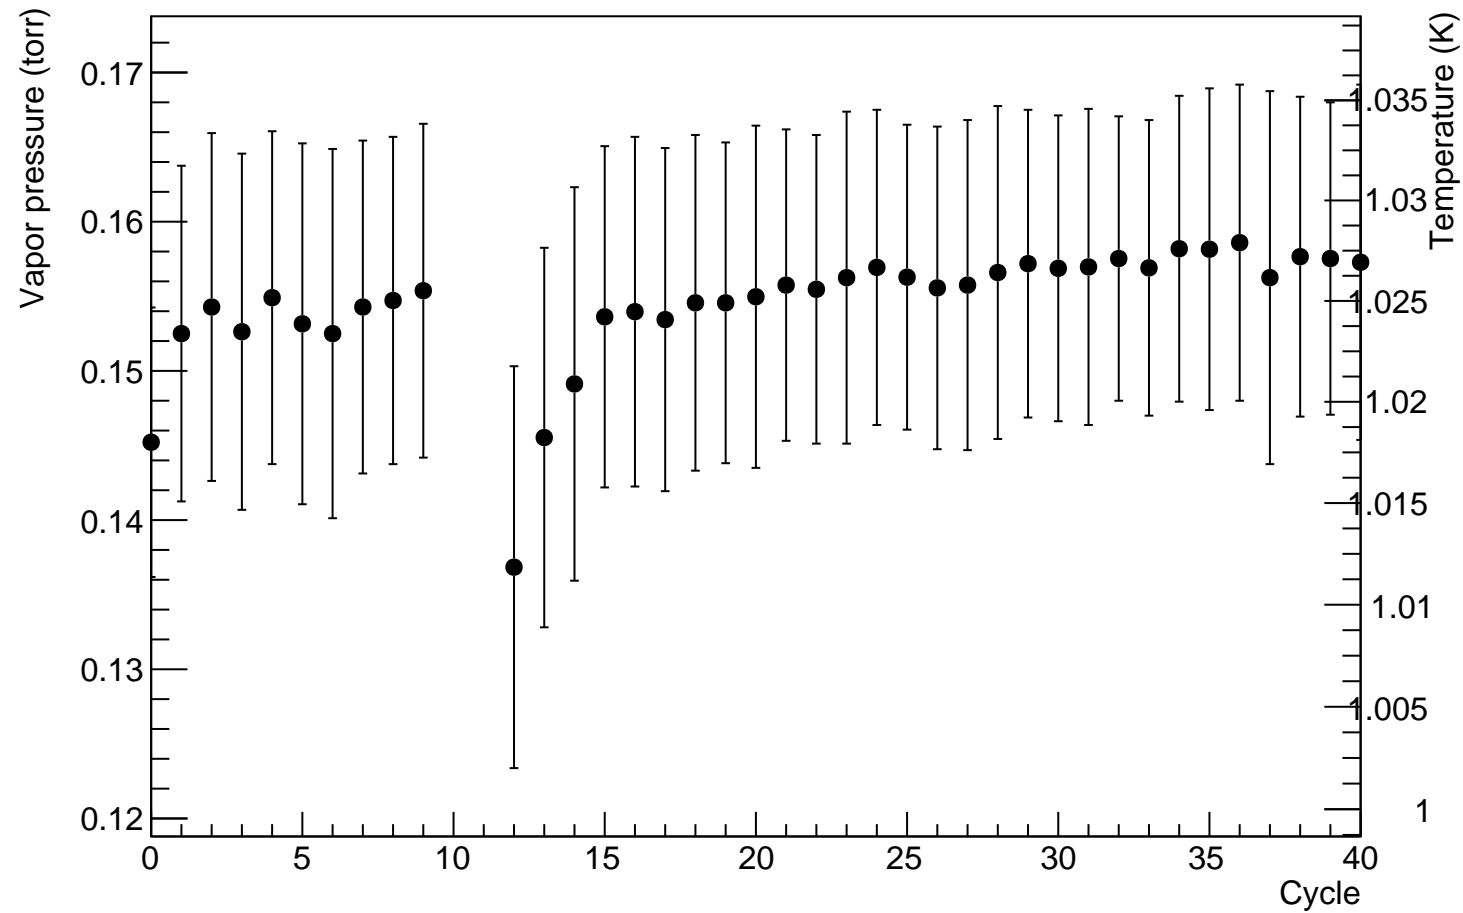


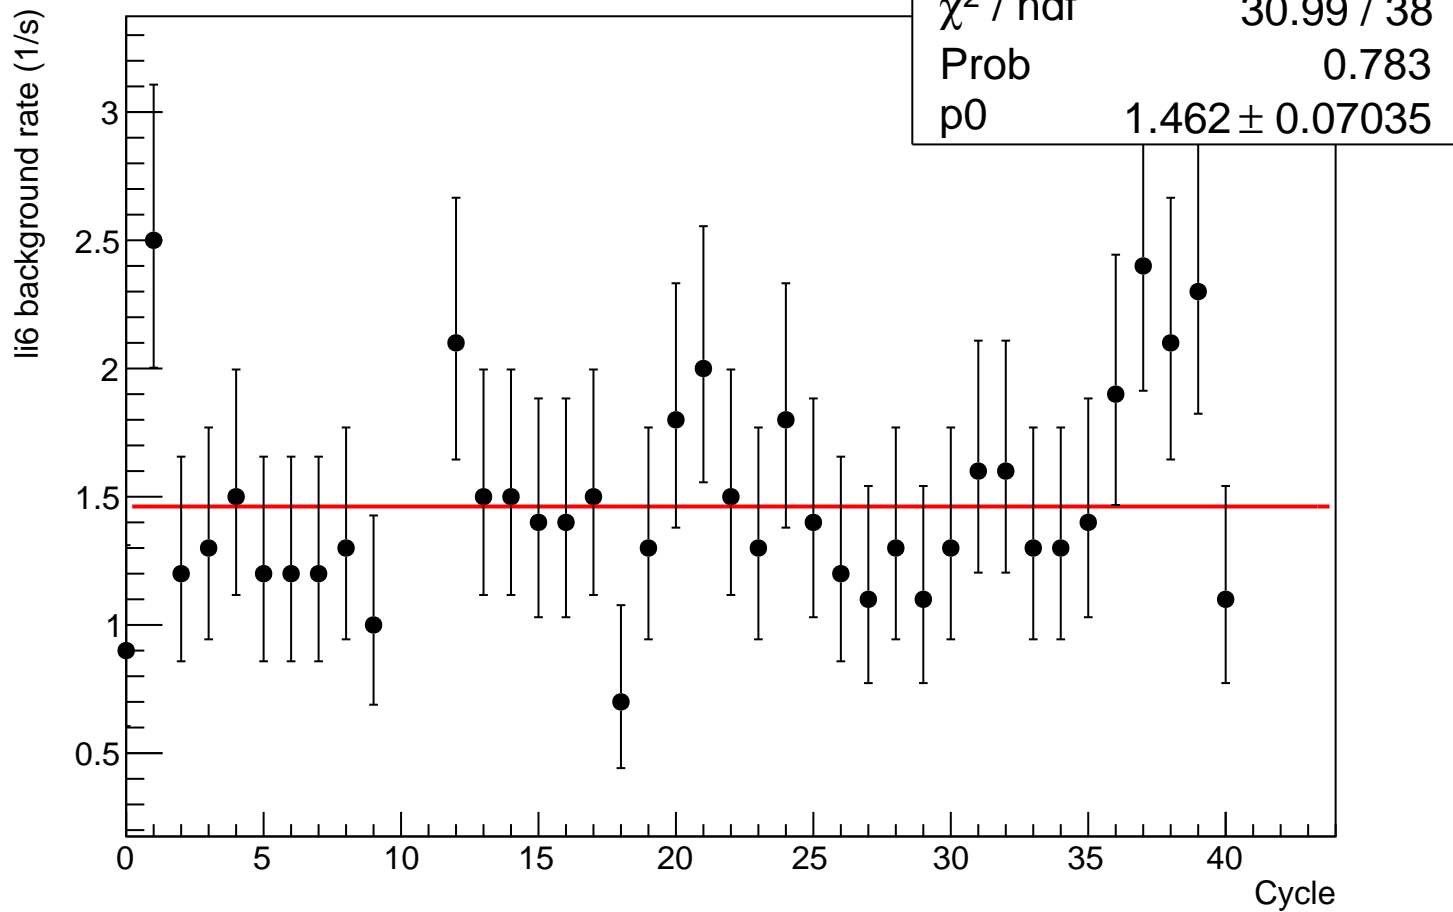



Pre-storage lifetime (s)

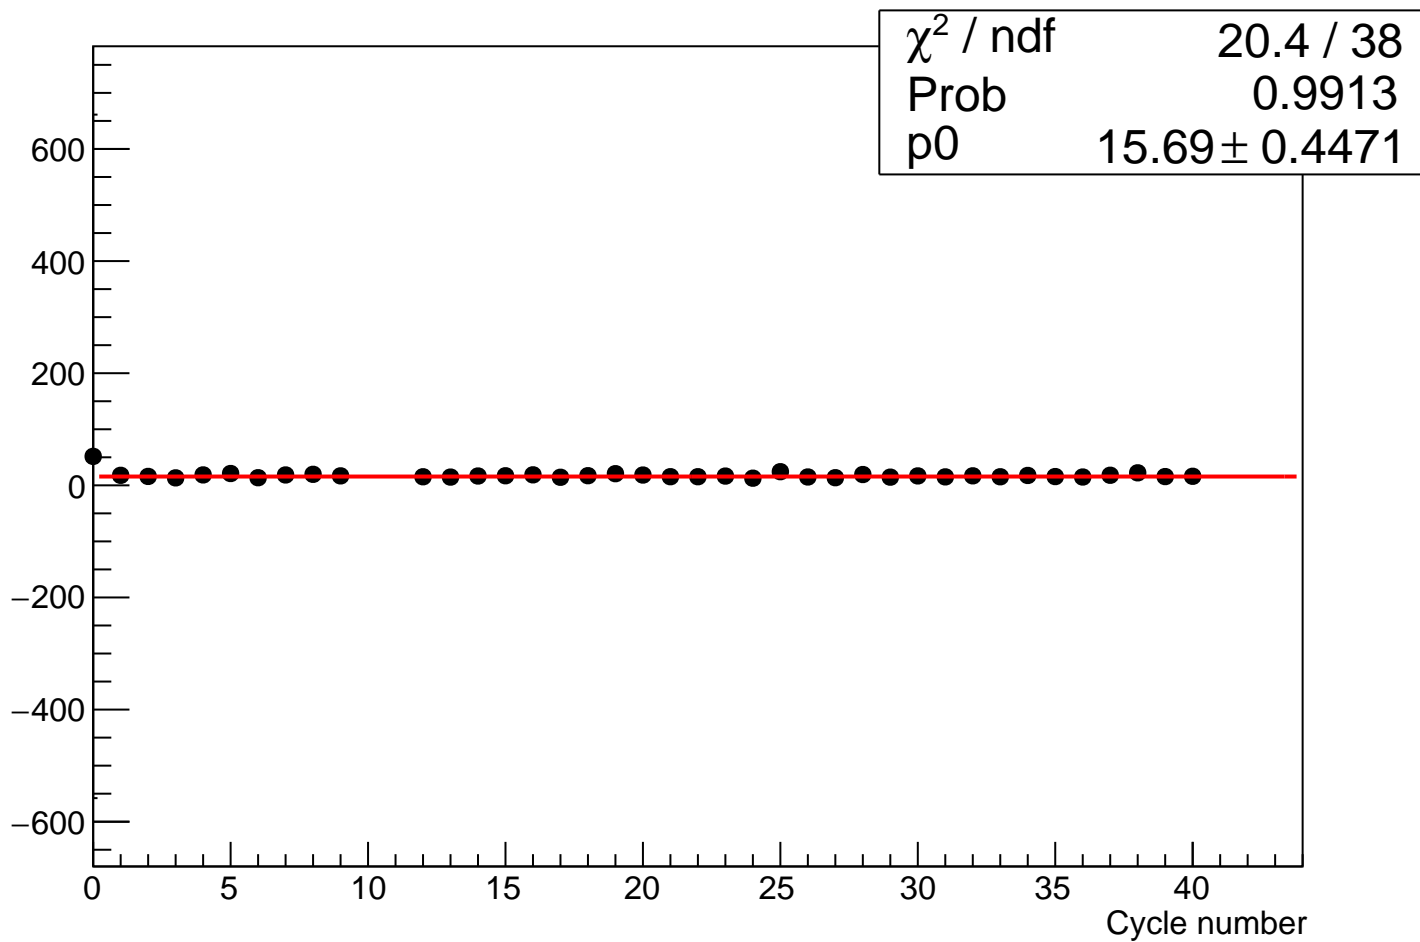


Corrected Li6-He3 ratio

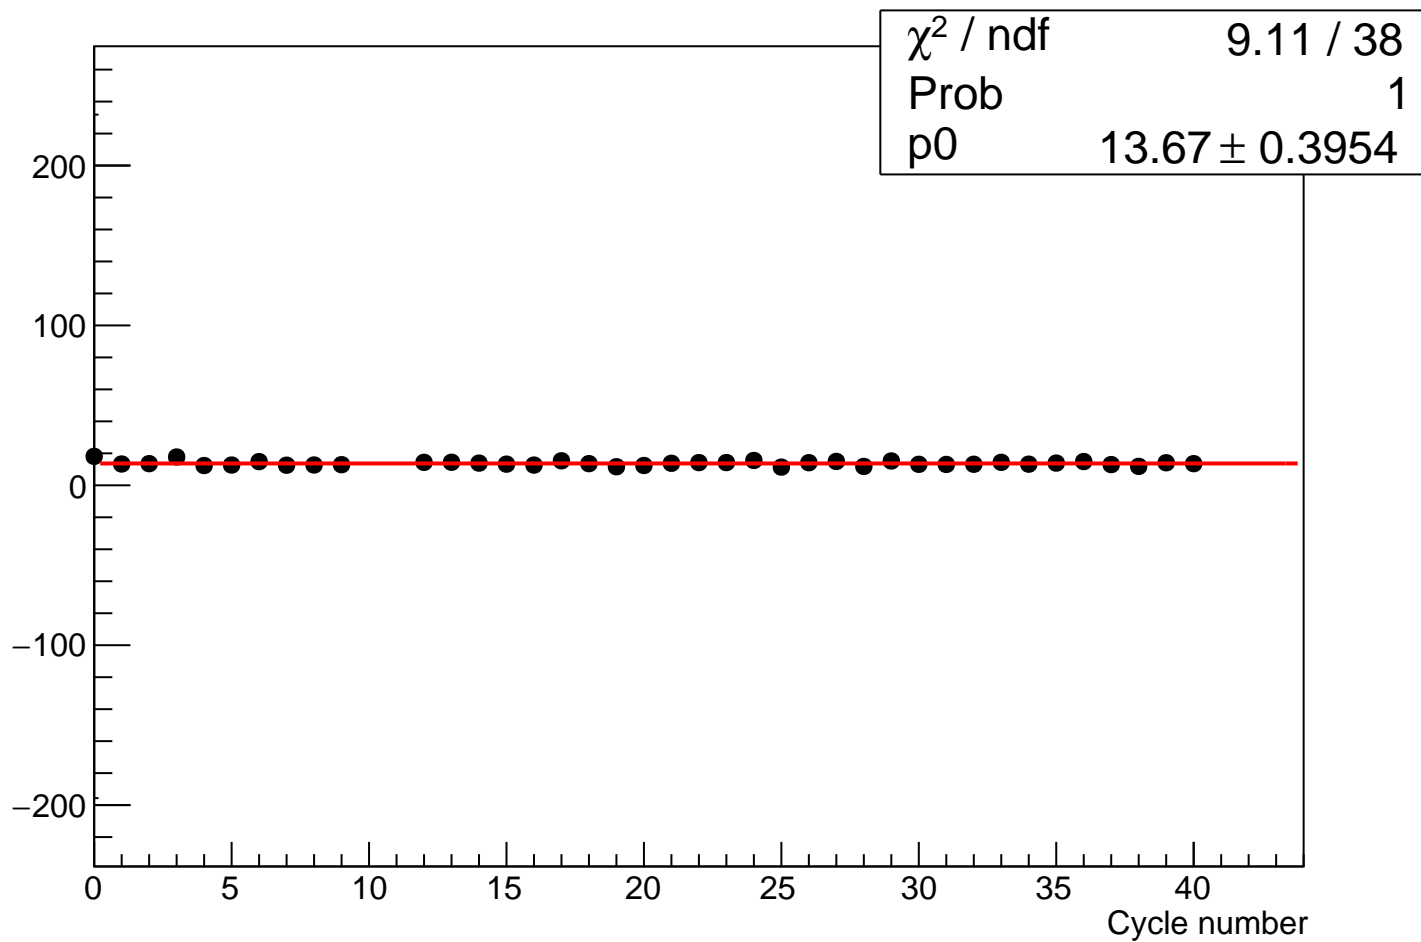


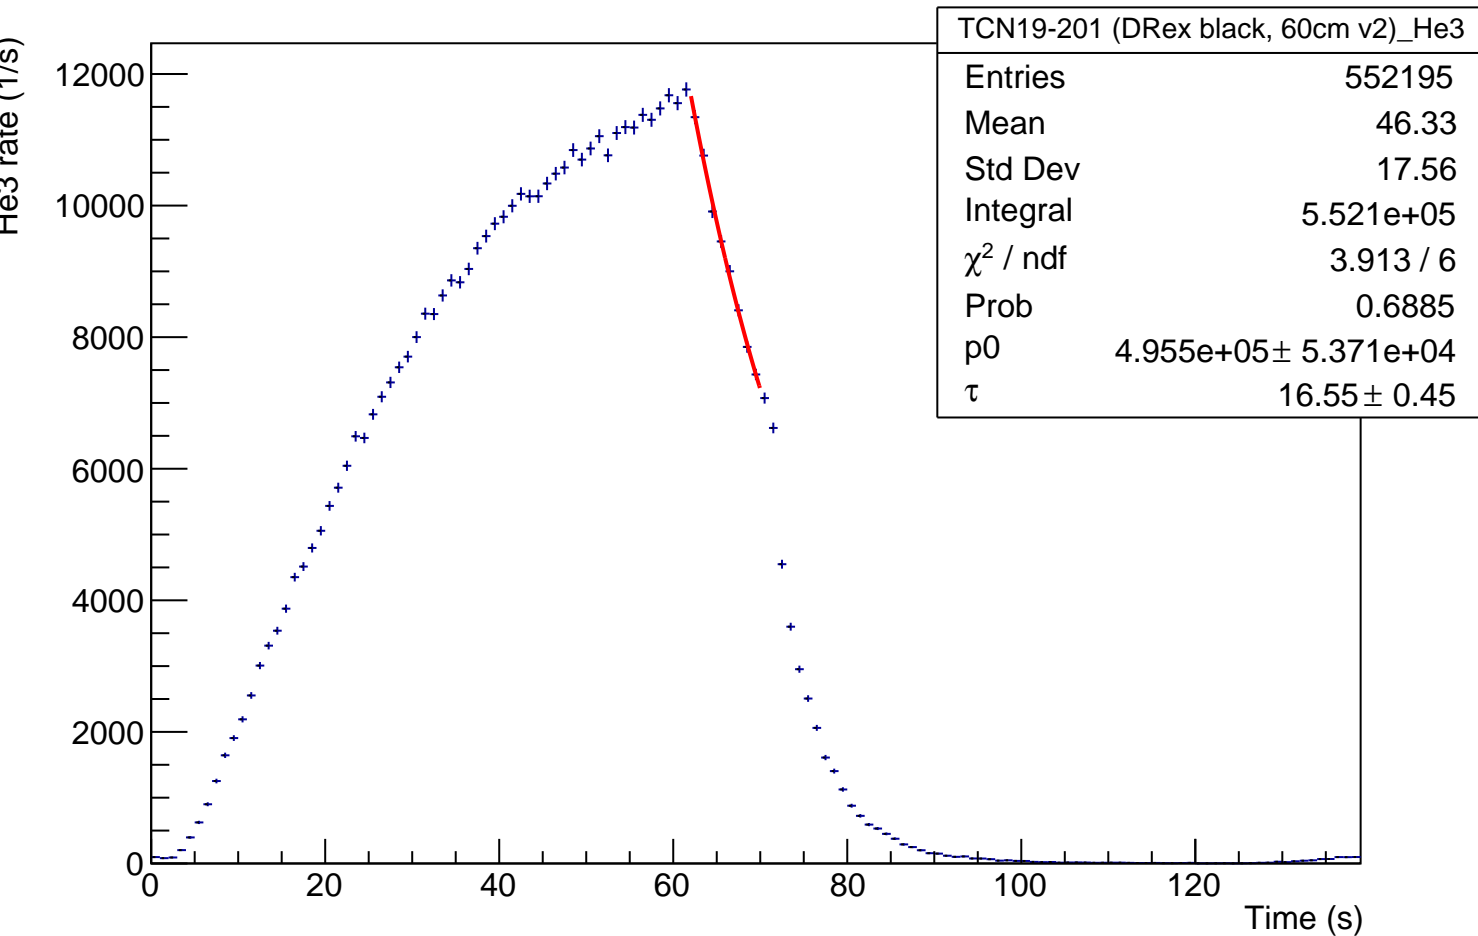

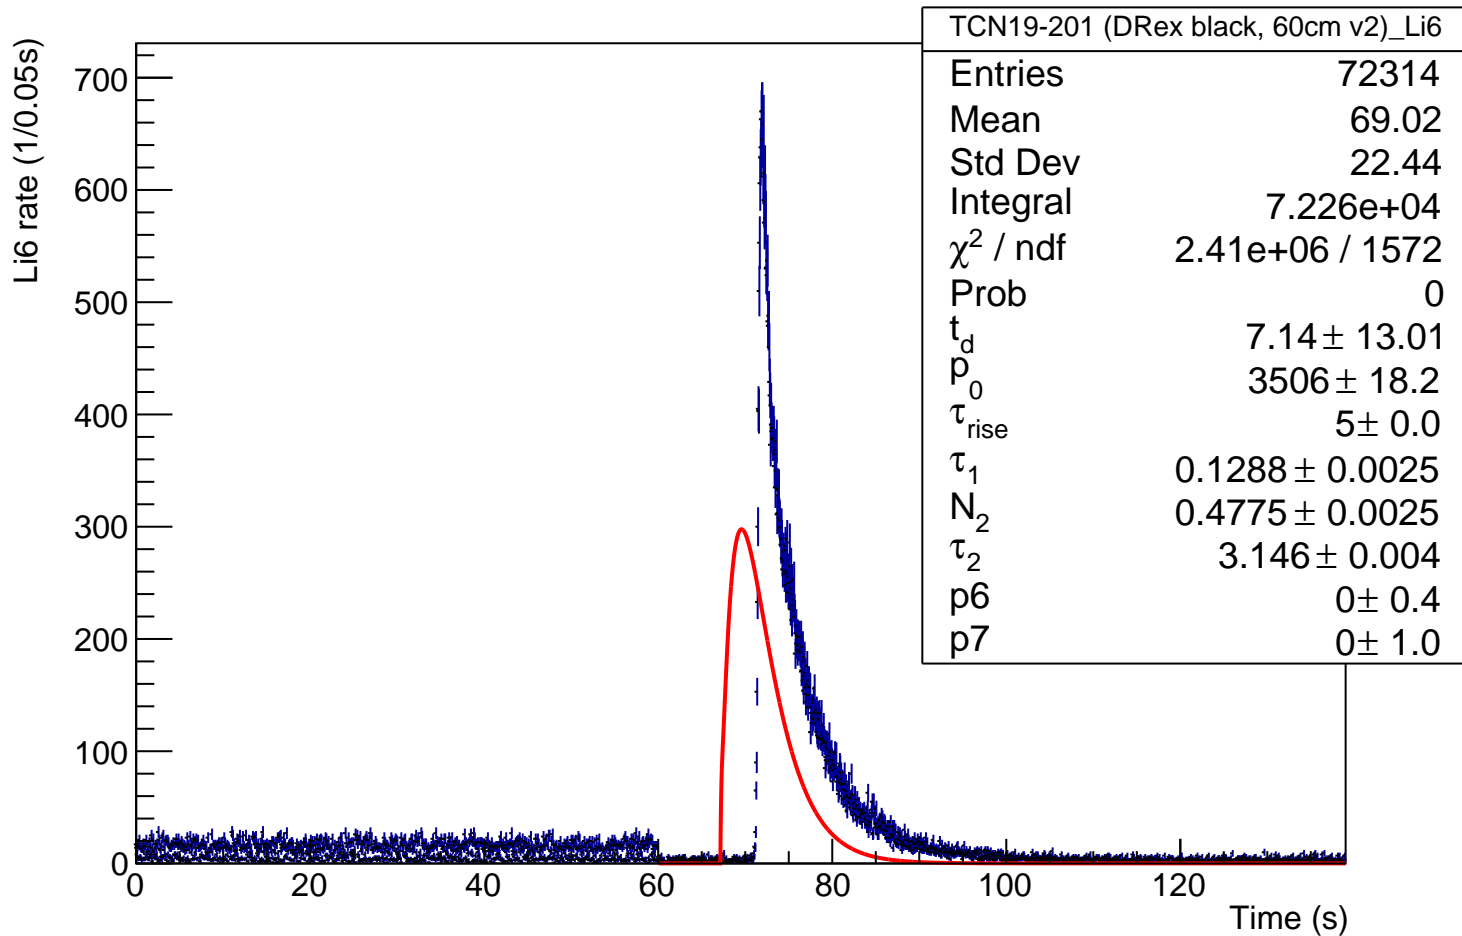


Normalized Li6 rate (1/0.05s)

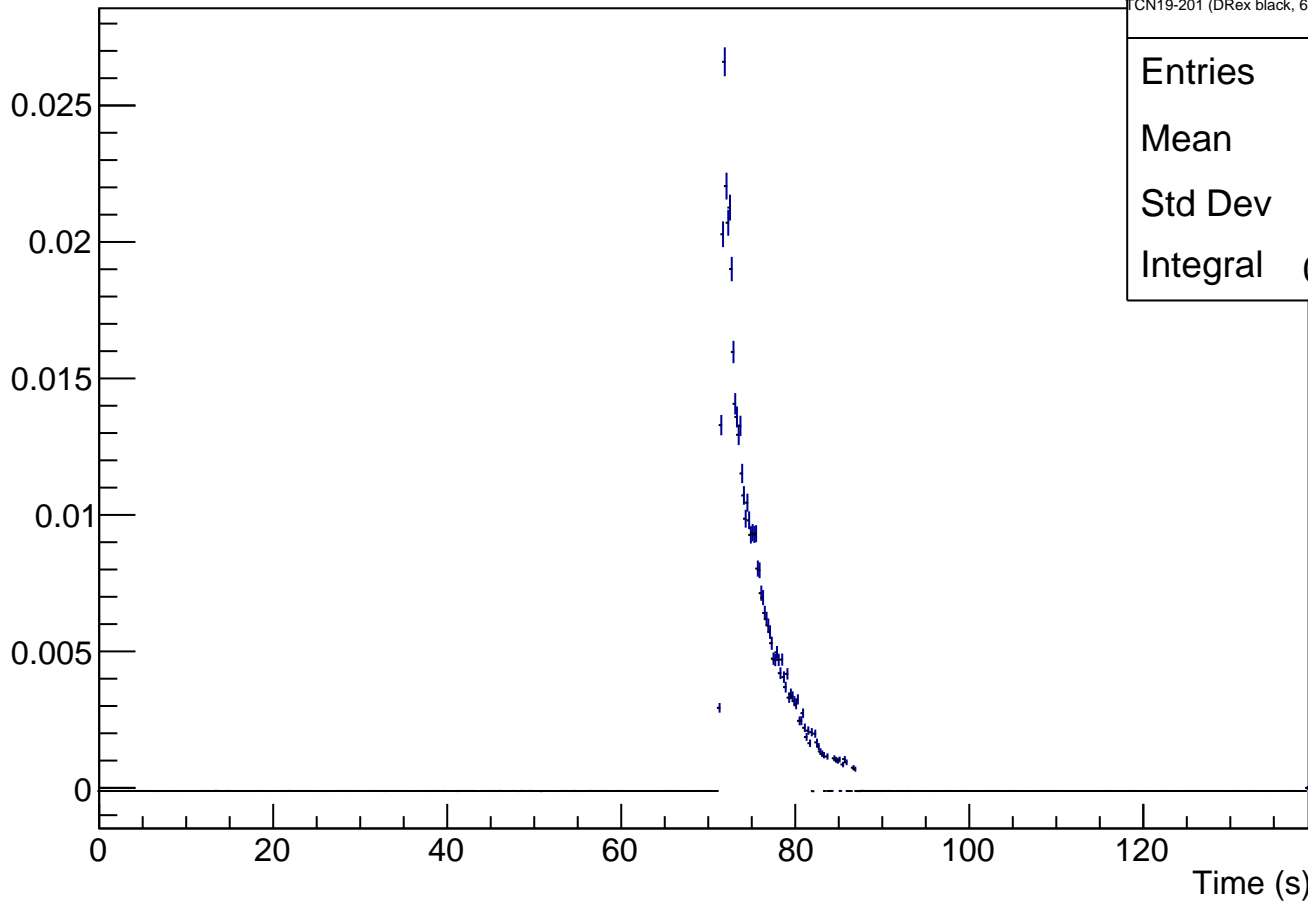

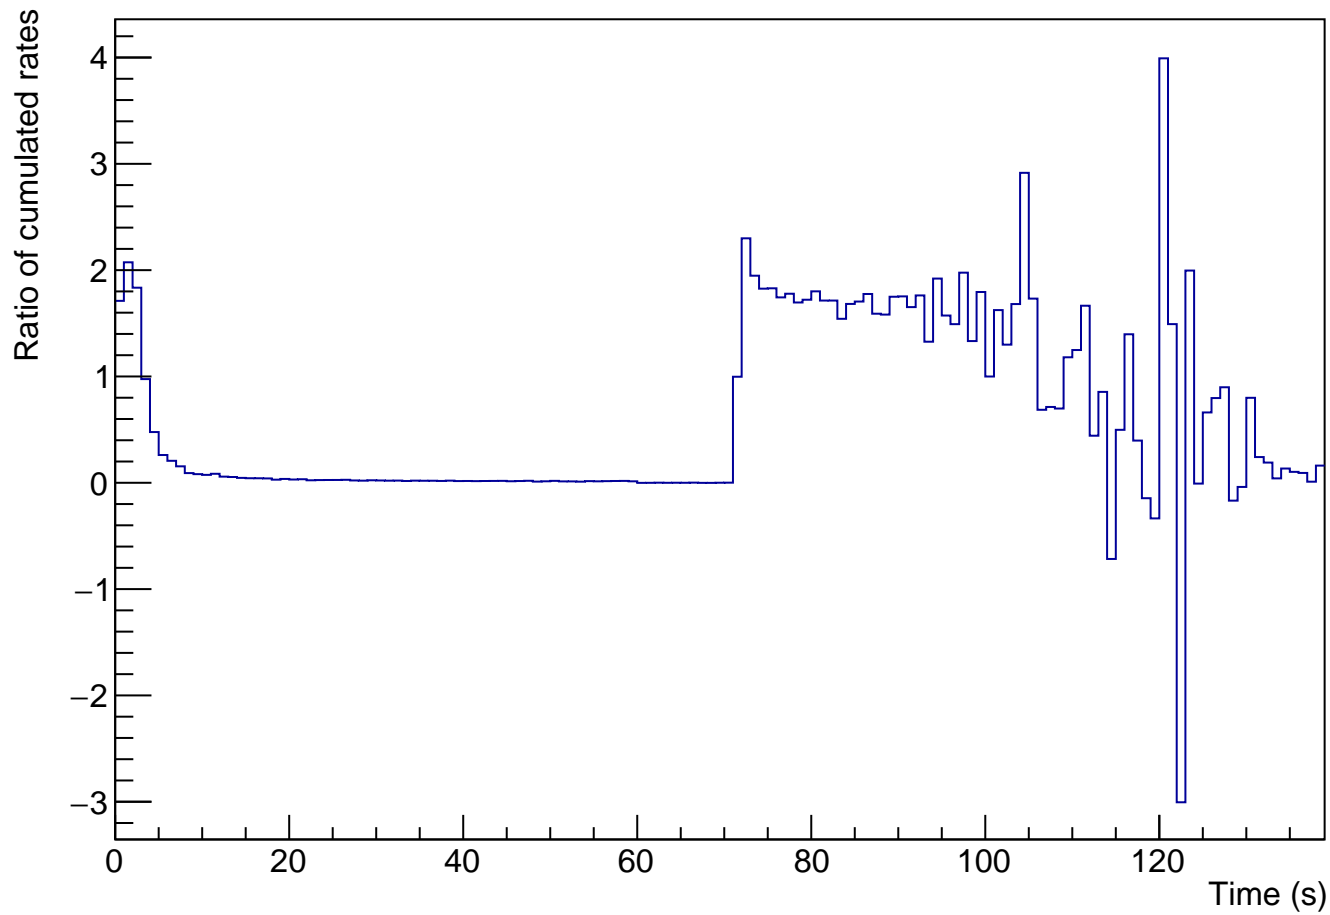


Average rate ratio

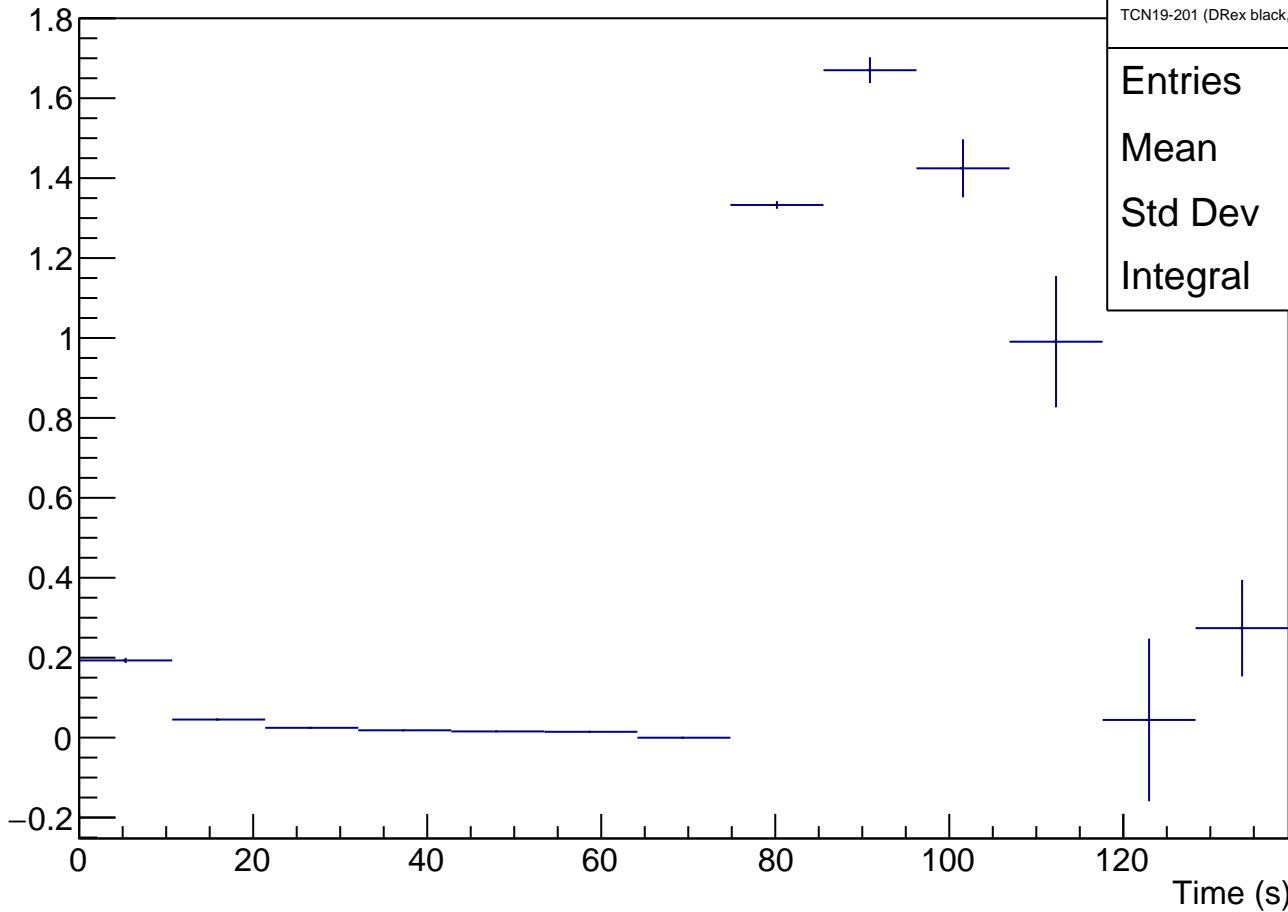

TCN19-201 (DRex black, 60cm v2)_ratio

Entries	198
Mean	88.96
Std Dev	22.08
Integral	6.047

TCN19-201 (DRex black, 60cm v2)

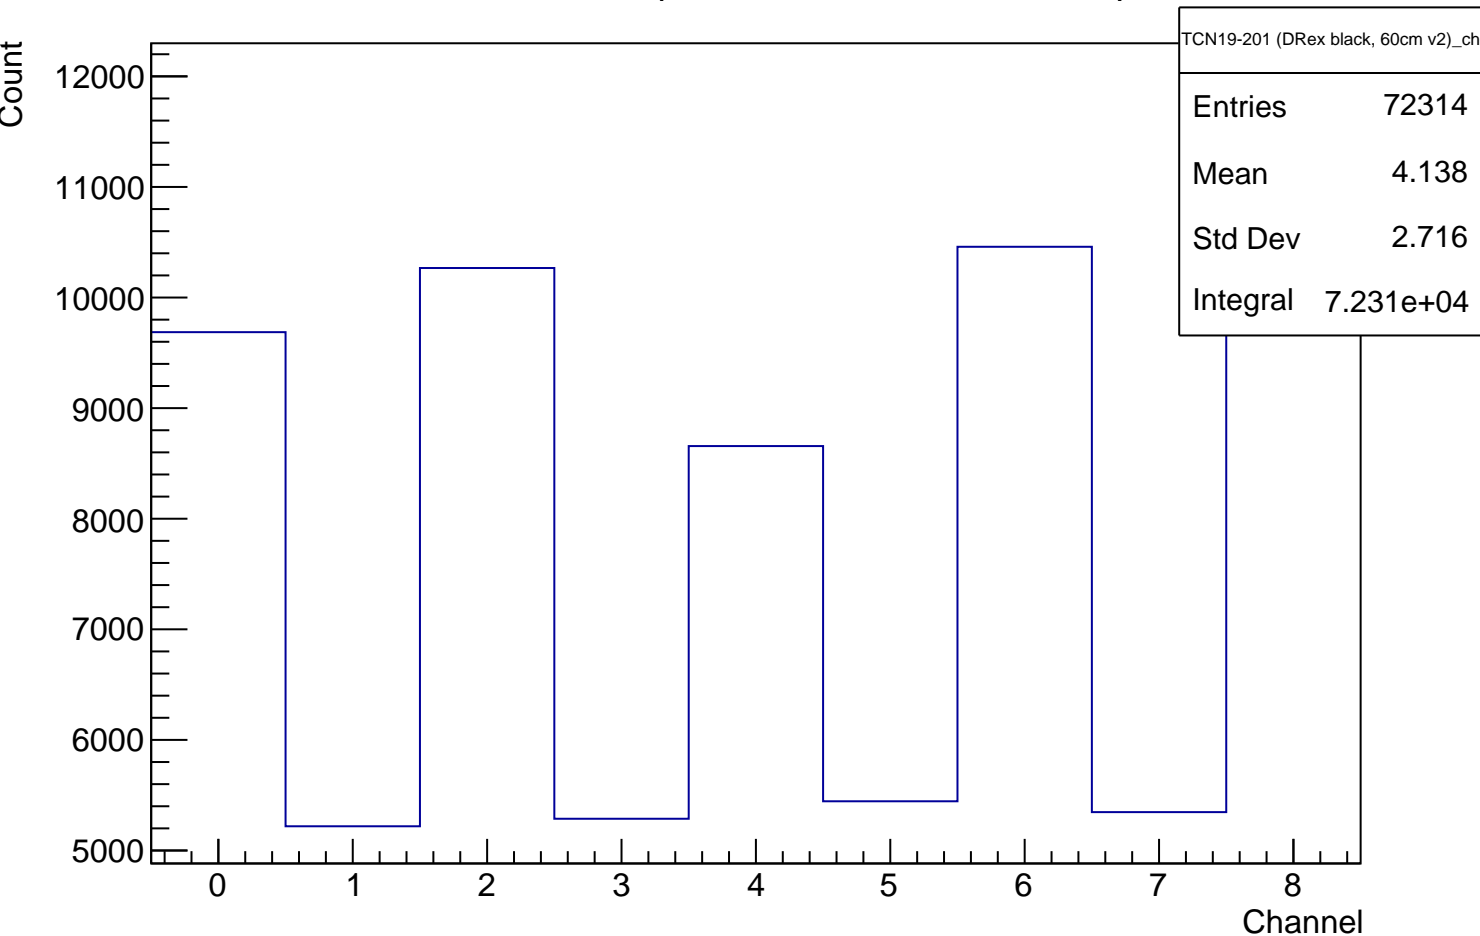

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 39

Mean 0

Std Dev 0

Integral 0