




TCN19-192 (DRex UGG3, 0cm), transmission normalized during prestorage


UCN-count-to-monitor ratio

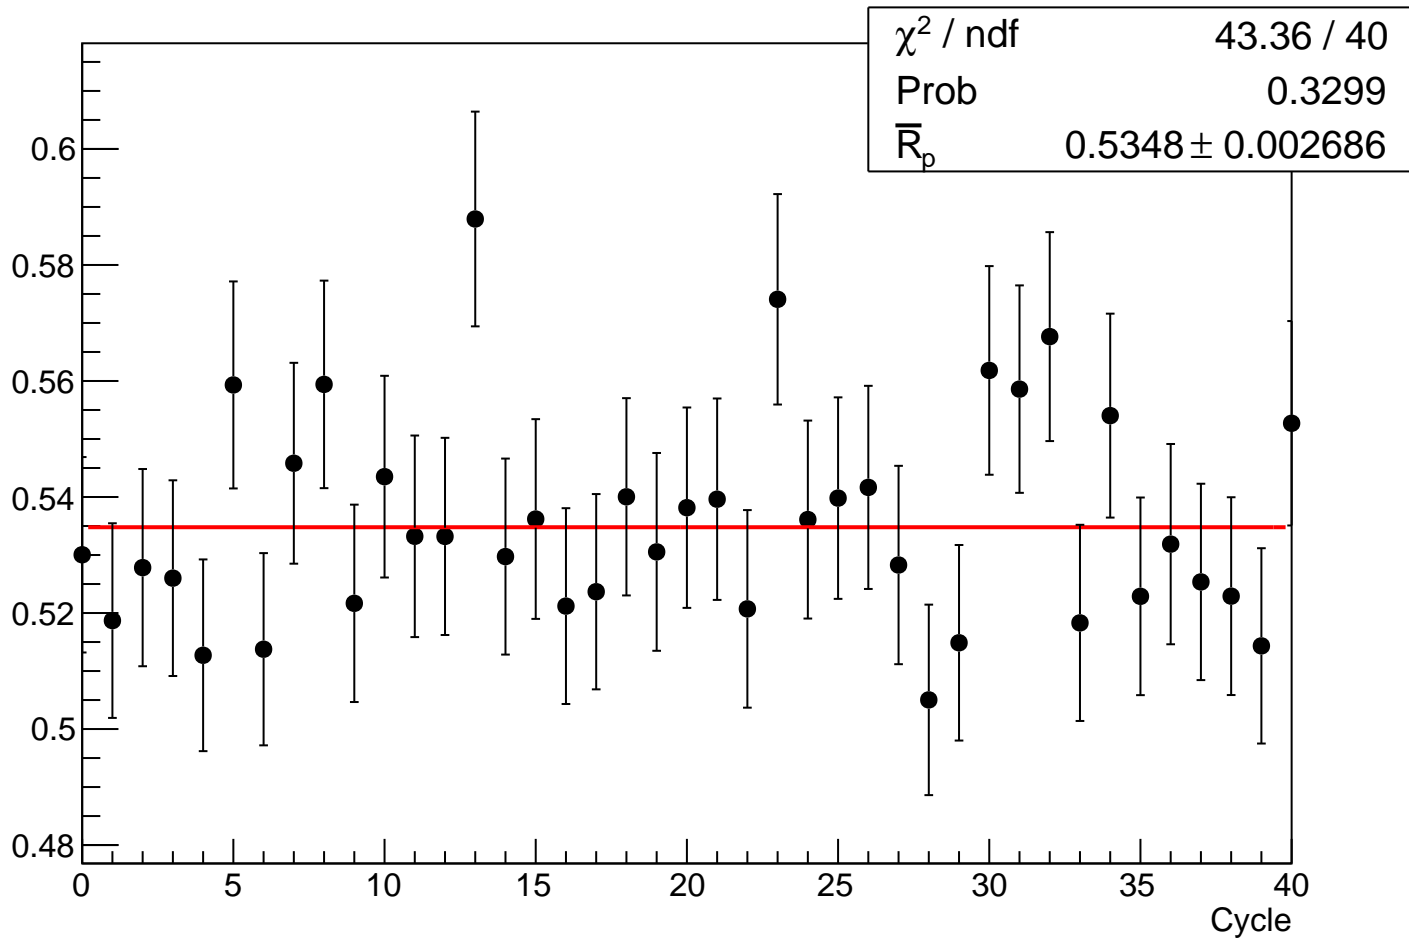

Graph

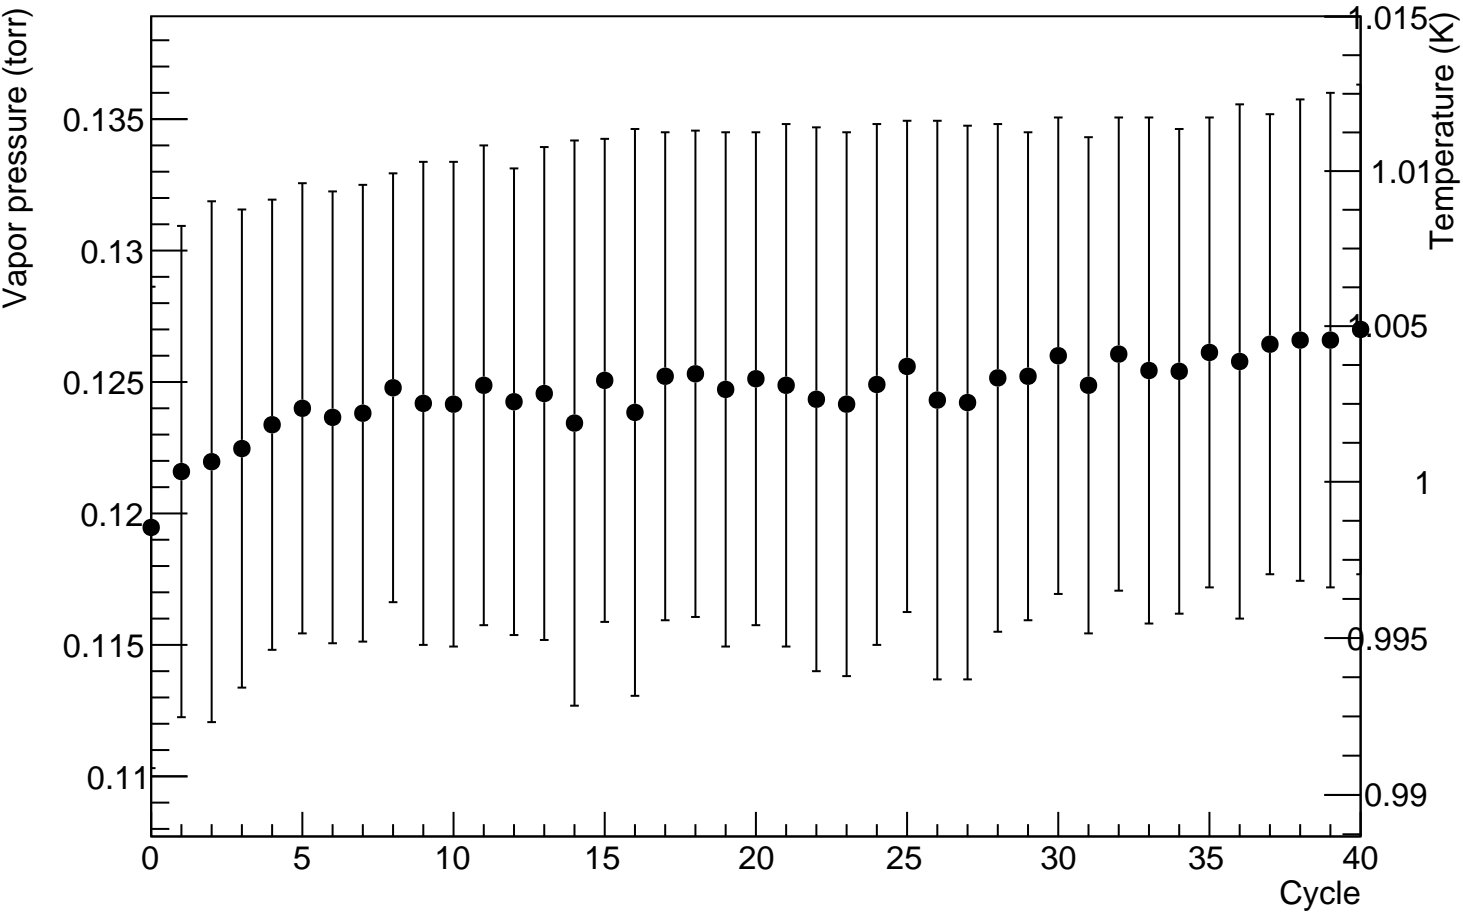


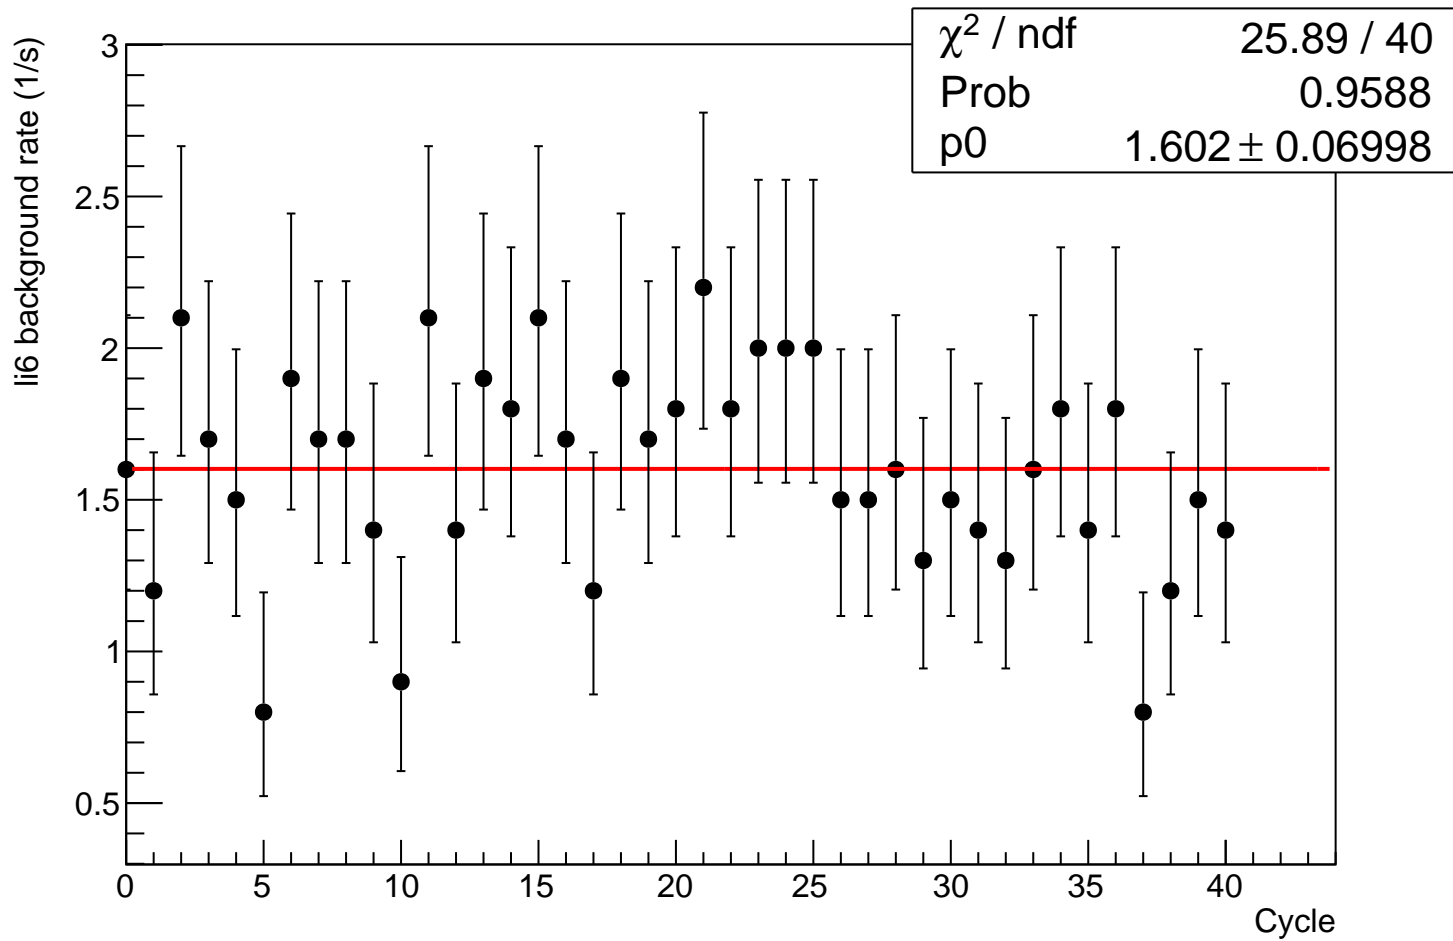


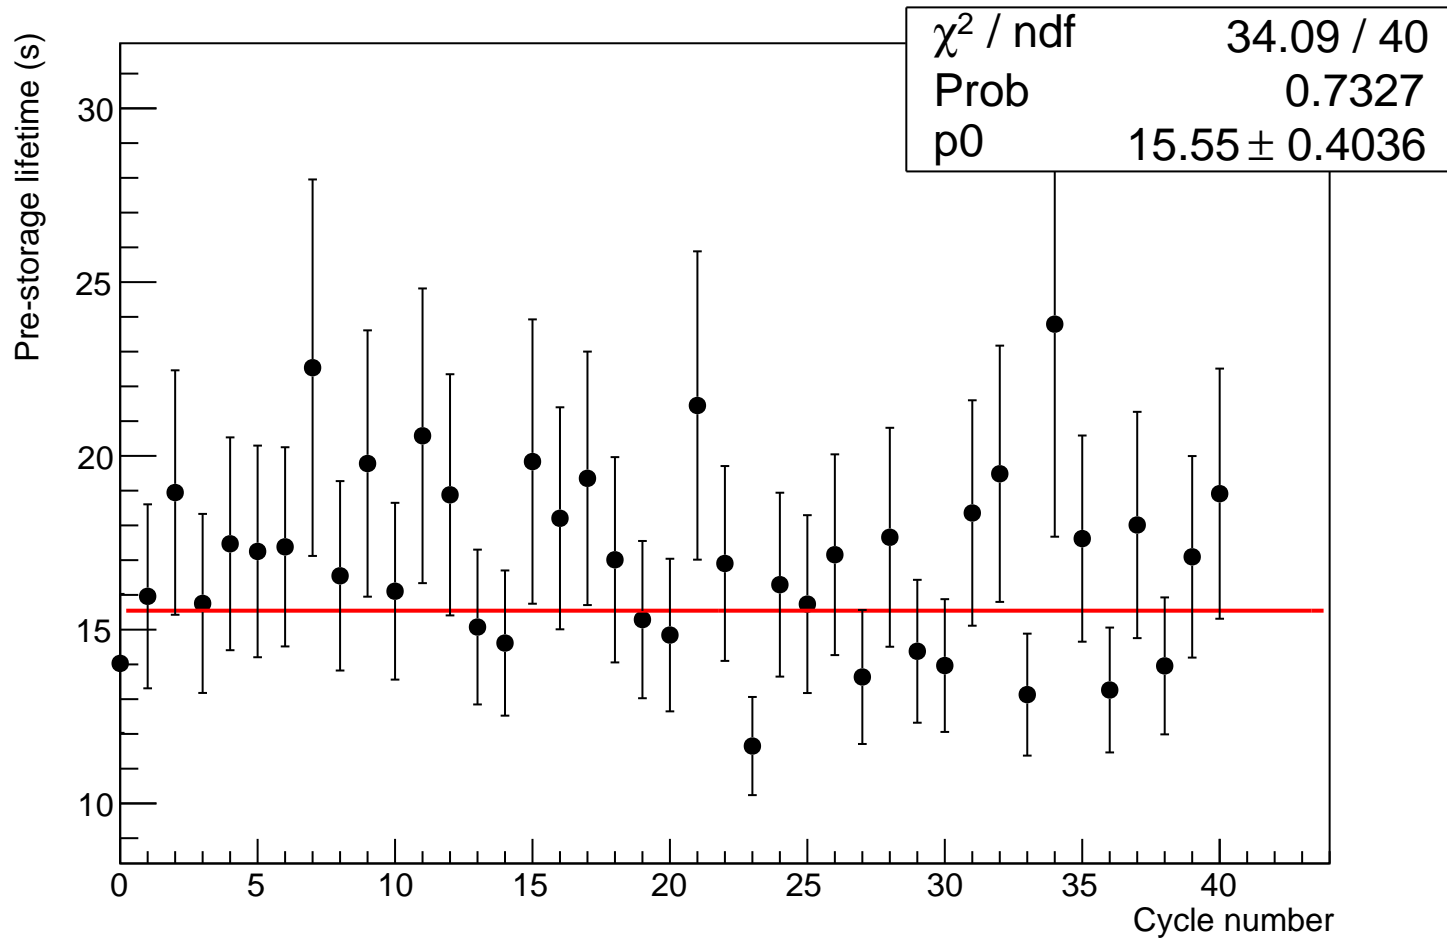


Corrected Li6-He3 ratio

χ^2 / ndf 12.06 / 40
Prob 1
p0 13.19 ± 0.347

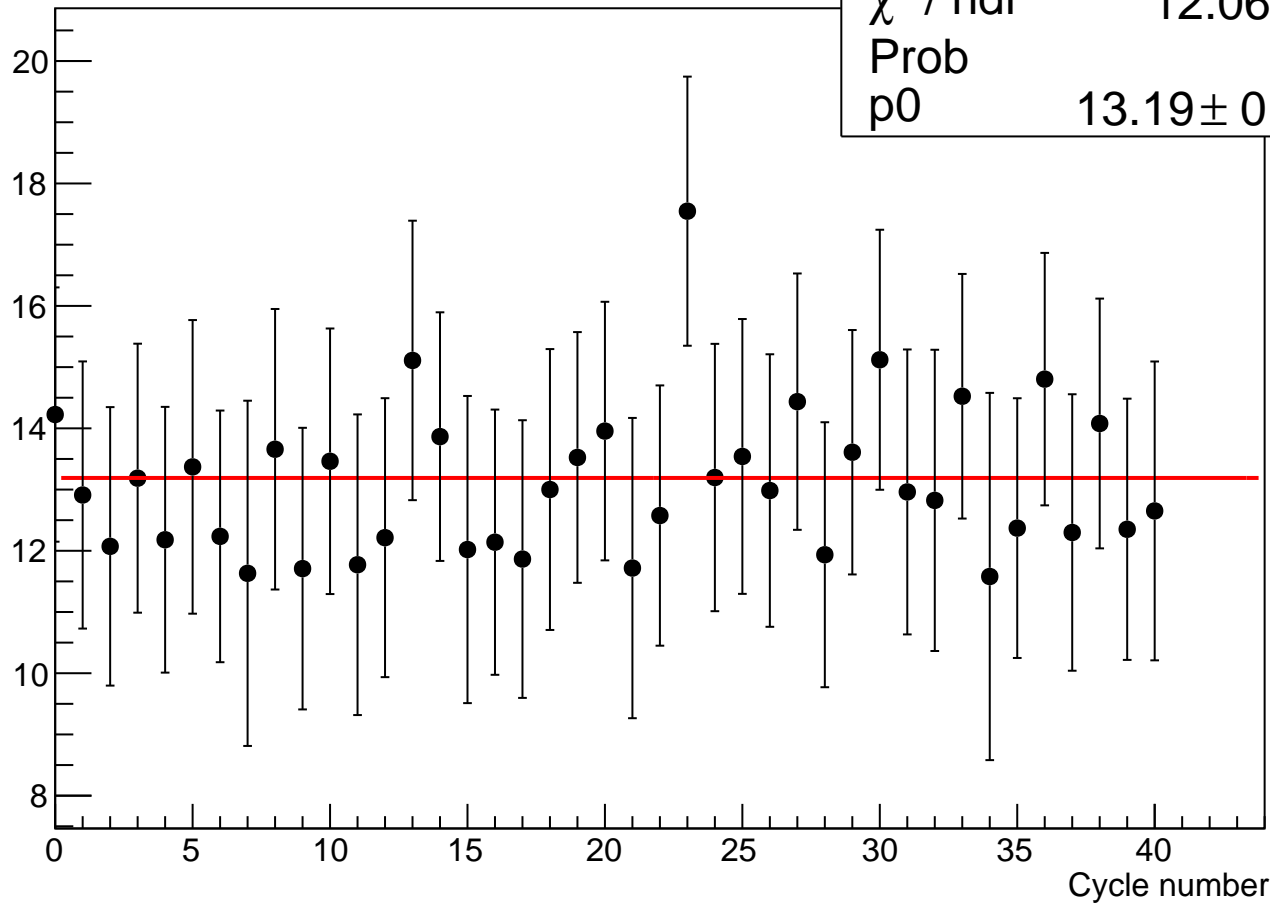


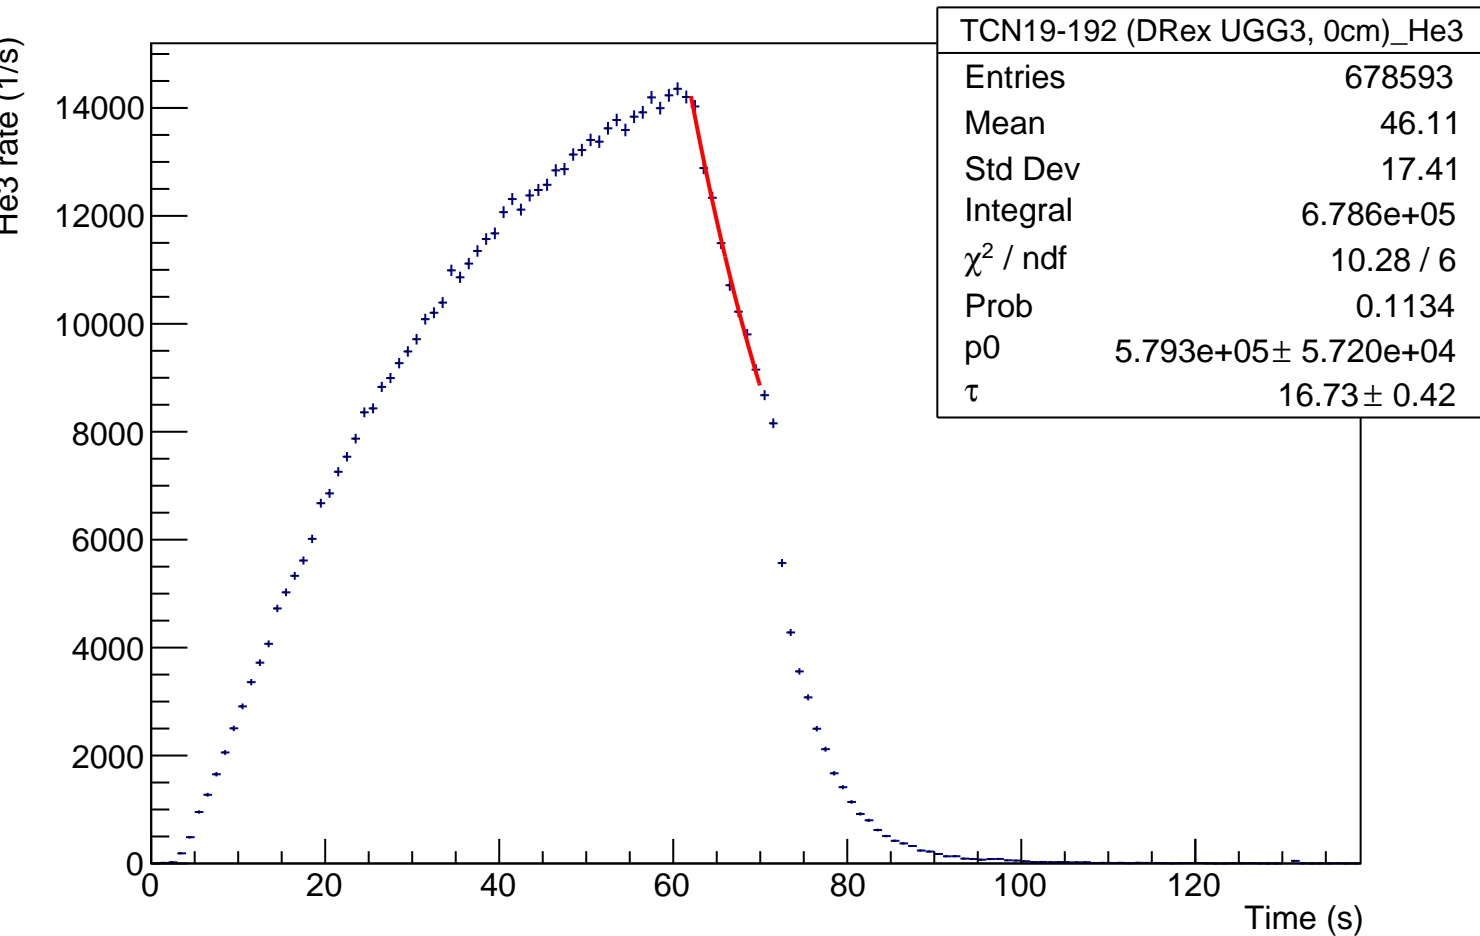

Li6 rate (1/0.05s)

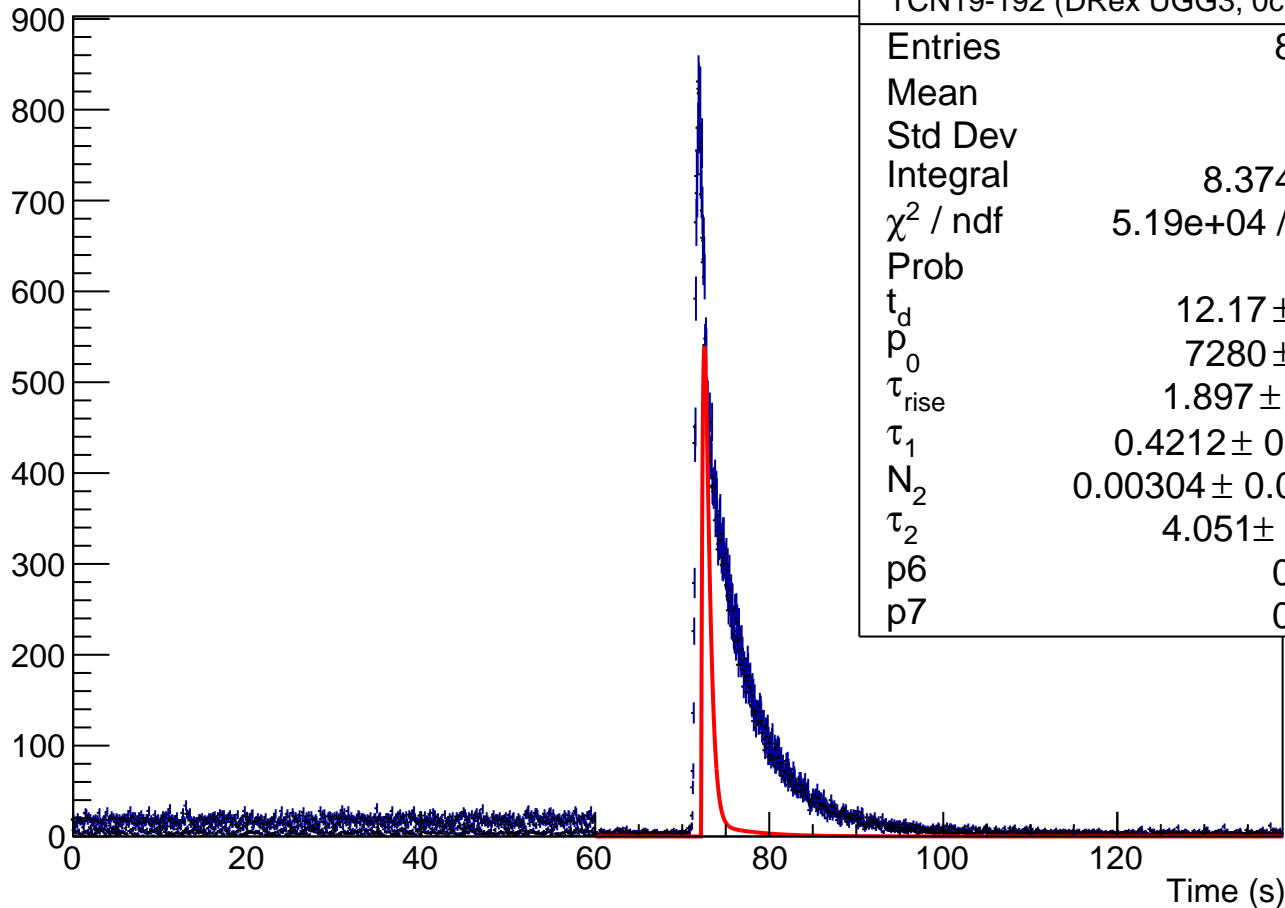


Normalized Li6 rate (1/0.05s)

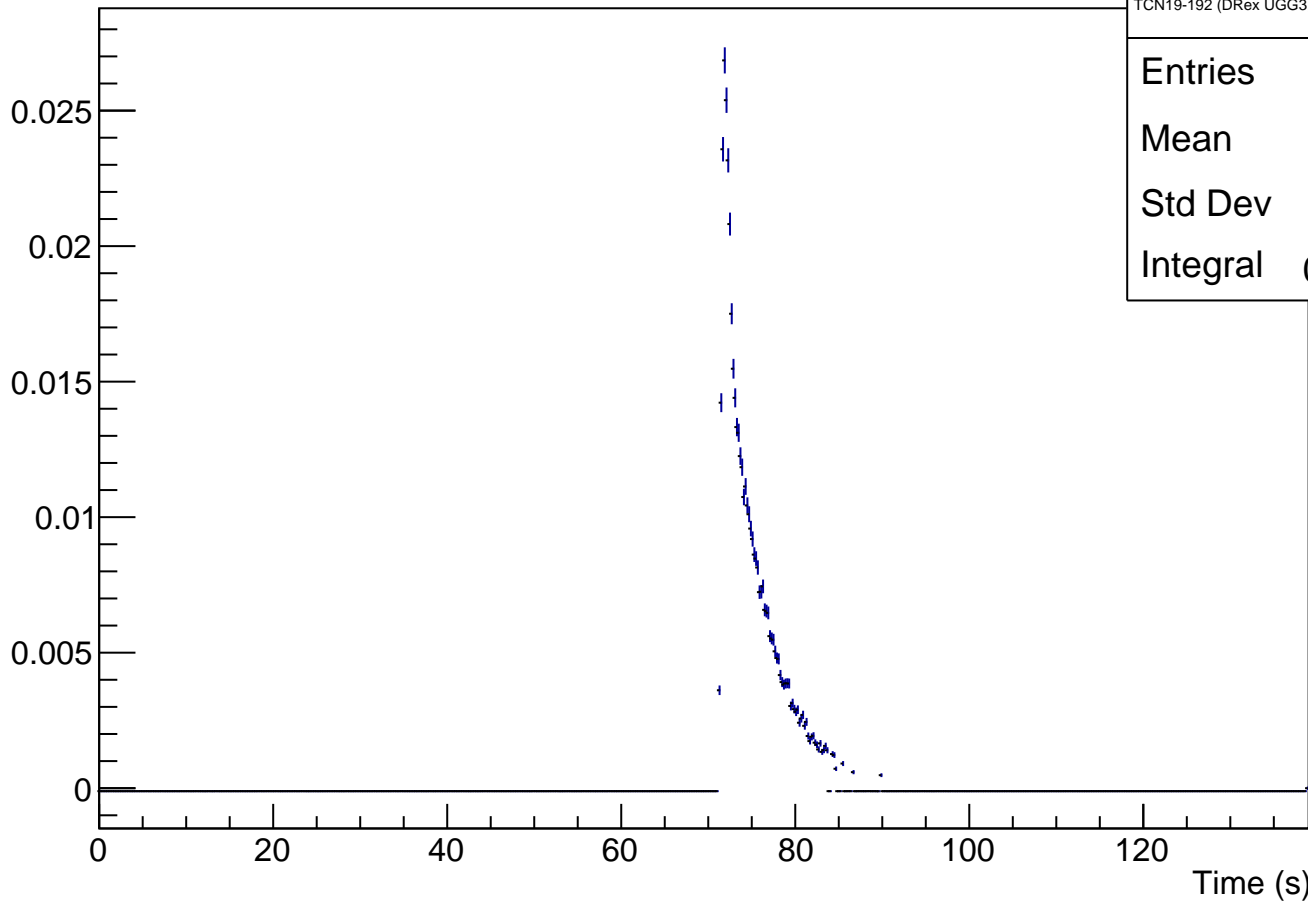


TCN19-192 (DRex UGG3, 0cm)_Li6_norm


Entries	65862
Mean	69.56
Std Dev	18.12
Integral	0.4014

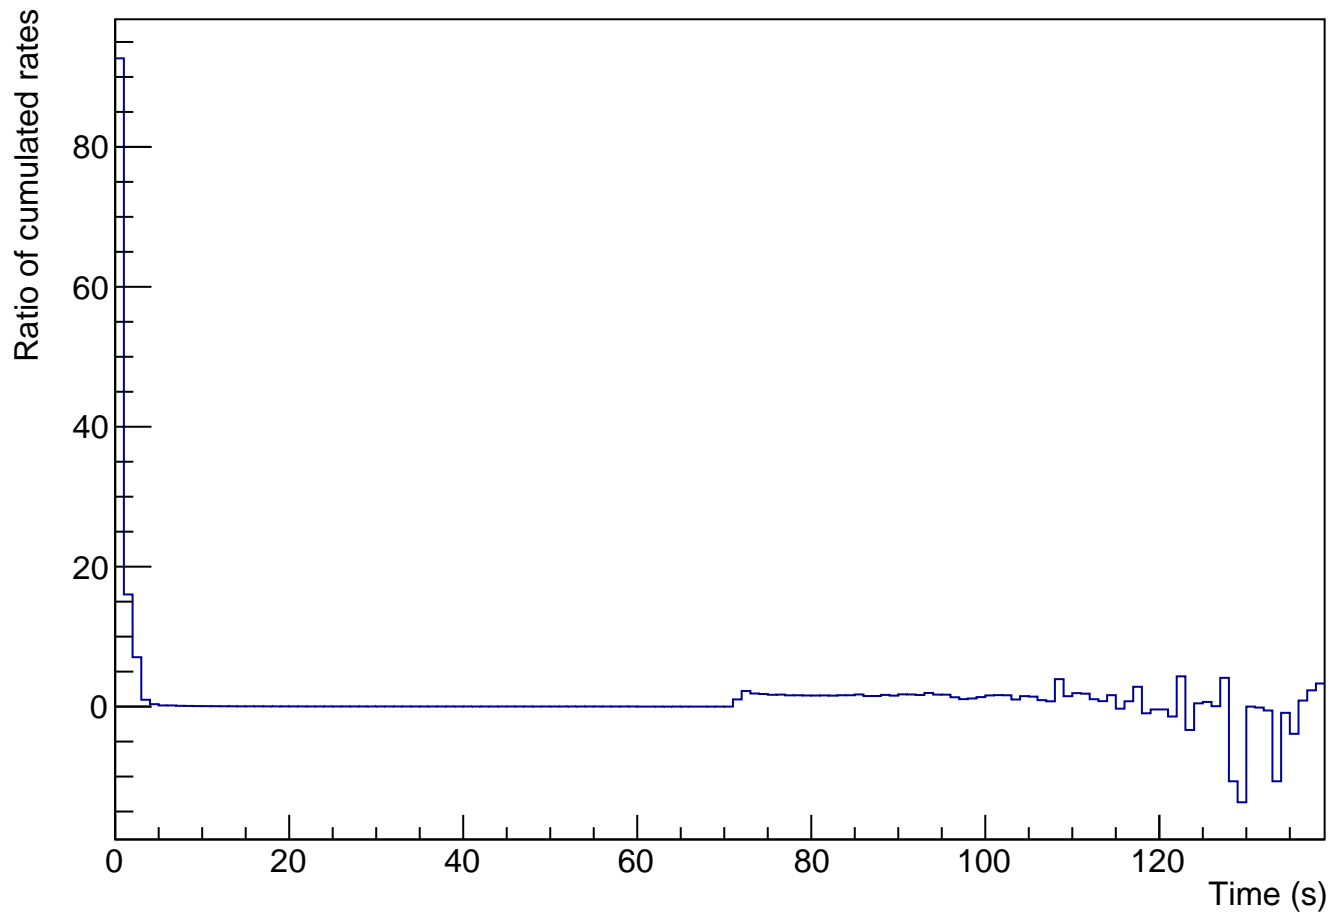

Average rate ratio

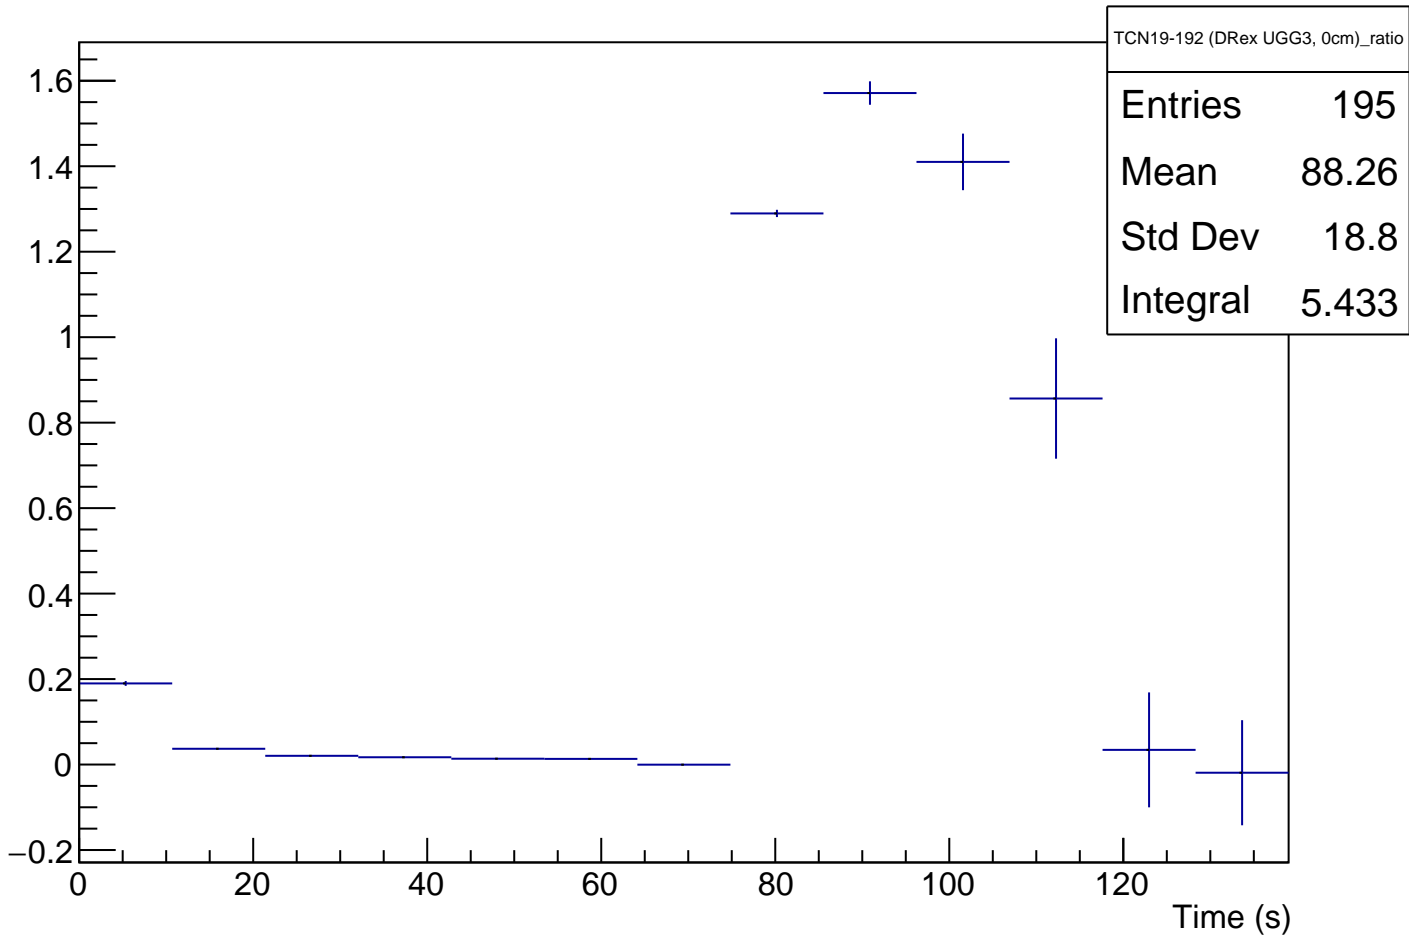

TCN19-192 (DRex UGG3, 0cm)

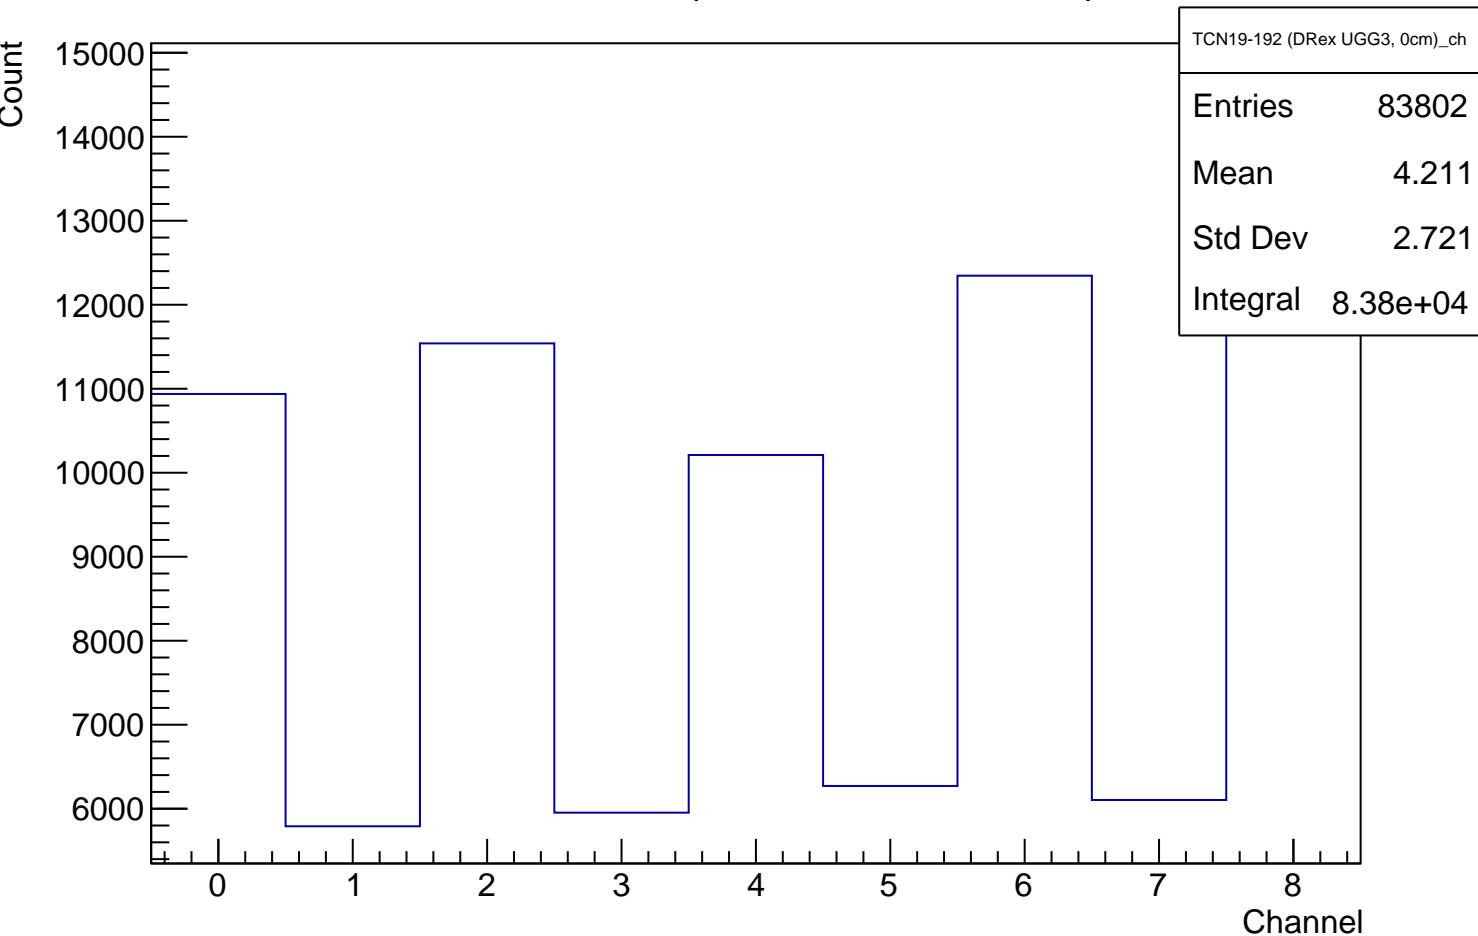

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries	41
Mean	0
Std Dev	0
Integral	0