



TCN19-010E, transmission normalized during prestorage χ^2 / ndf 34.85 / 19 UCN-count-to-monitor ratio **Prob** 0.01458 $\overline{\mathsf{R}}$ 1.627 ± 0.008021 1.75 1.7 1.65 1.6 1.55 1.5 10 12 14 16 18 20 Cycle


Graph

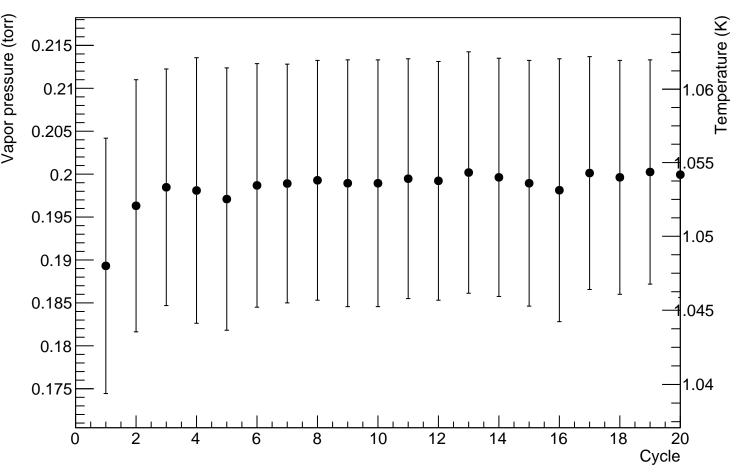


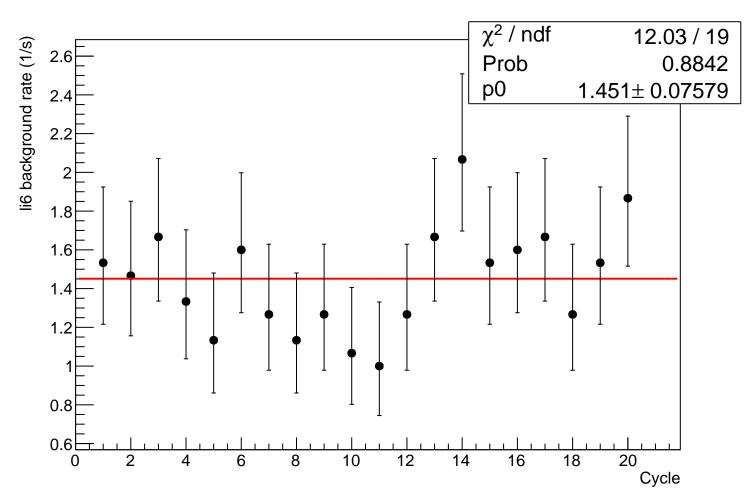


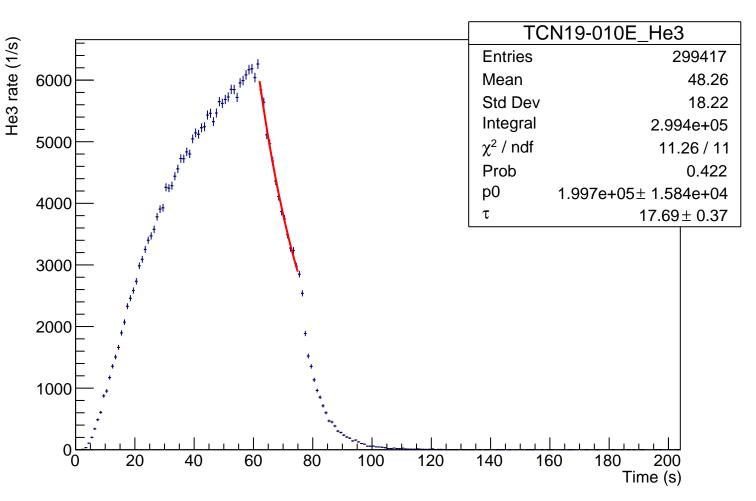

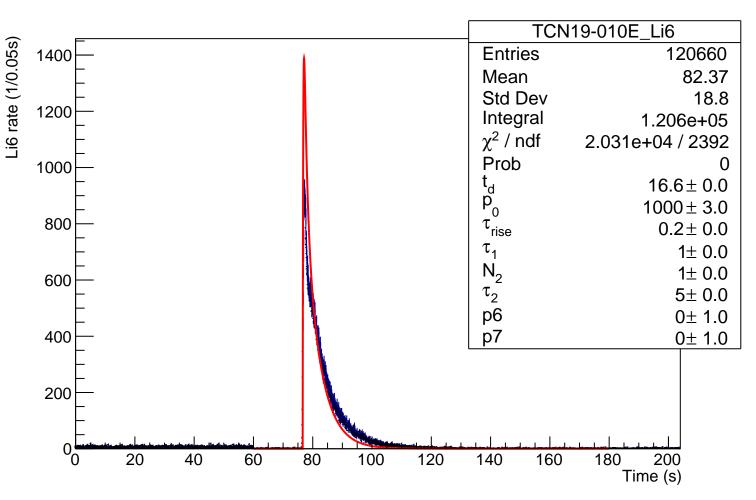

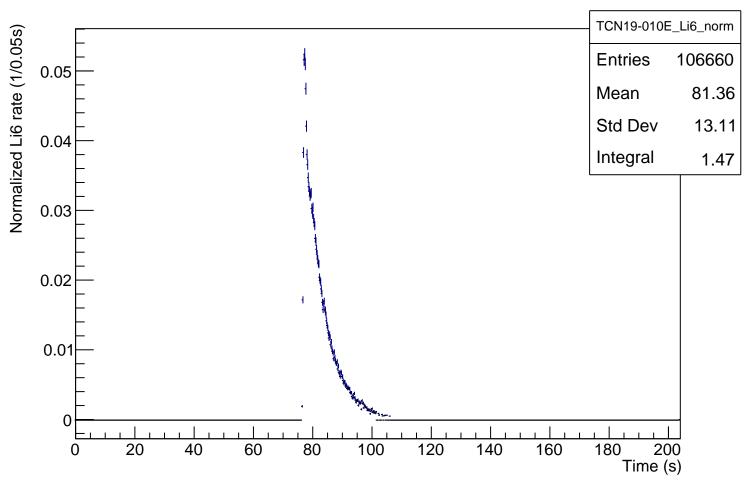

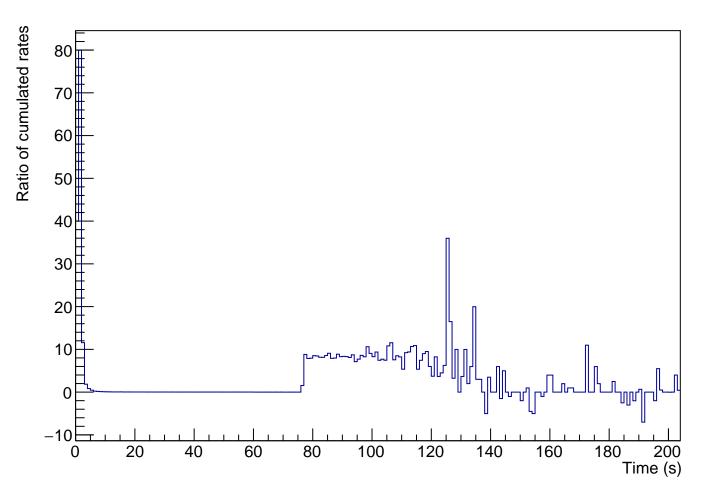

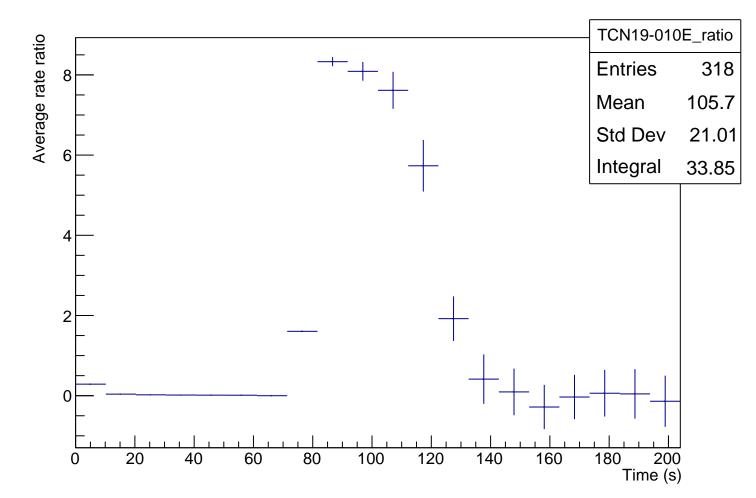

TCN19-010E_ch 20000 **Entries** 120660 18000 3.733 Mean 16000 Std Dev 2.569 Integral 1.207e+05 14000 12000 10000 8000 6000 4000 2000 10 Channel

TCN19-010E

Li6 window li6window Frequency **Entries** 20 Mean Std Dev 0 8.0 Integral 0.6 0.4 0.2 0, 3.5 4 4.5 5 Time after valve opened (s) 1.5 2.5 0.5