





TCN19-193 (DRex Cu, 10cm), transmission normalized during prestorage

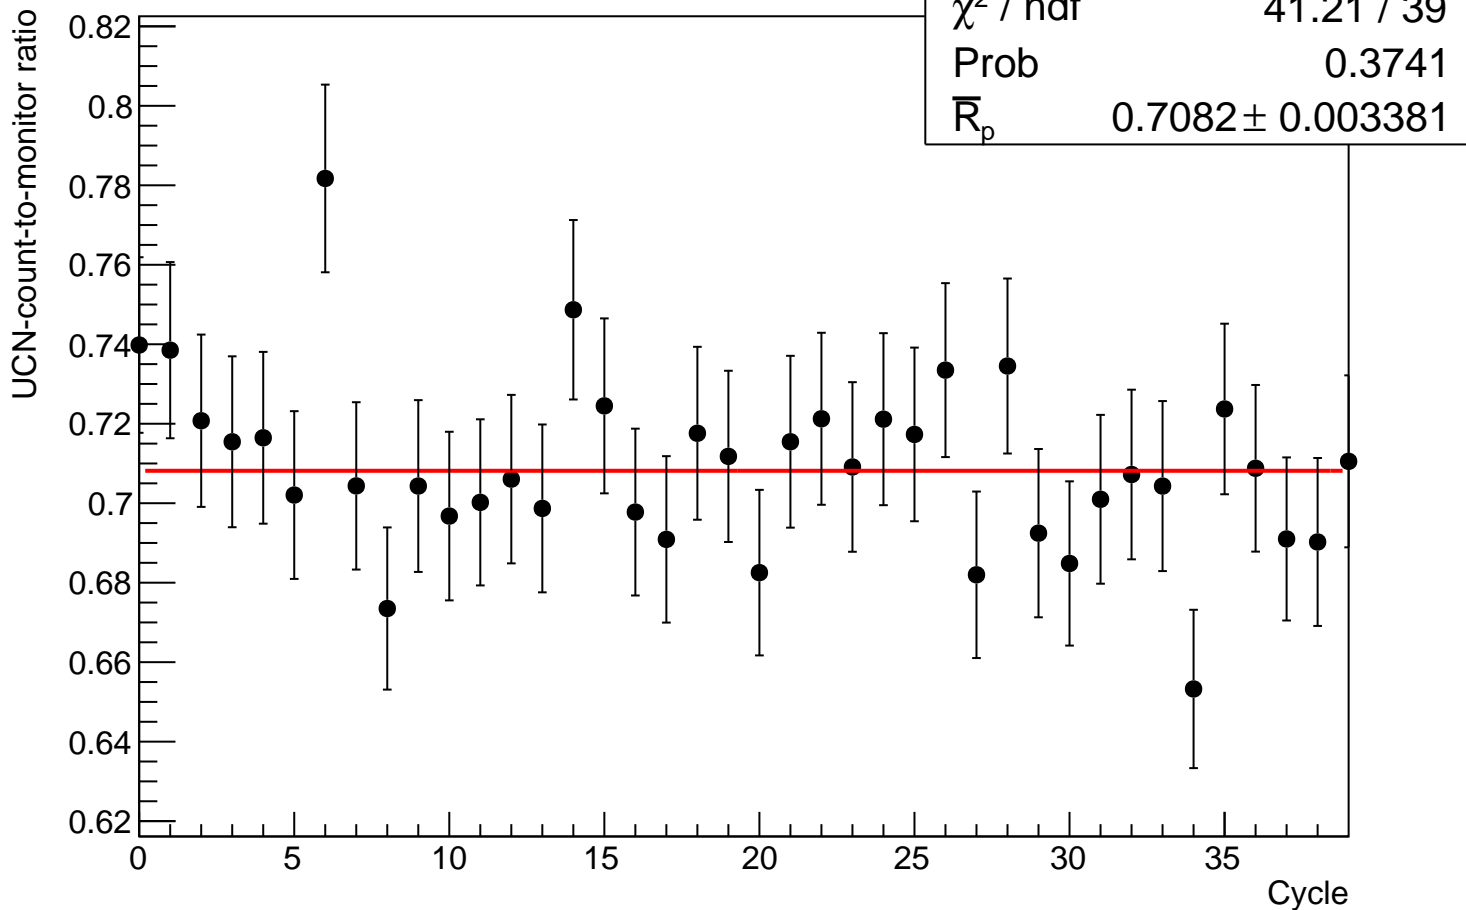

Graph

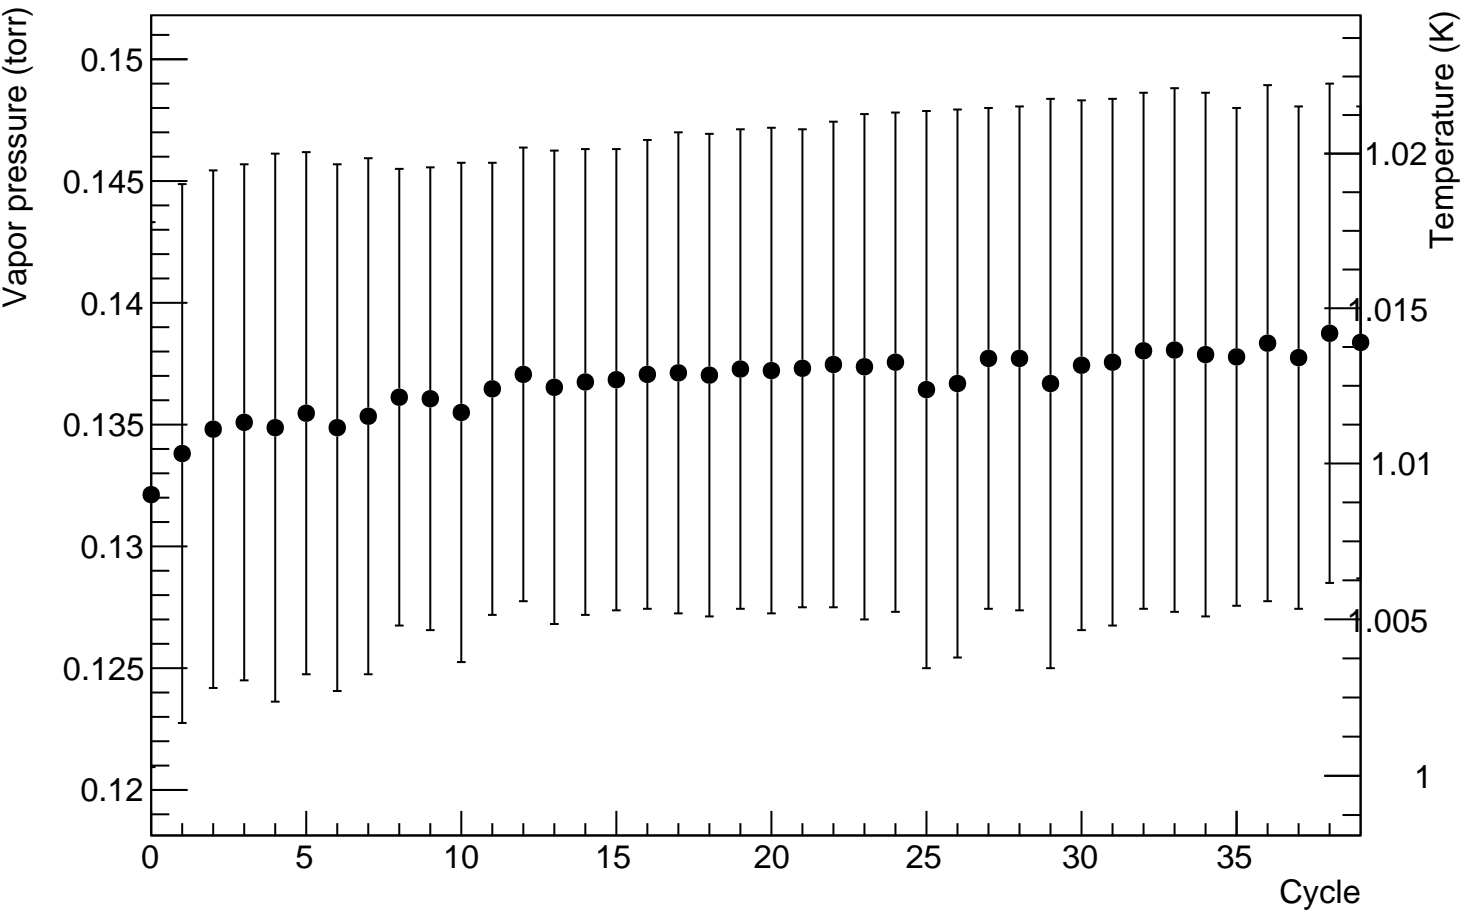

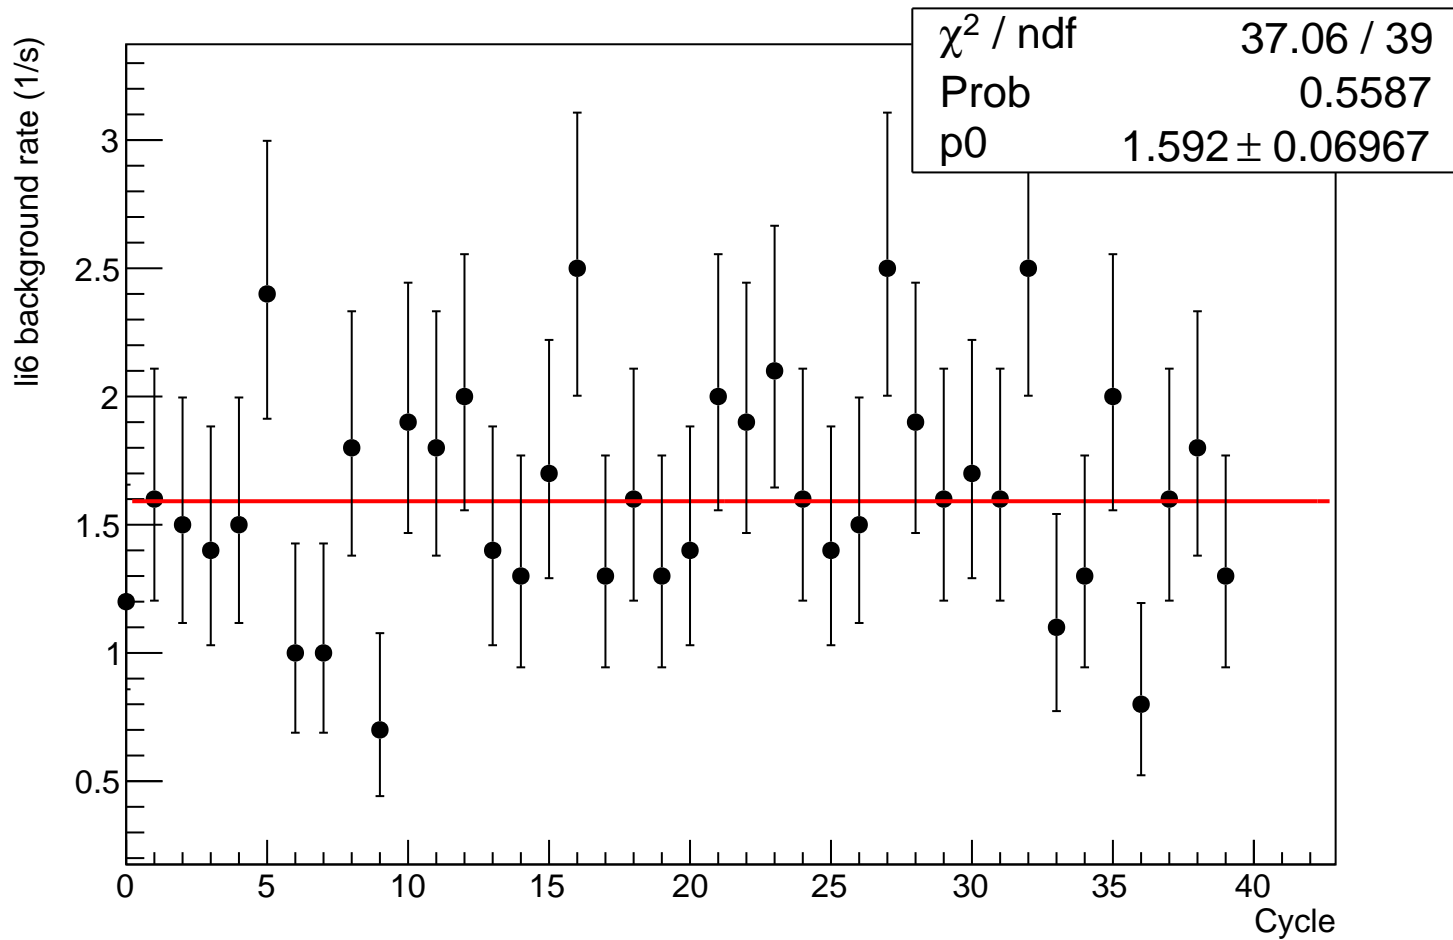

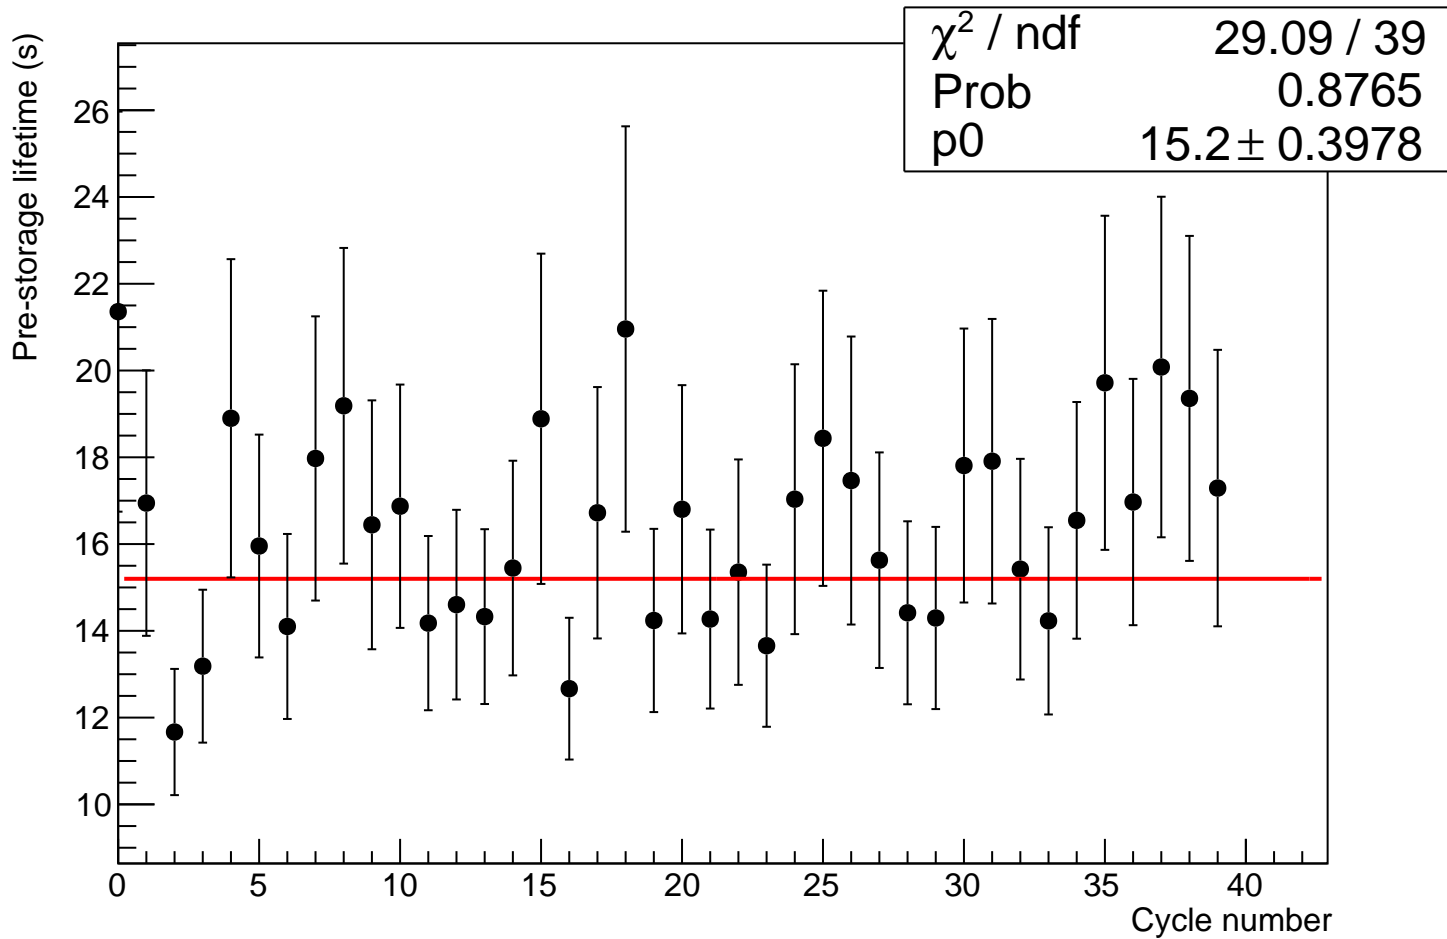

Corrected Li6-He3 ratio

χ^2 / ndf


10.98 / 39


Prob

1


p0

17.73 ± 0.4695

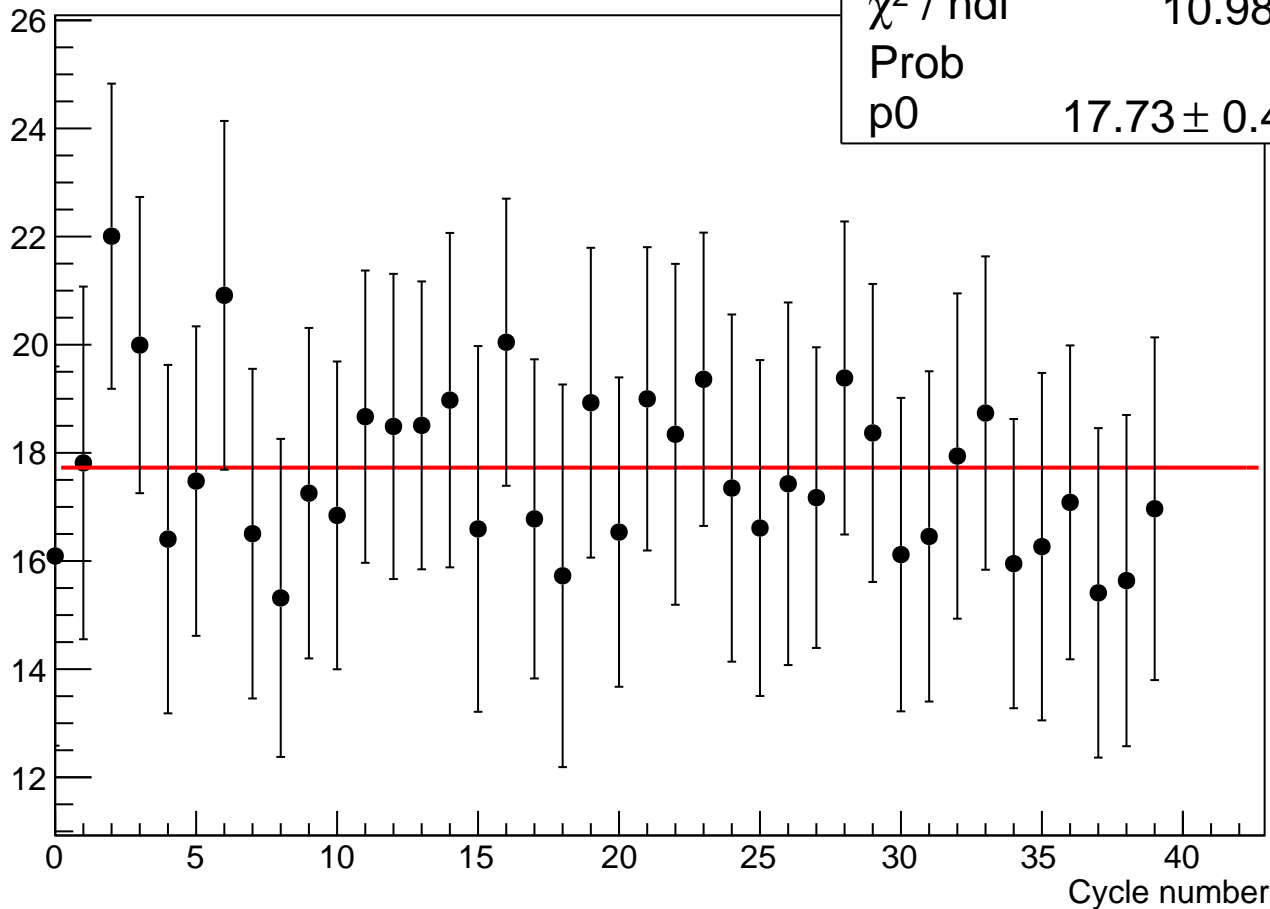


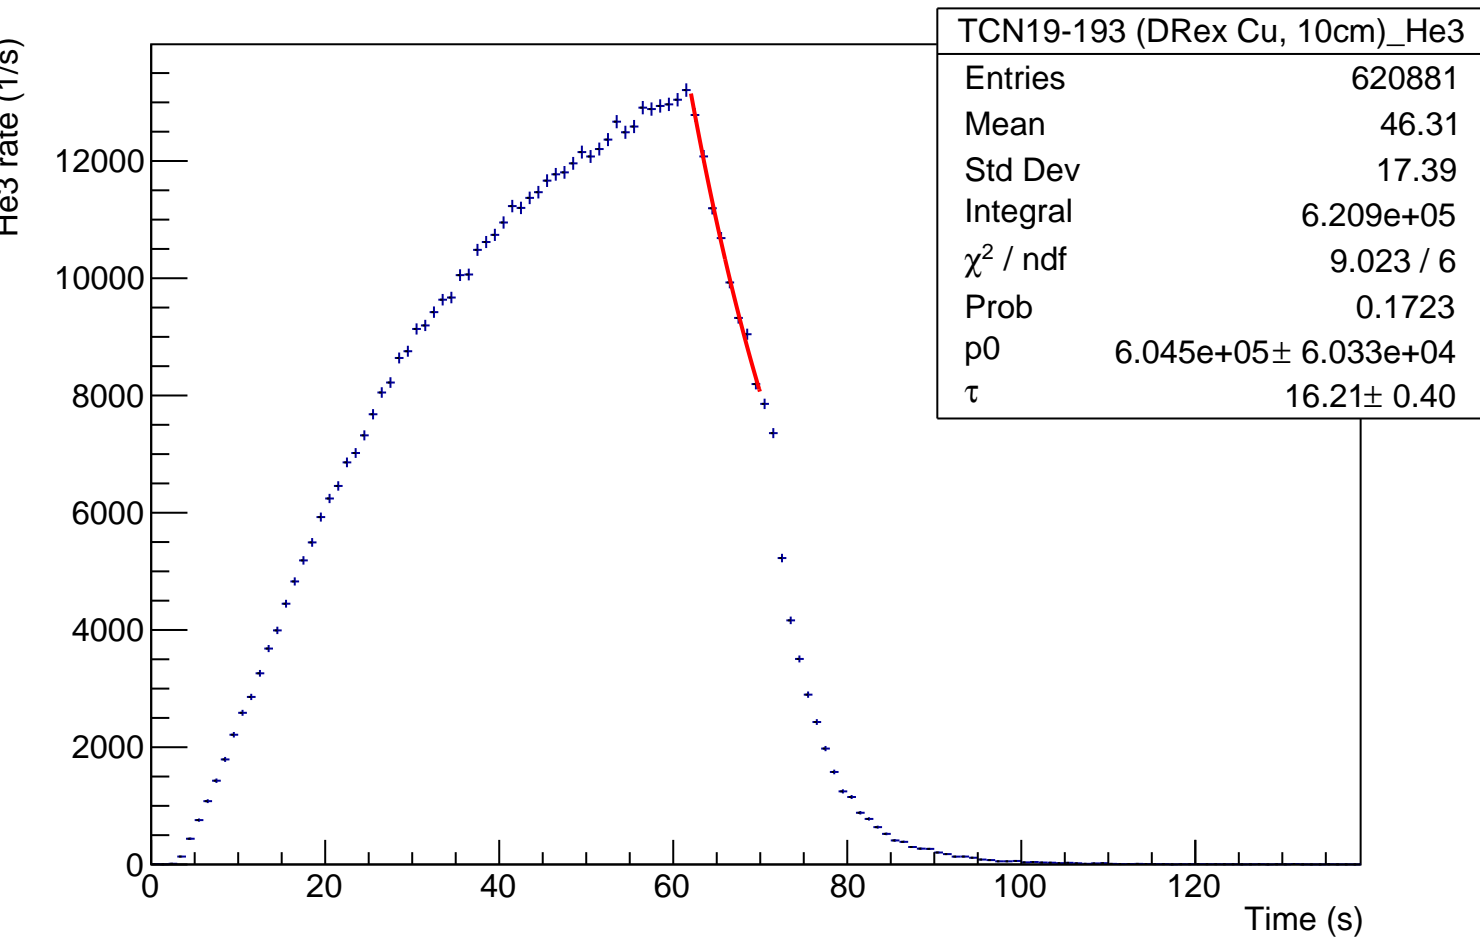

Li6 rate (1/0.05s)

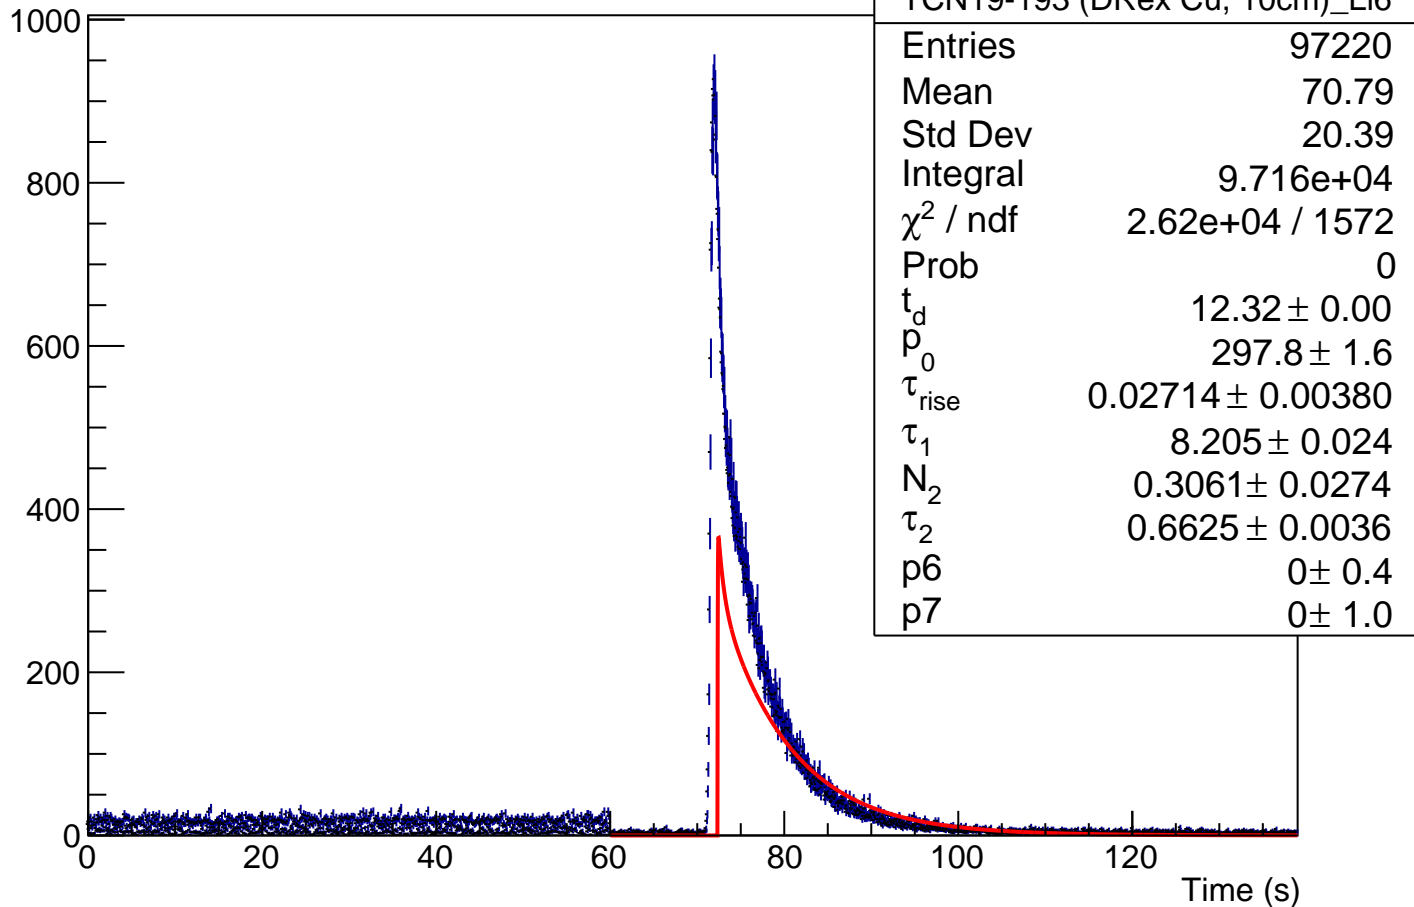


Normalized Li6 rate (1/0.05s)

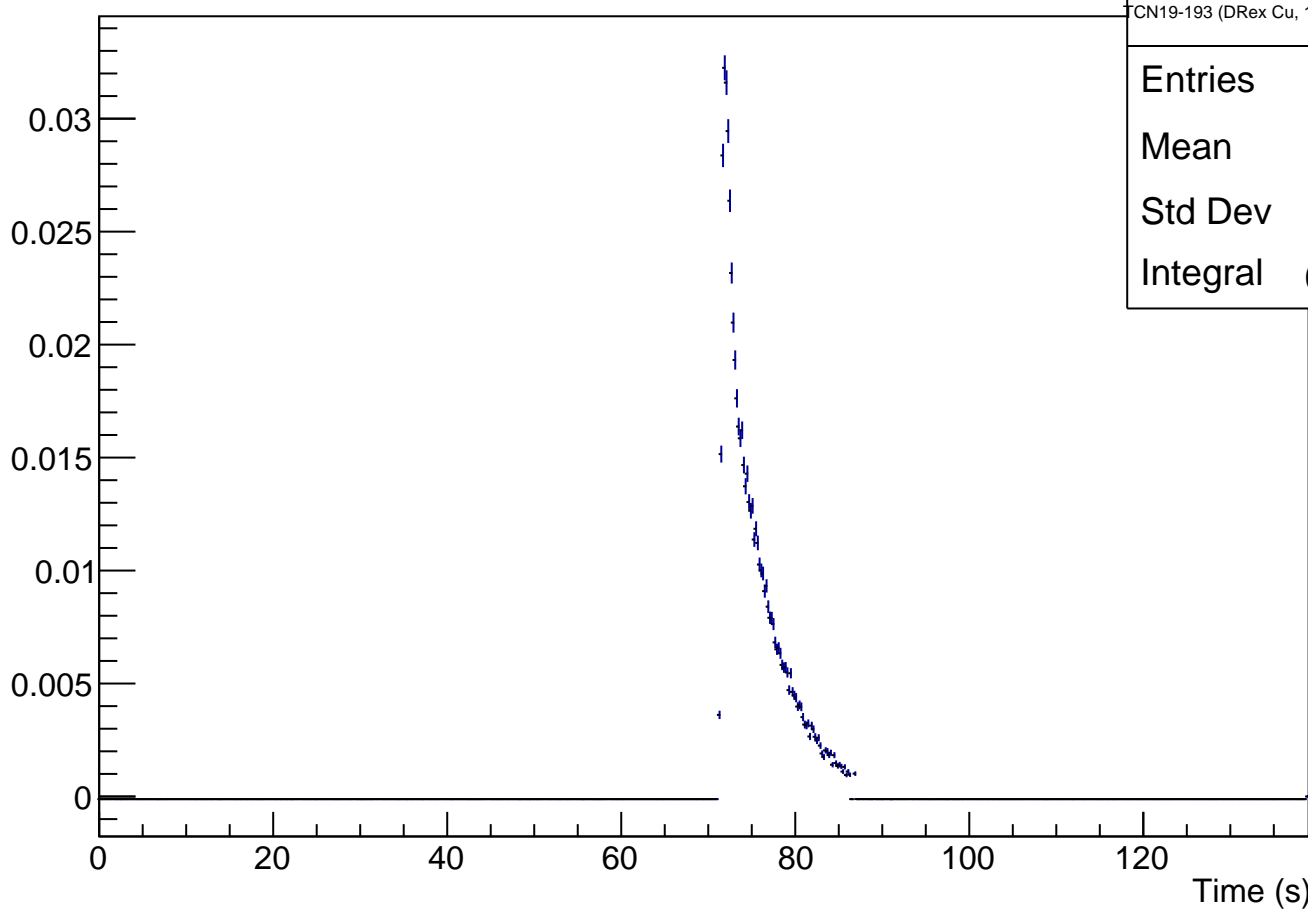


CN19-193 (DRex Cu, 10cm)_Li6_norm


Entries	79310
Mean	70.92
Std Dev	17.2
Integral	0.5639

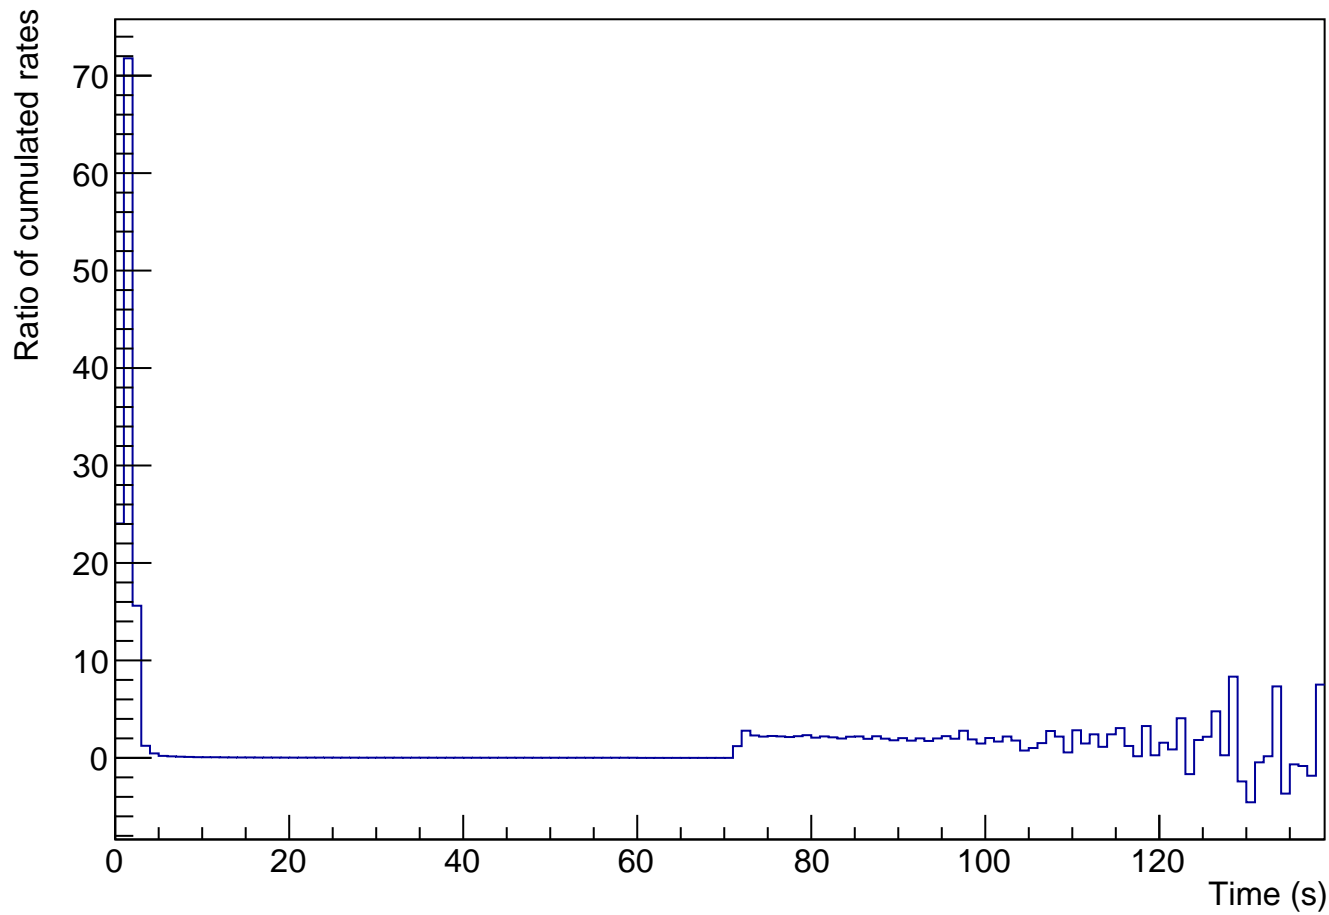

Average rate ratio

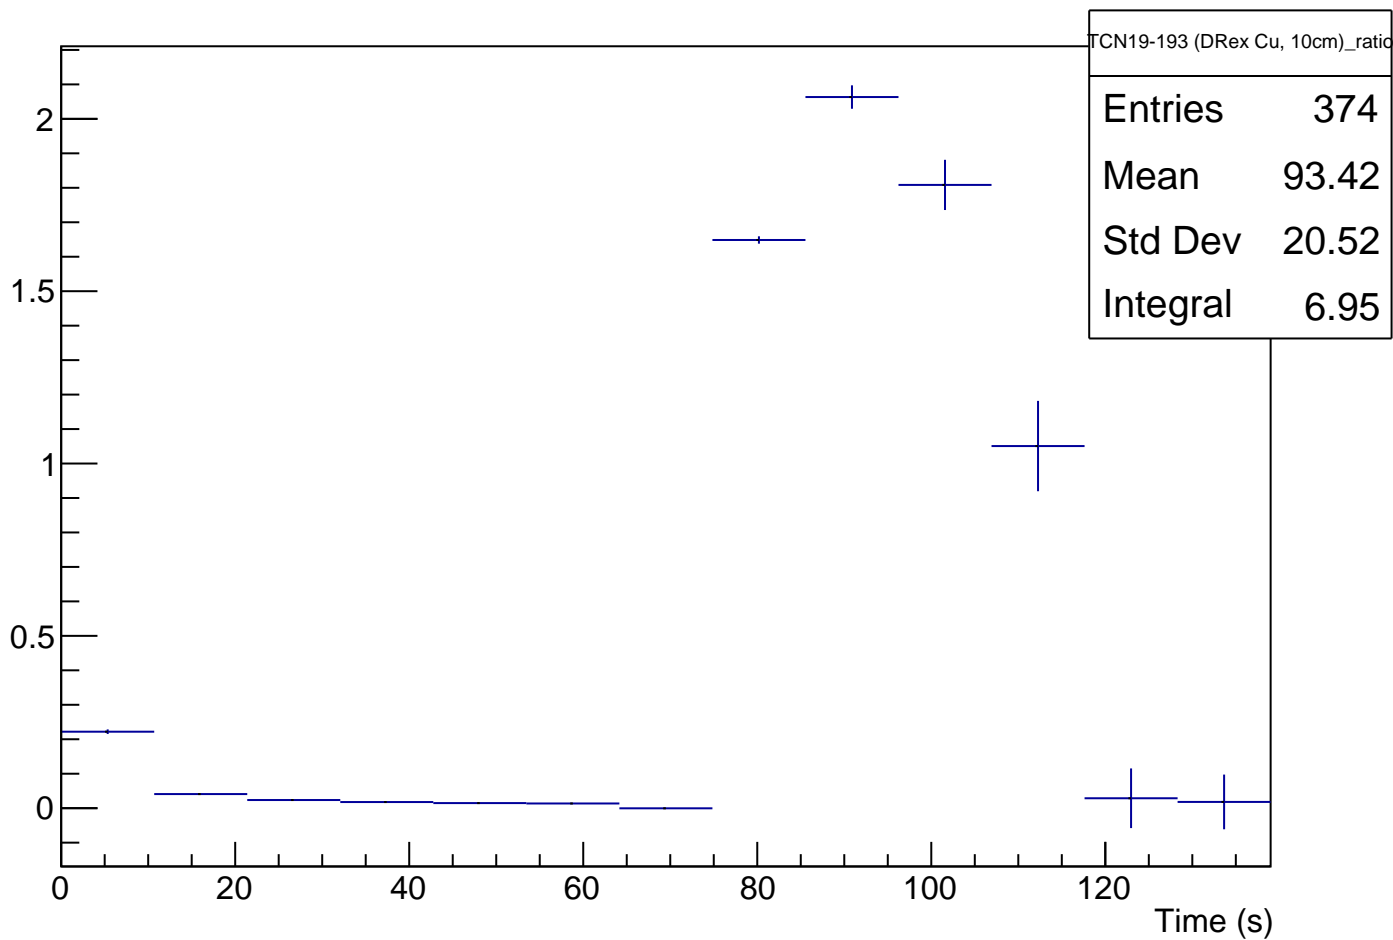

TCN19-193 (DRex Cu, 10cm)

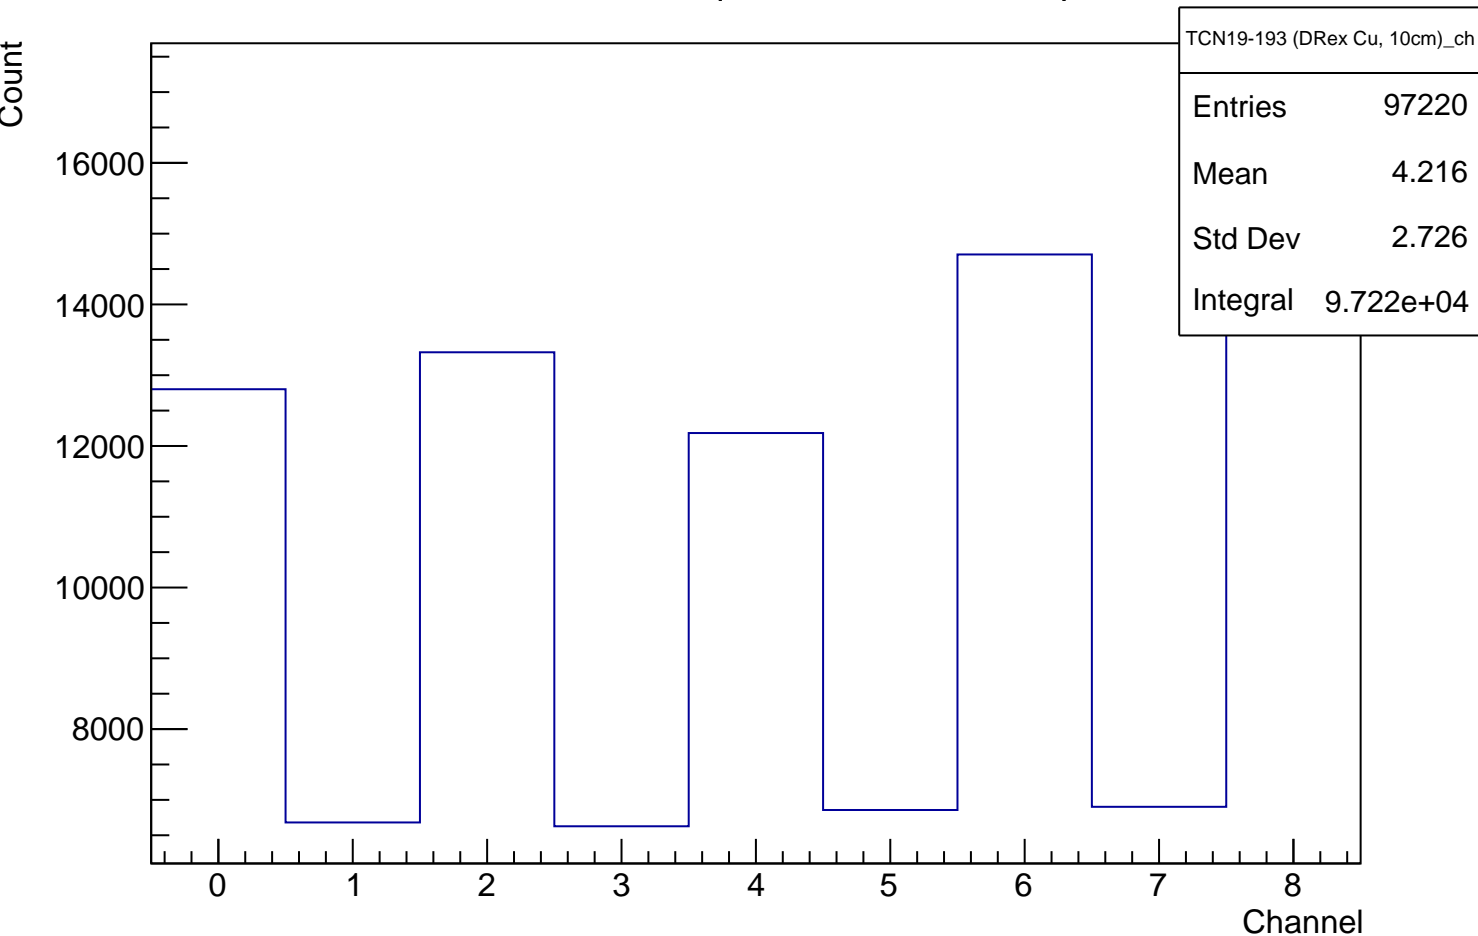

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 40

Mean 0

Std Dev 0

Integral 0