



TCN19-193 (DRex Cu, 60cm), transmission normalized during prestorage χ^2 / ndf 32.68 / 43 UCN-count-to-monitor ratio Prob 0.8737 $\overline{\mathsf{R}}_{\mathsf{p}}$ 0.8267 ± 0.003571 88.0 0.86 0.84 0.82 8.0 0.78 0.76 0.74 25 Cycle 10 15 20


Graph

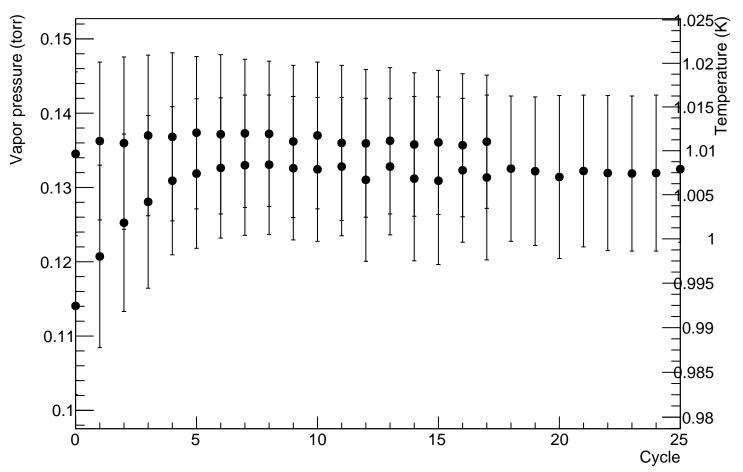


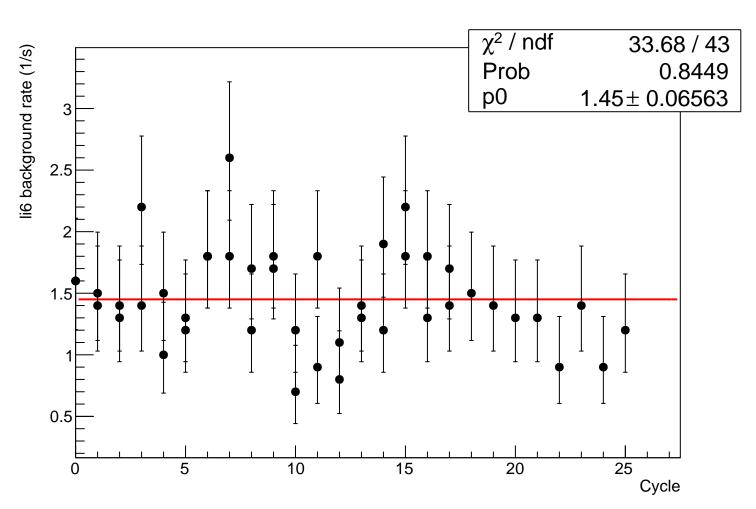


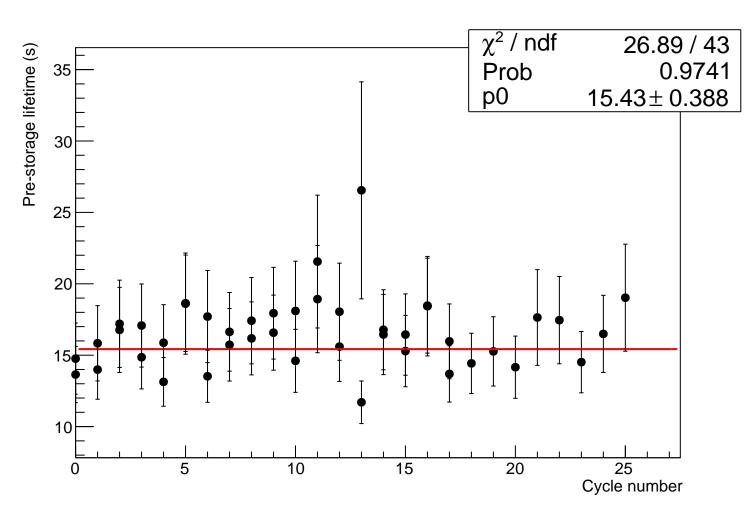


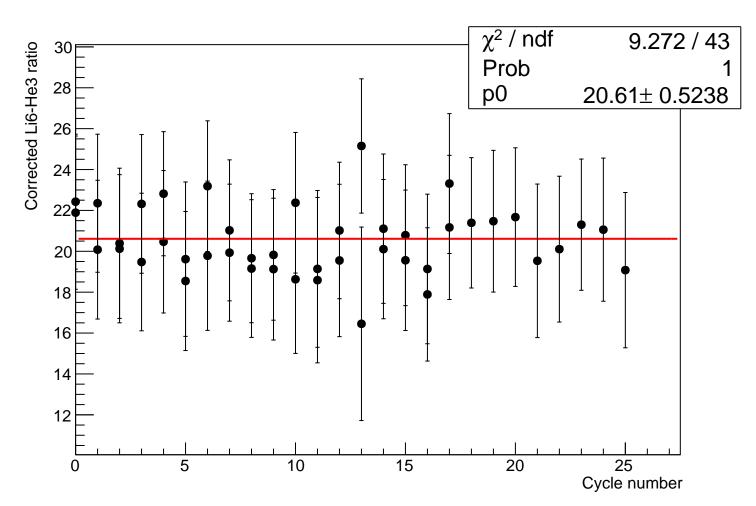


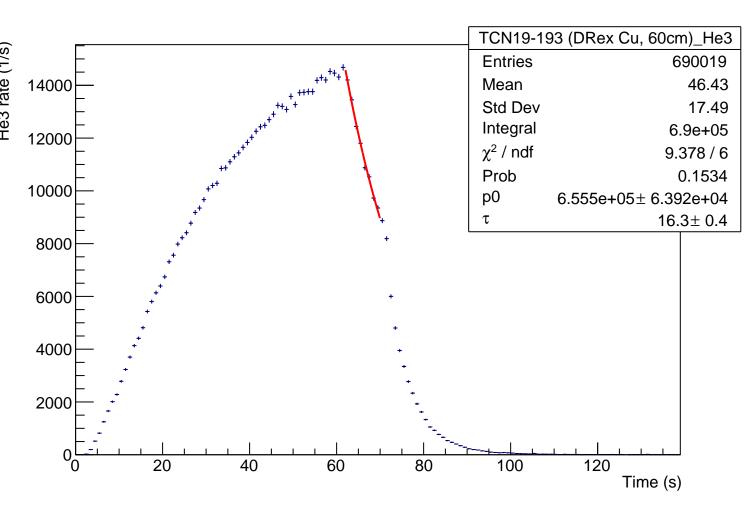

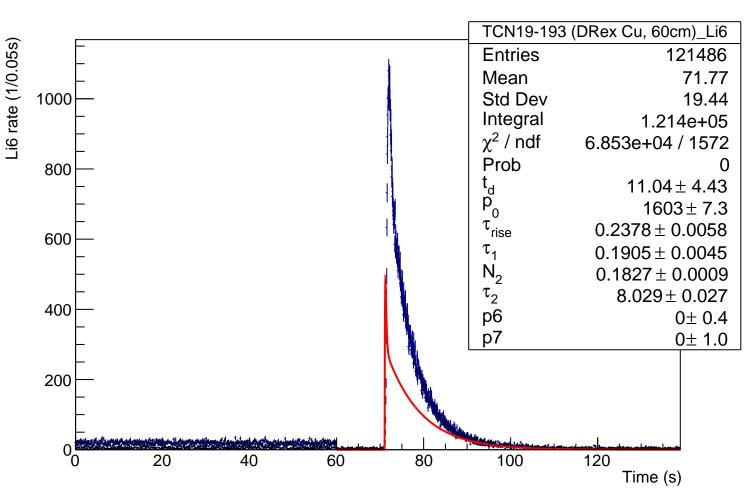


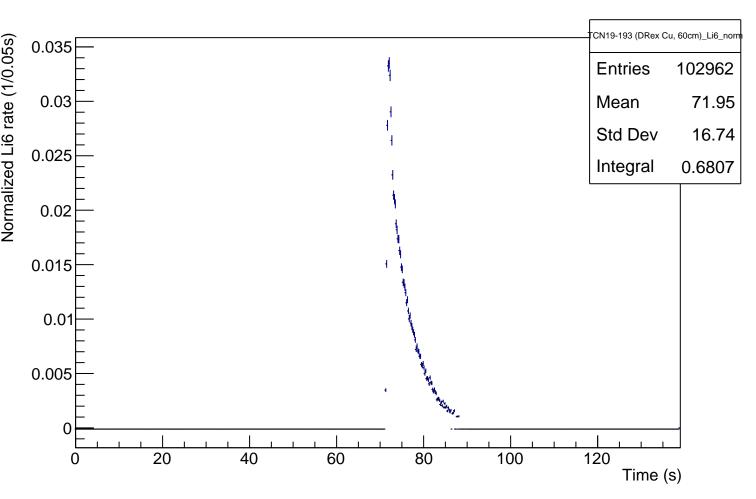

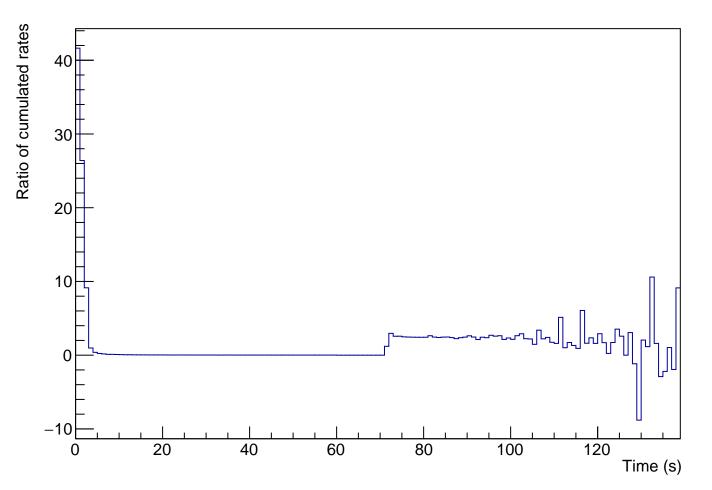

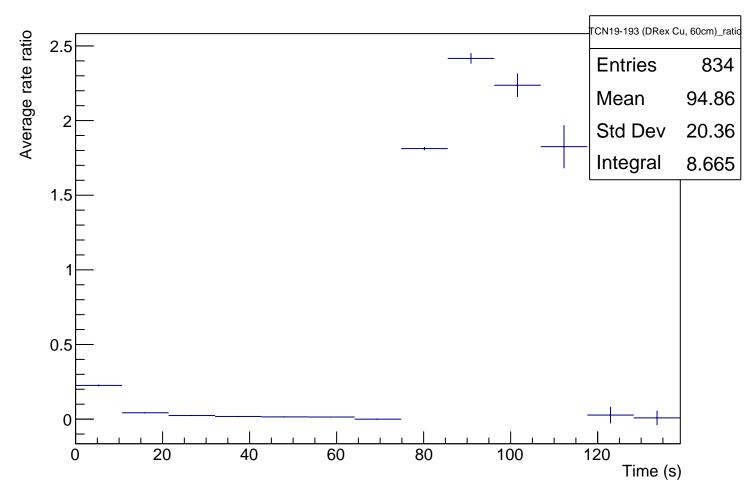

TCN19-193 (DRex Cu, 60cm)

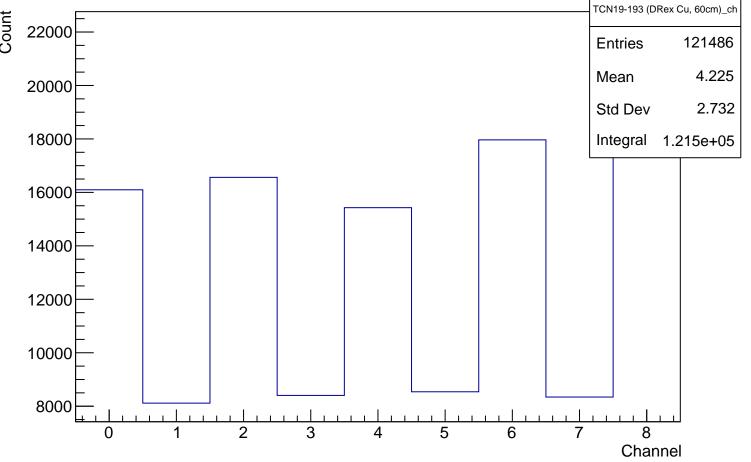

Li6 window li6window Frequency **Entries** 44 Mean Std Dev 0 8.0 Integral 0.6 0.4 0.2 0, 3.5 4 4.5 5 Time after valve opened (s) 1.5 2.5 0.5