





# TCN19-010D, transmission normalized during prestorage

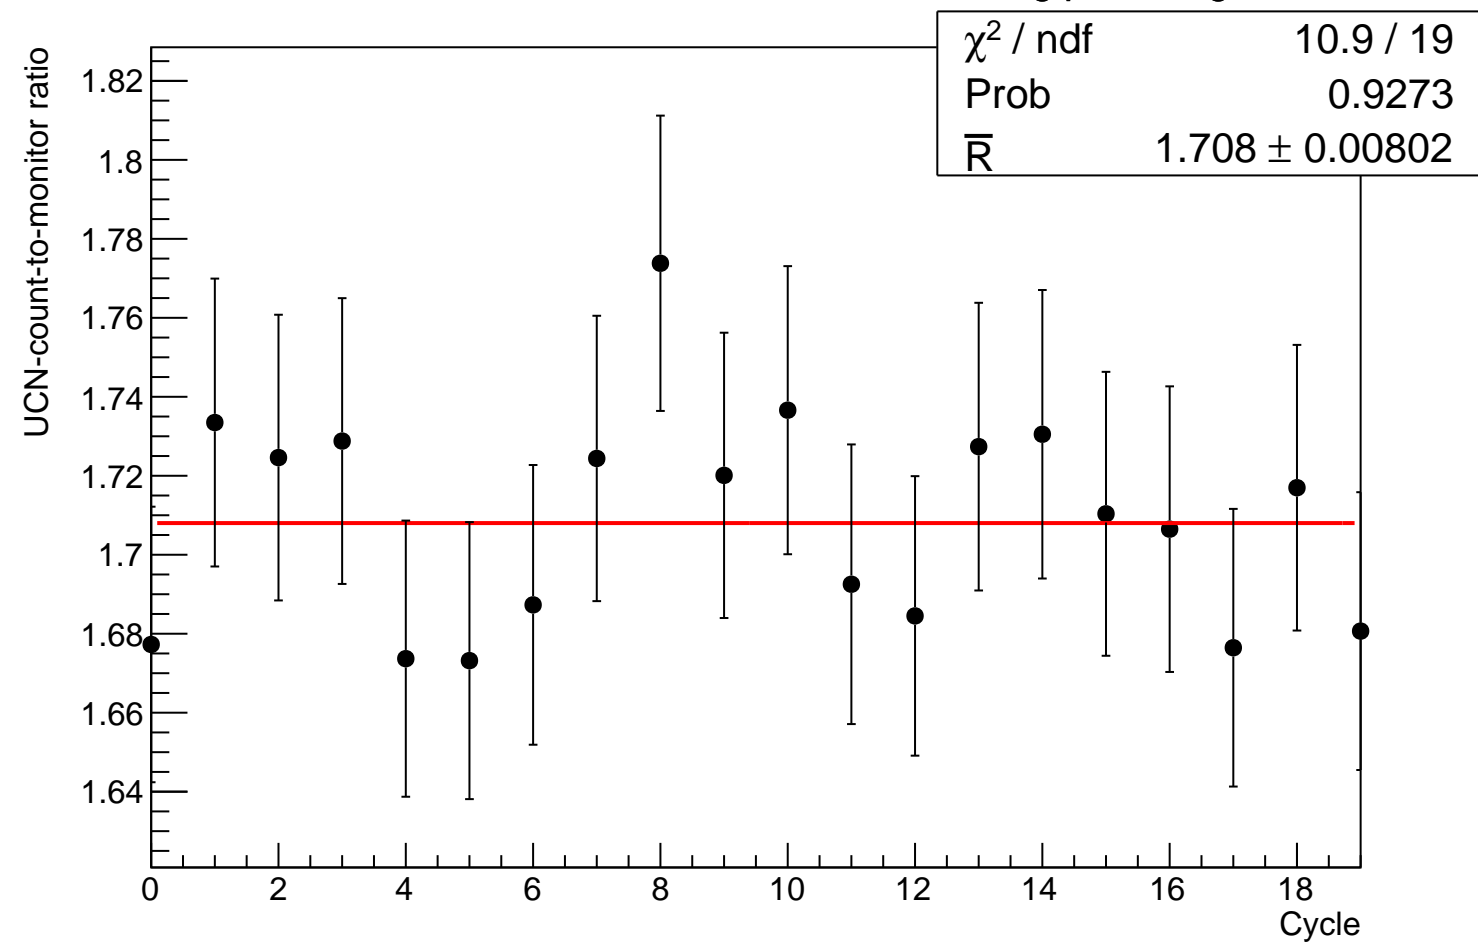


# Graph

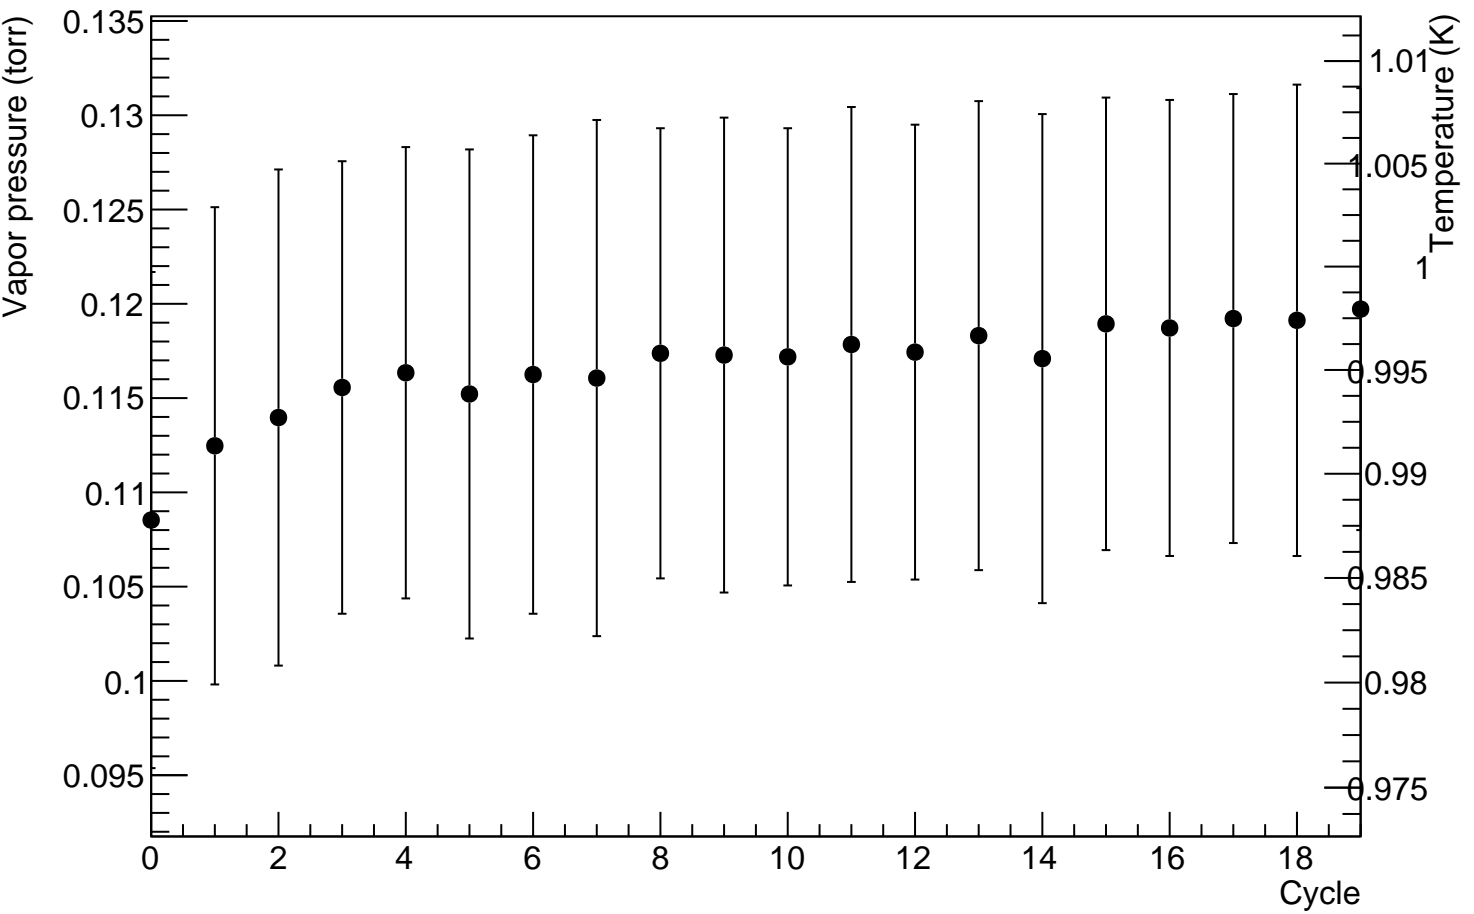

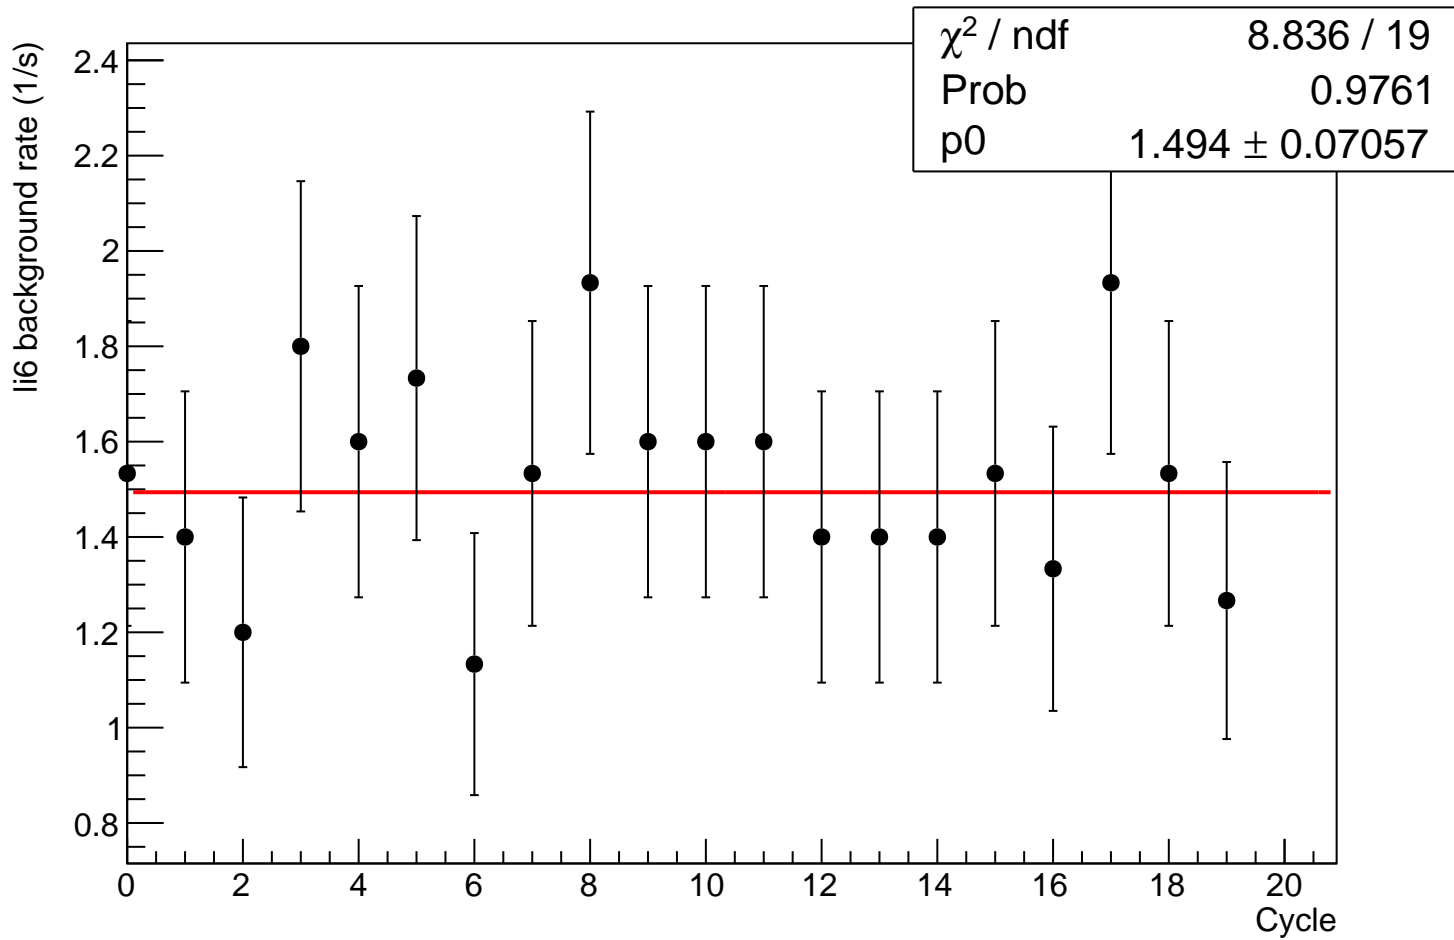


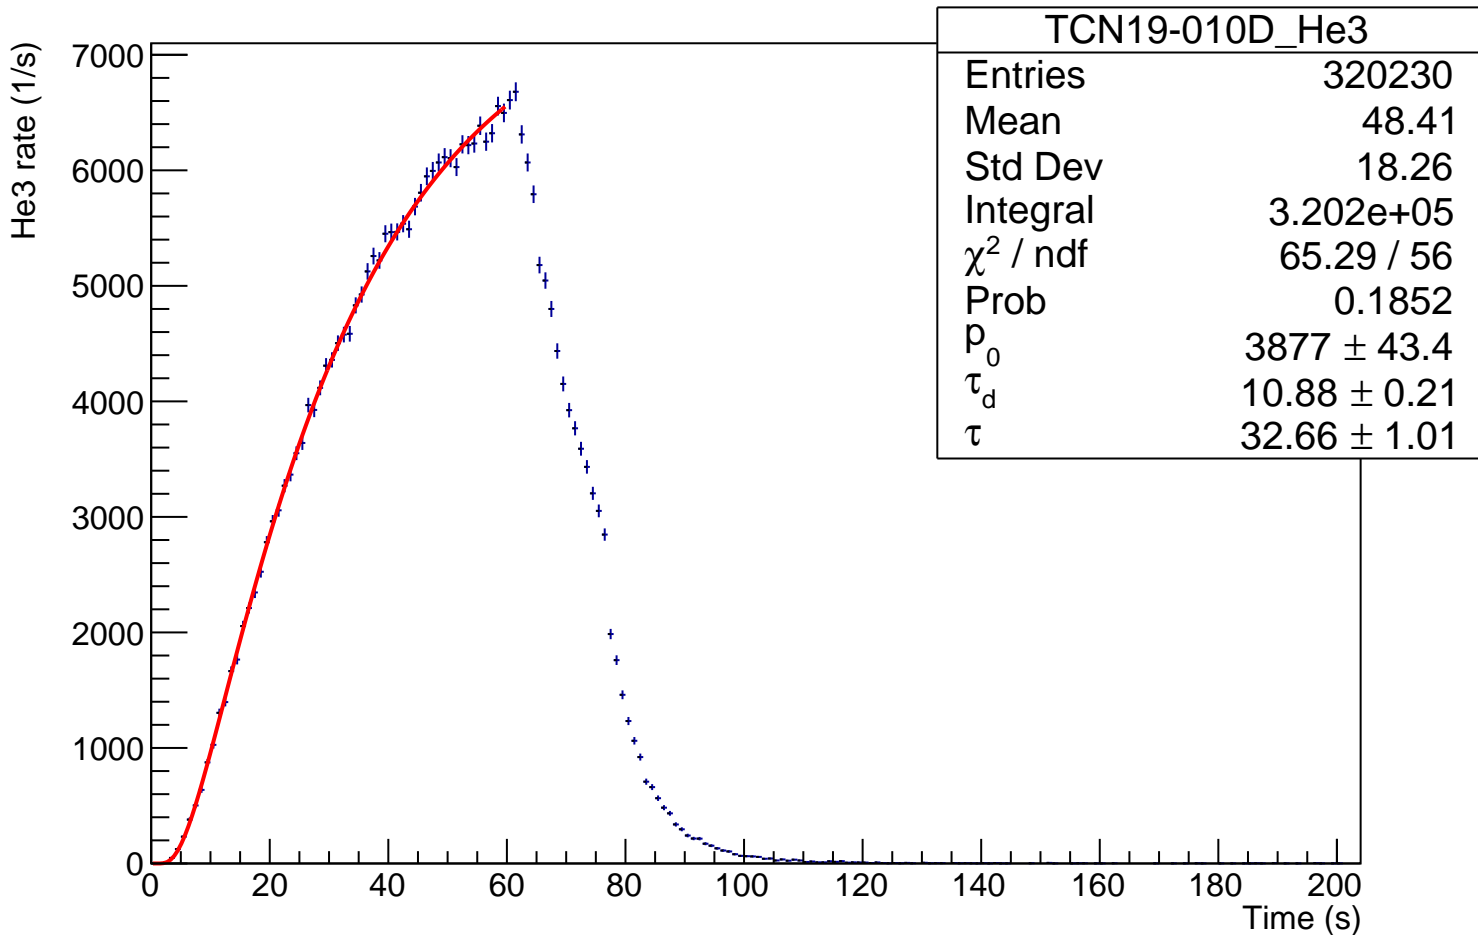

Li6 rate (1/0.05s)

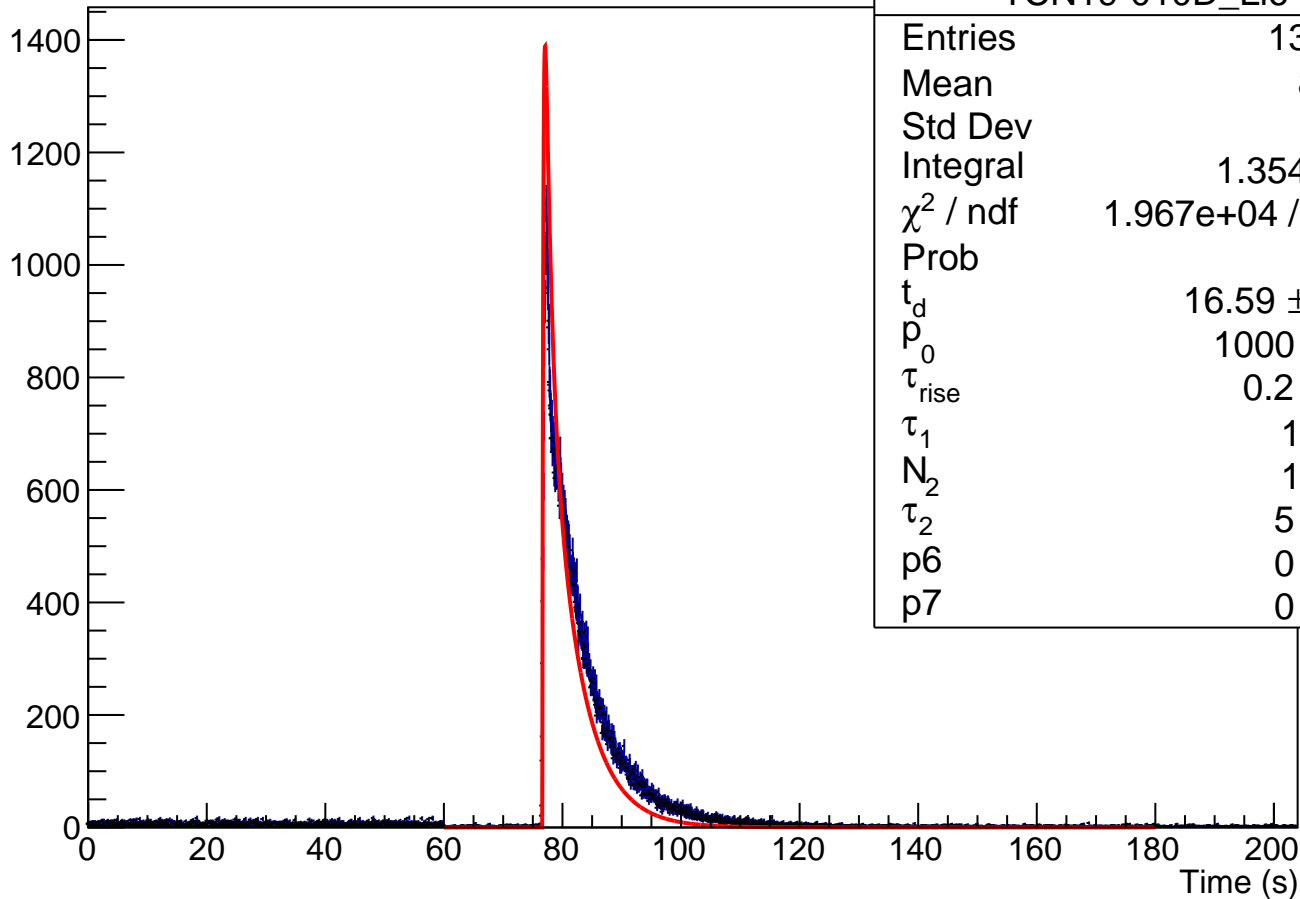

Normalized Li6 rate (1/0.05s)

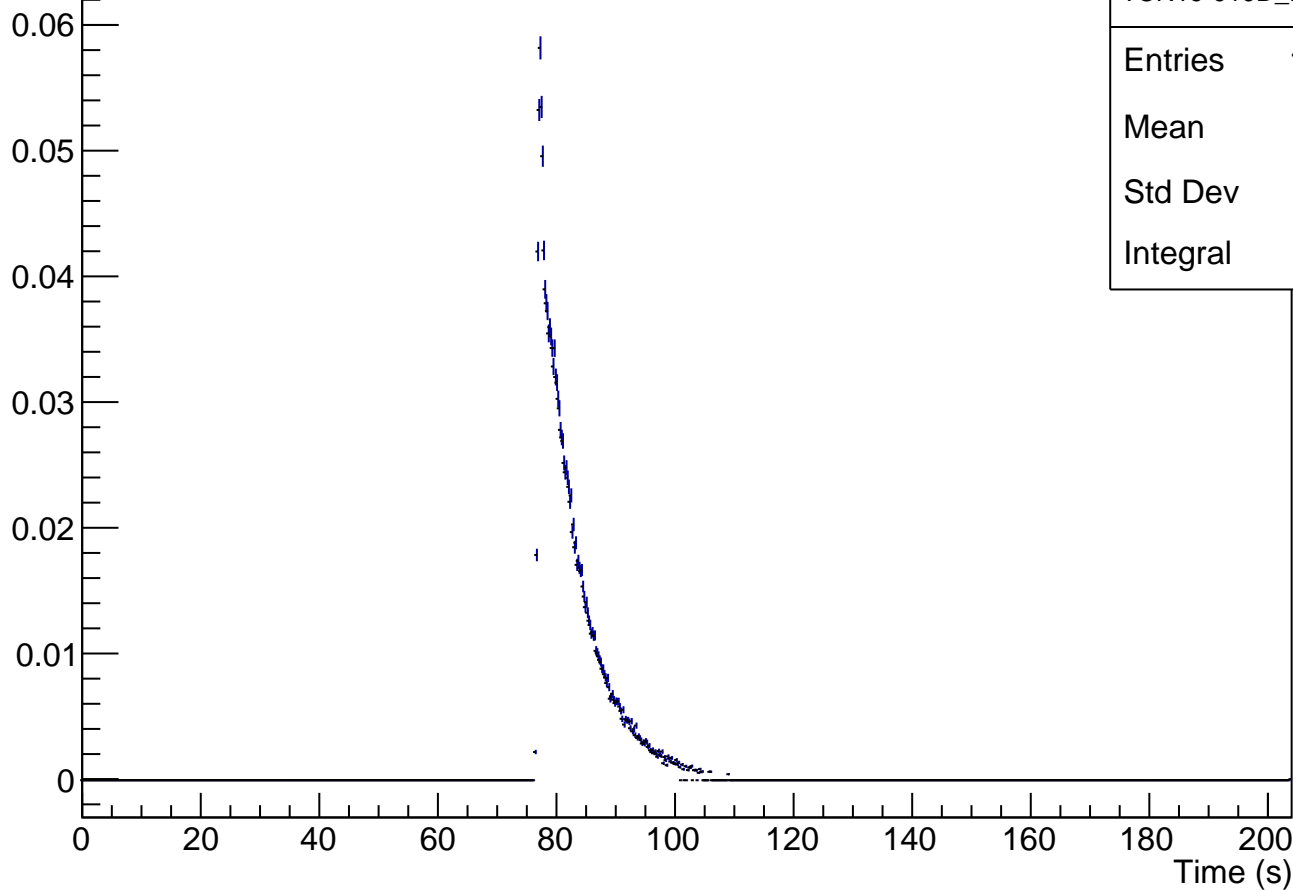


TCN19-010D\_Li6\_norm

Entries 120587

Mean 81.56


Std Dev 12.63

Integral 1.559

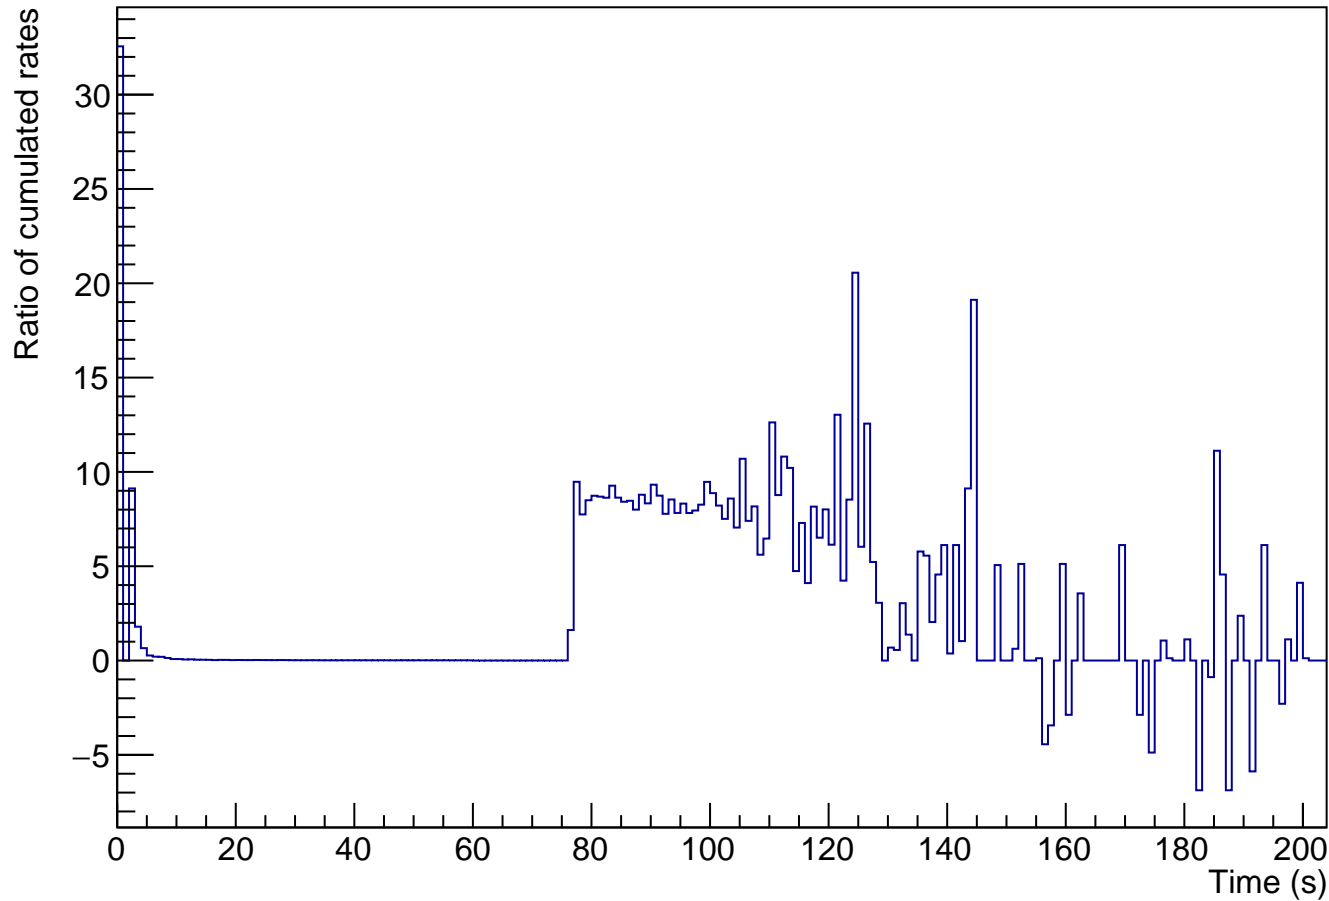

Average rate ratio


| TCN19-010D_ratio |       |
|------------------|-------|
| Entries          | 327   |
| Mean             | 106   |
| Std Dev          | 19.64 |
| Integral         | 38.3  |

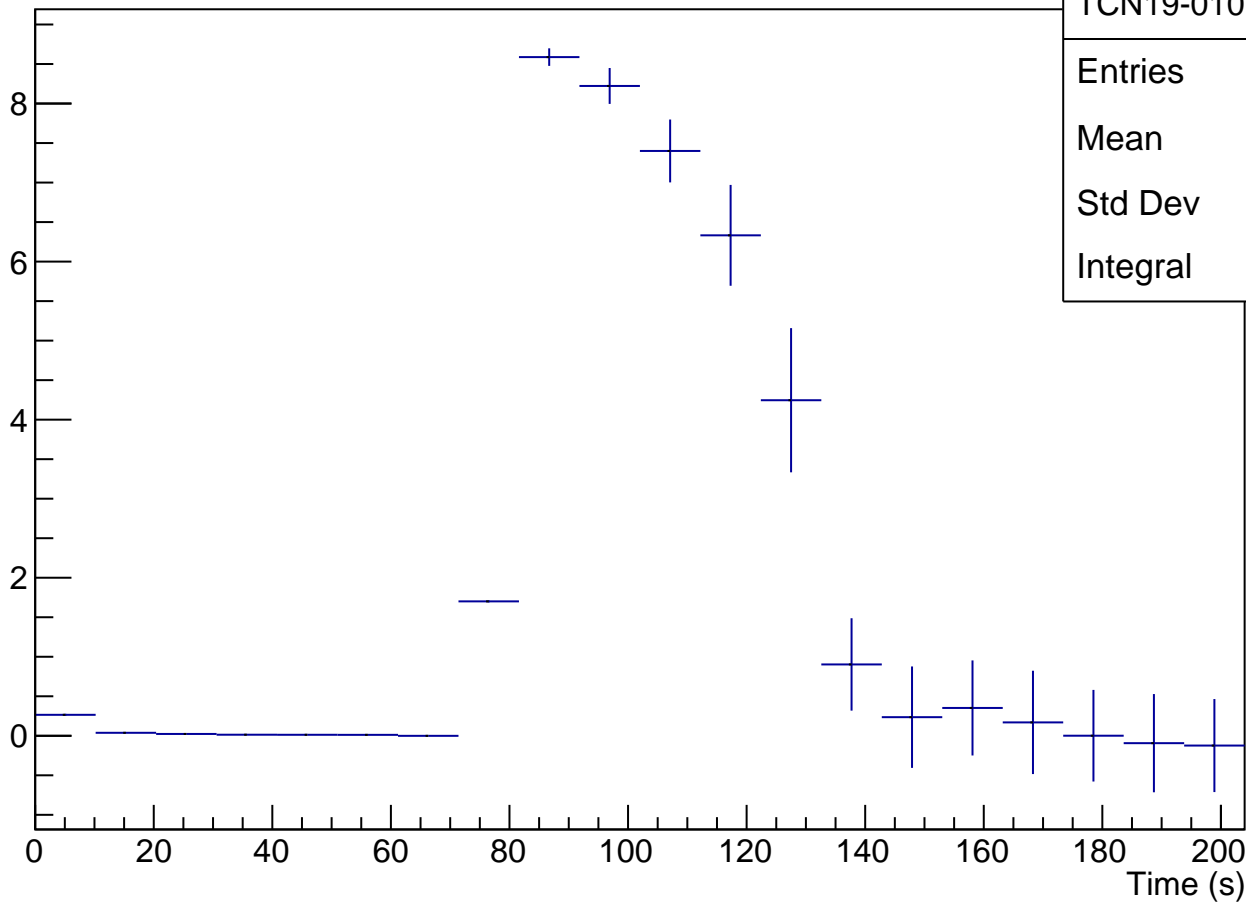



# TCN19-010D

Count

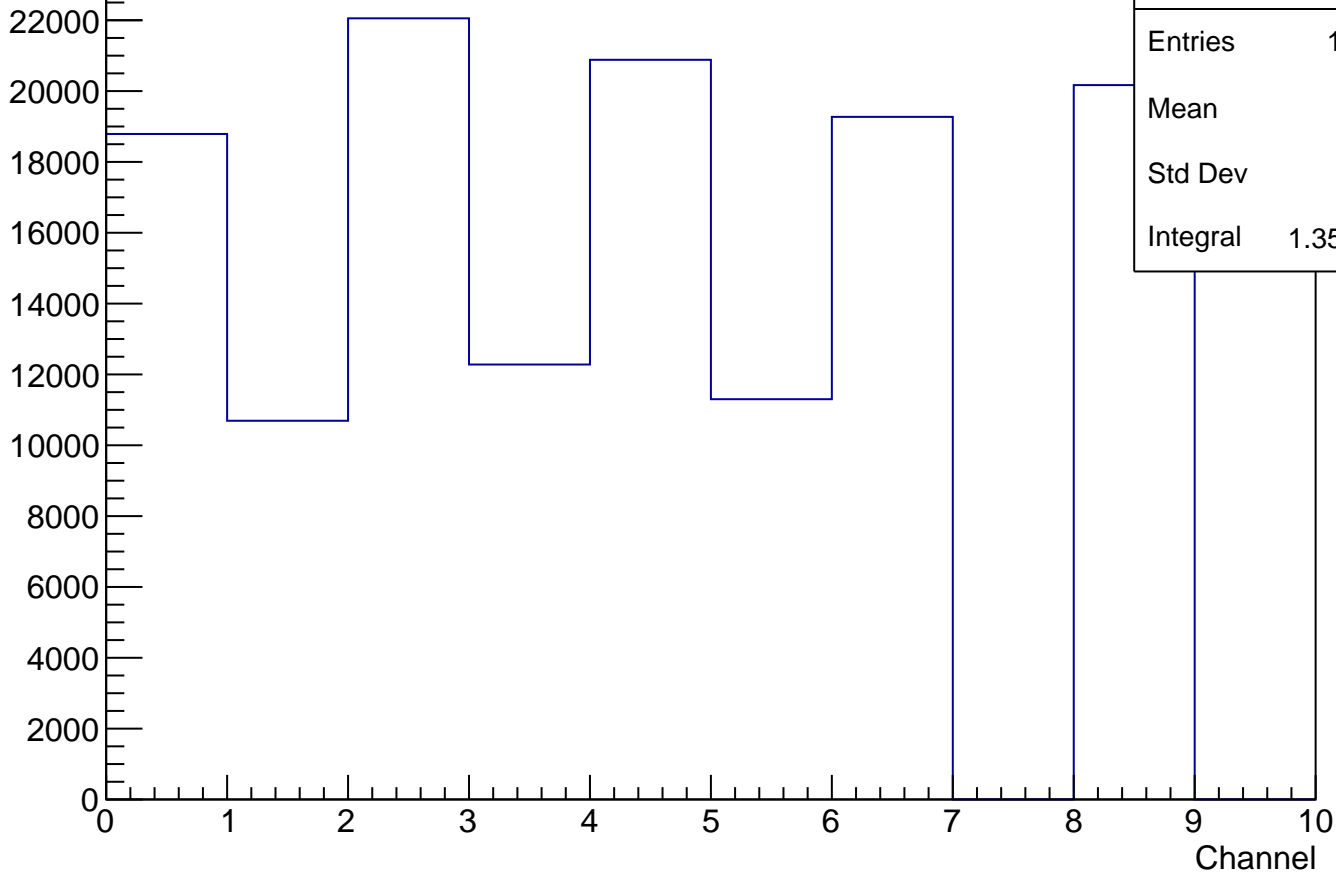

TCN19-010D\_ch

Entries 135440

Mean 3.756

Std Dev 2.578

Integral 1.354e+05

# Li6 window

Frequency

1  
0.8  
0.6  
0.4  
0.2  
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 20

Mean 0

Std Dev 0

Integral 0