





TCN19-280 (spider v1), transmission normalized during prestorage

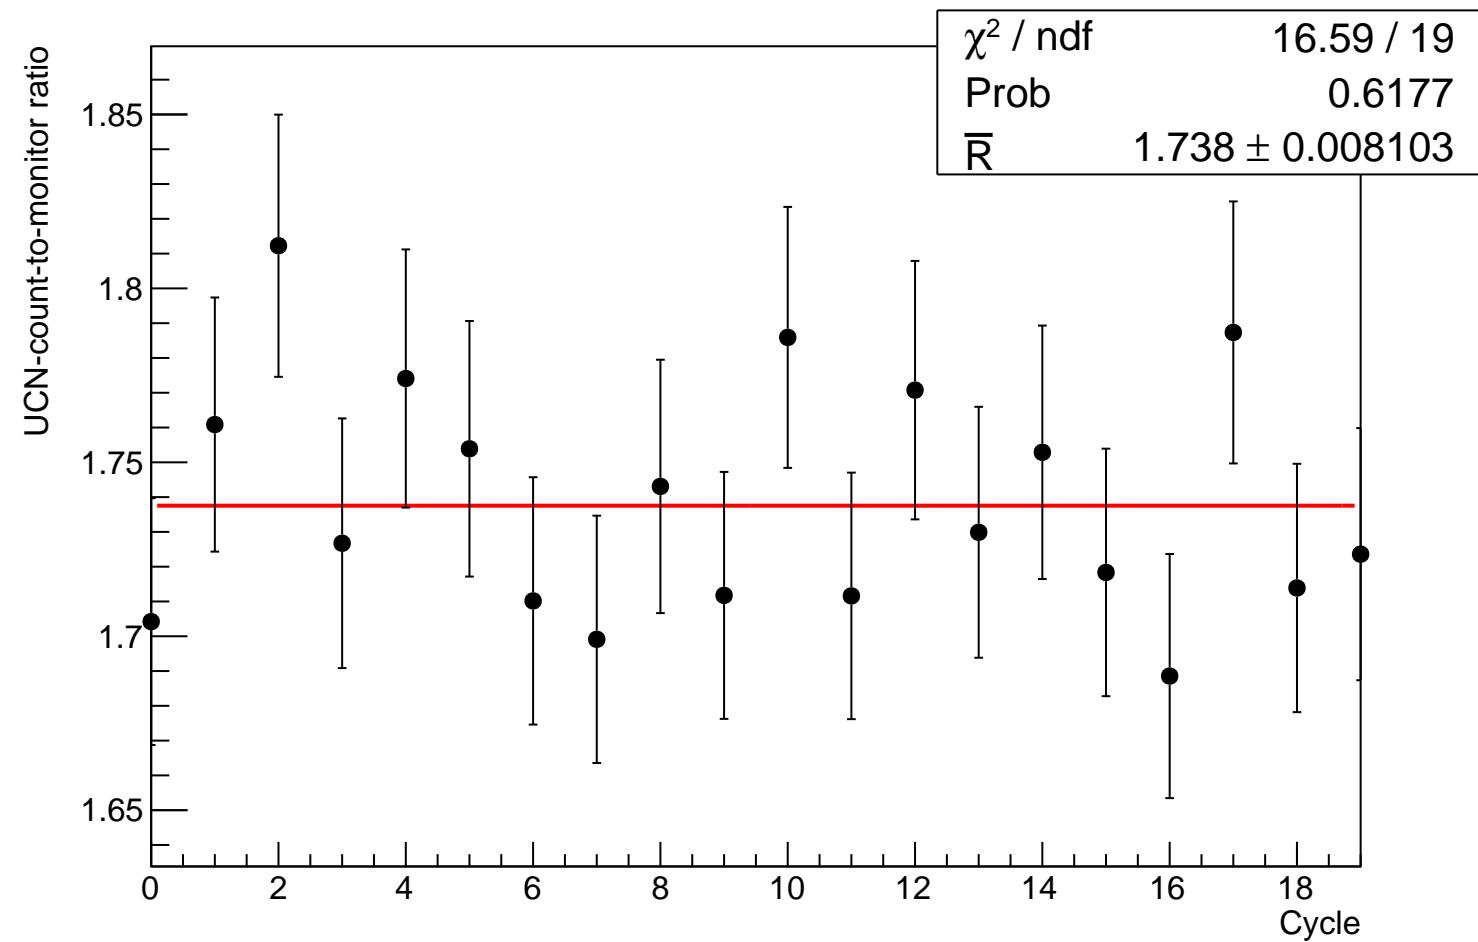


Graph

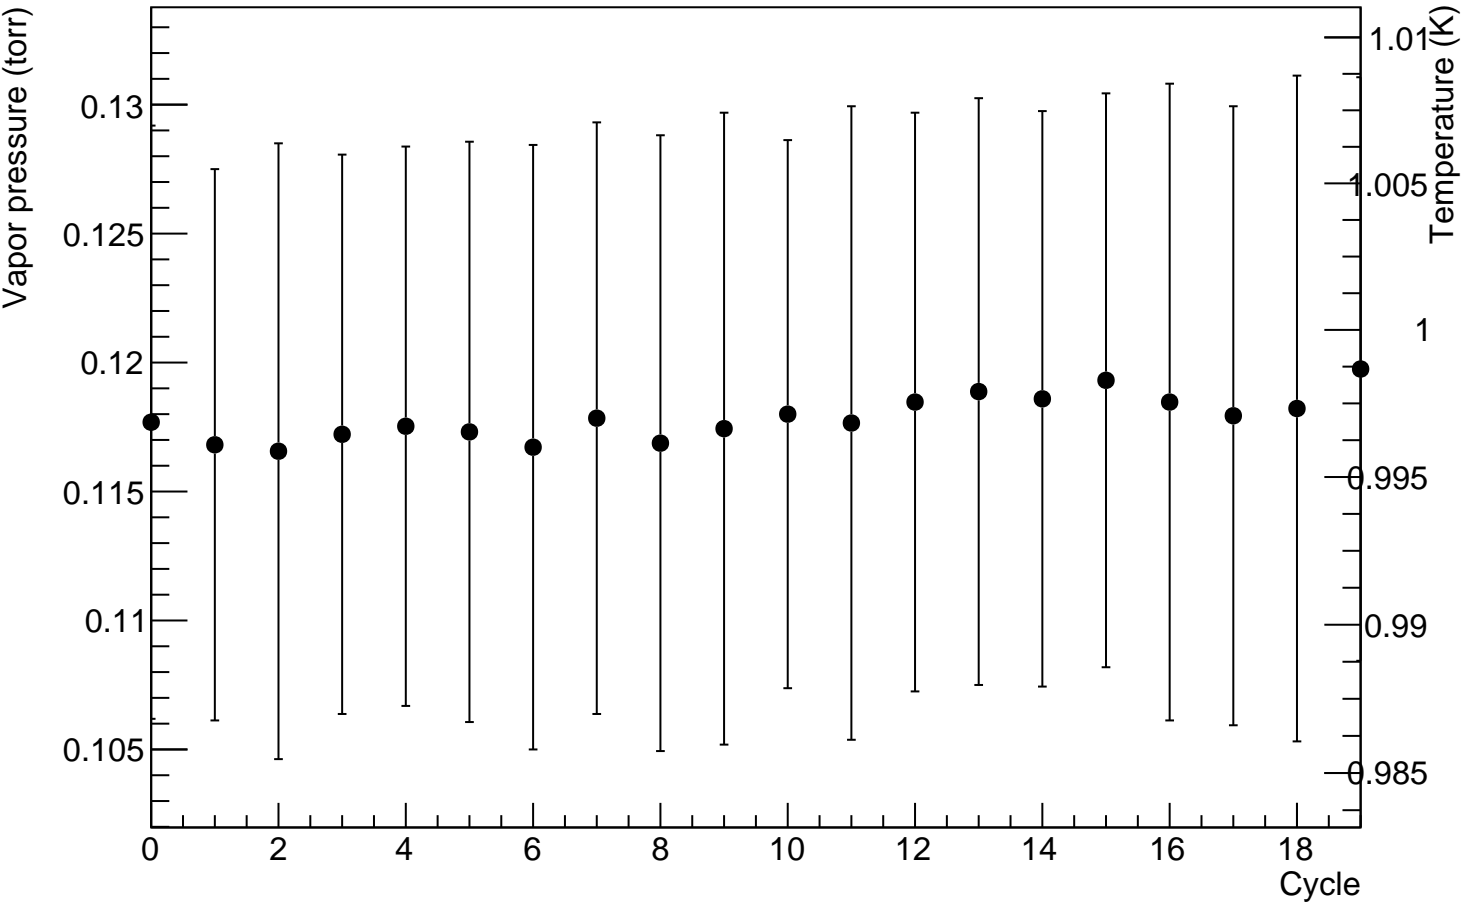


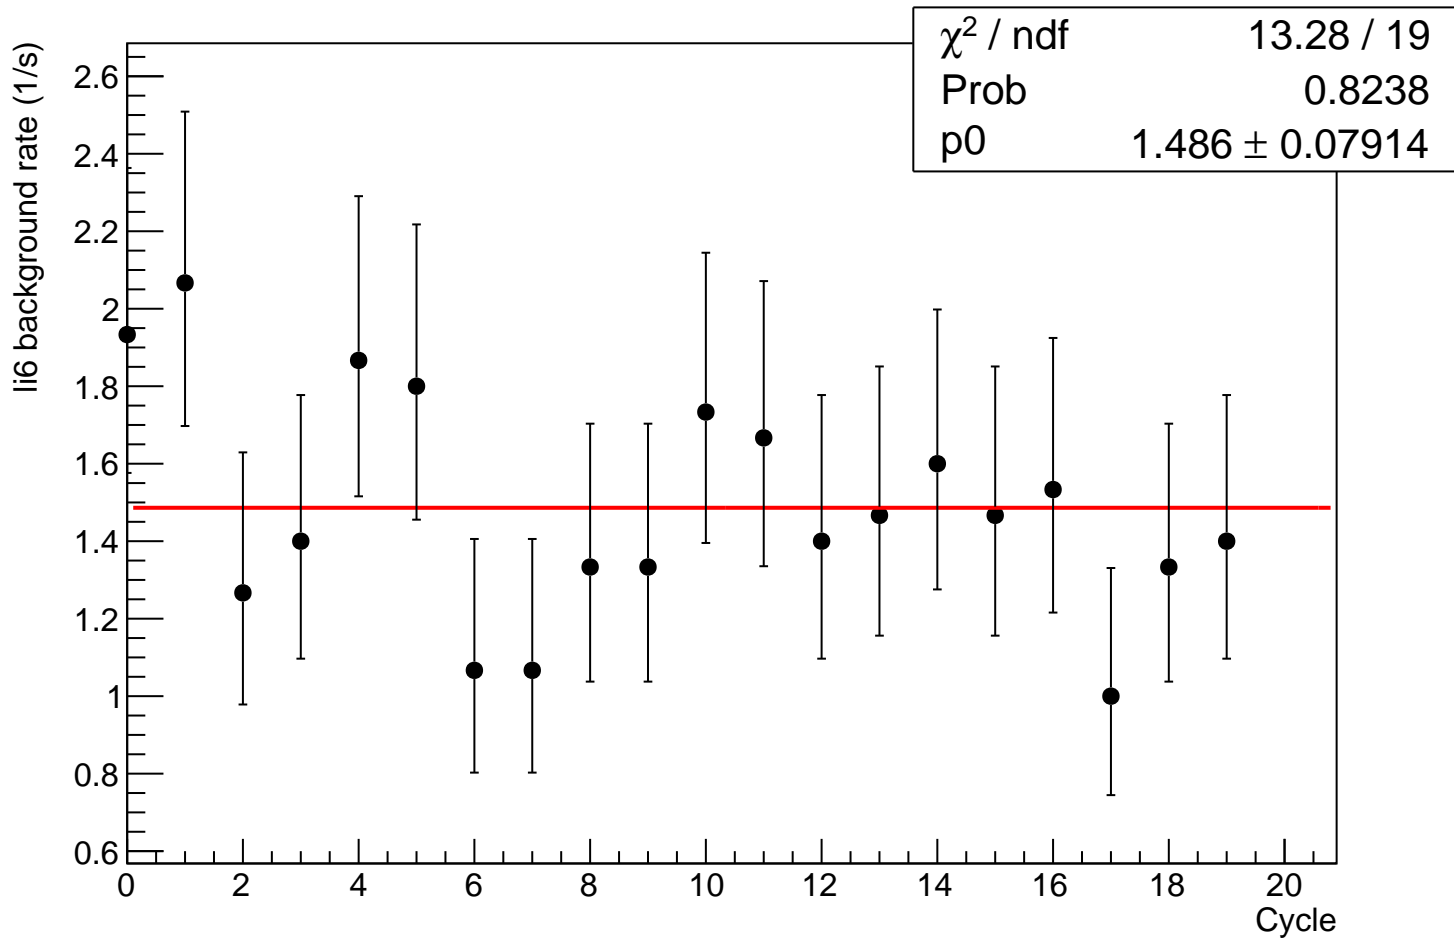

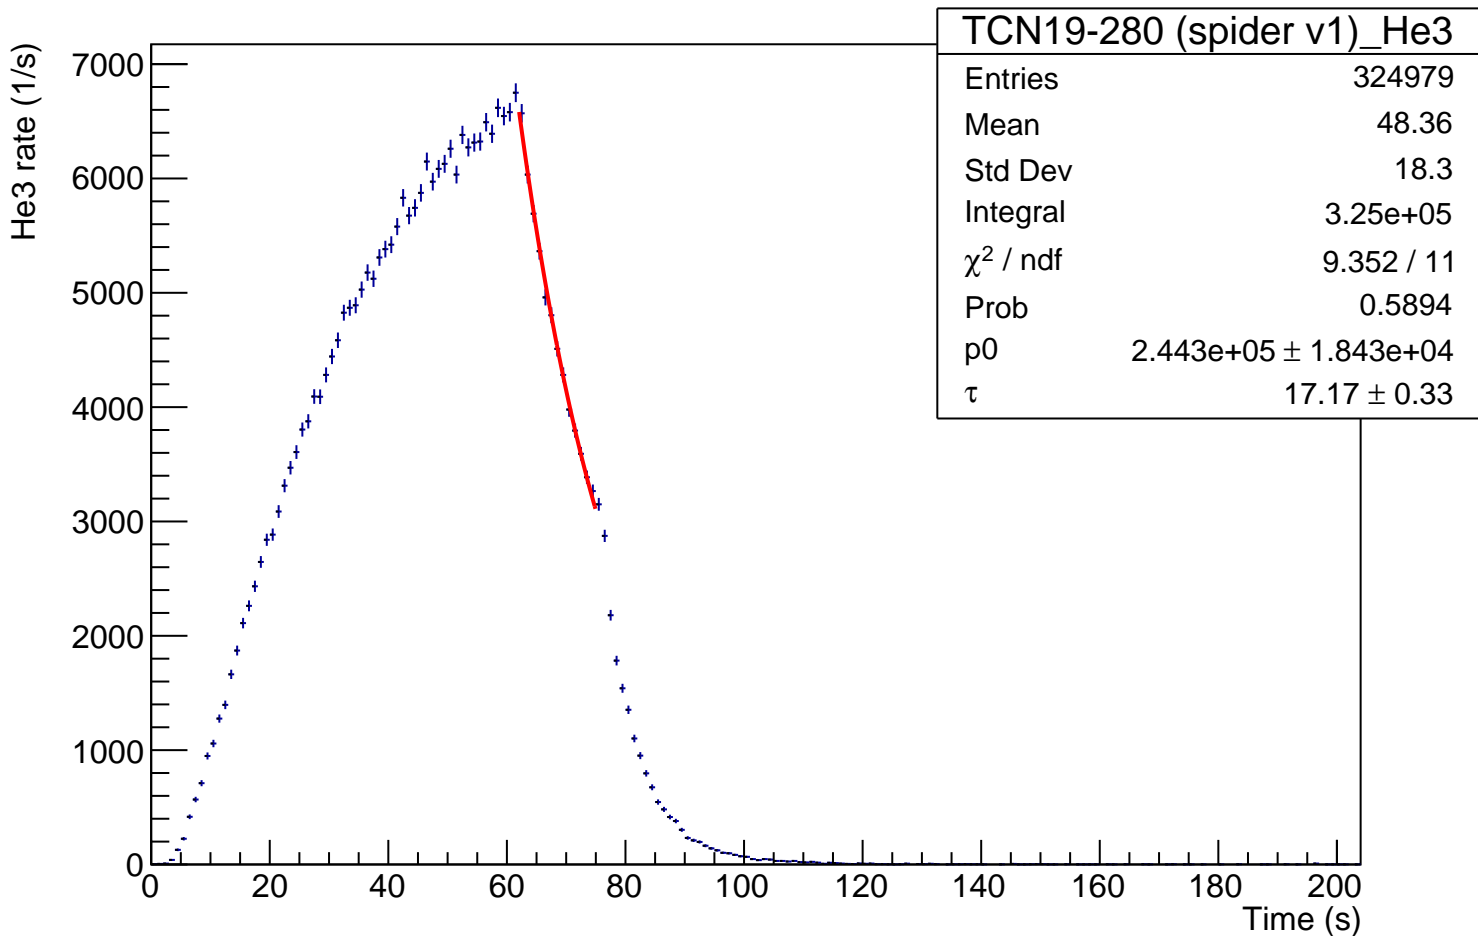

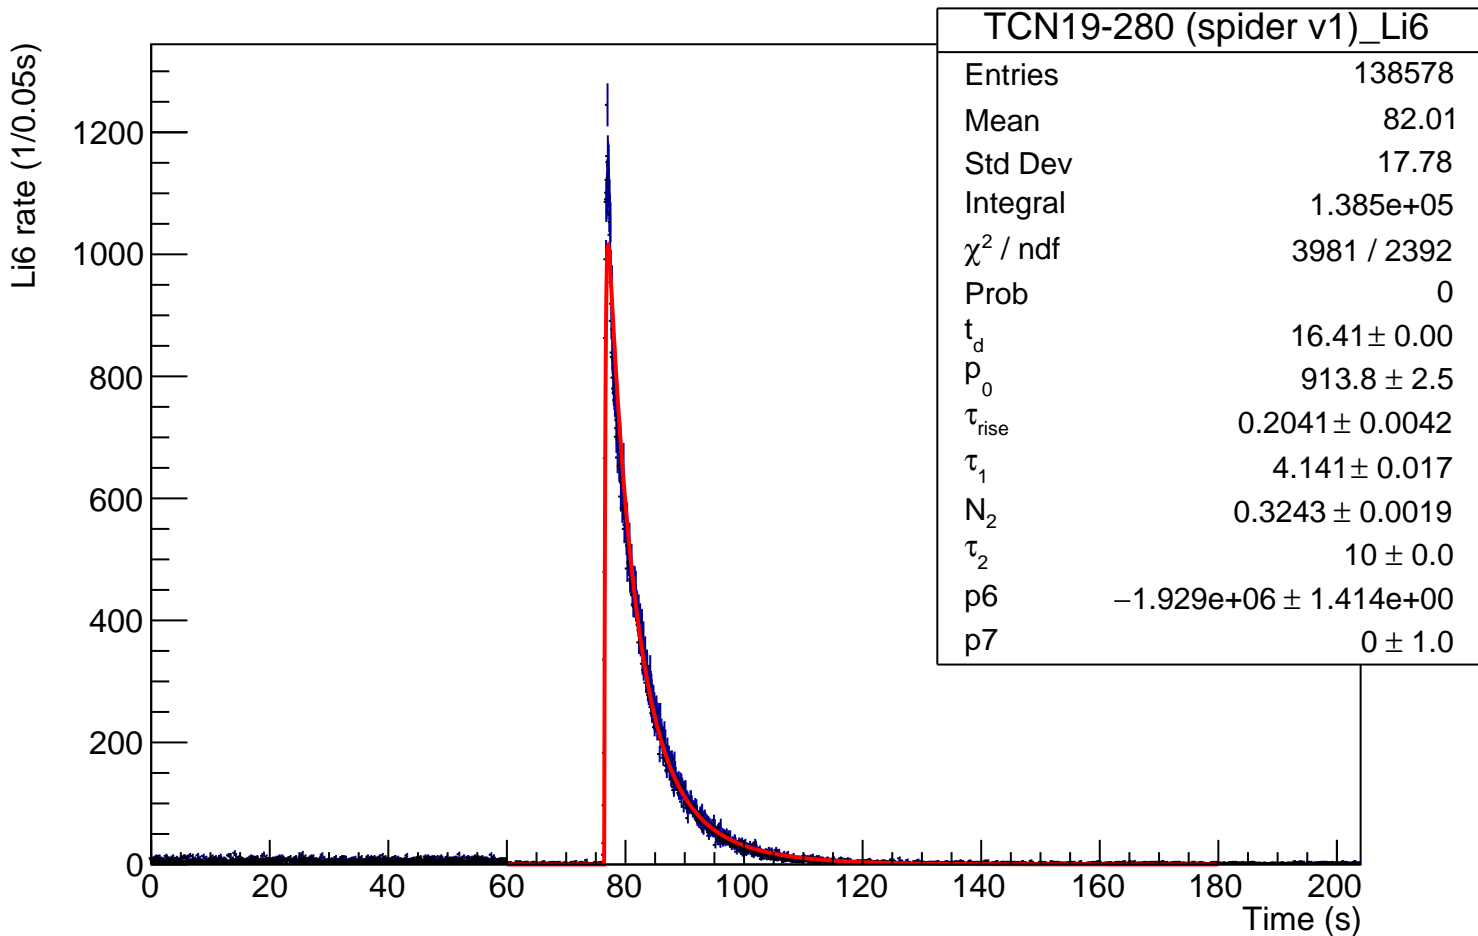

Normalized Li6 rate (1/0.05s)

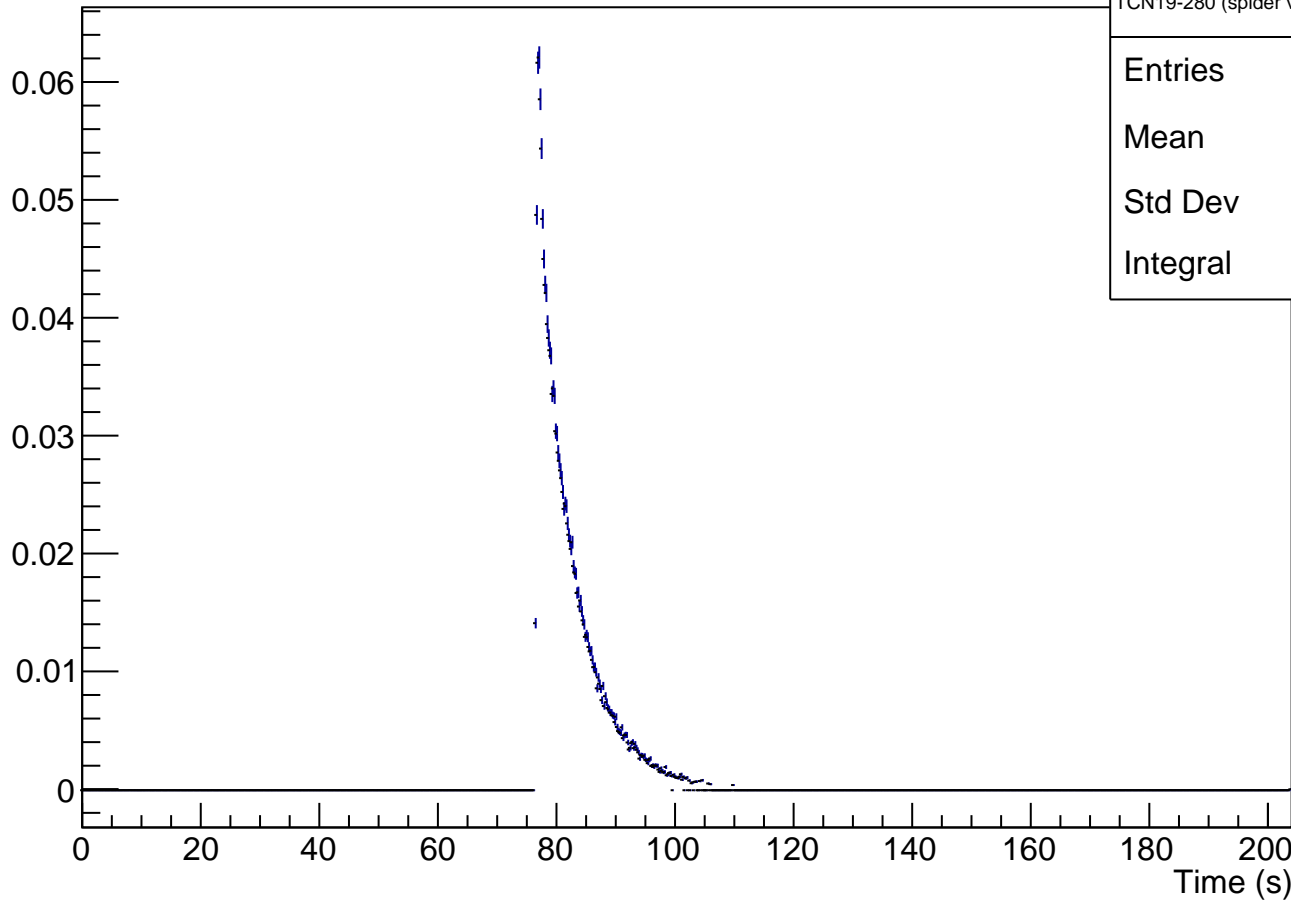

TCN19-280 (spider v1)_Li6_norm


Entries 123399

Mean 81.09


Std Dev 12.35

Integral 1.591

Ratio of cumulated rates

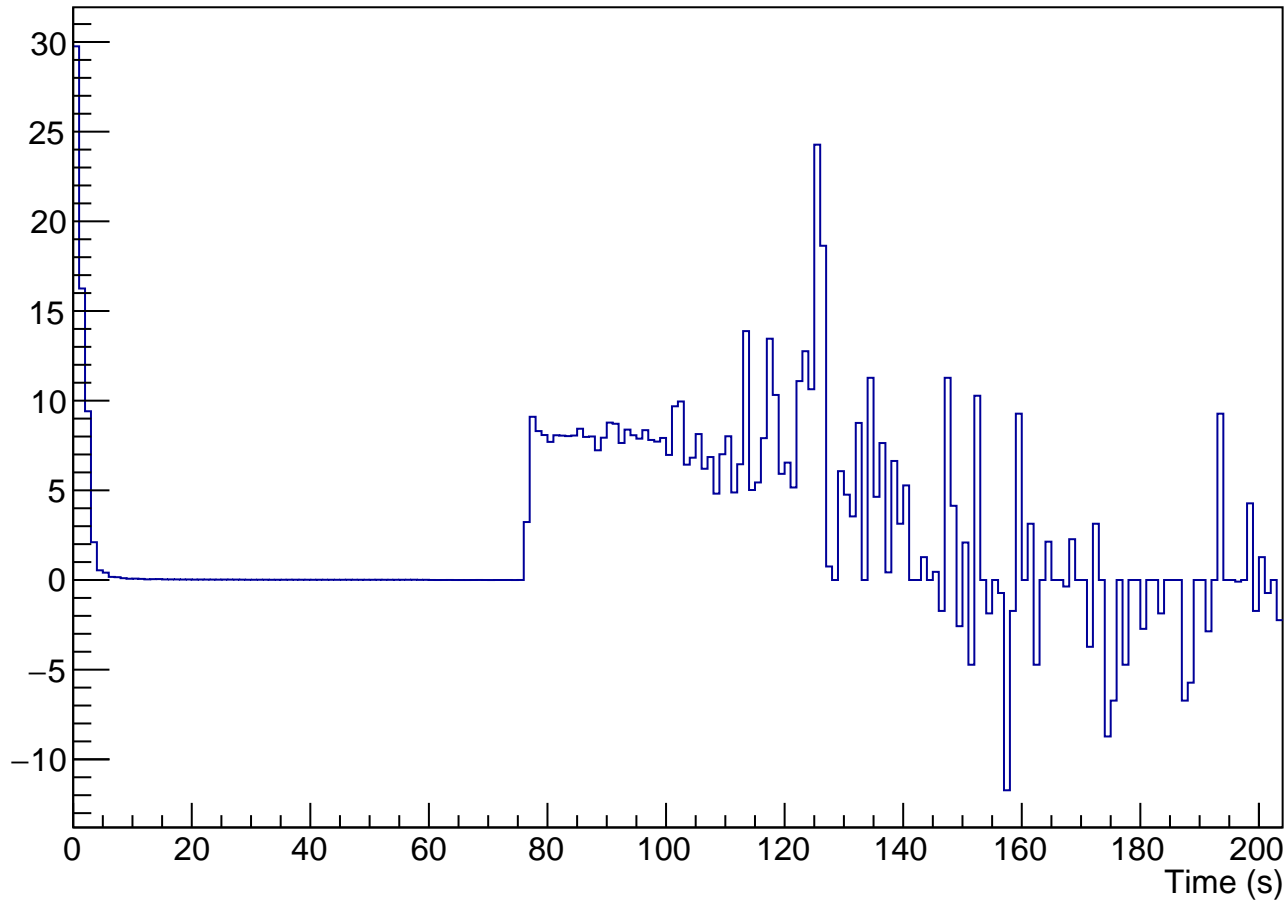

Average rate ratio

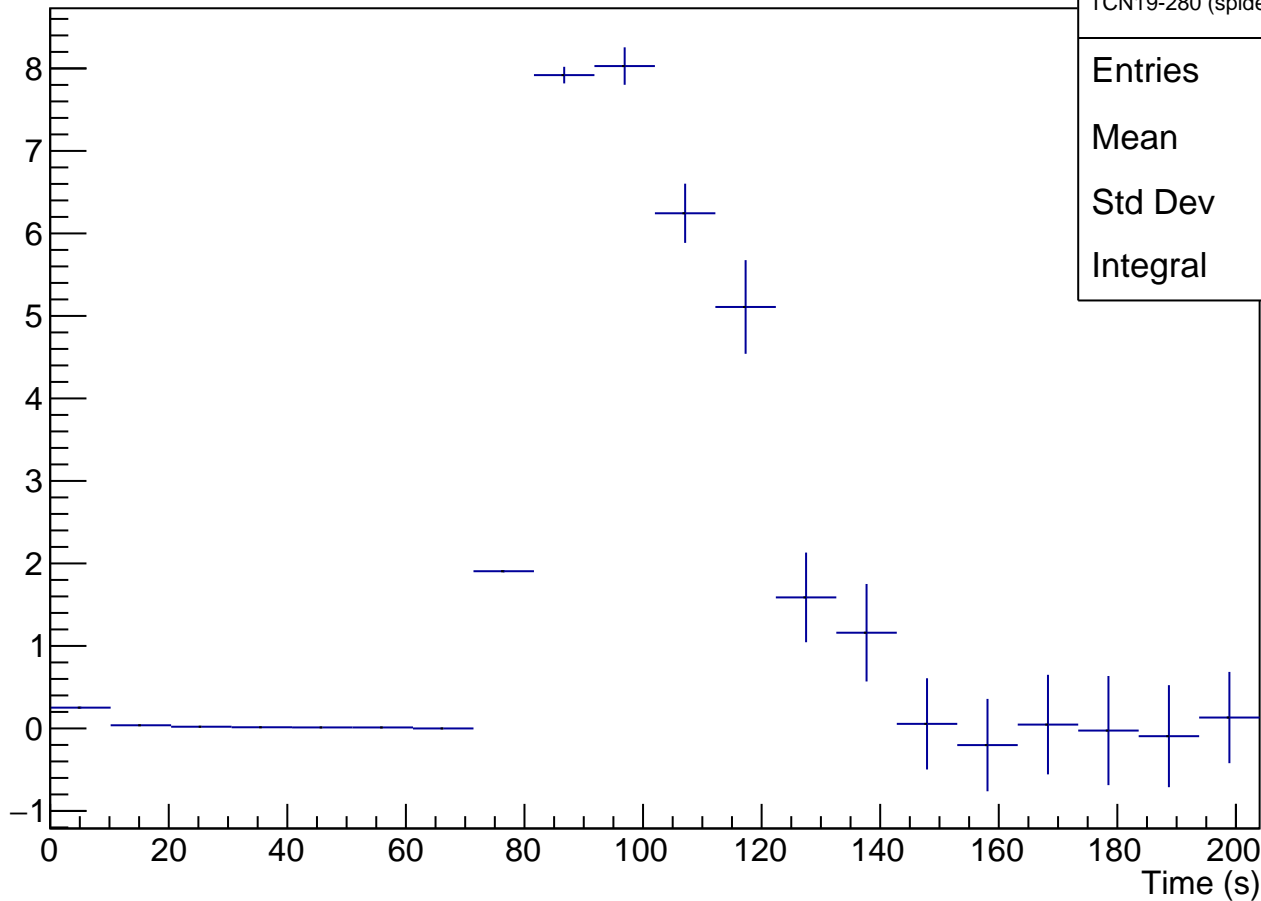

TCN19-280 (spider v1)_ratio

Entries 285


Mean 104.9

Std Dev 18.73

Integral 32.22

TCN19-280 (spider v1)

Count

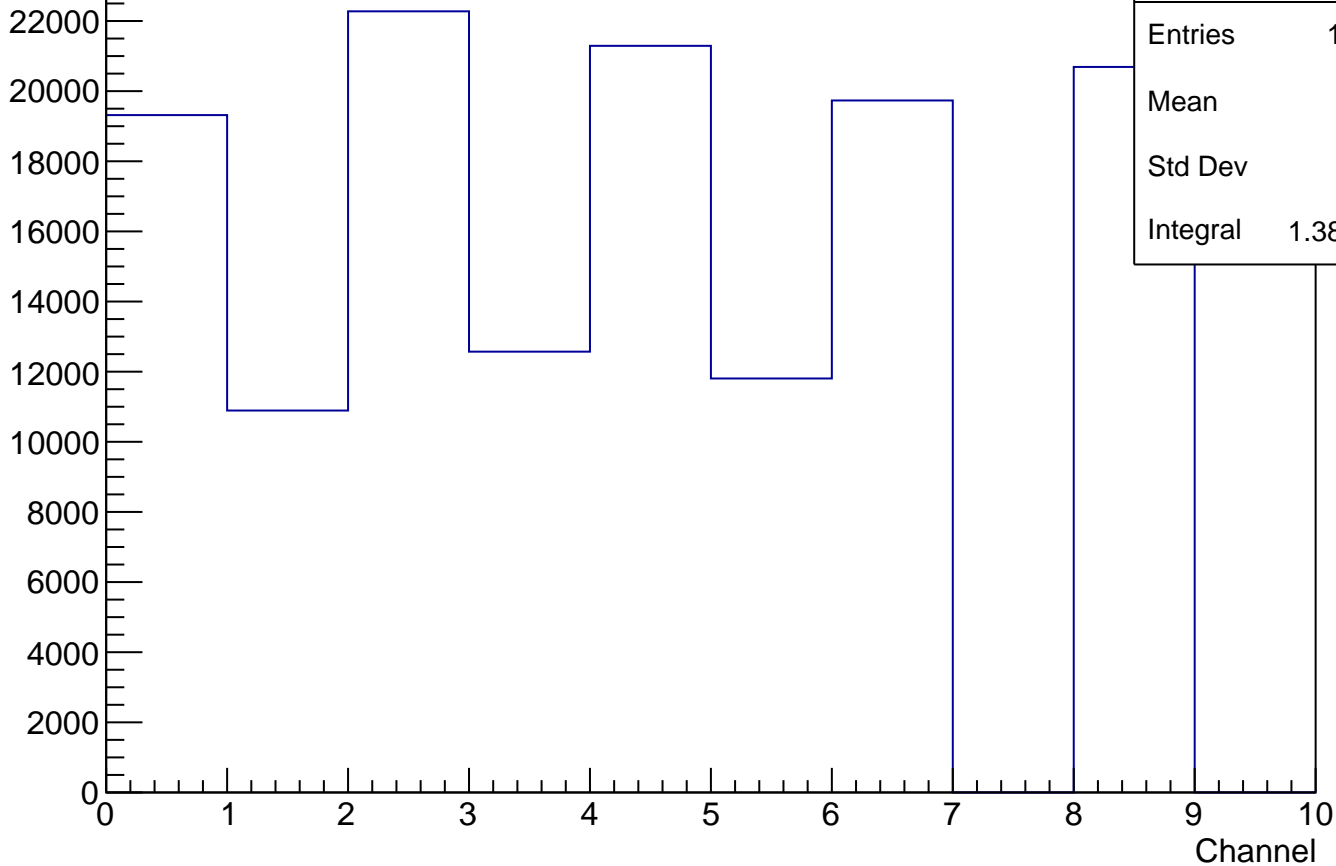

TCN19-280 (spider v1)_ch

Entries 138578

Mean 3.762

Std Dev 2.58

Integral 1.386e+05

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 20

Mean 0

Std Dev 0

Integral 0