





TCN19-201 (DRex black, 80cm), transmission normalized during prestorage

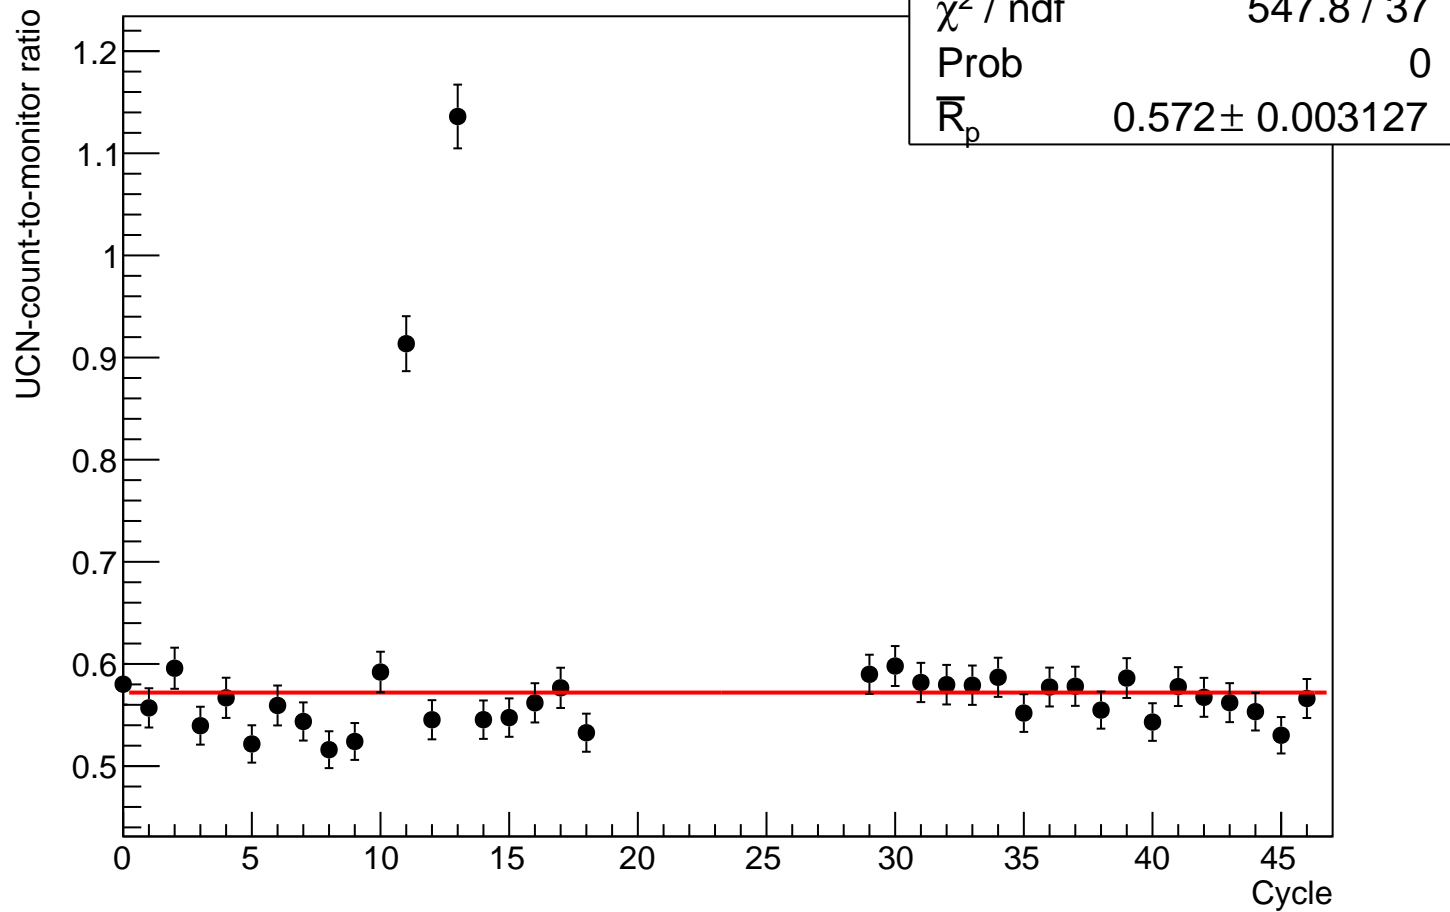

Graph

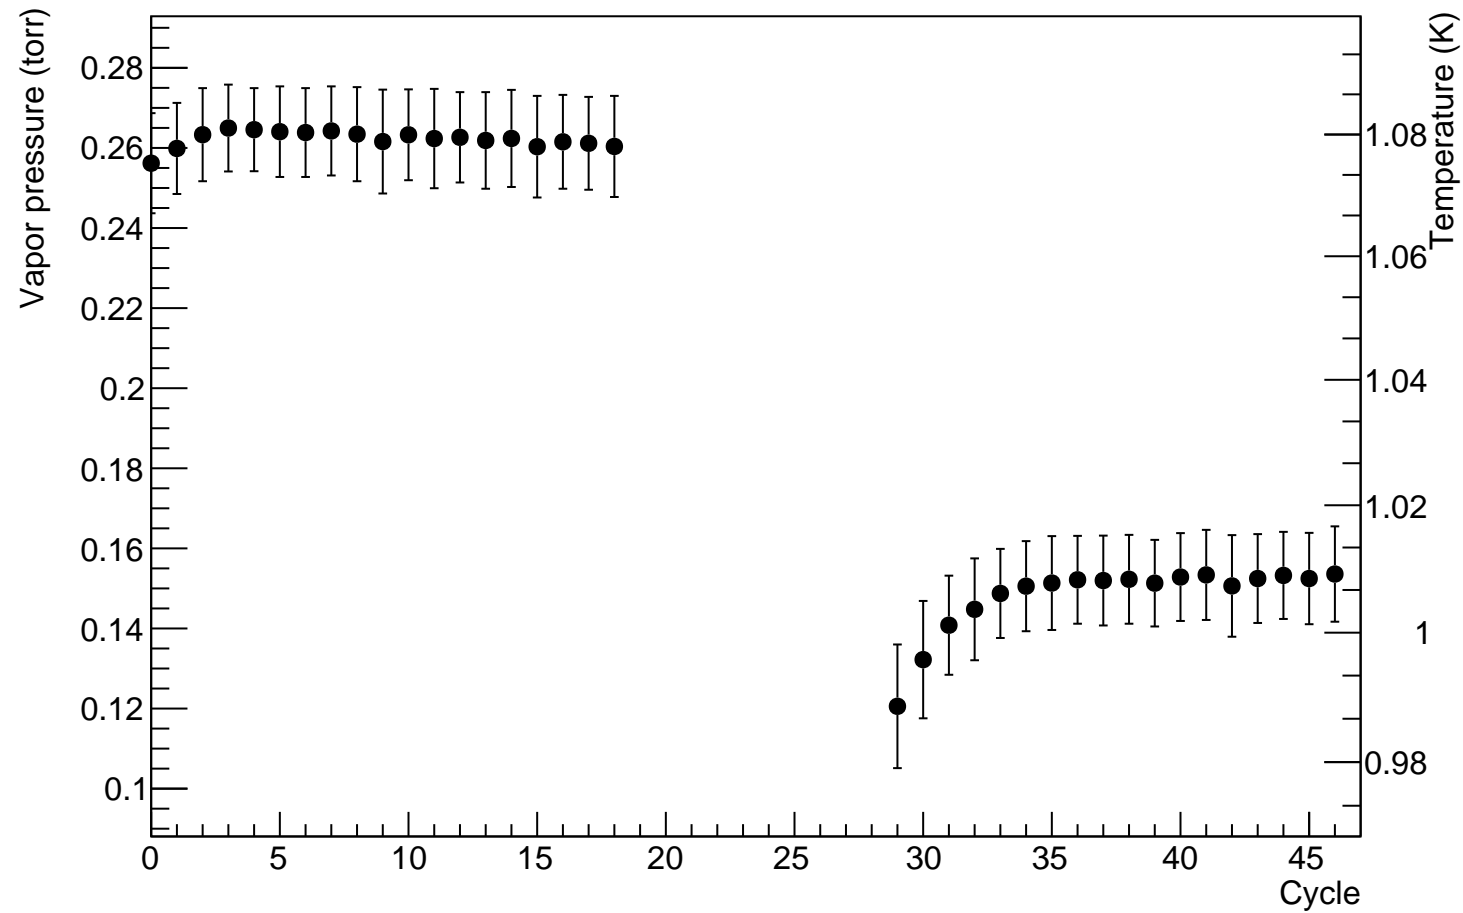


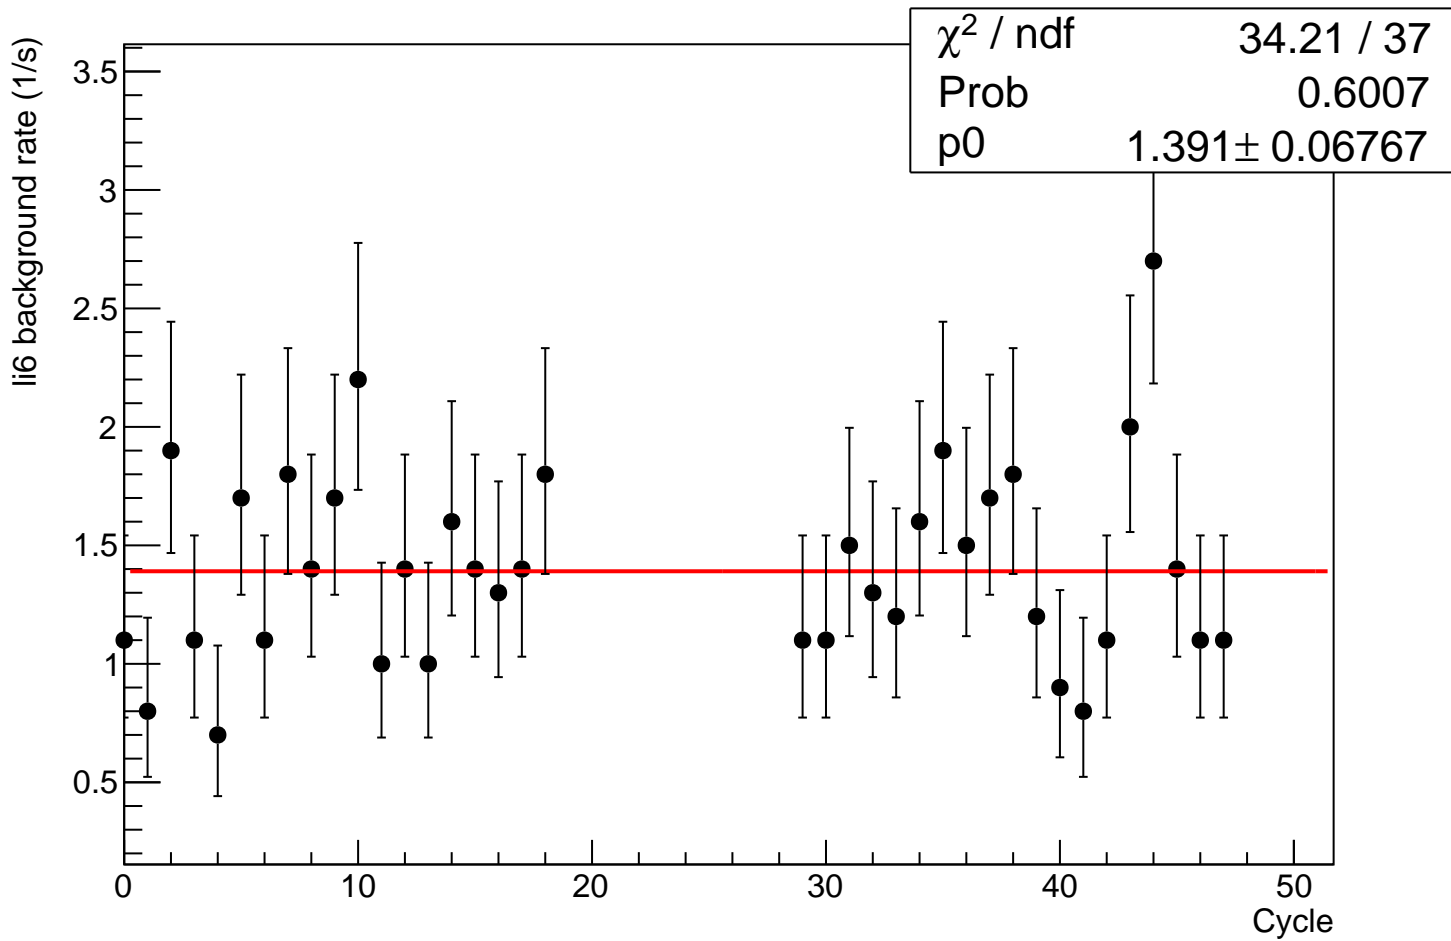


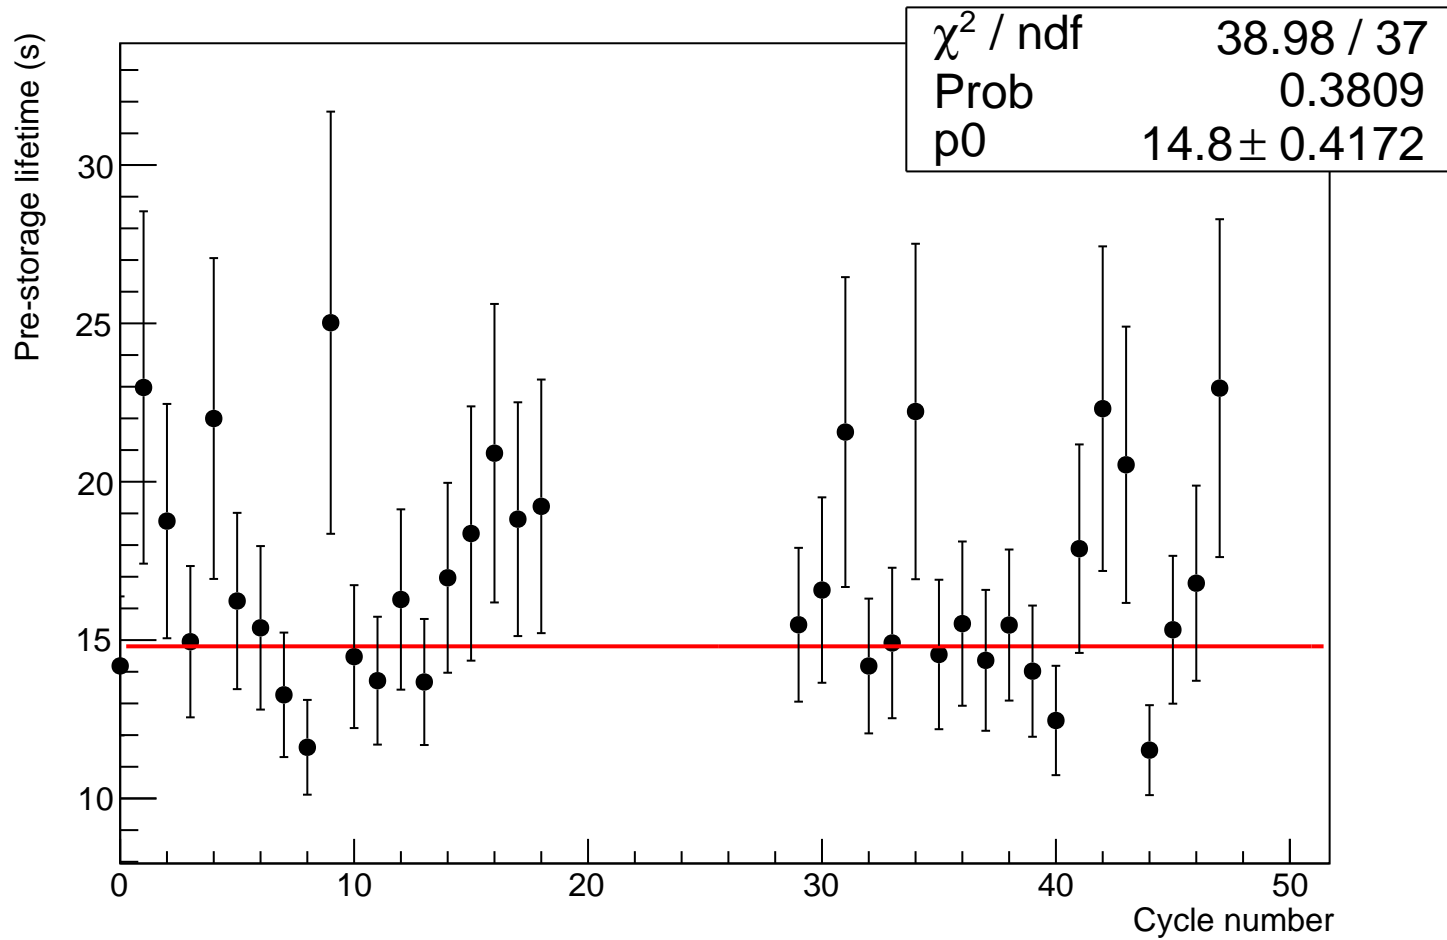


Corrected Li6-He3 ratio


χ^2 / ndf	33.27 / 37
Prob	0.6445
p0	14.29 ± 0.4106

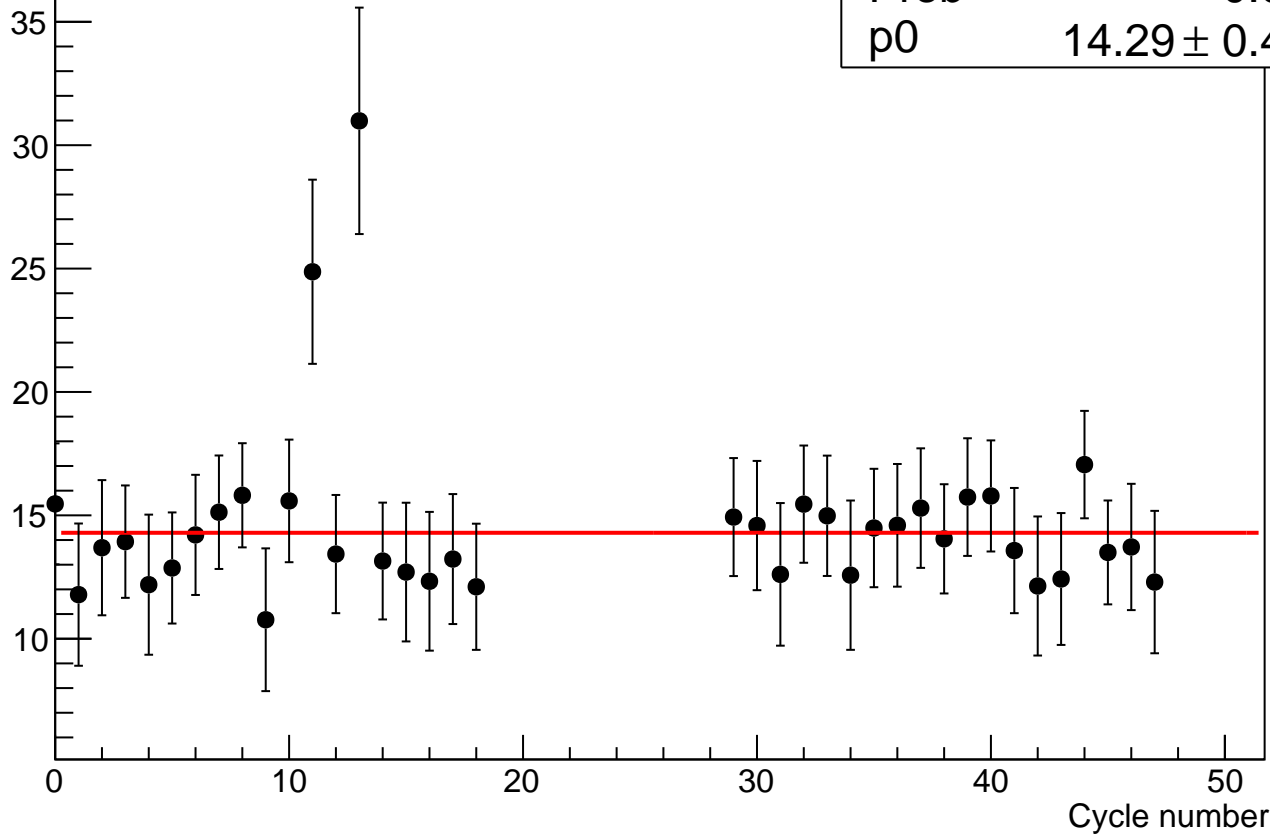

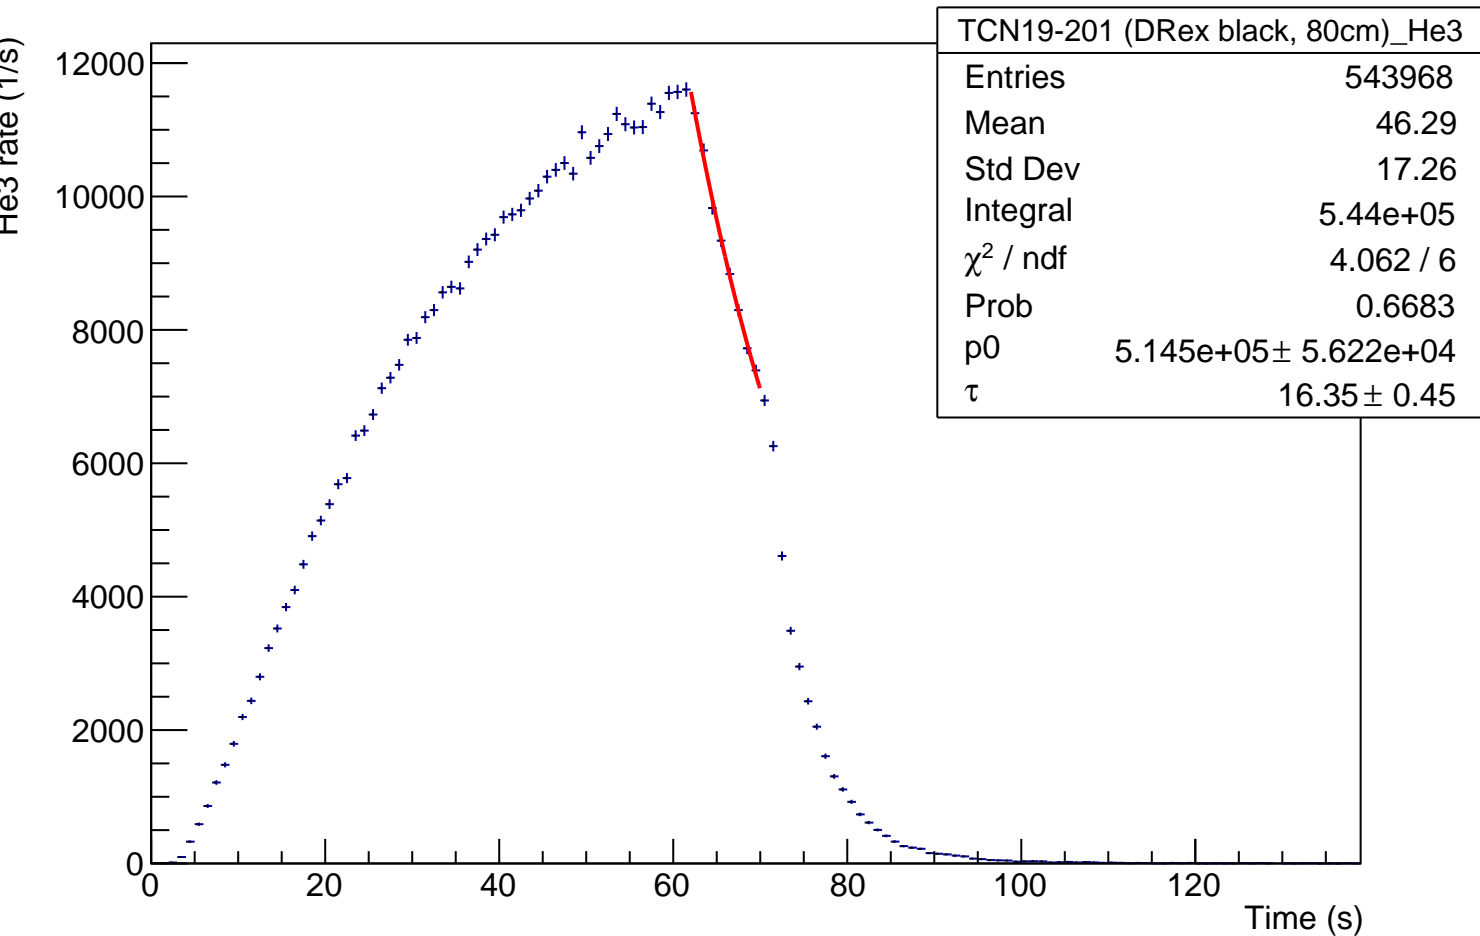

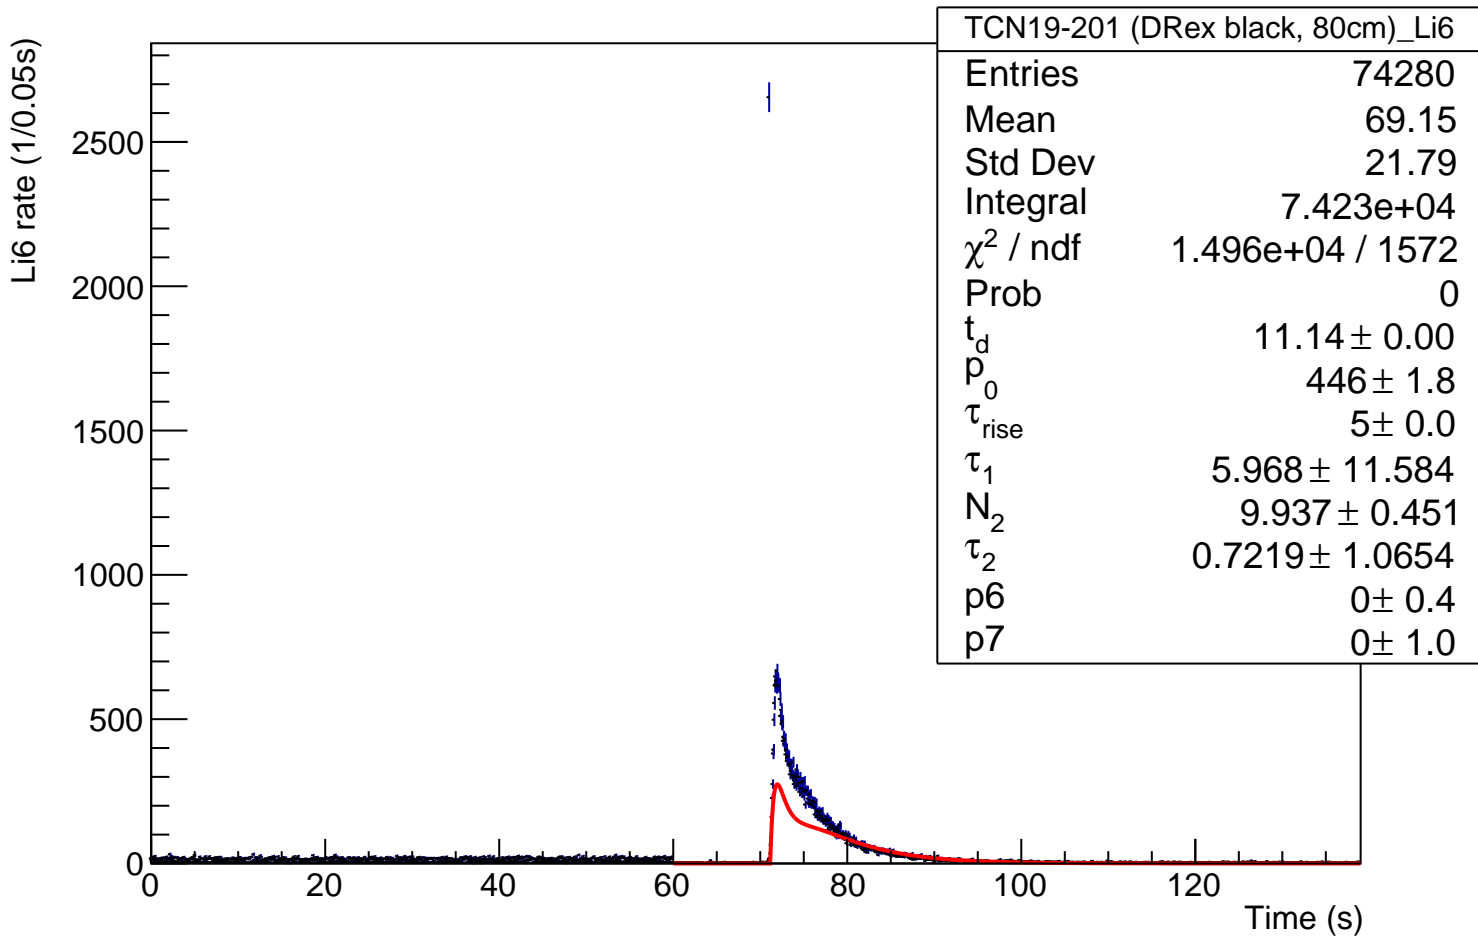

Normalized Li6 rate (1/0.05s)

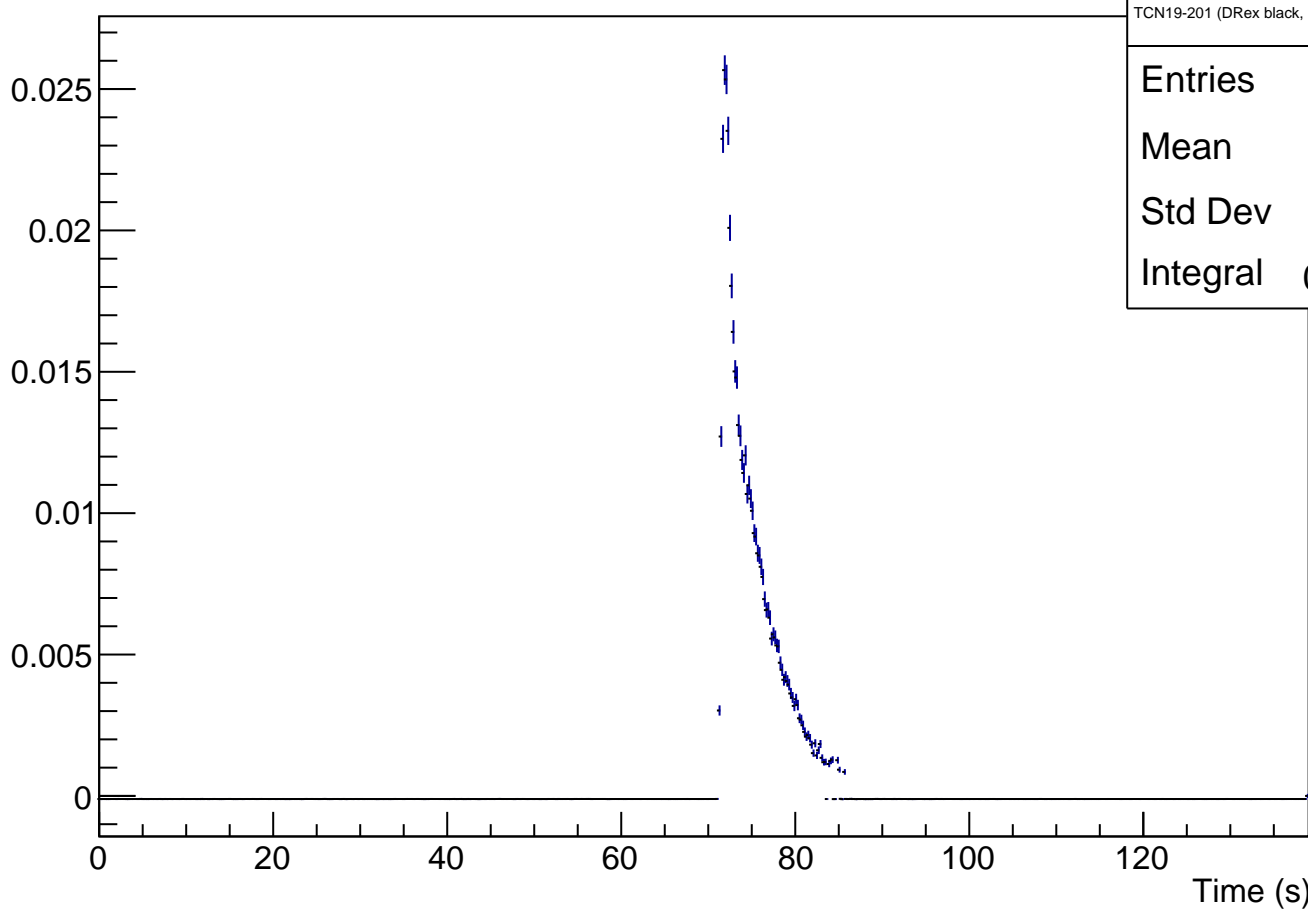

TCN19-201 (DRex black, 80cm)_Li6_norm


Entries 58835

Mean 69.1


Std Dev 18.7

Integral 0.4176


Ratio of cumulated rates

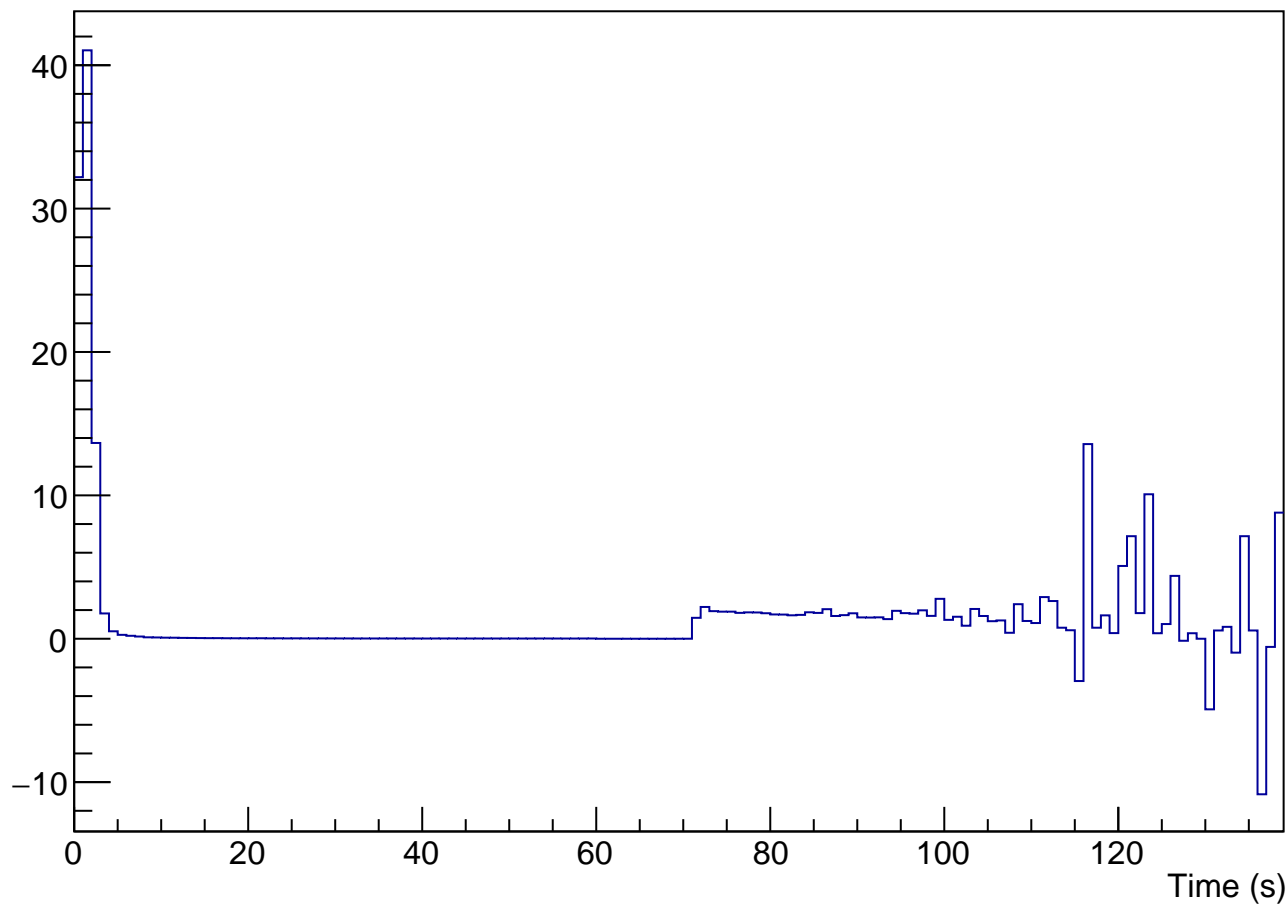

Average rate ratio

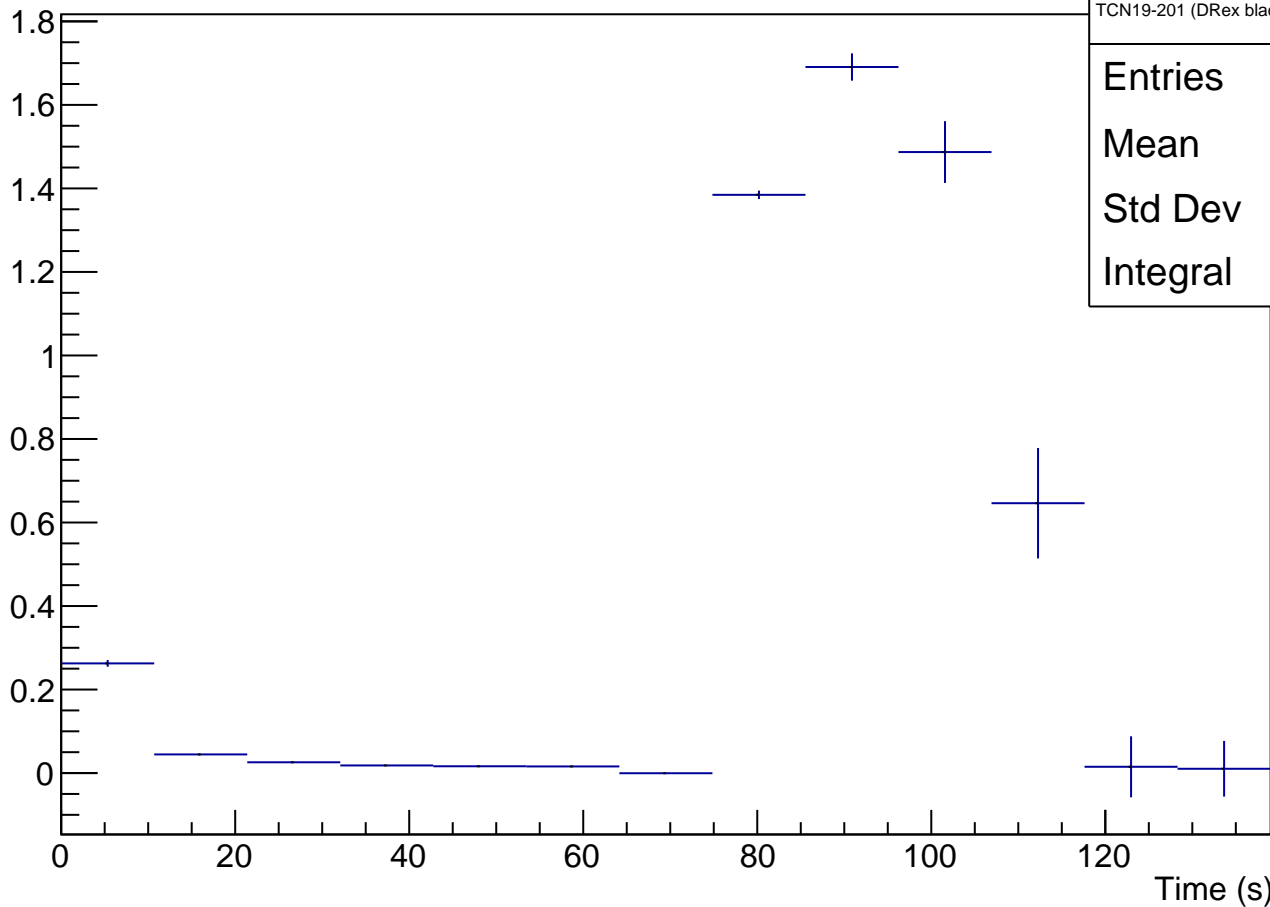

TCN19-201 (DRex black, 80cm)

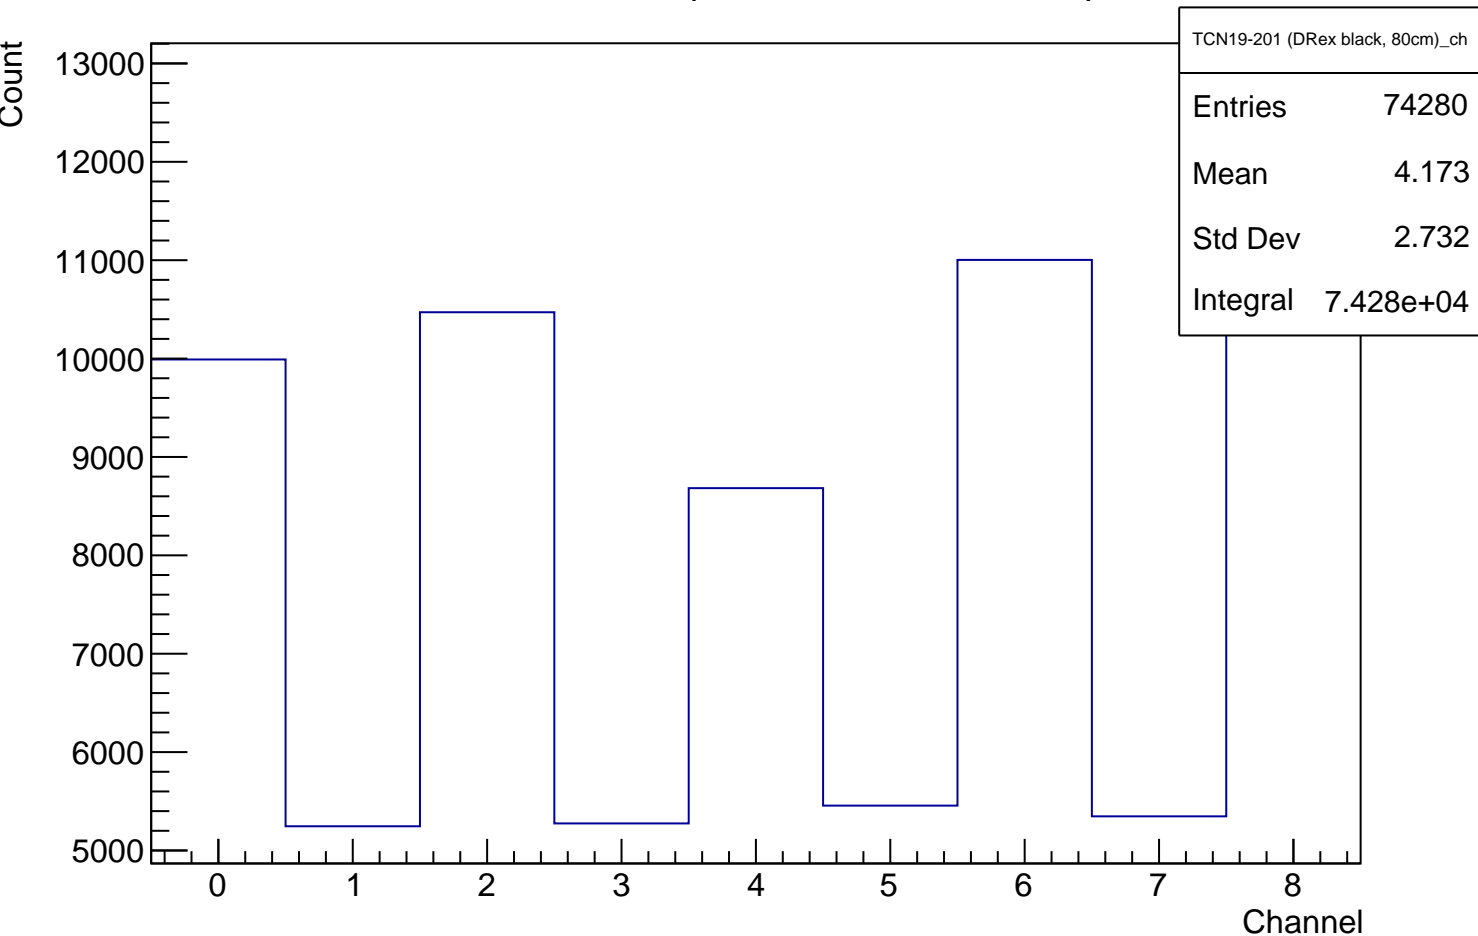

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 38

Mean 0

Std Dev 0

Integral 0