



TCN19-193 (DRex Cu, 10cm), transmission normalized during prestorage


UCN-count-to-monitor ratio

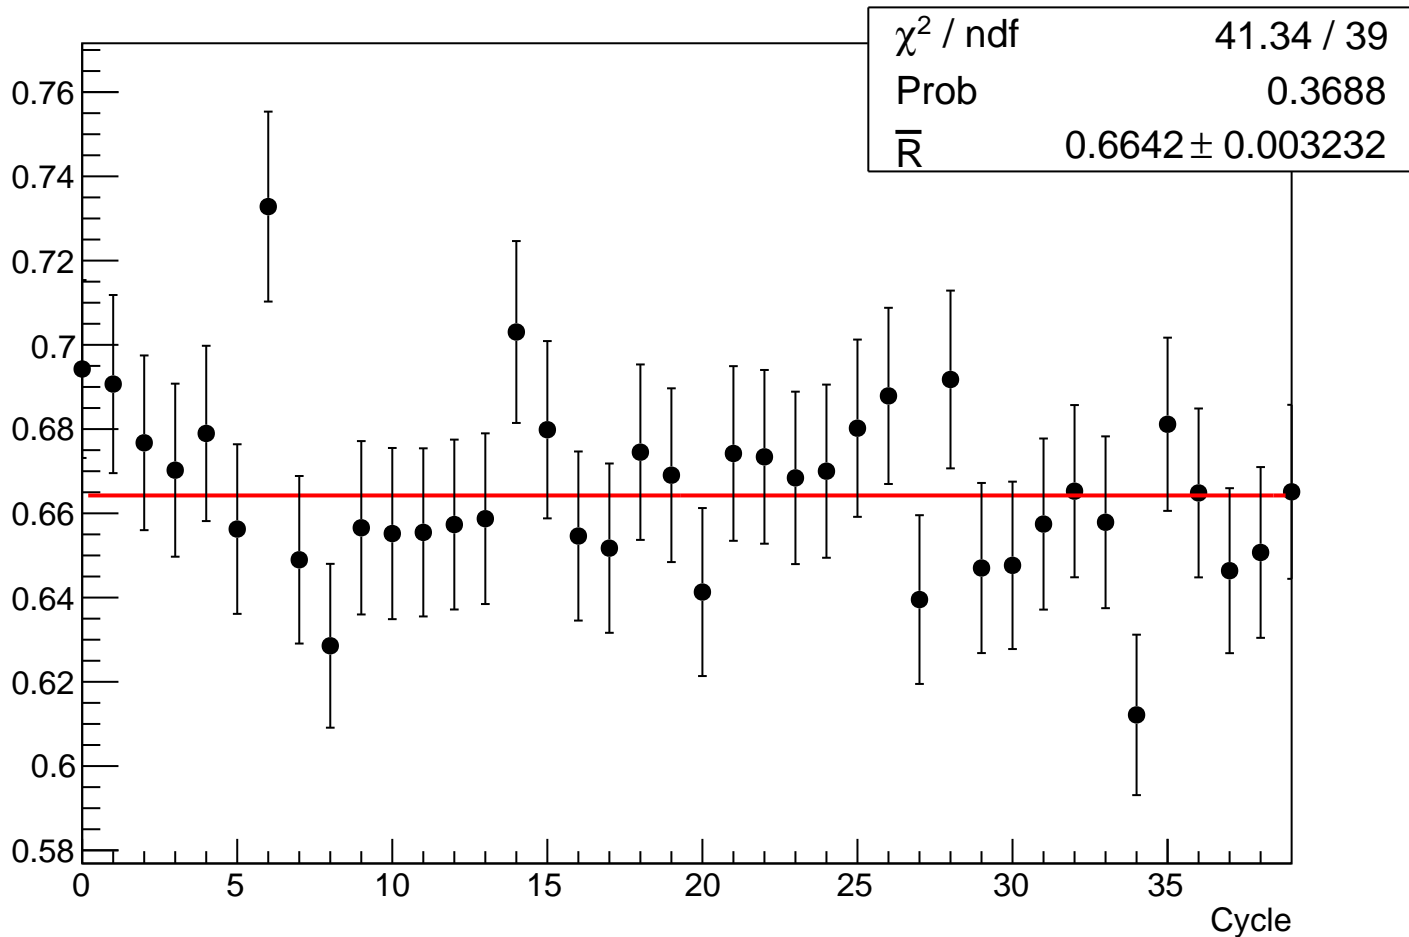



Graph

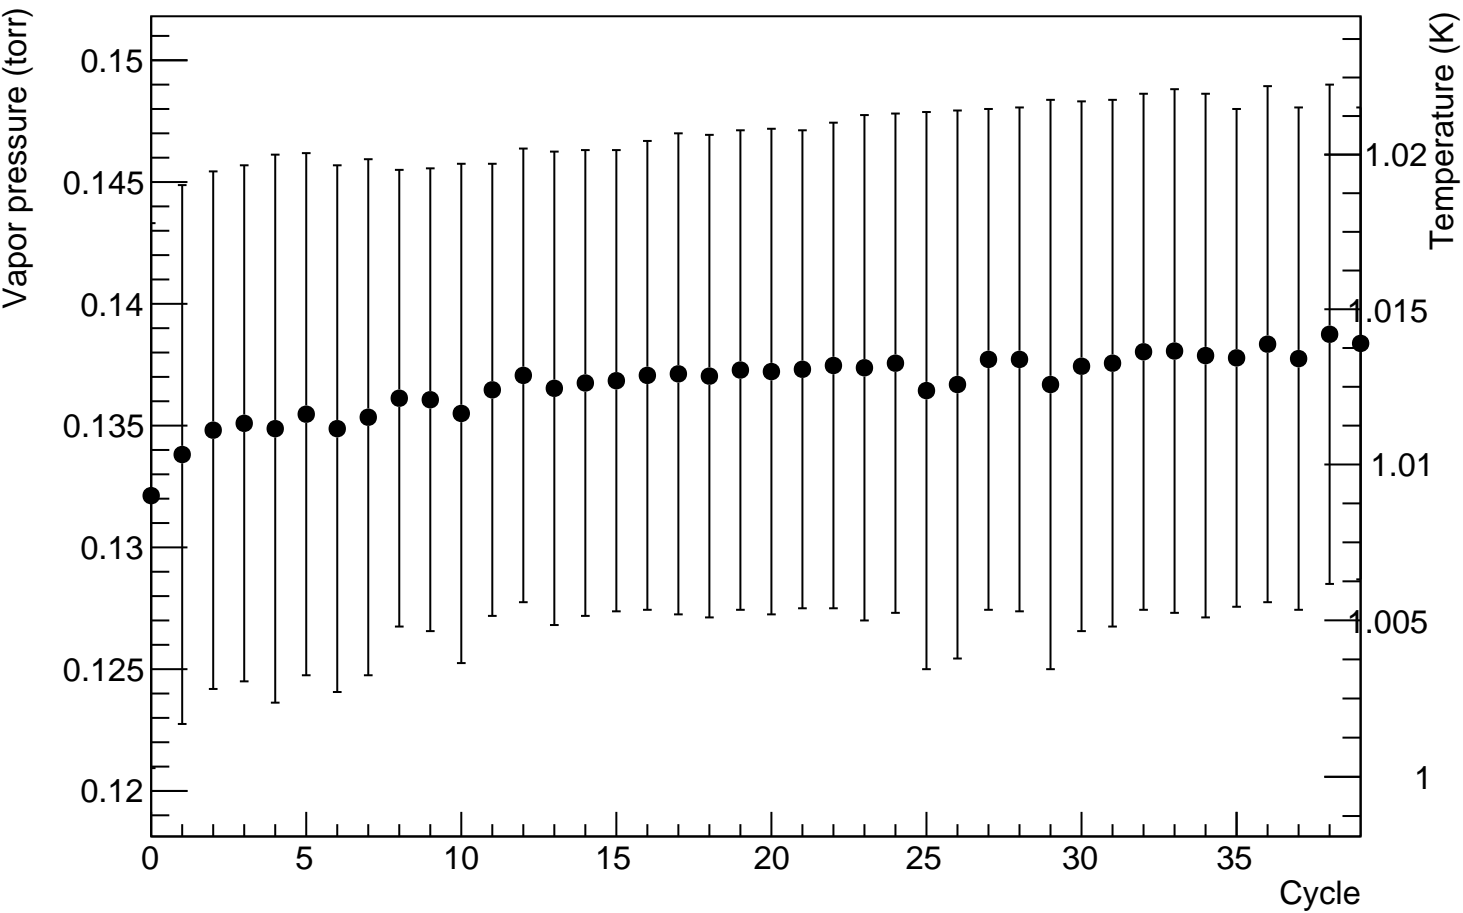


li6 background rate (1/s)

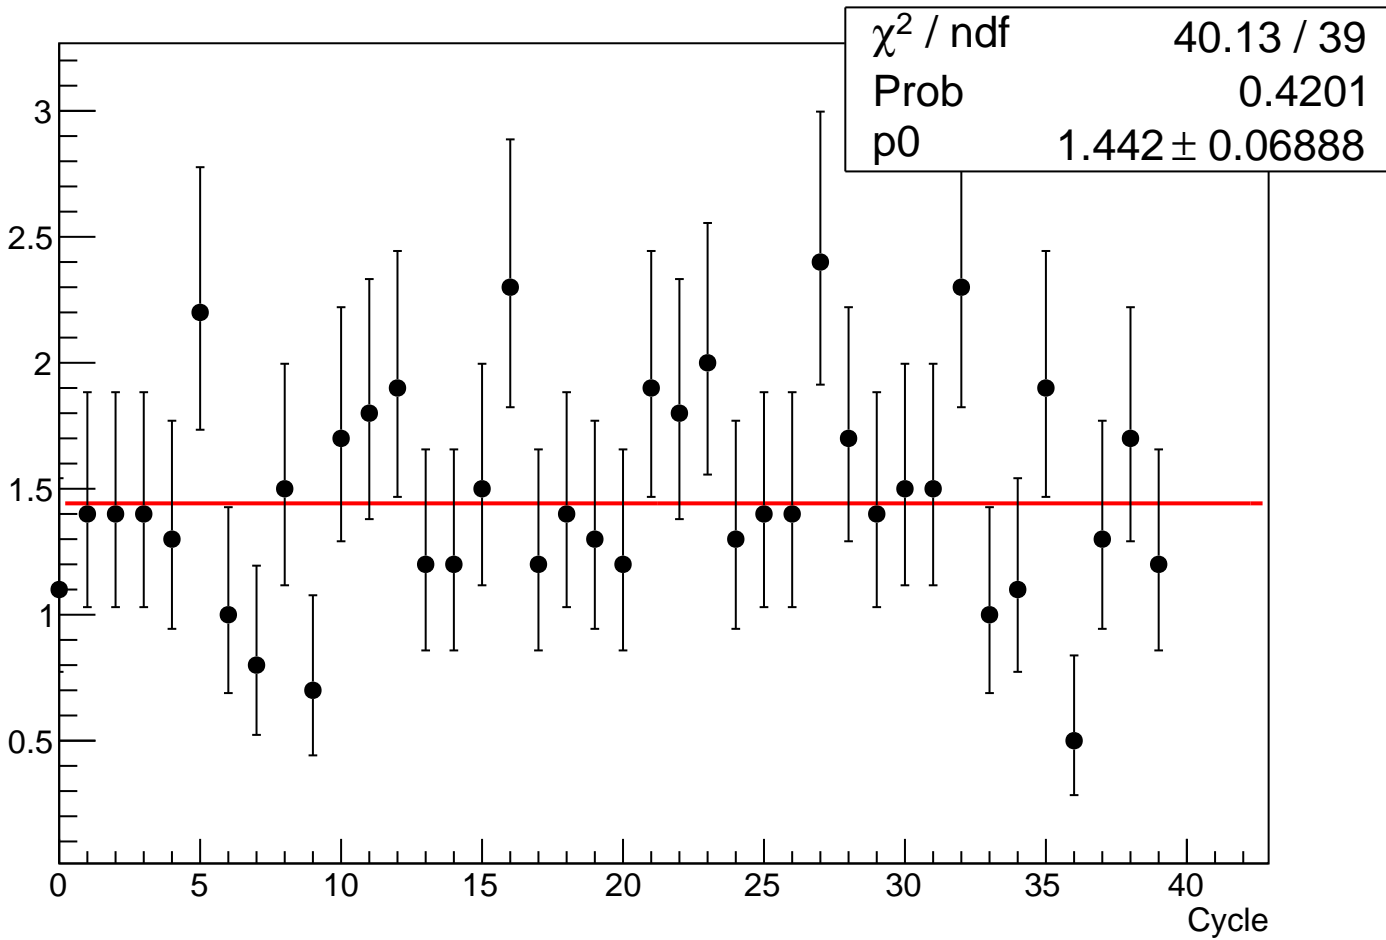

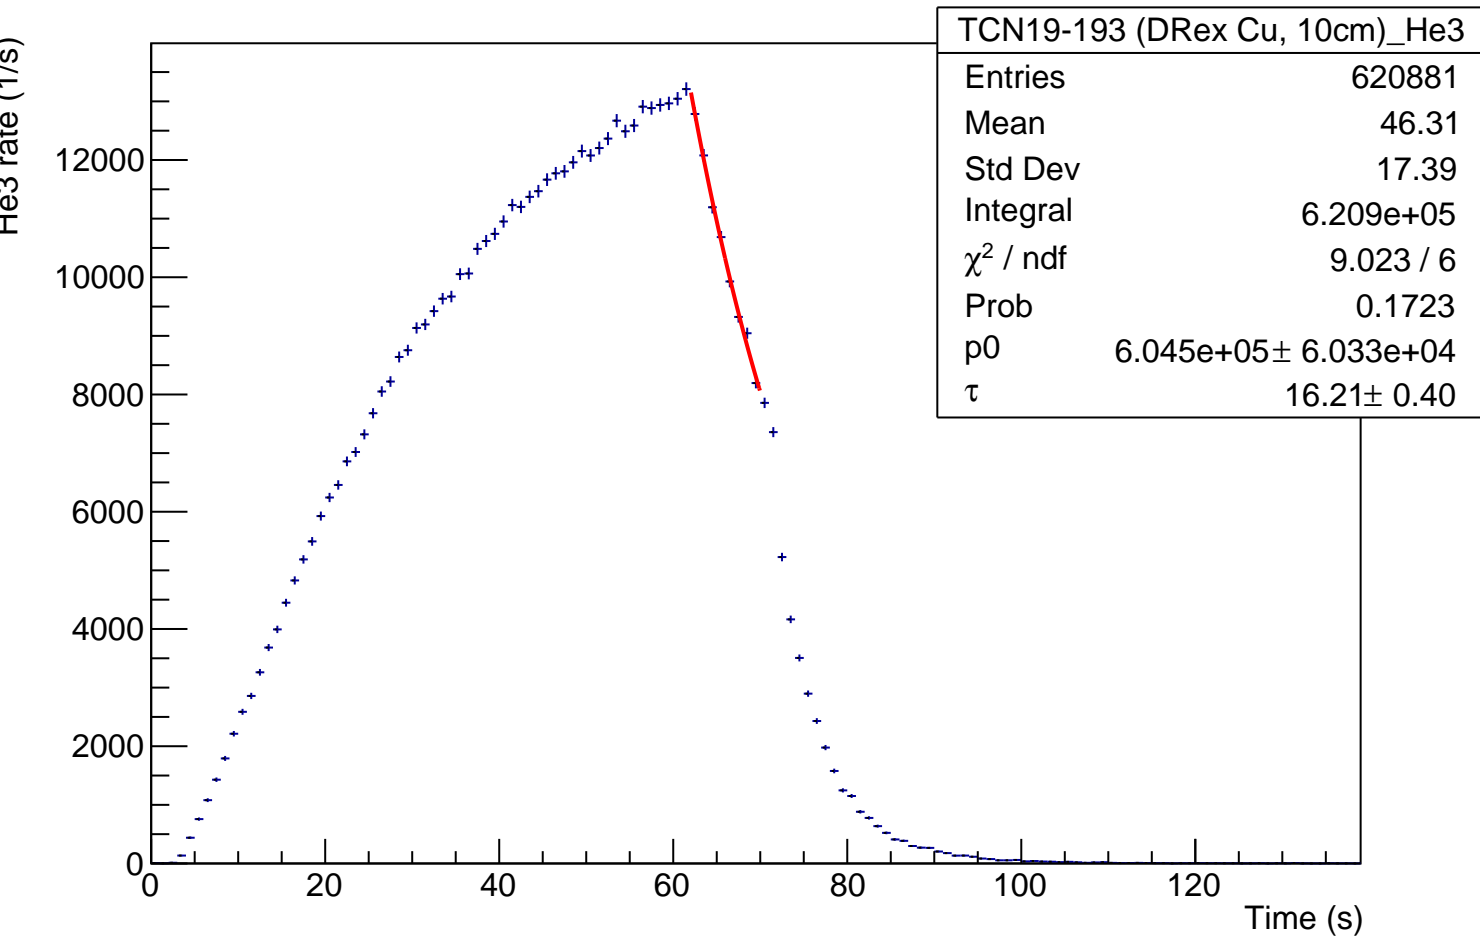

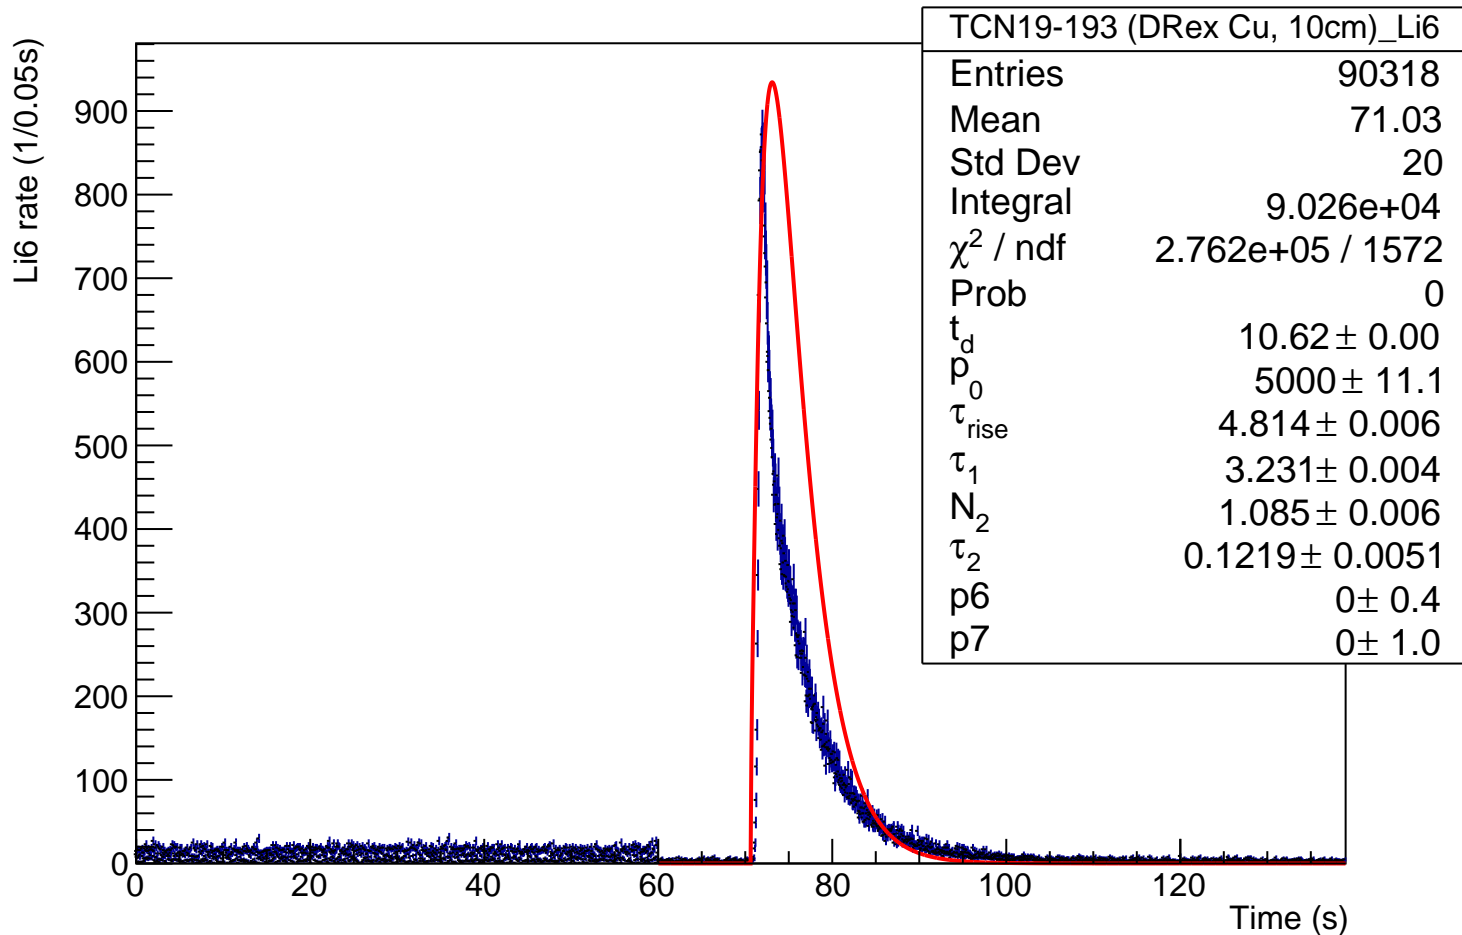


Normalized Li6 rate (1/0.05s)

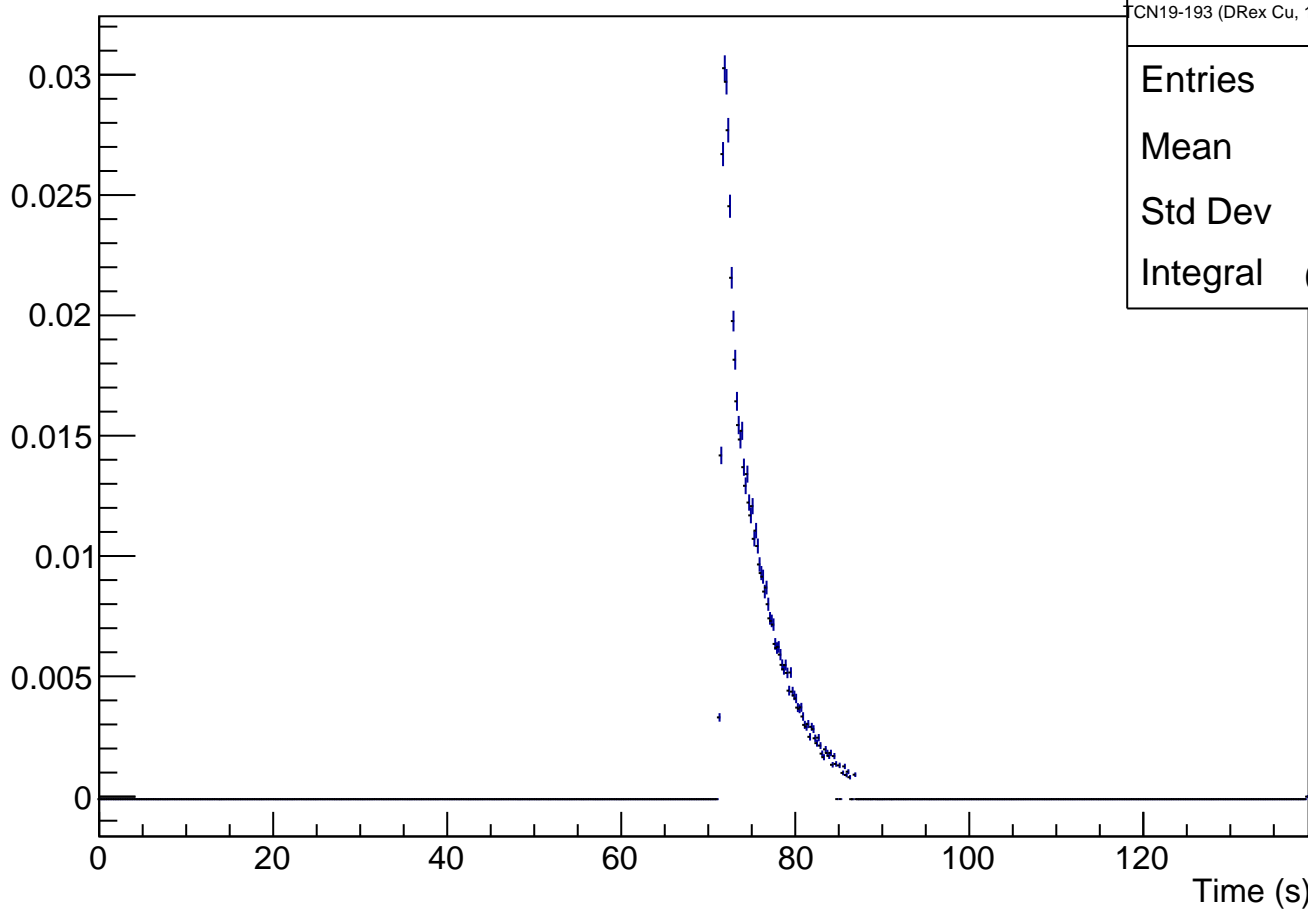


CN19-193 (DRex Cu, 10cm)_Li6_norm

| | |
|----------|--------|
| Entries | 74095 |
| Mean | 71.18 |
| Std Dev | 16.79 |
| Integral | 0.5272 |

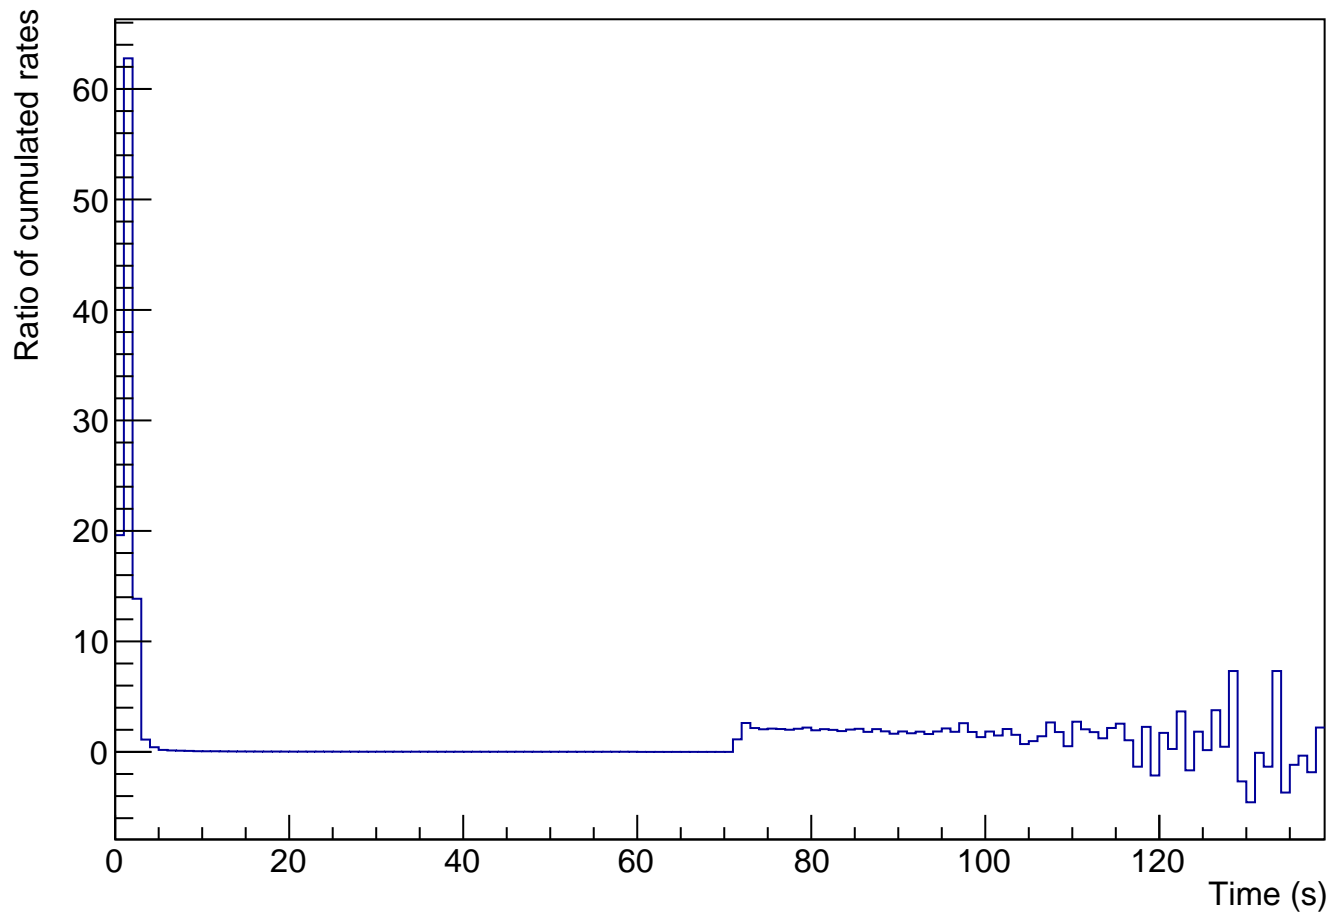


Average rate ratio

| | |
|---------------------------------|-------|
| TCN19-193 (DRex Cu, 10cm)_ratio | |
| Entries | 360 |
| Mean | 92.23 |
| Std Dev | 19.99 |
| Integral | 6.489 |

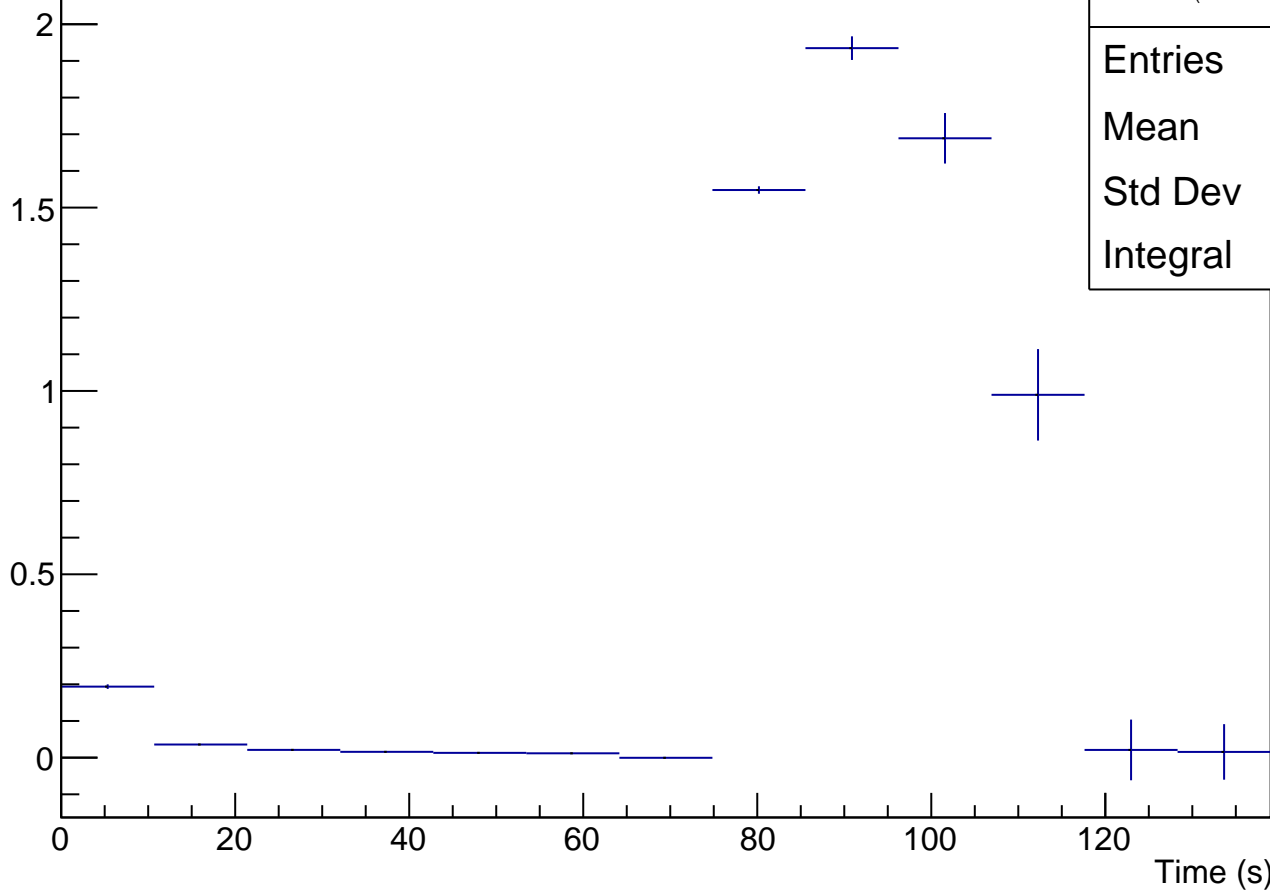

TCN19-193 (DRex Cu, 10cm)

Count

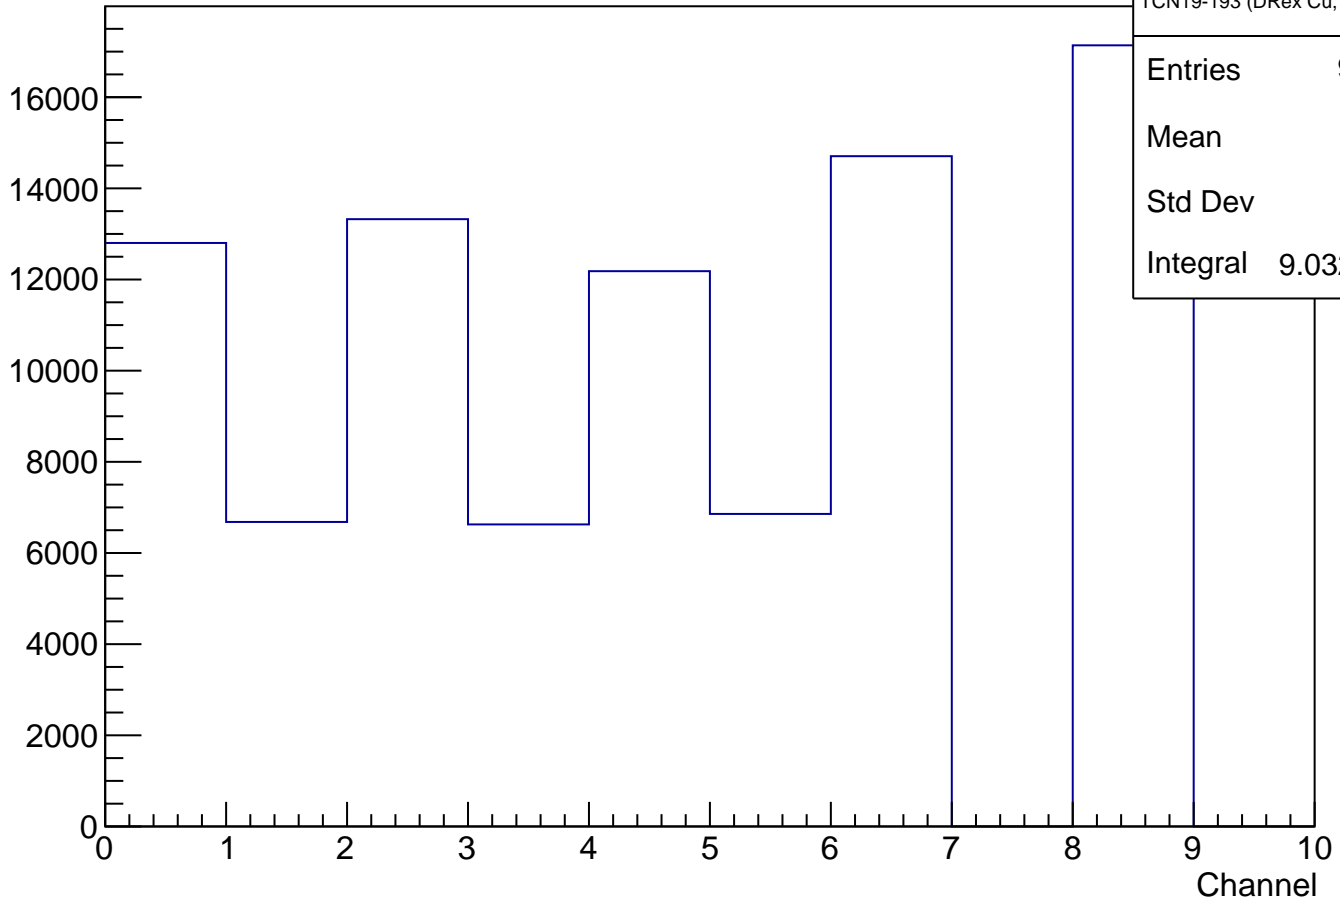

TCN19-193 (DRex Cu, 10cm)_ch

Entries 90318

Mean 4.003

Std Dev 2.713

Integral 9.032e+04

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 40

Mean 0

Std Dev 0

Integral 0