




TCN19-193 (DRex Cu, -4.5cm), transmission normalized during prestorage

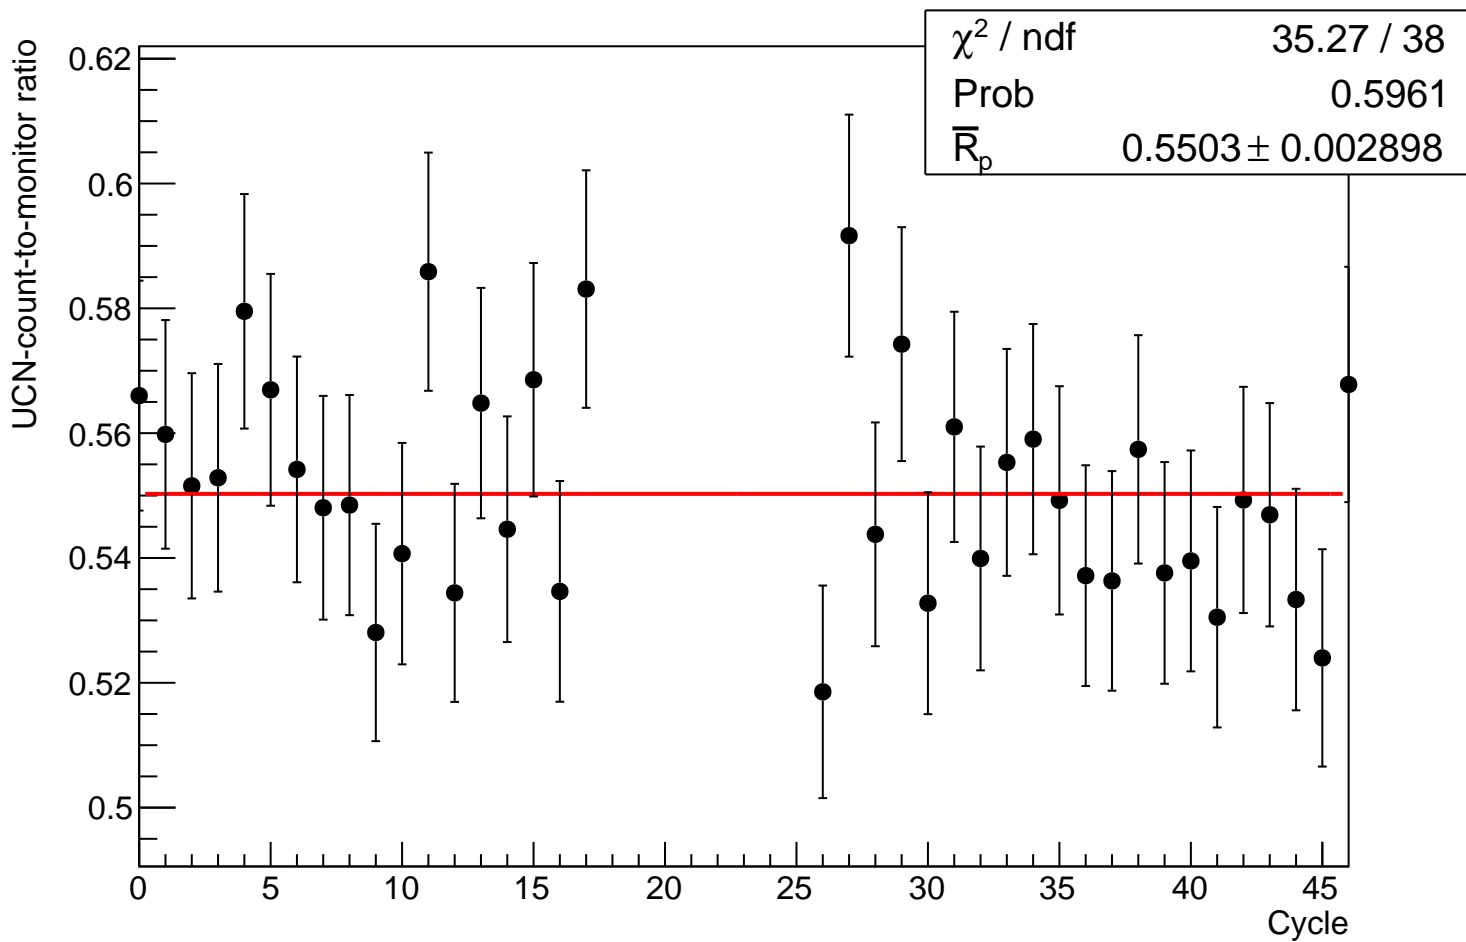


Graph

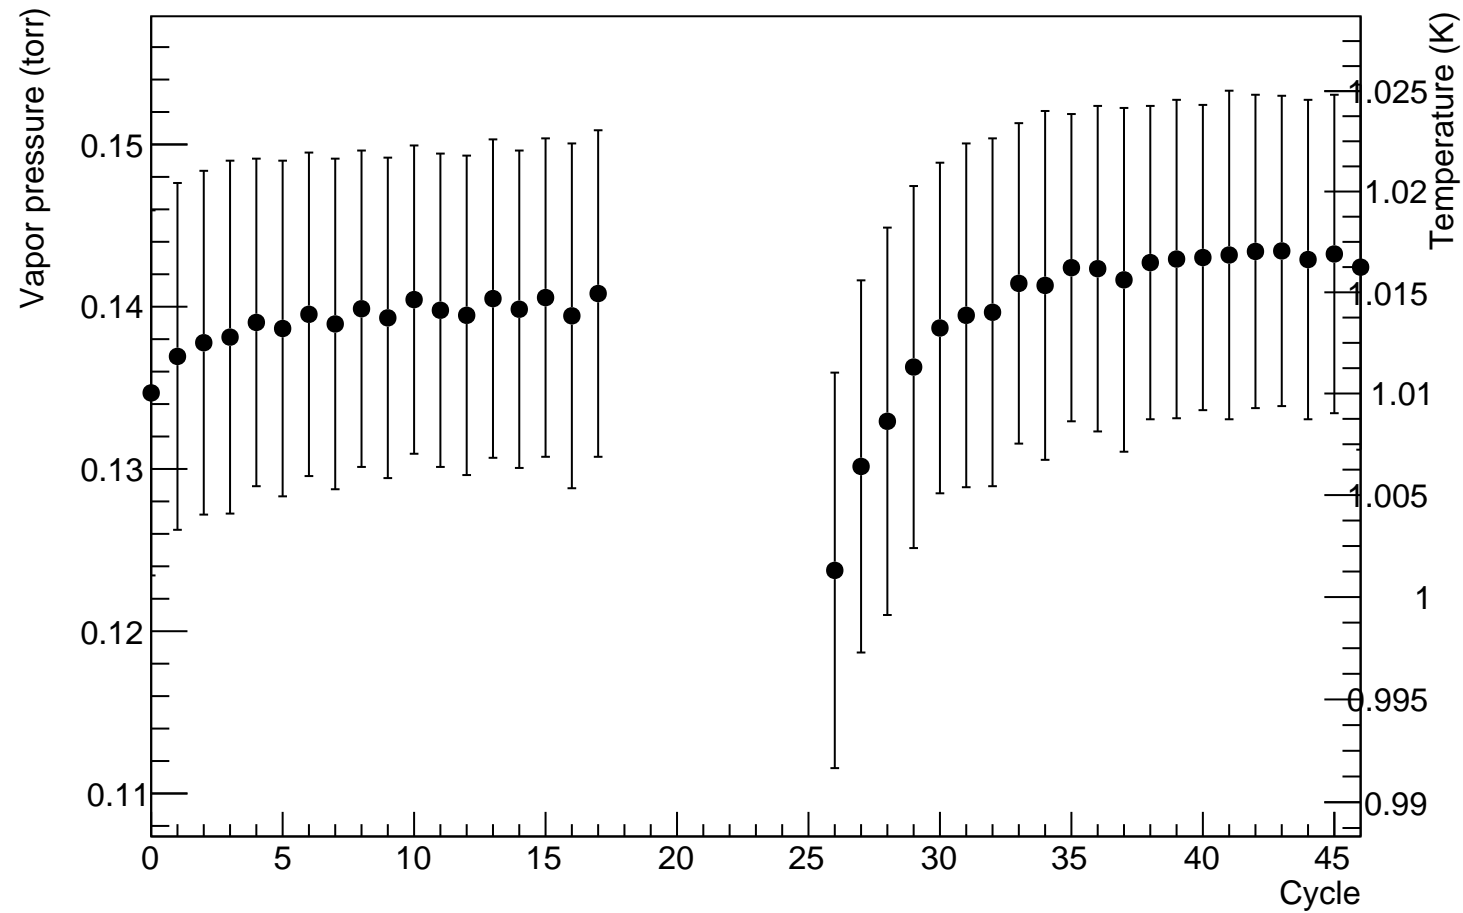


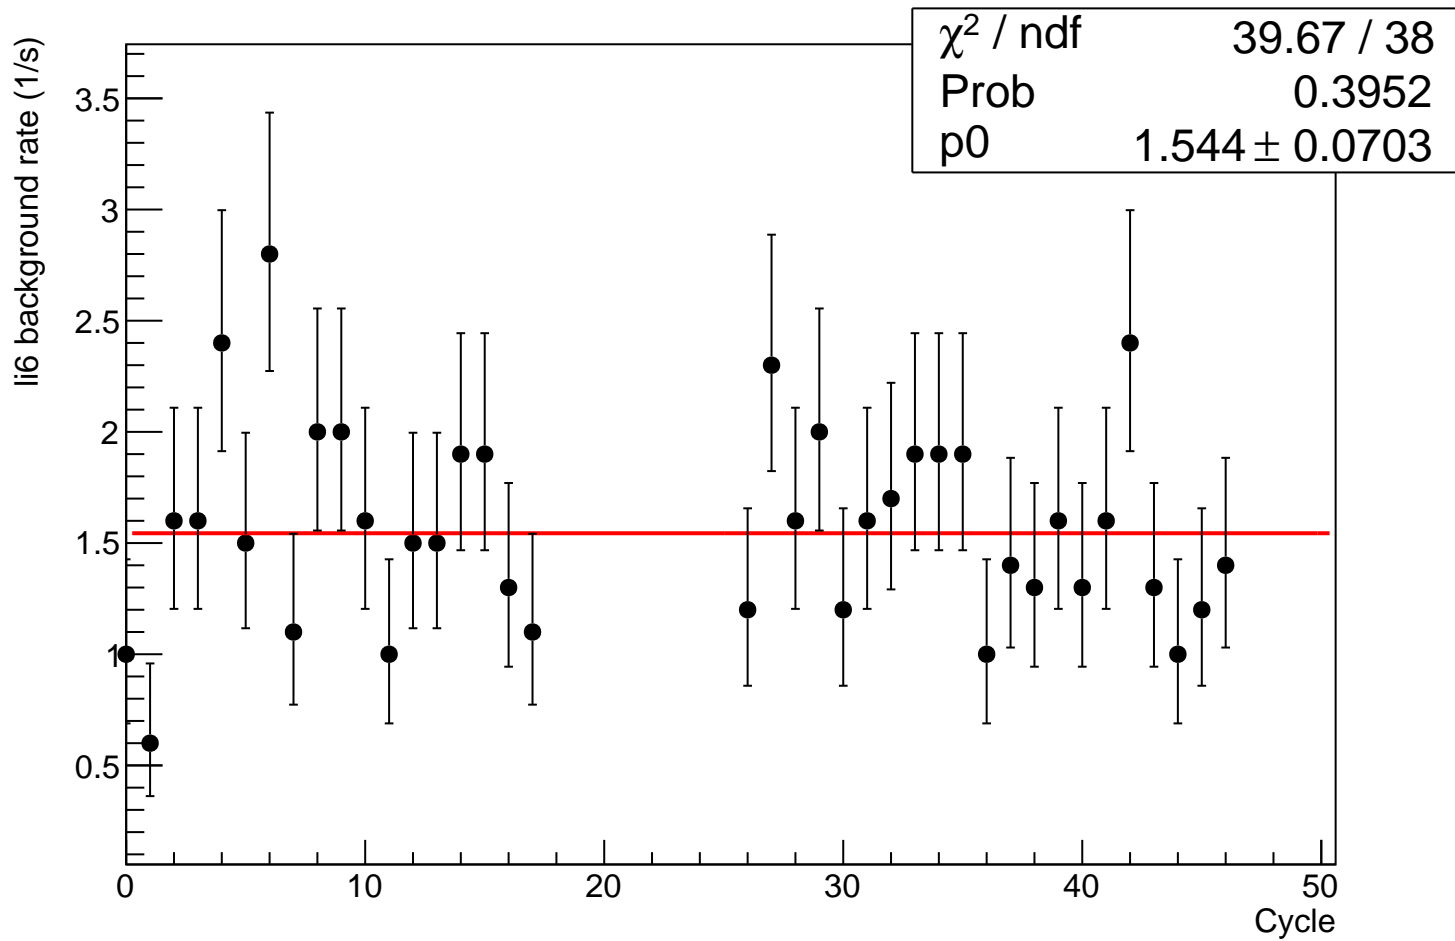



Pre-storage lifetime (s)

| | |
|-----------------------|------------------|
| χ^2 / ndf | 36.47 / 38 |
| Prob | 0.5405 |
| p0 | 14.42 ± 0.37 |

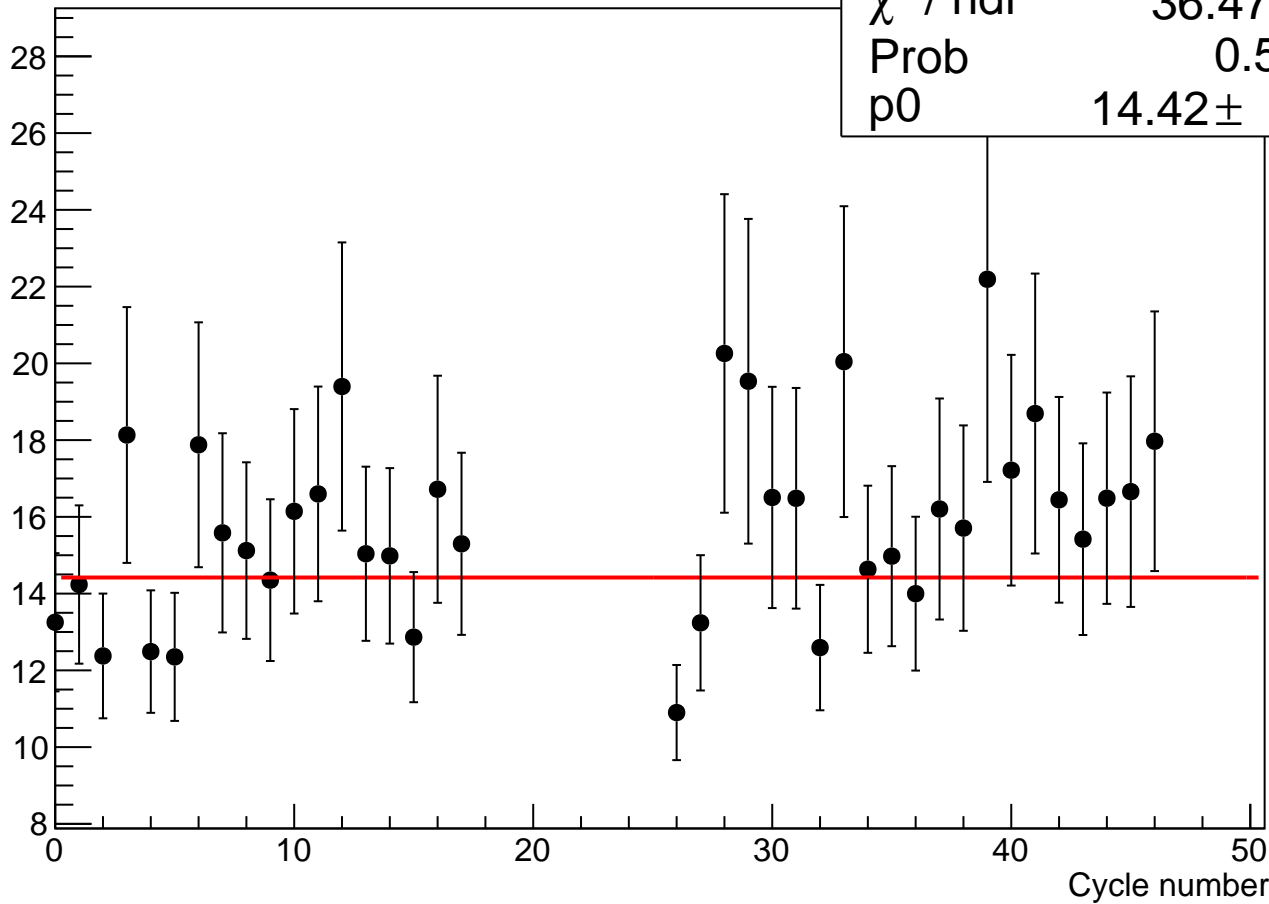


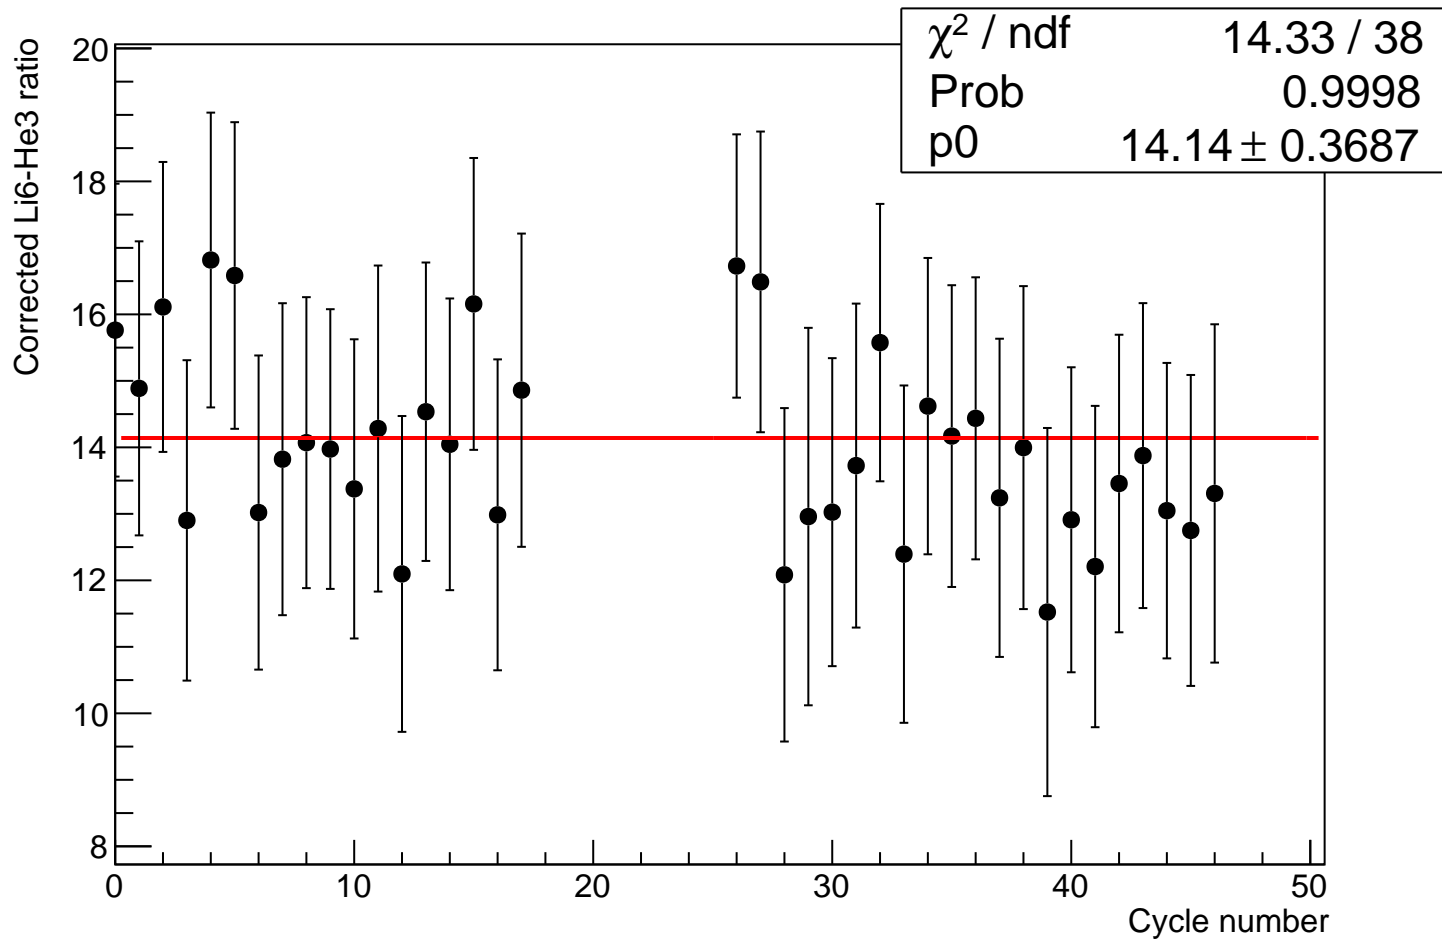

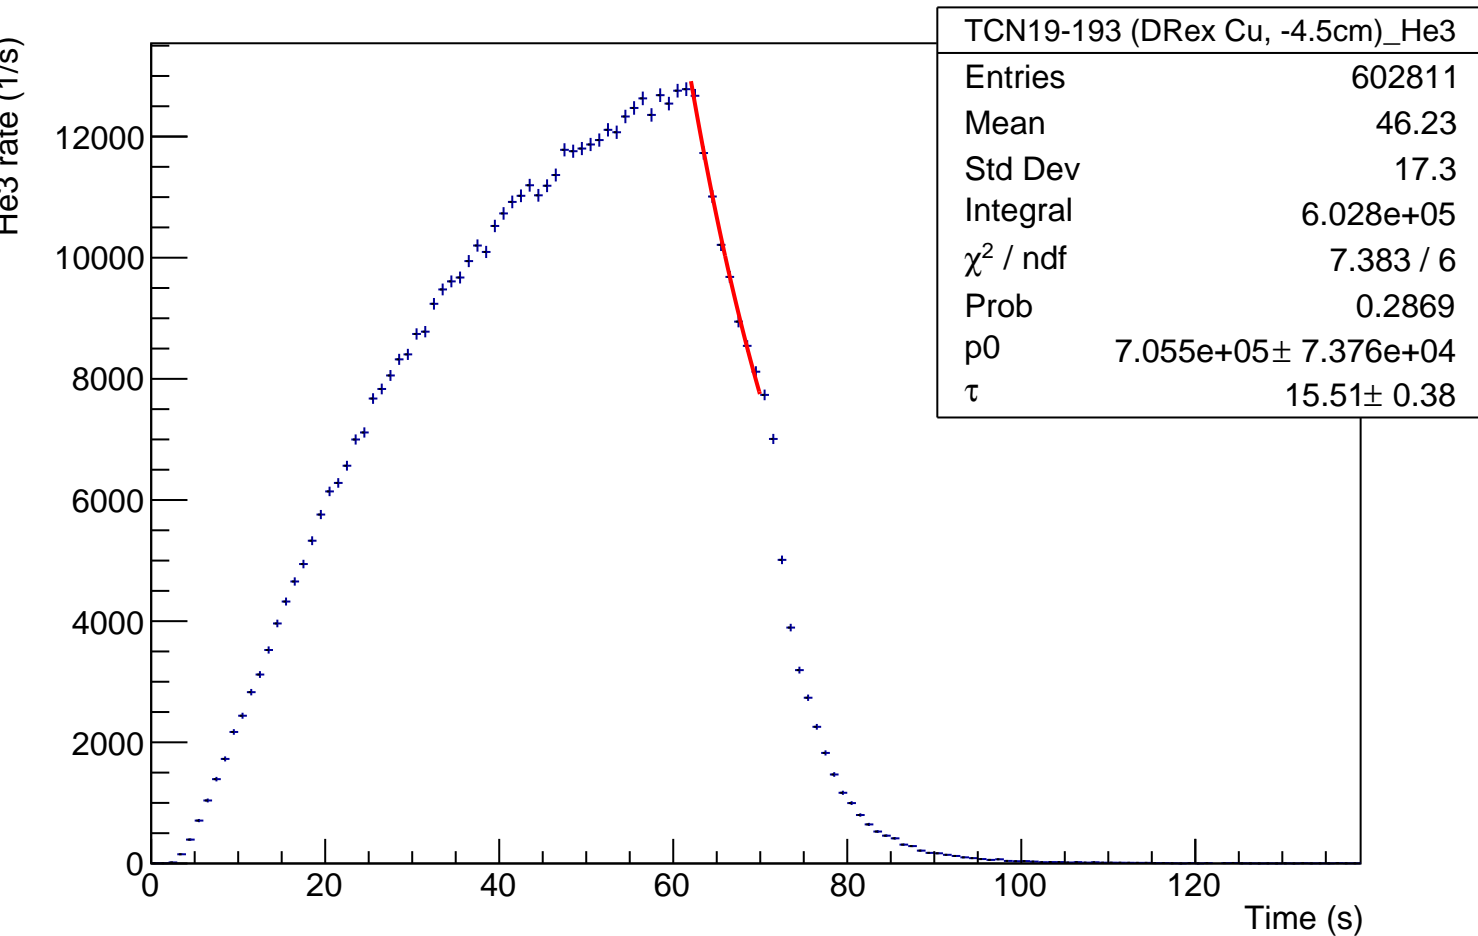

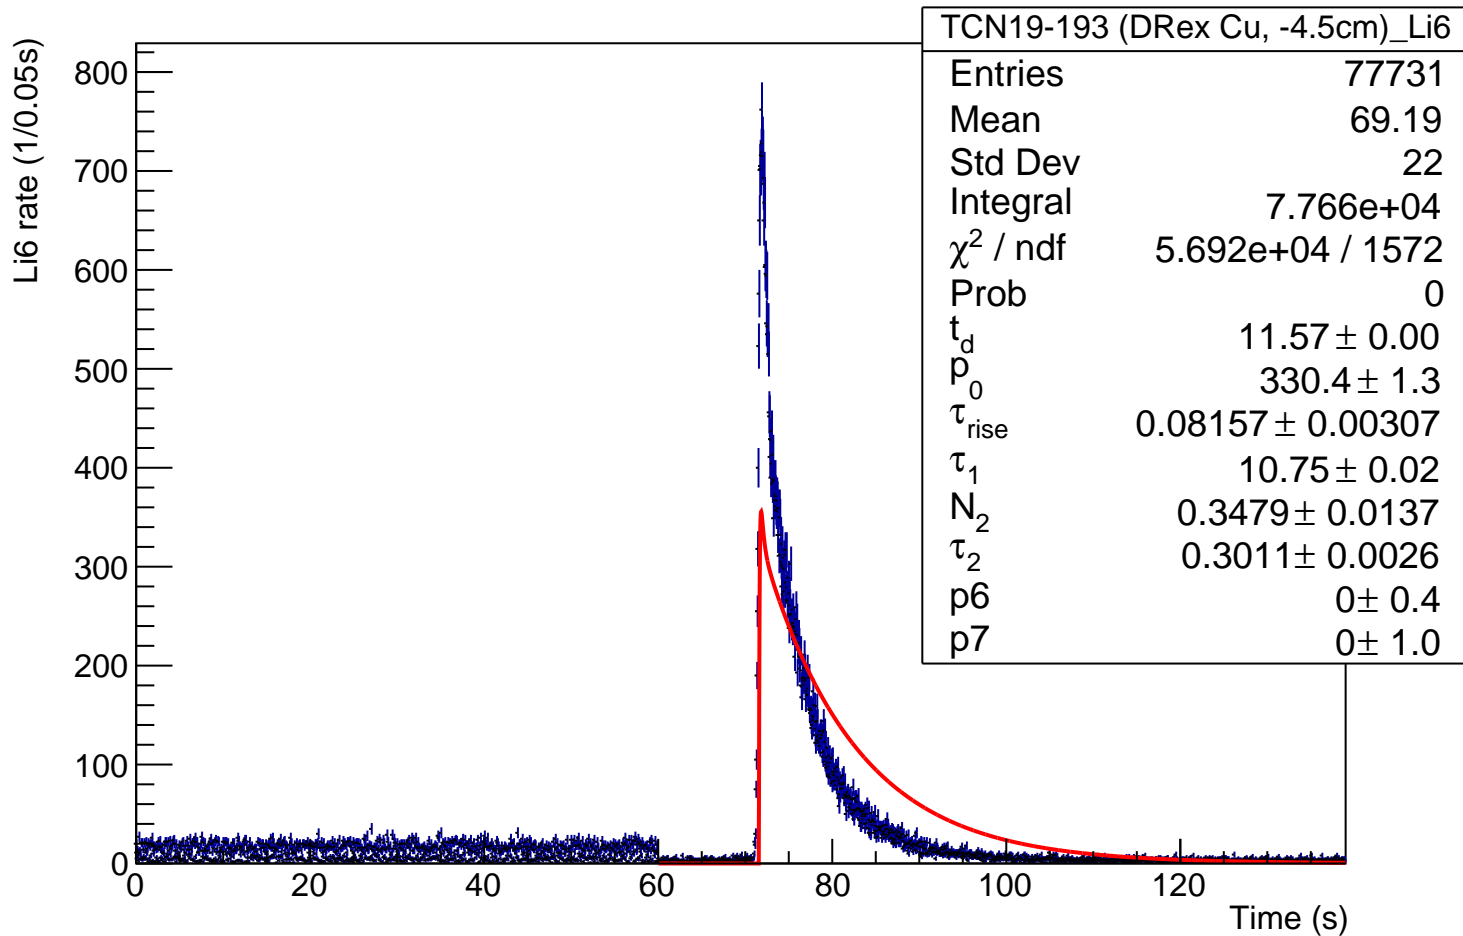


Normalized Li6 rate (1/0.05s)

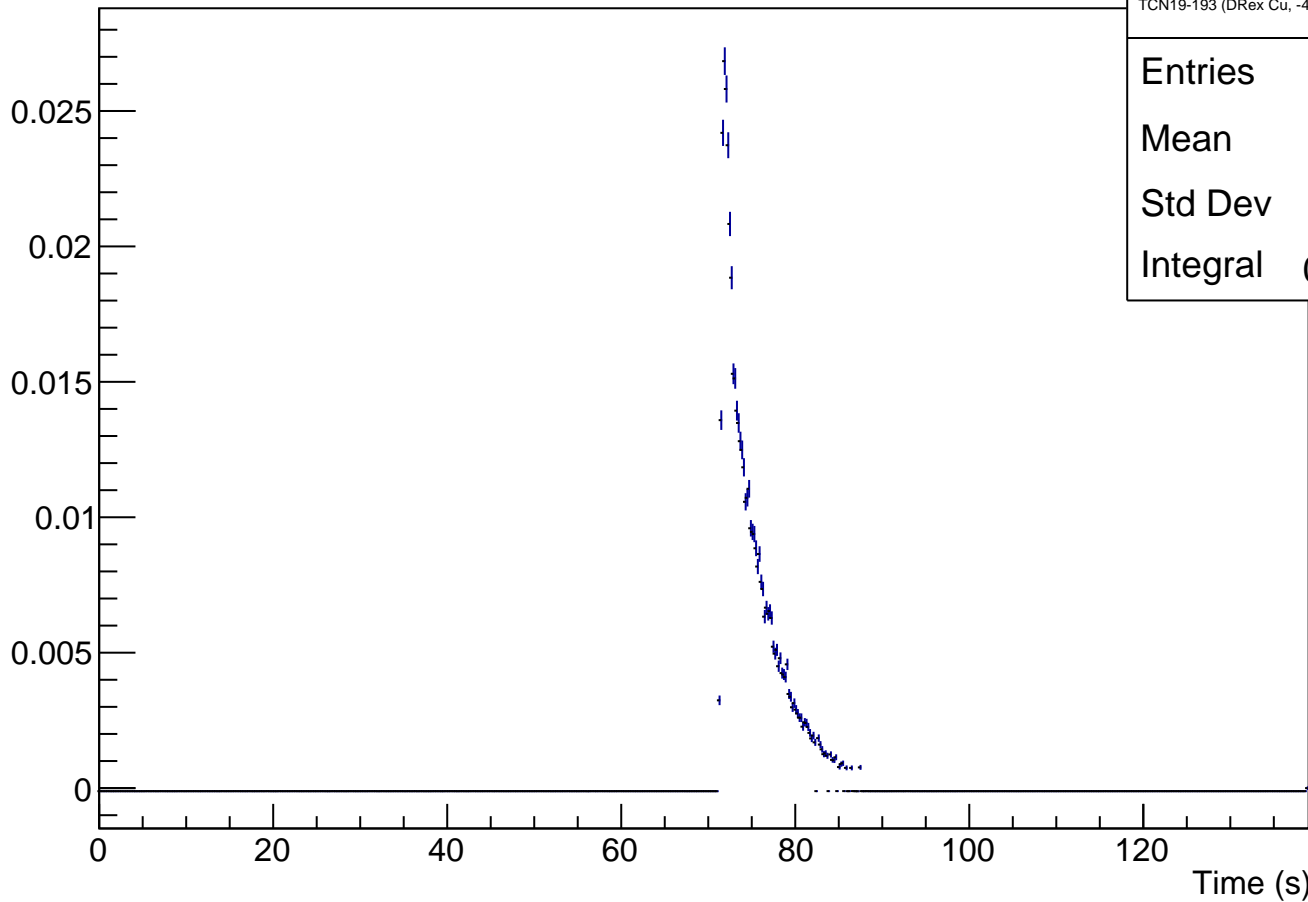


TCN19-193 (DRex Cu, -4.5cm)_Li6_norm


| | |
|----------|--------|
| Entries | 61243 |
| Mean | 69.15 |
| Std Dev | 18.65 |
| Integral | 0.4157 |

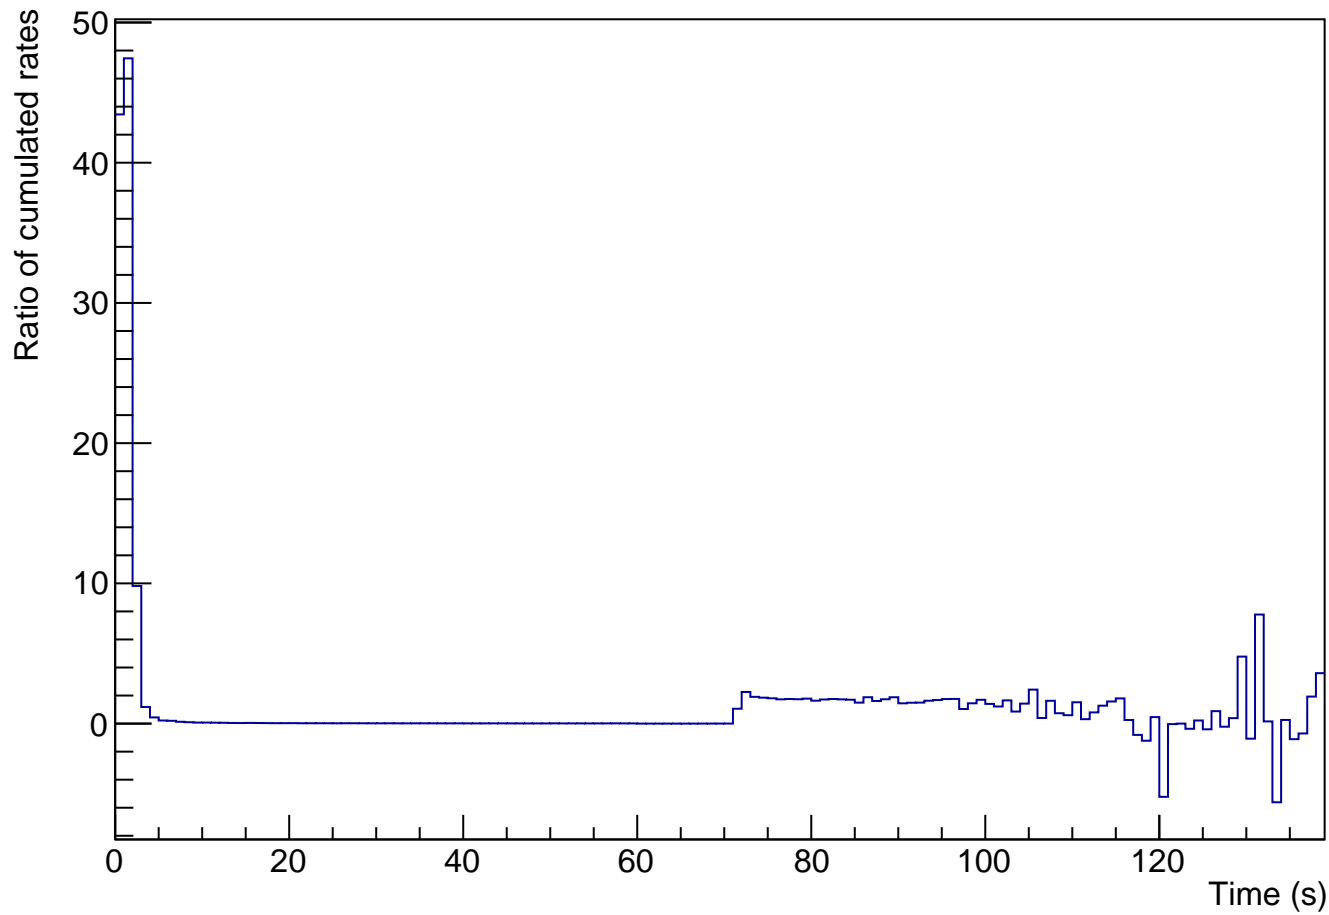

Average rate ratio

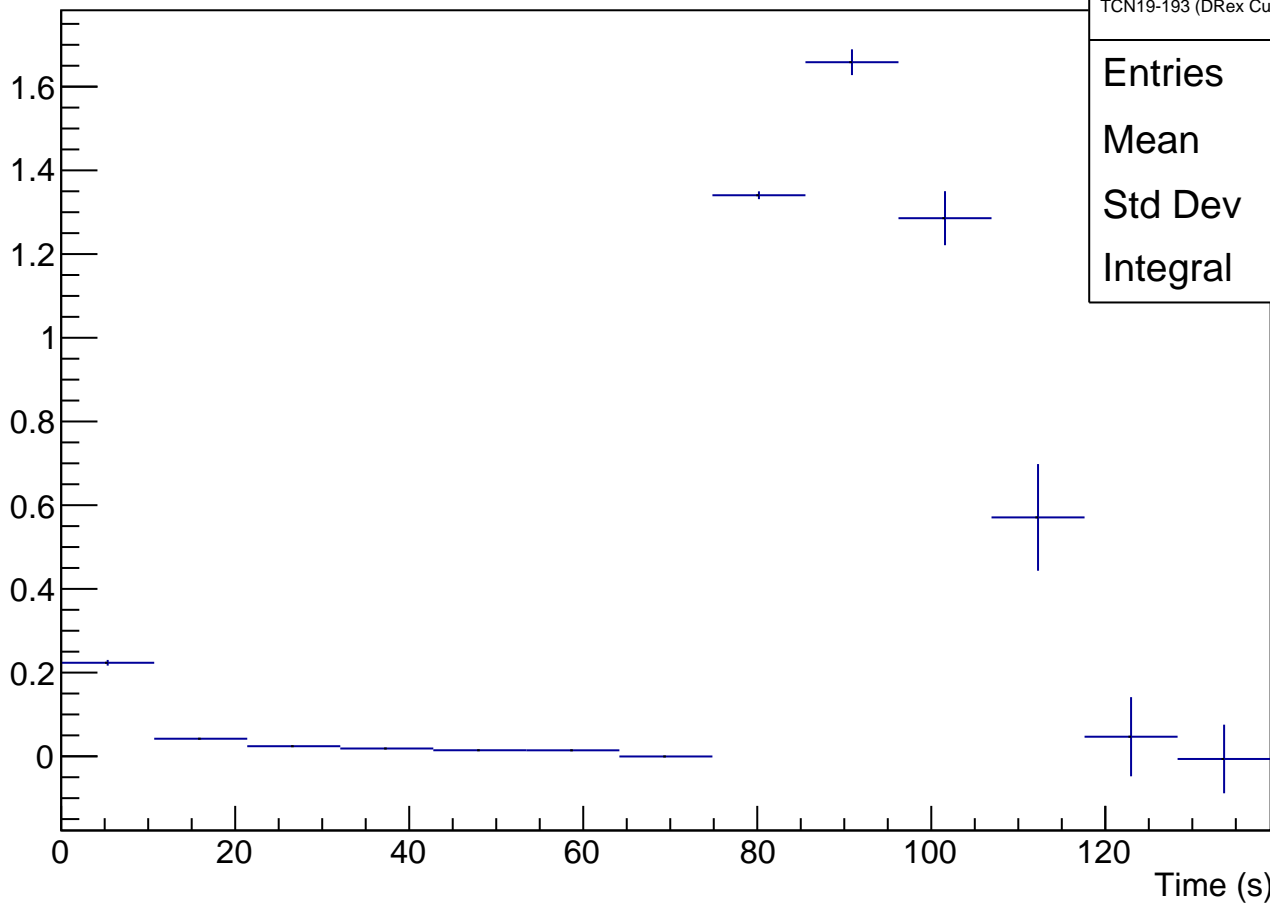

TCN19-193 (DRex Cu, -4.5cm)

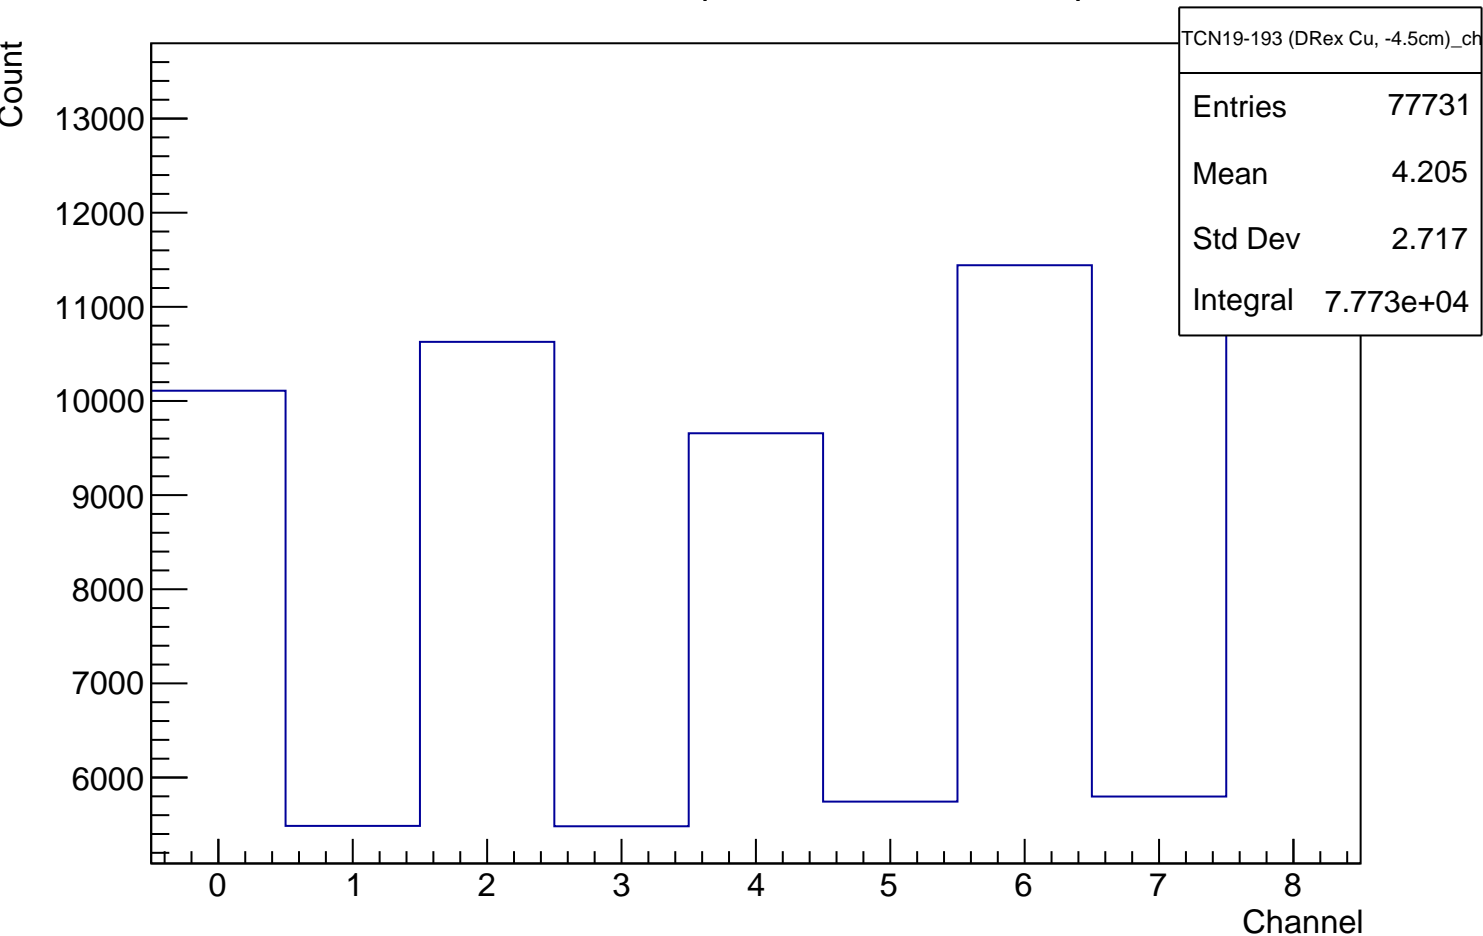

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 39

Mean 0

Std Dev 0

Integral 0