





TCN19-201 (DRex black, 80cm), transmission normalized during prestorage

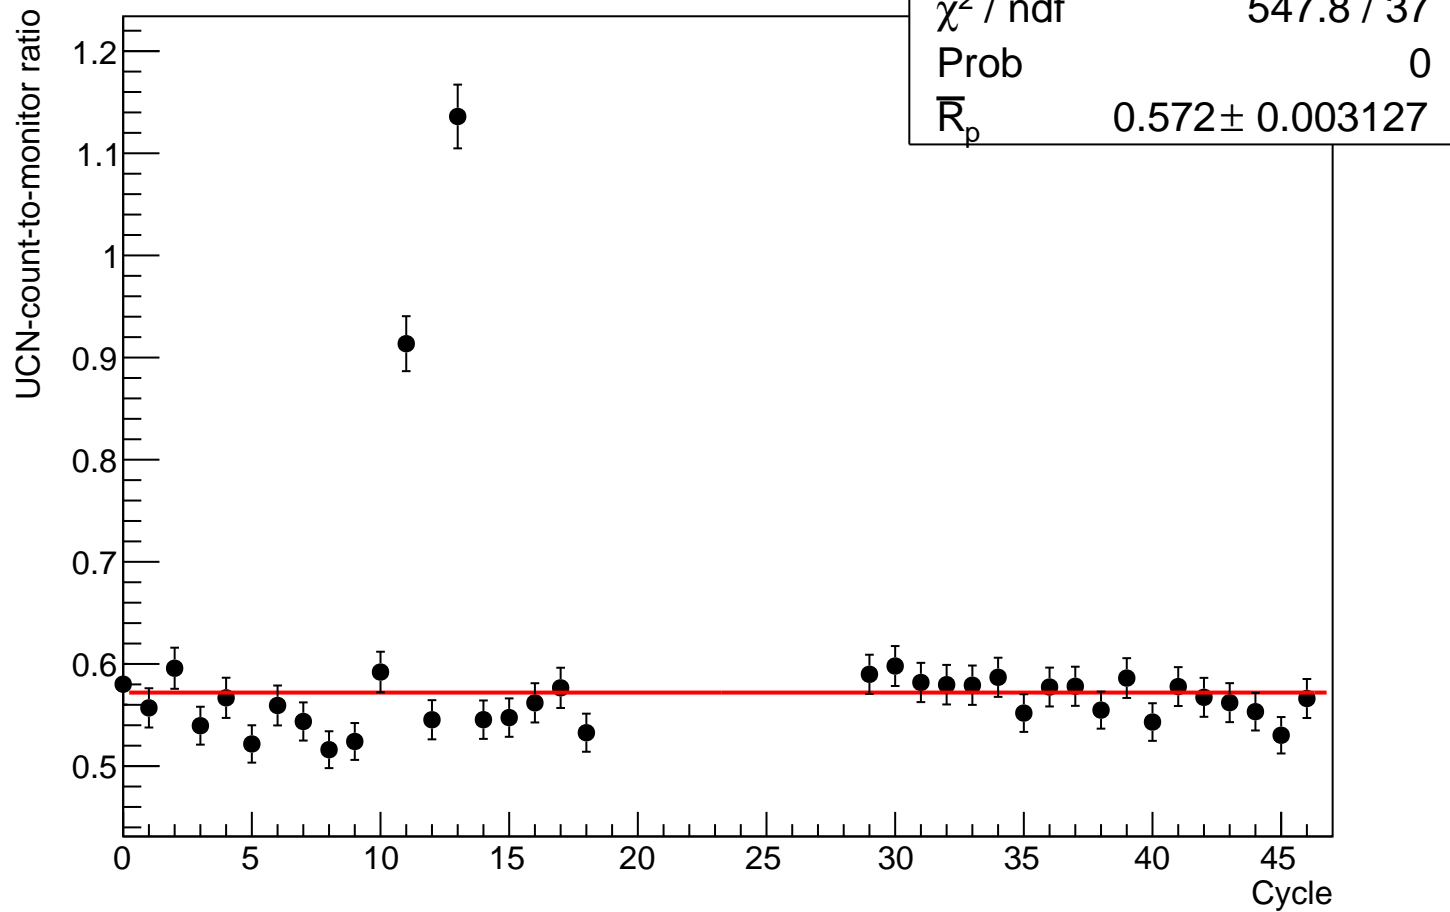

# Graph

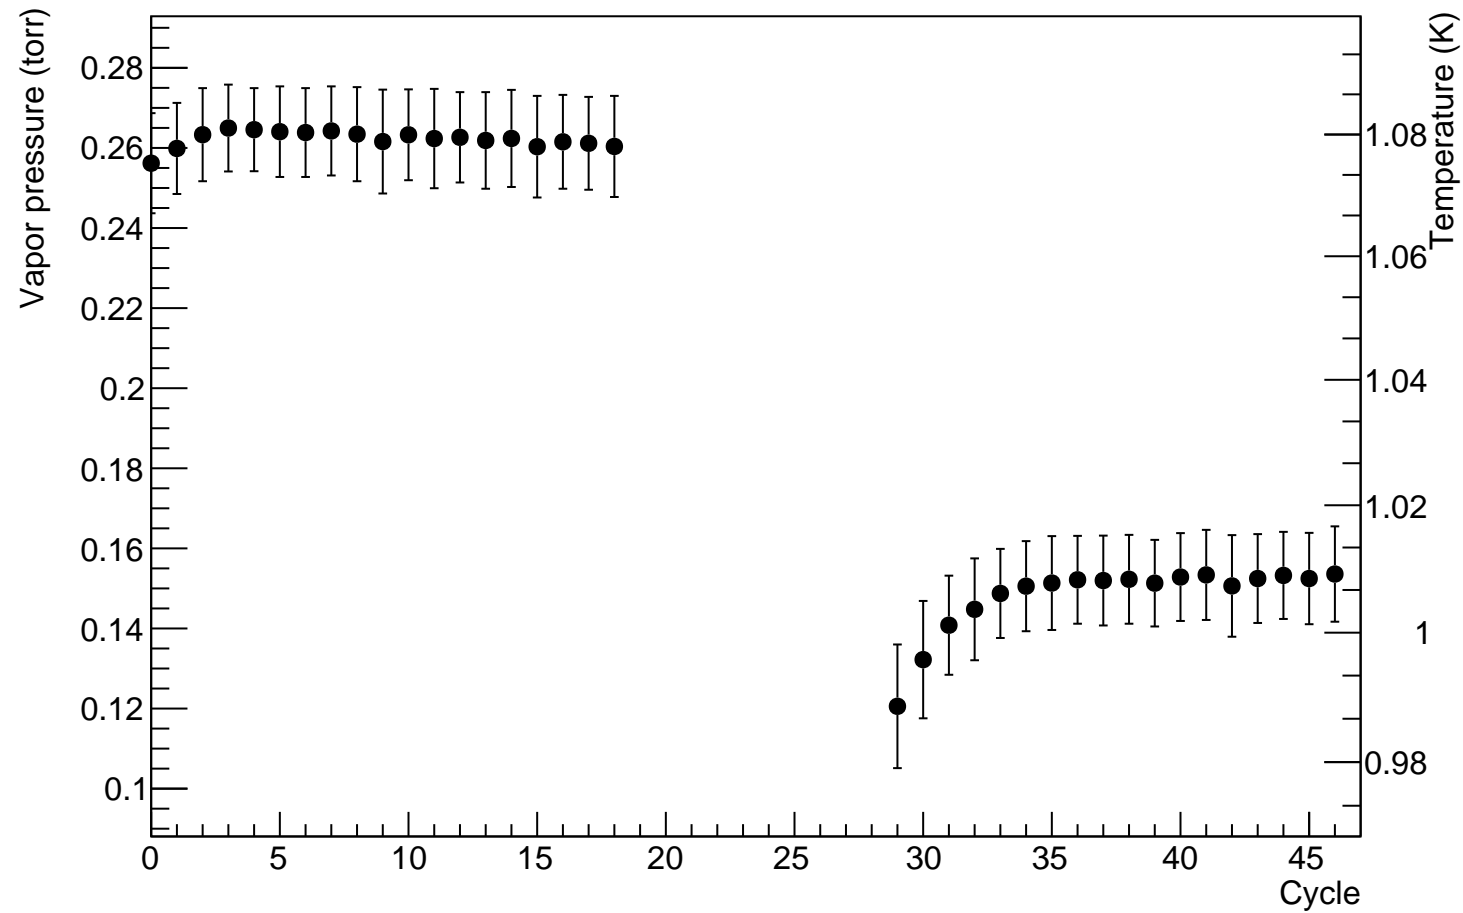


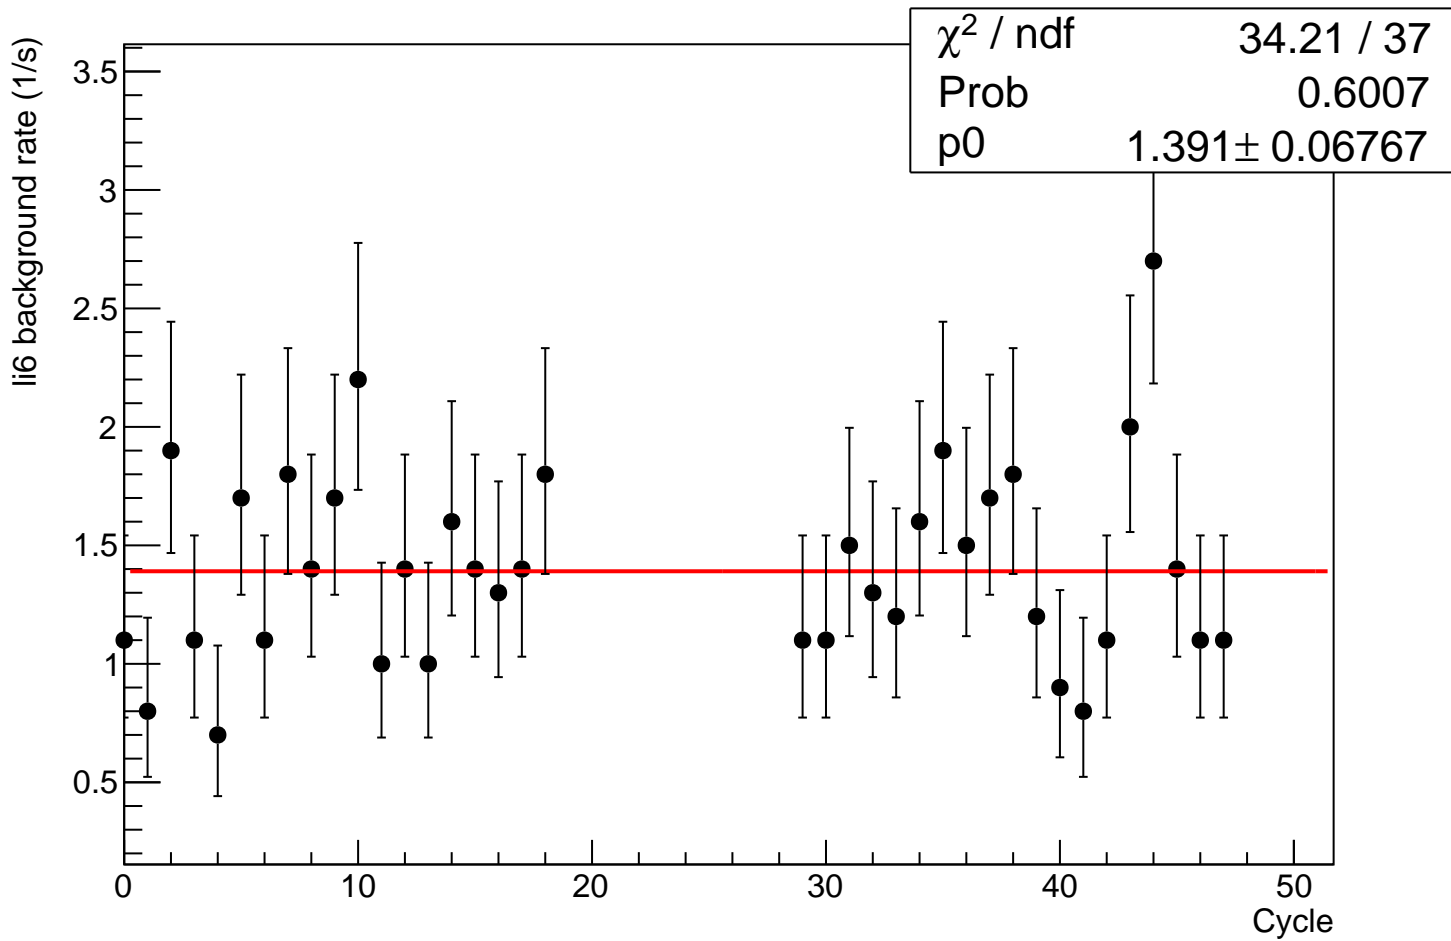


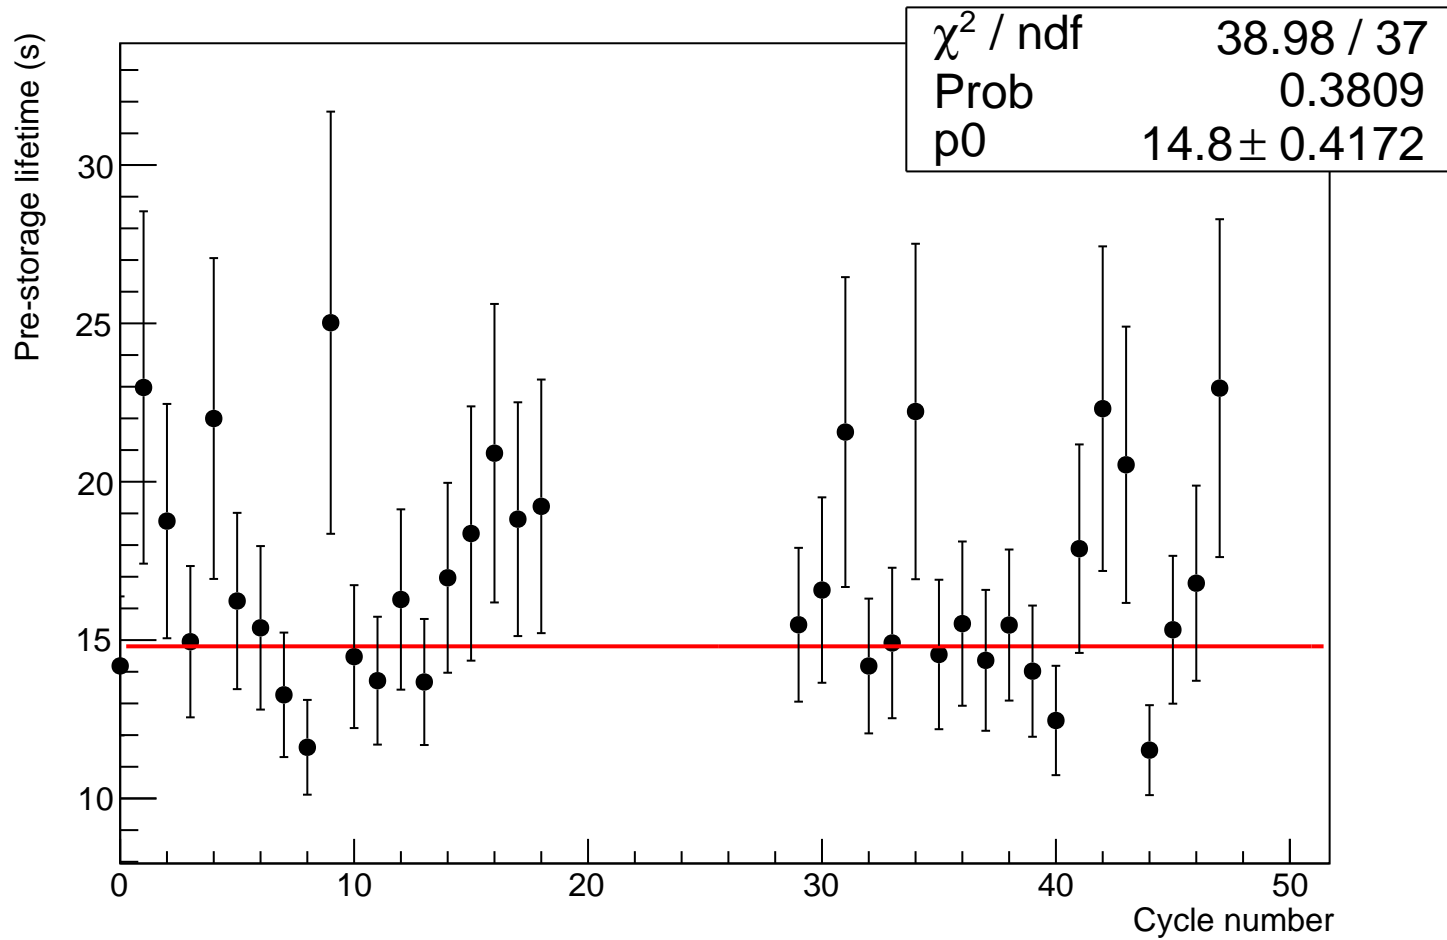


Corrected Li6-He3 ratio


$\chi^2 / \text{ndf}$	33.27 / 37
Prob	0.6445
p0	$14.29 \pm 0.4106$

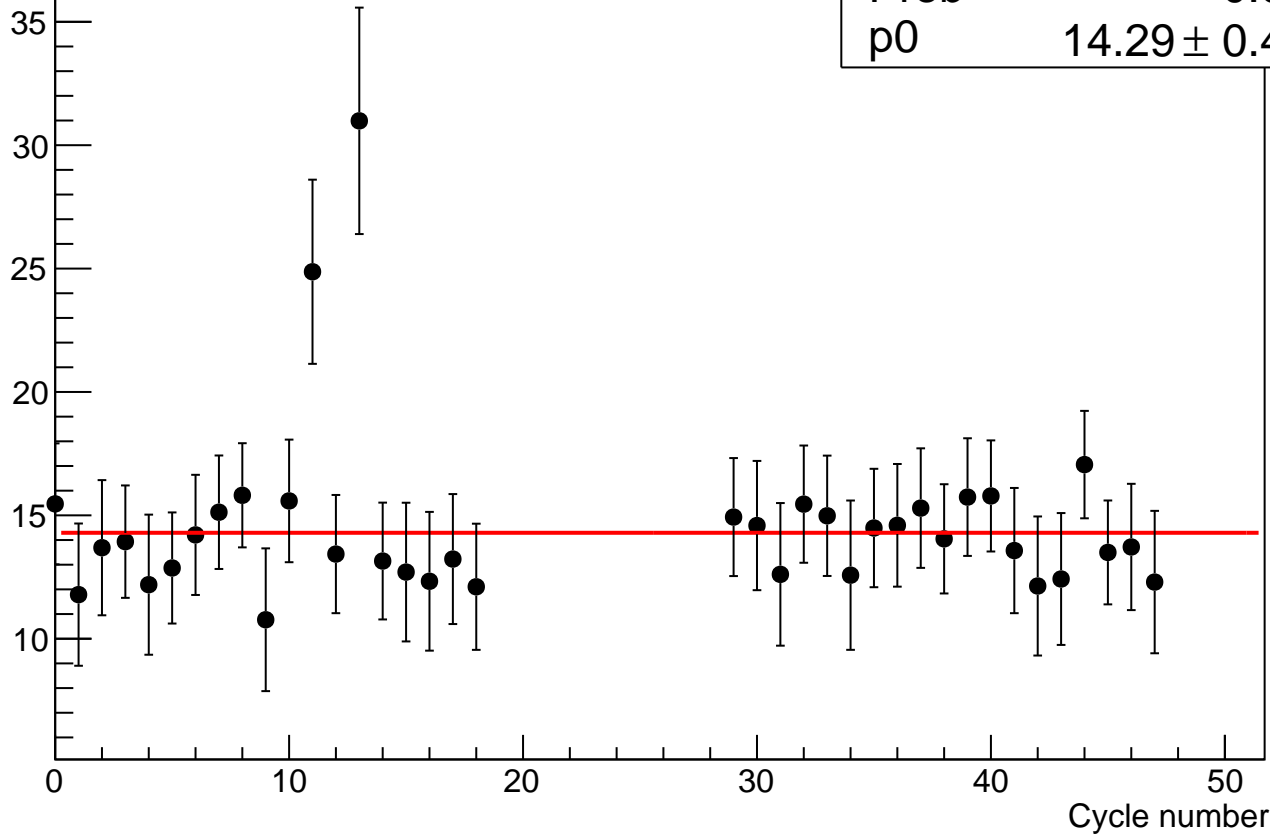

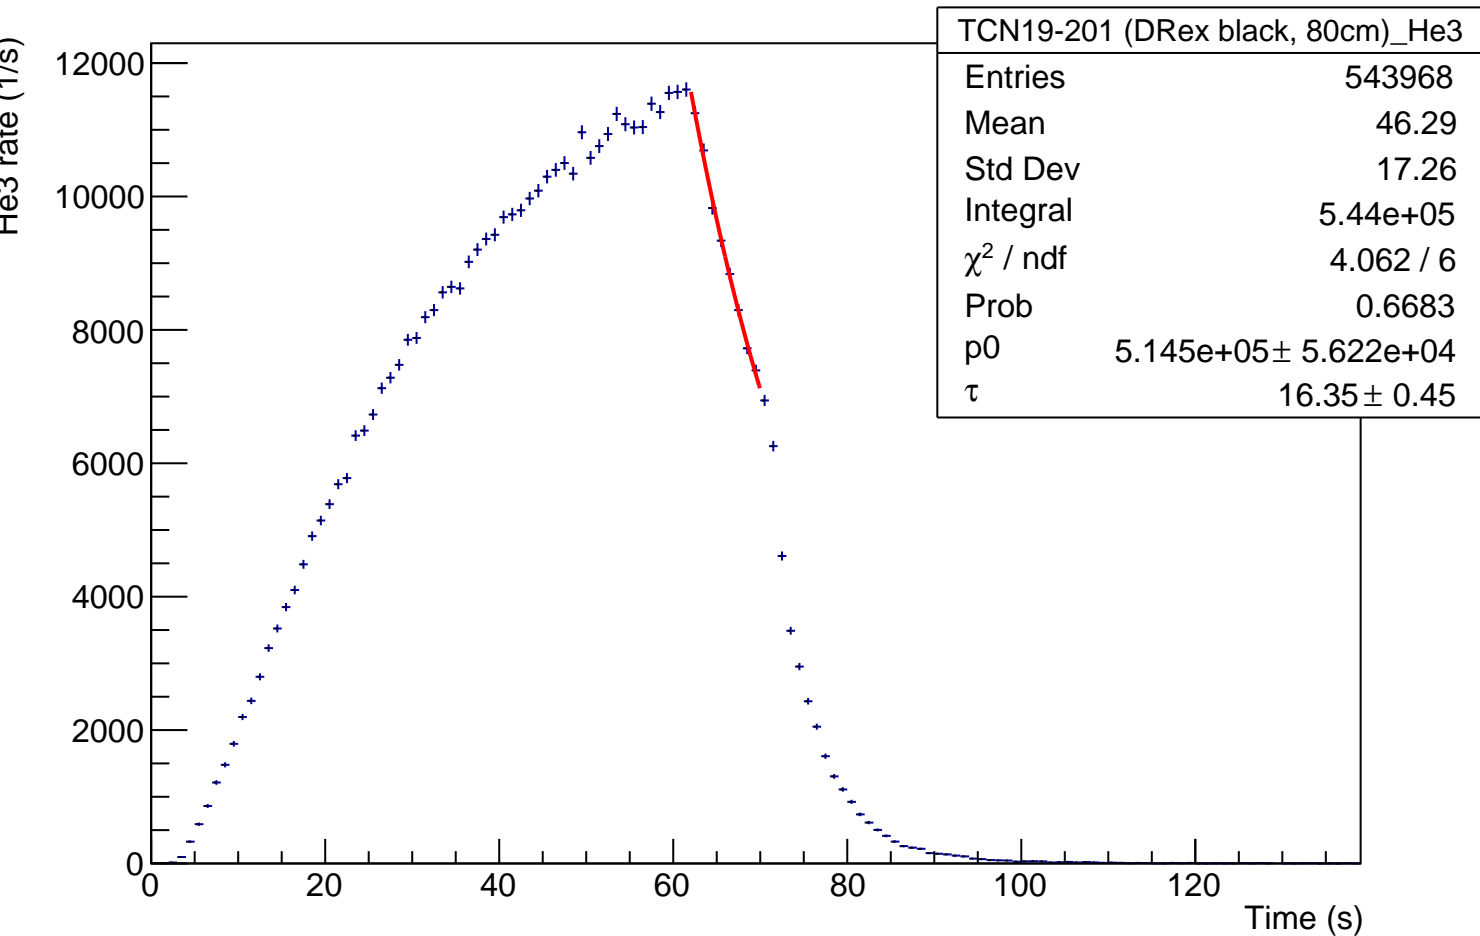

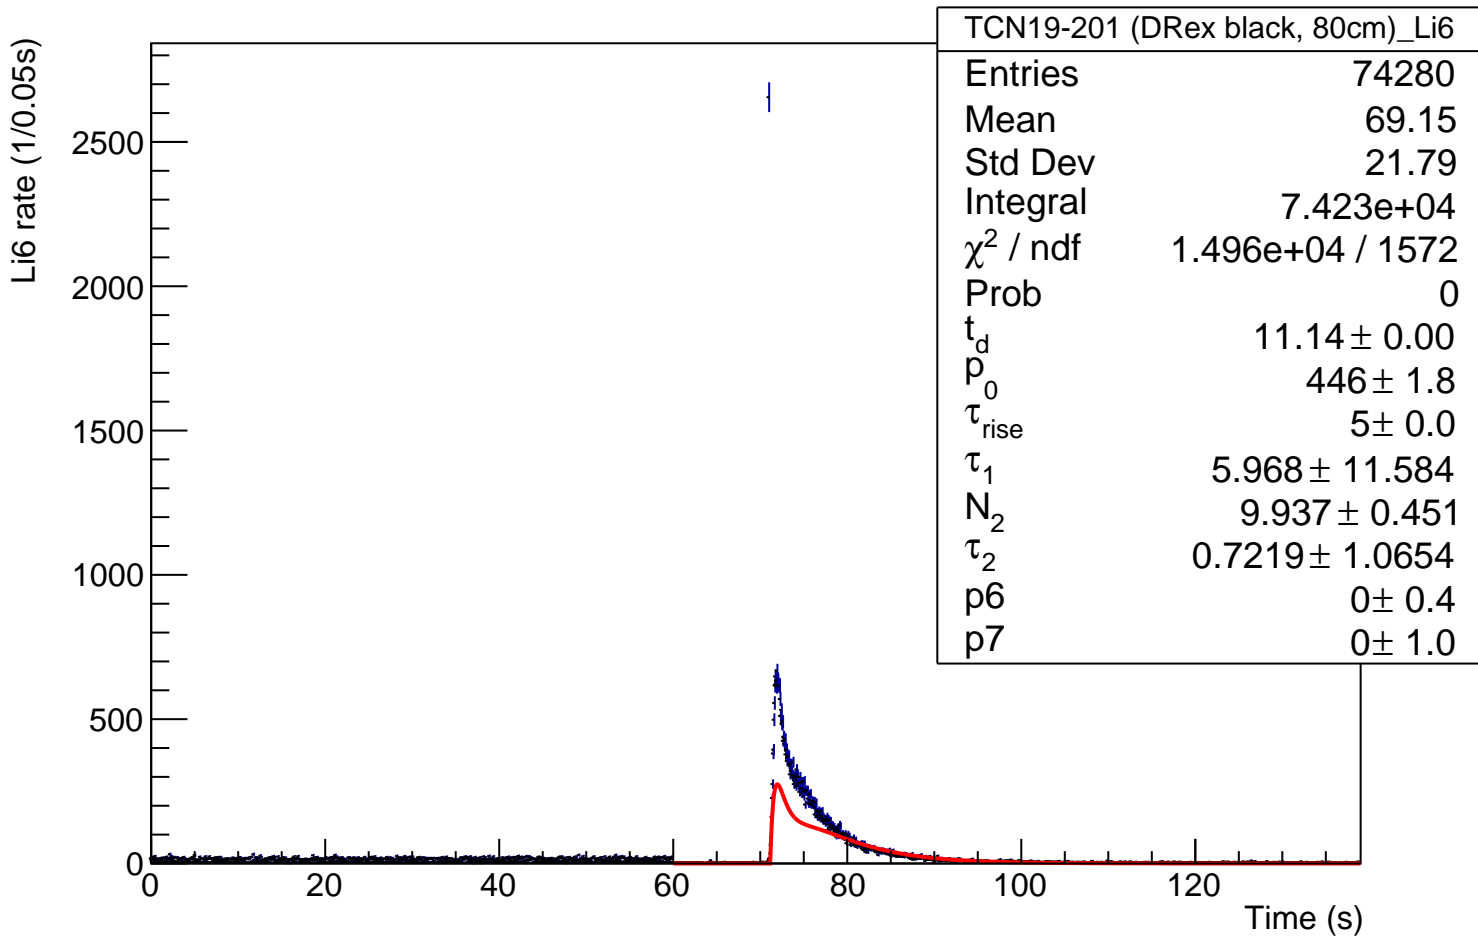

Normalized Li6 rate (1/0.05s)

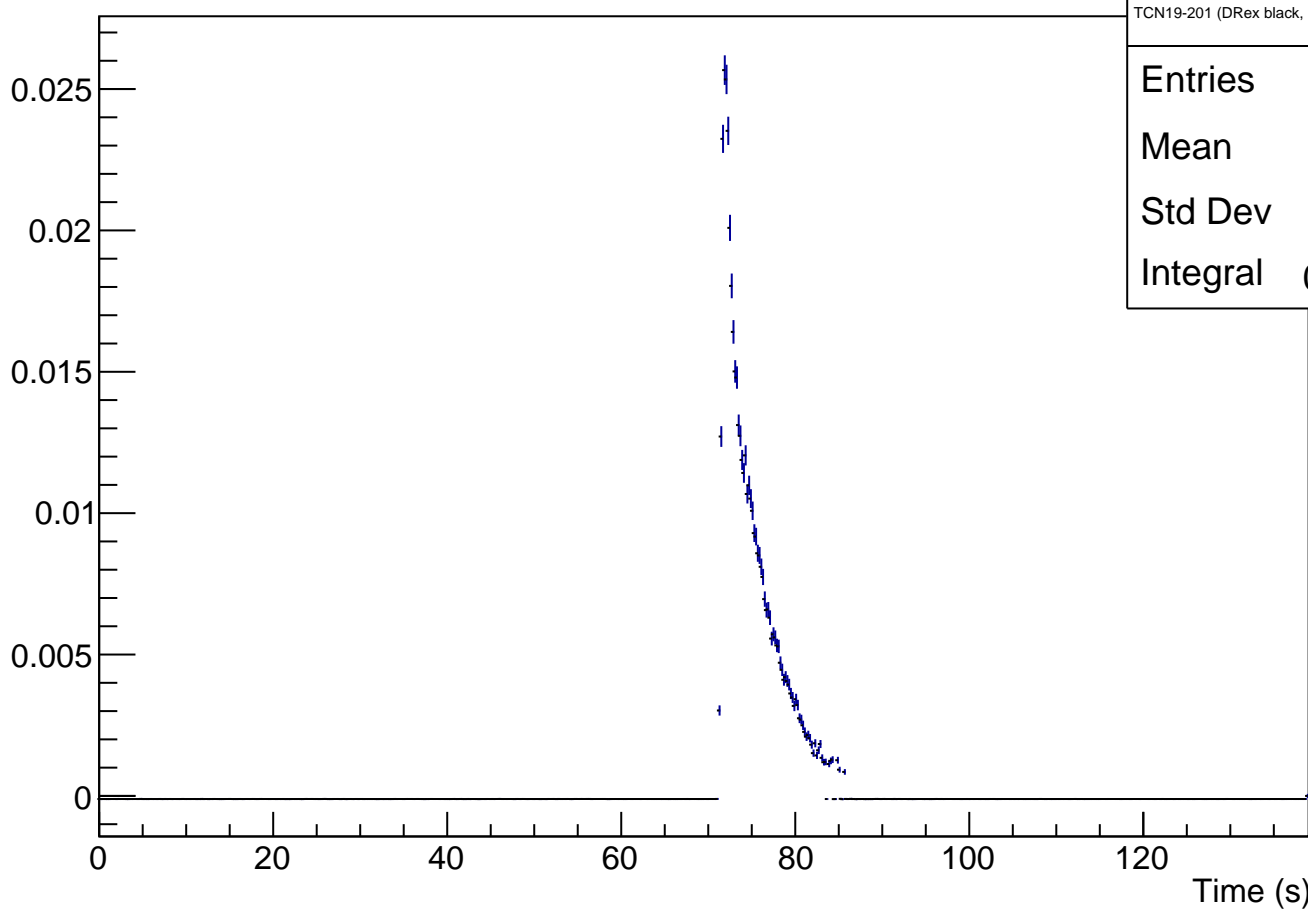

TCN19-201 (DRex black, 80cm)\_Li6\_norm

Entries 58835


Mean 69.1

Std Dev 18.7


Integral 0.4176




Ratio of cumulated rates

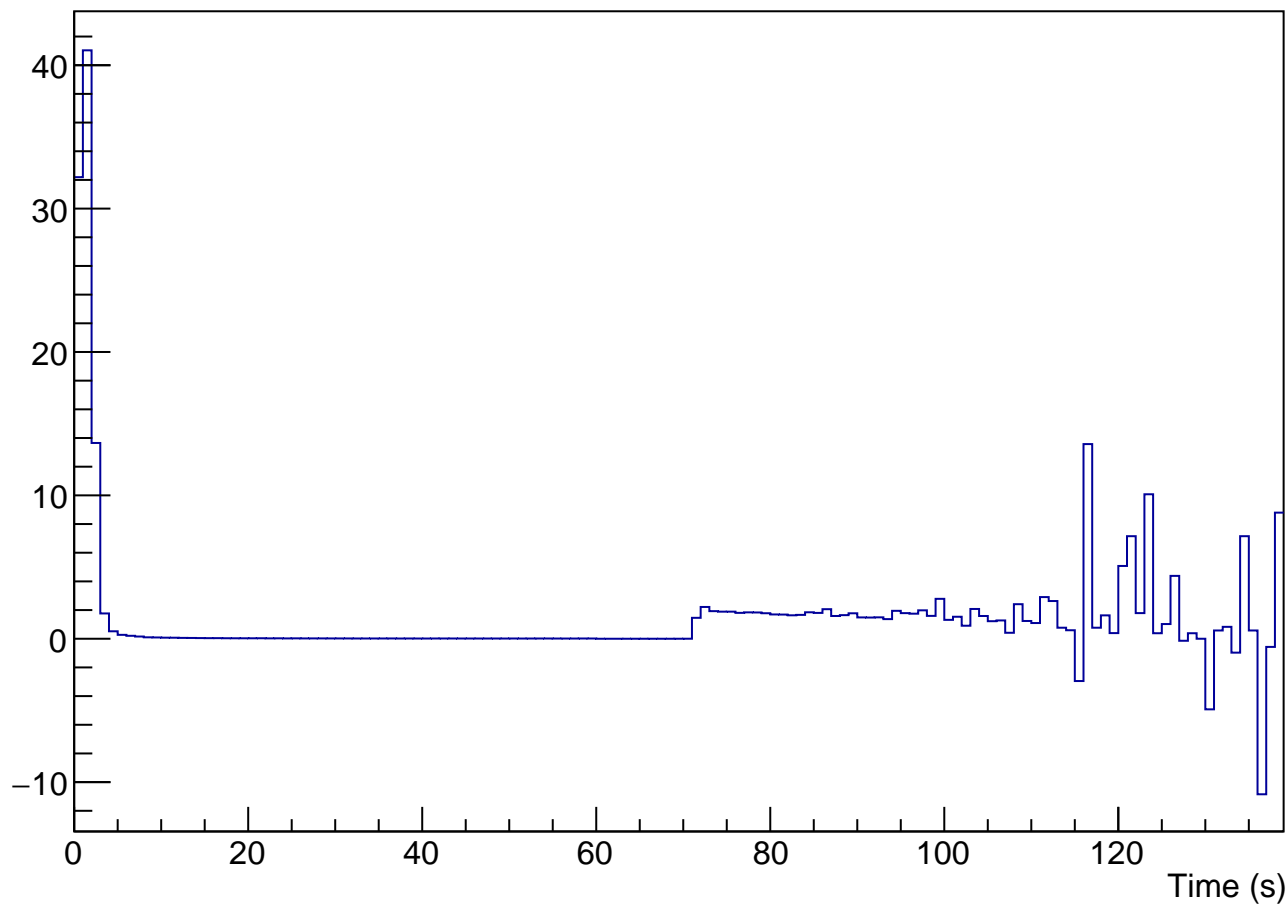

Average rate ratio

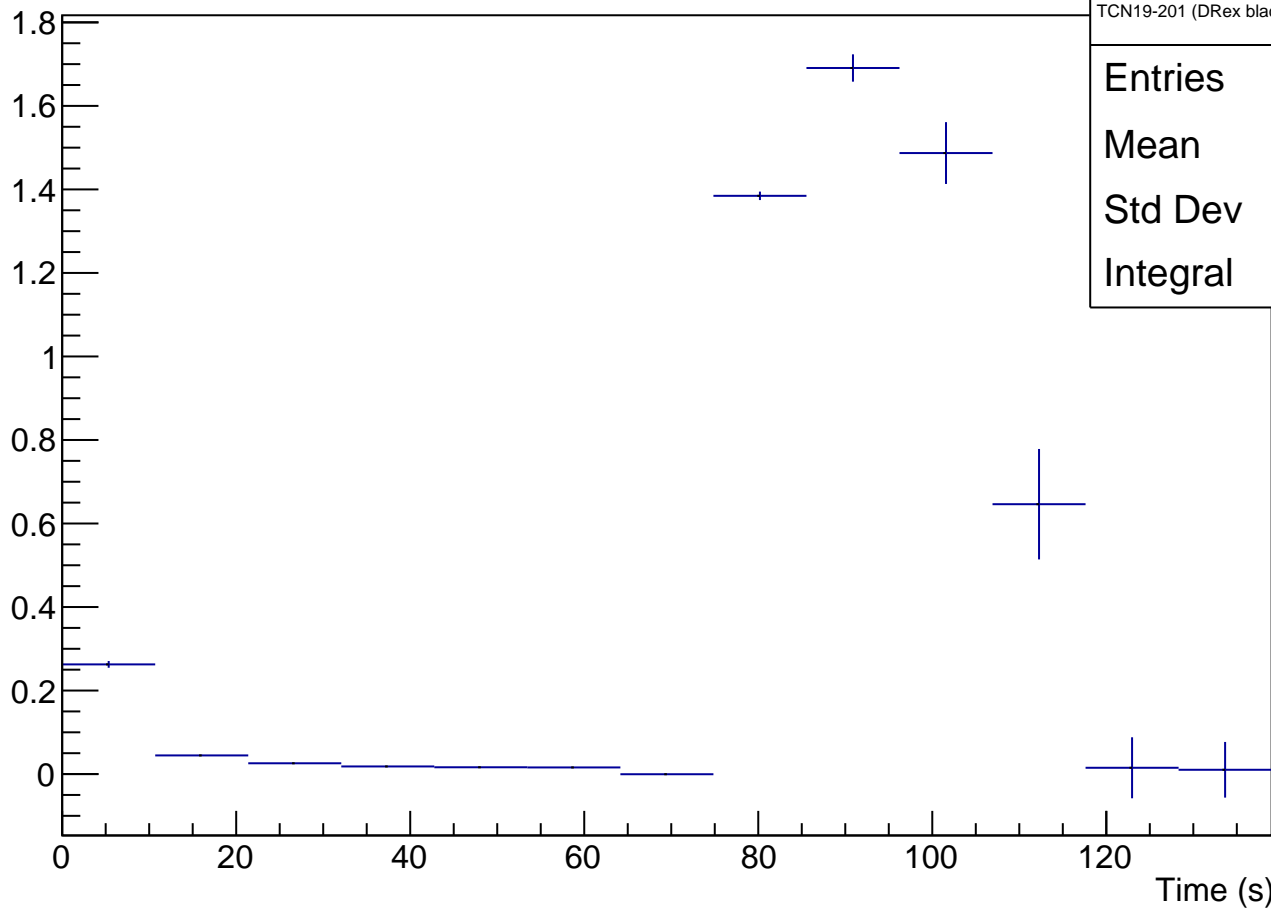

# TCN19-201 (DRex black, 80cm)

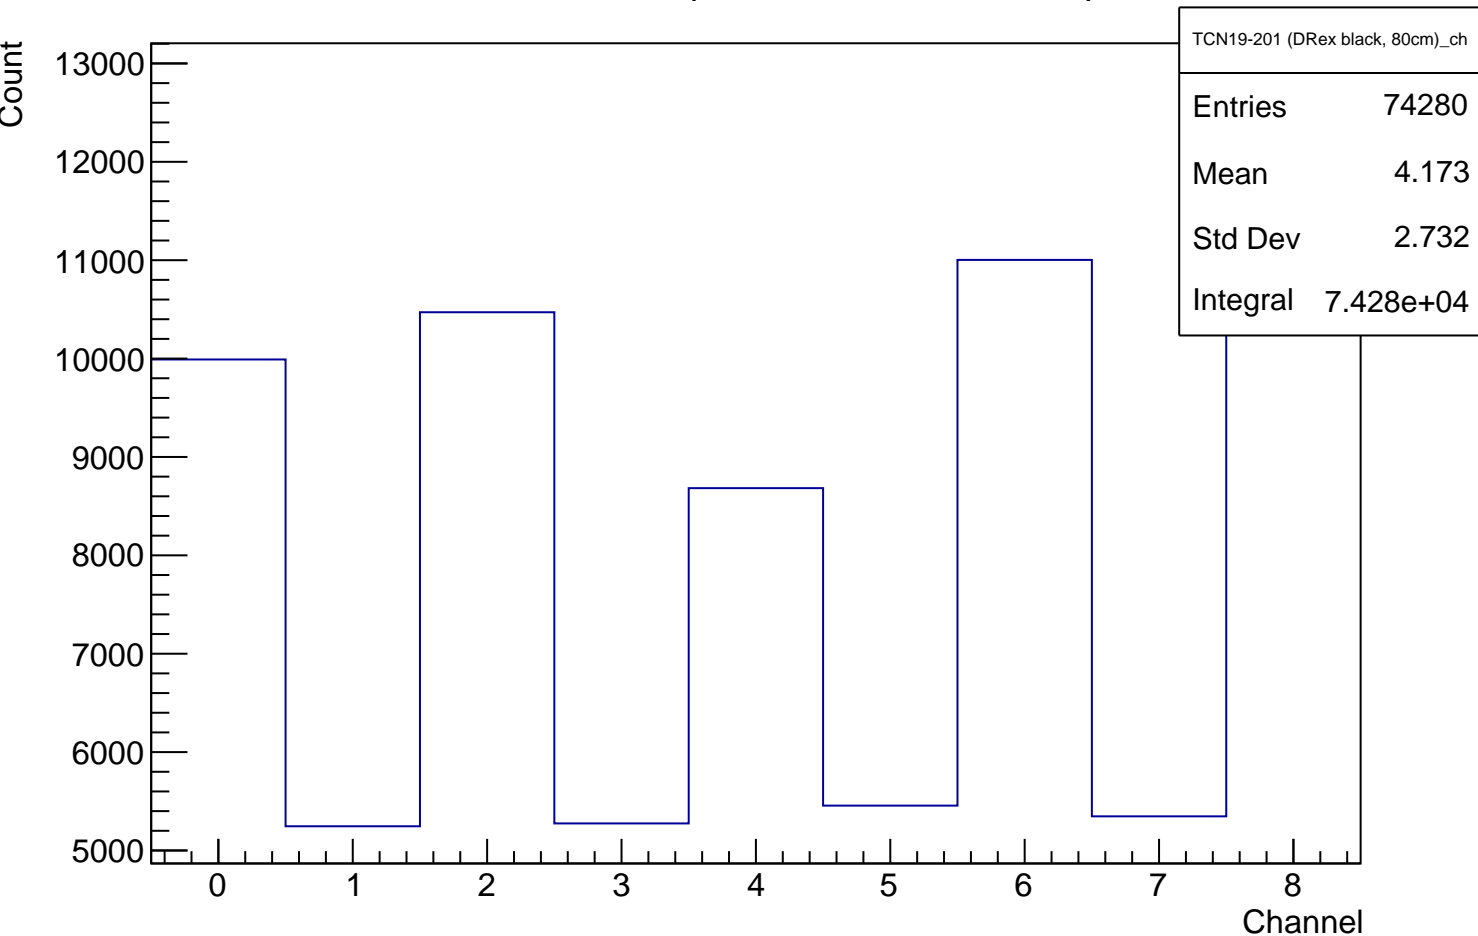

# Li6 window

Frequency

1  
0.8  
0.6  
0.4  
0.2  
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 38

Mean 0

Std Dev 0

Integral 0