



TCN19-201 (DRex black, 97cm), transmission normalized during prestorage


UCN-count-to-monitor ratio

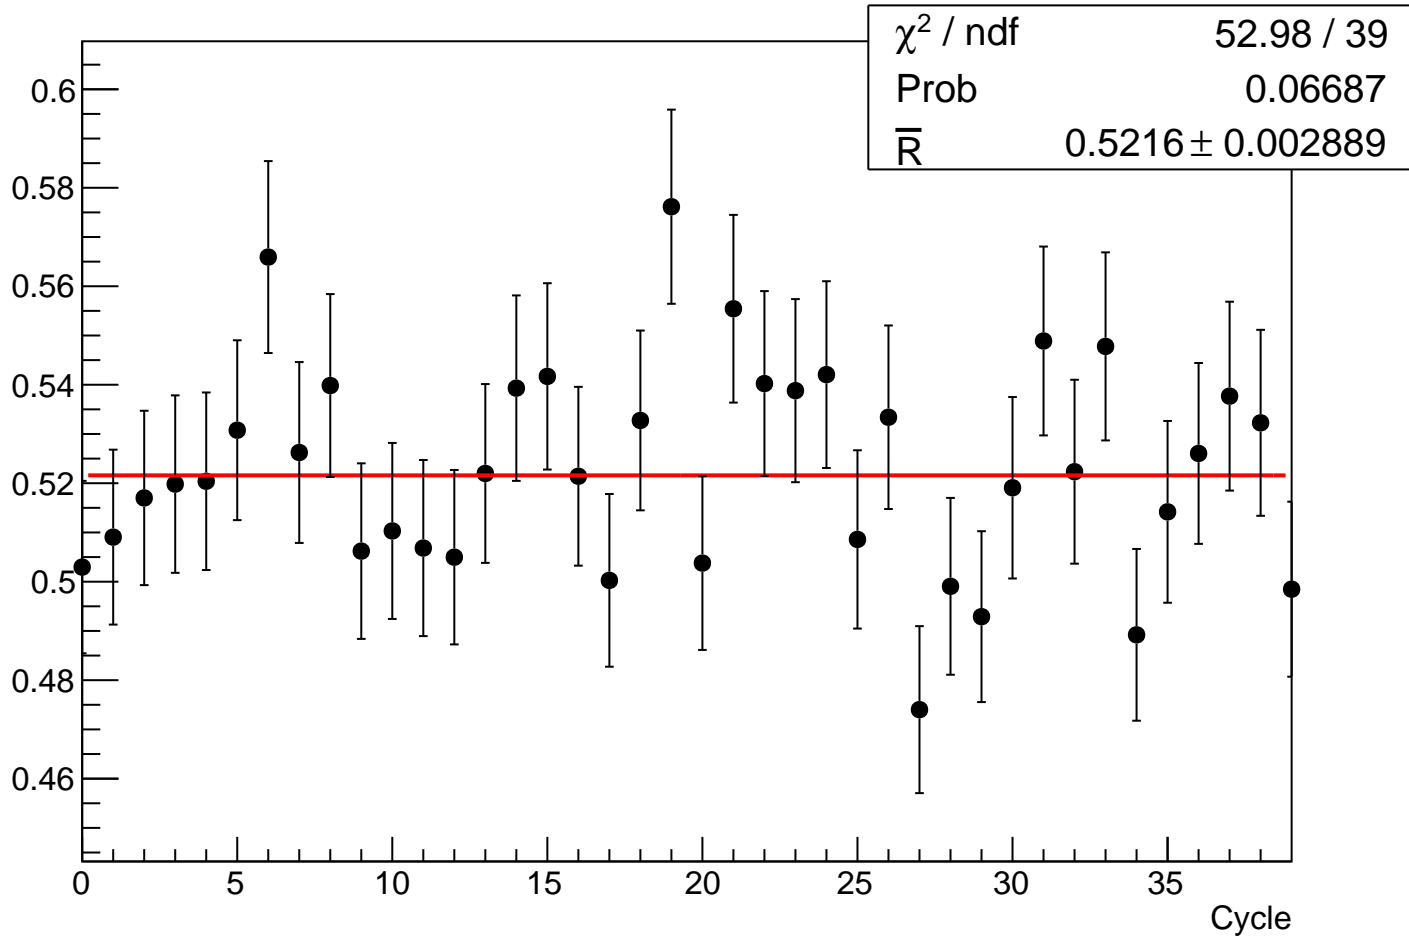



Graph

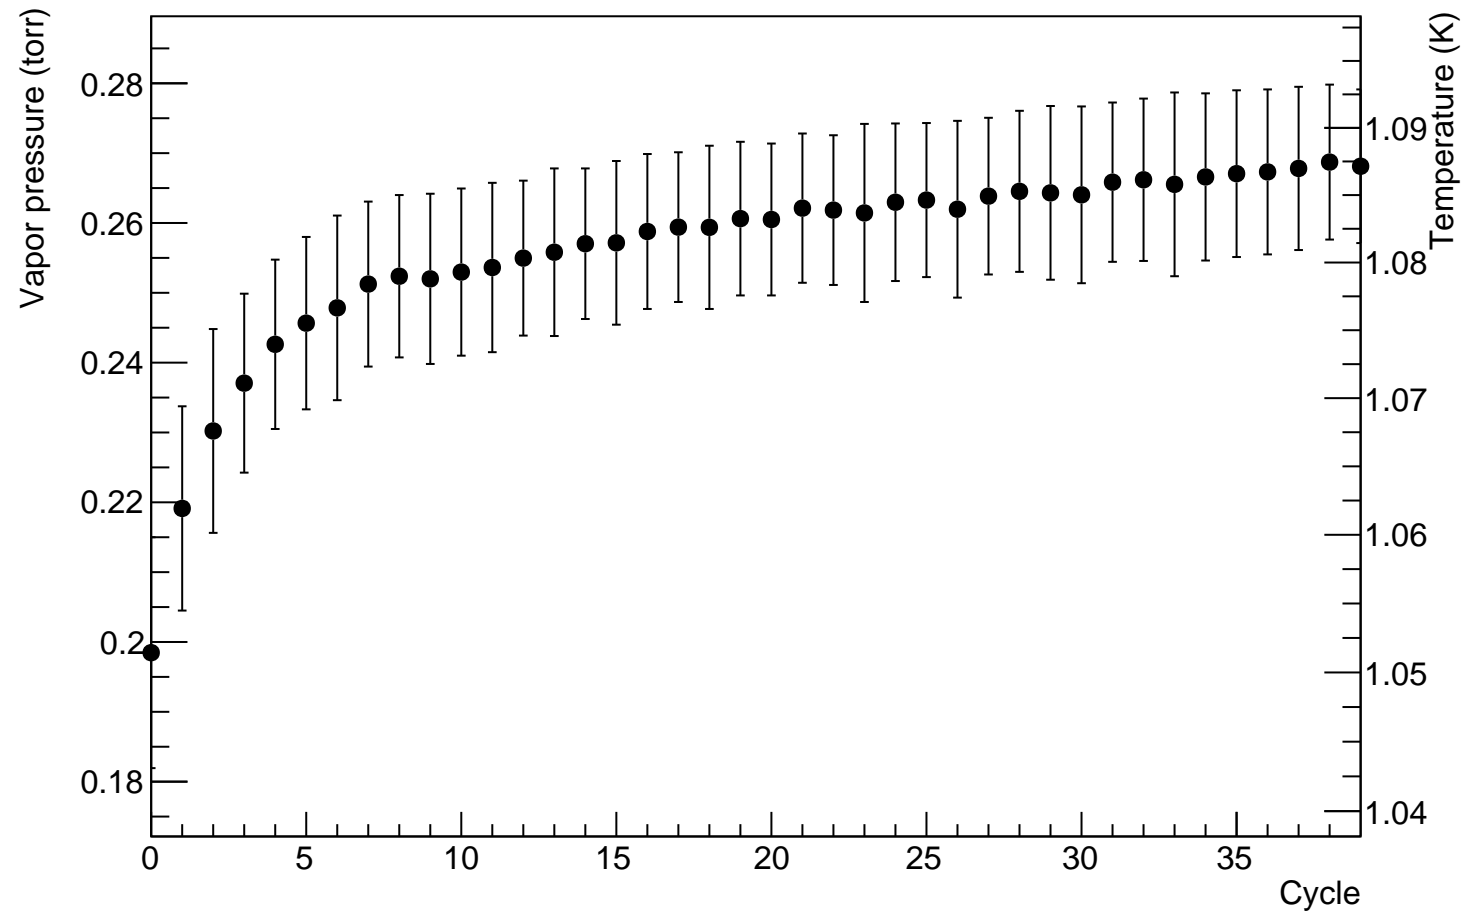


li6 background rate (1/s)

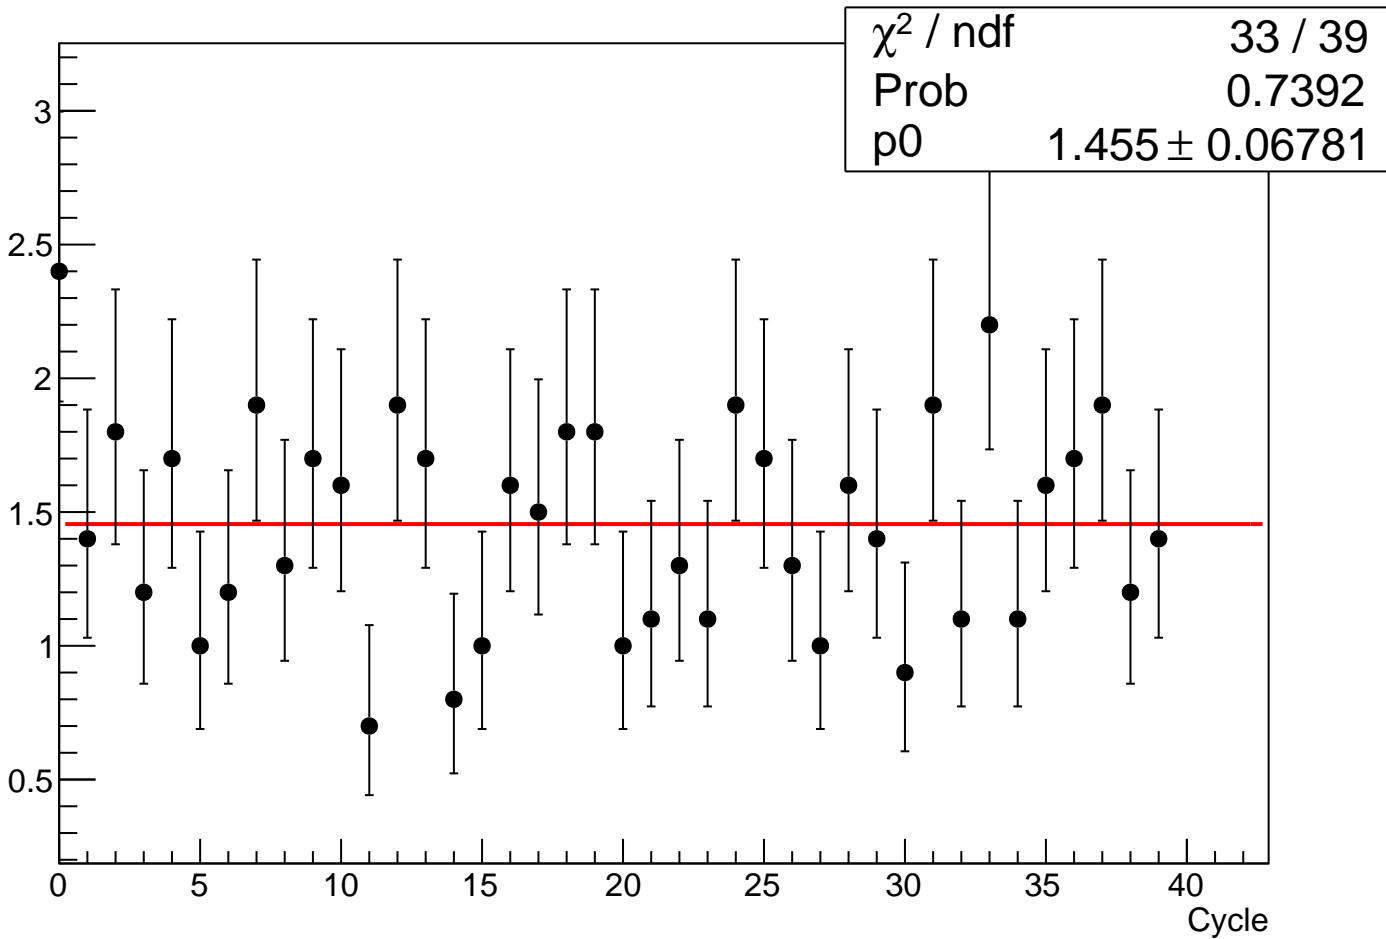

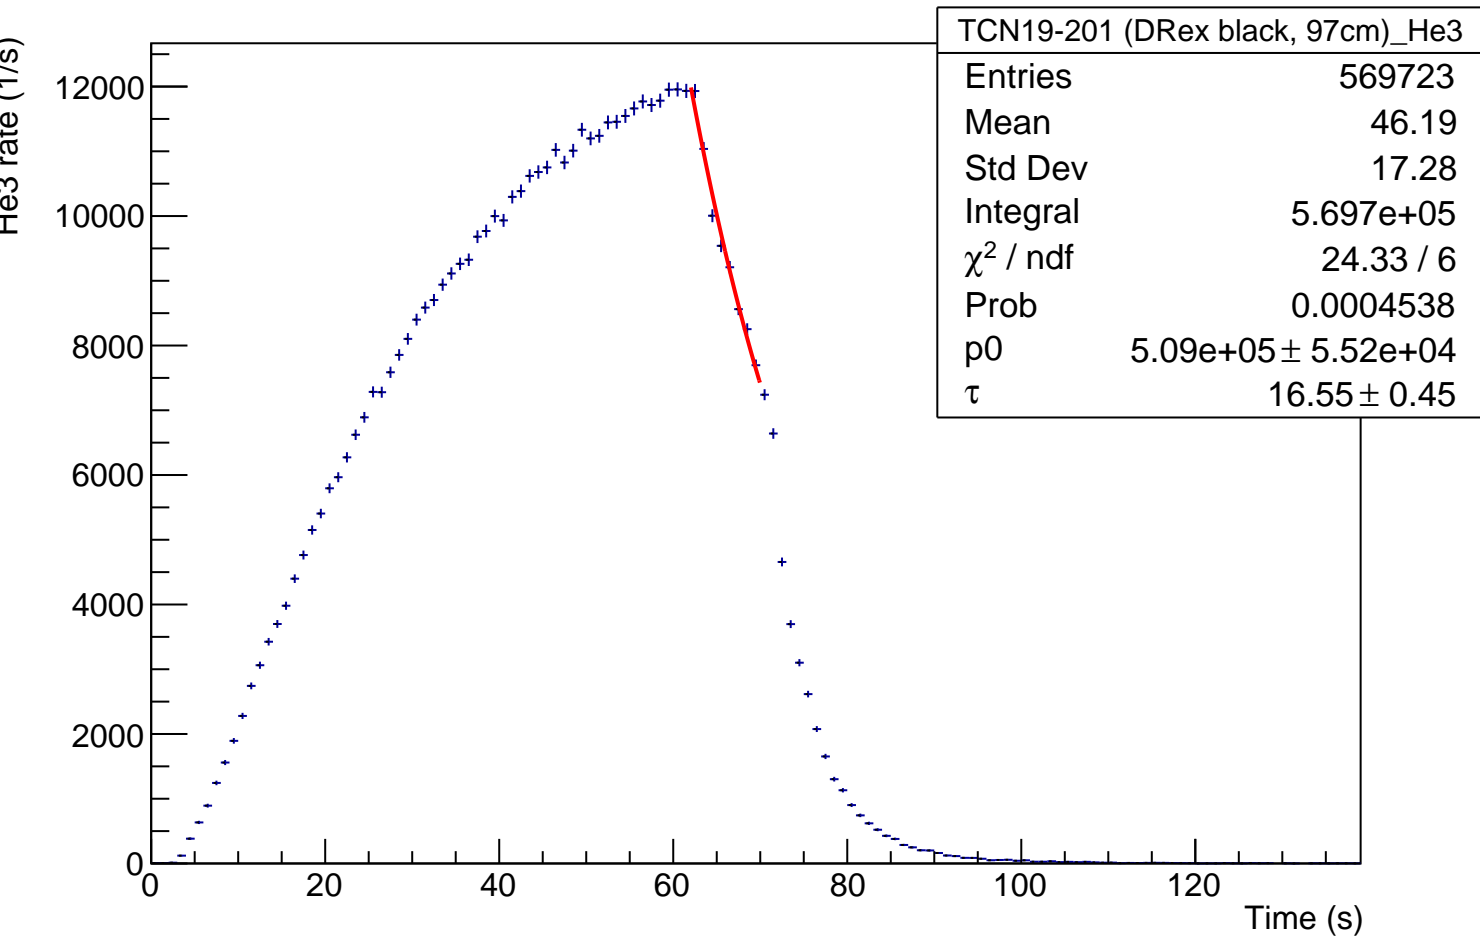

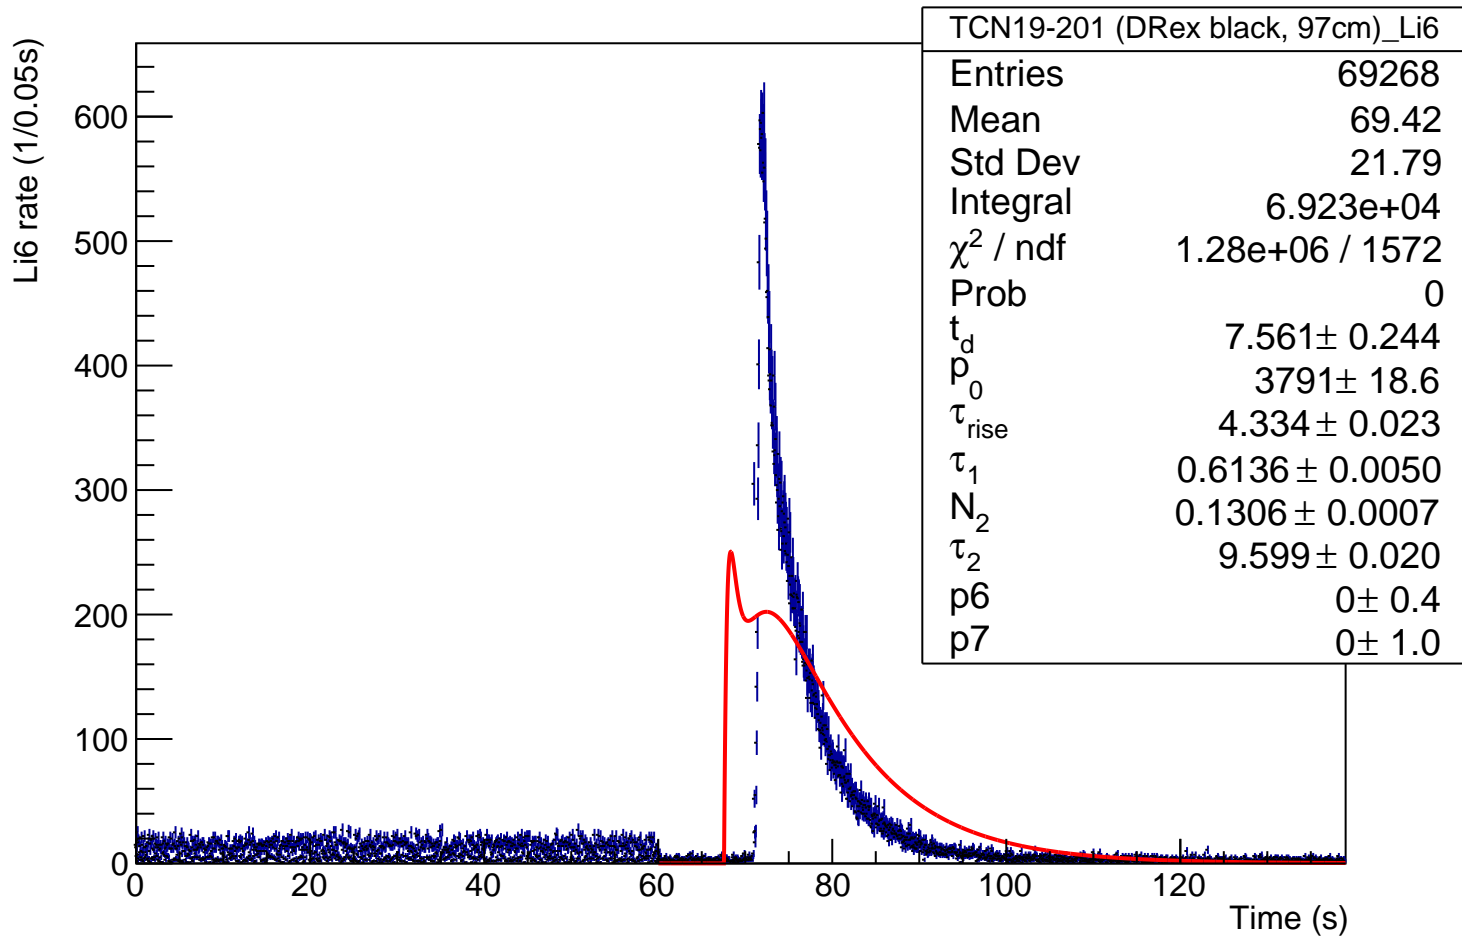

Normalized Li6 rate (1/0.05s)

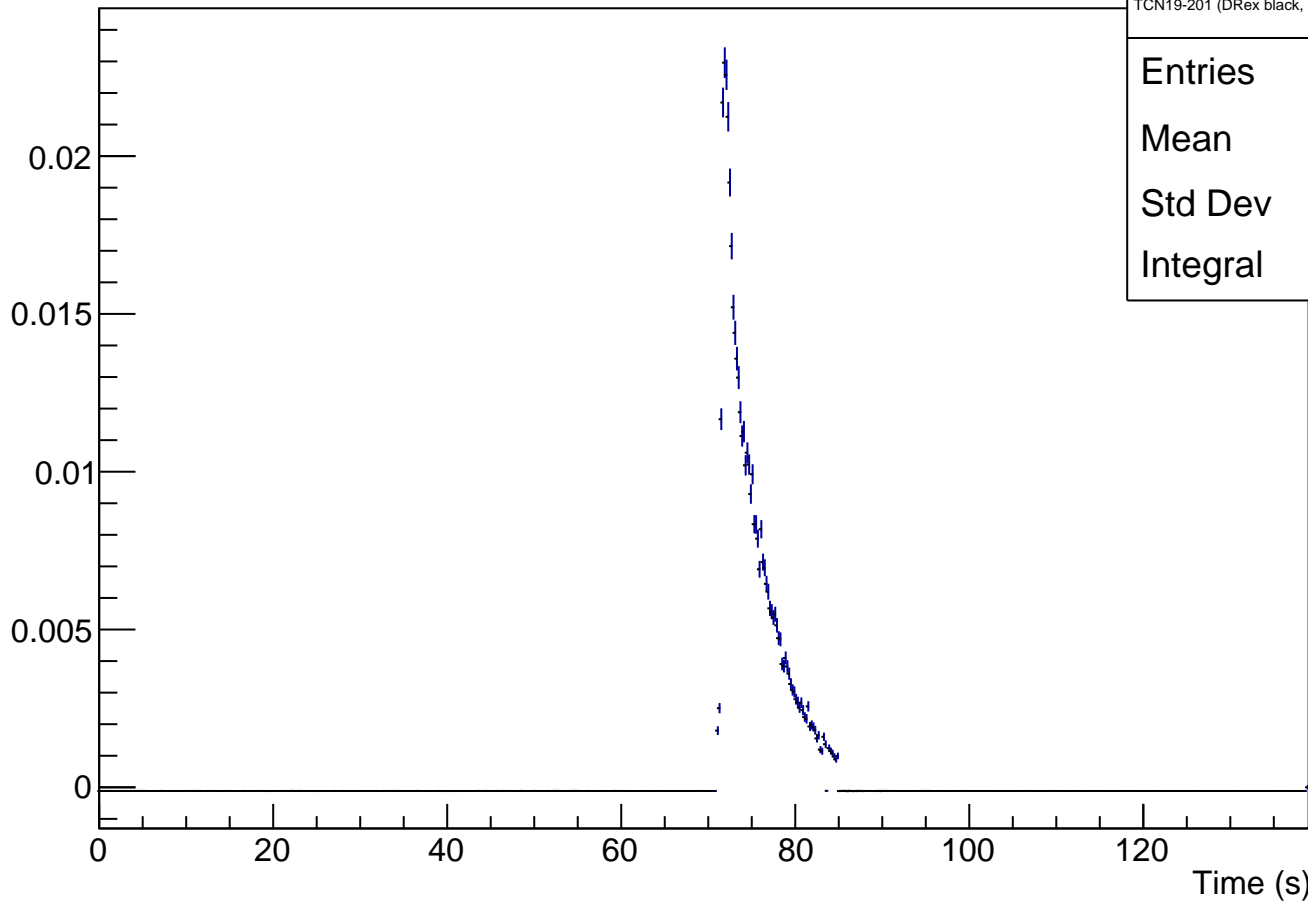


TCN19-201 (DRex black, 97cm)_Li6_norm

Entries 53529


Mean 69.41

Std Dev 18.02


Integral 0.3831

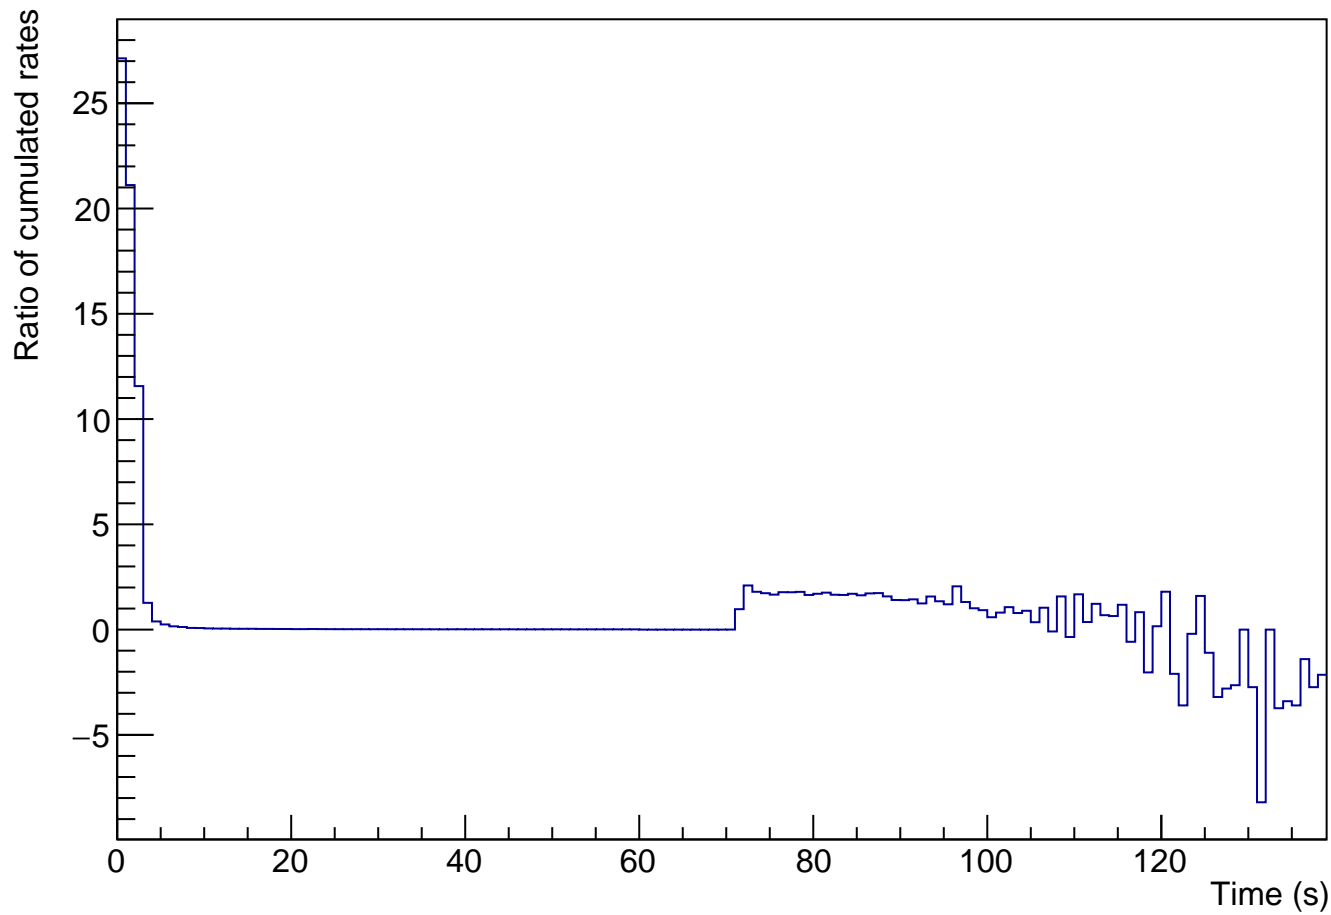

Average rate ratio

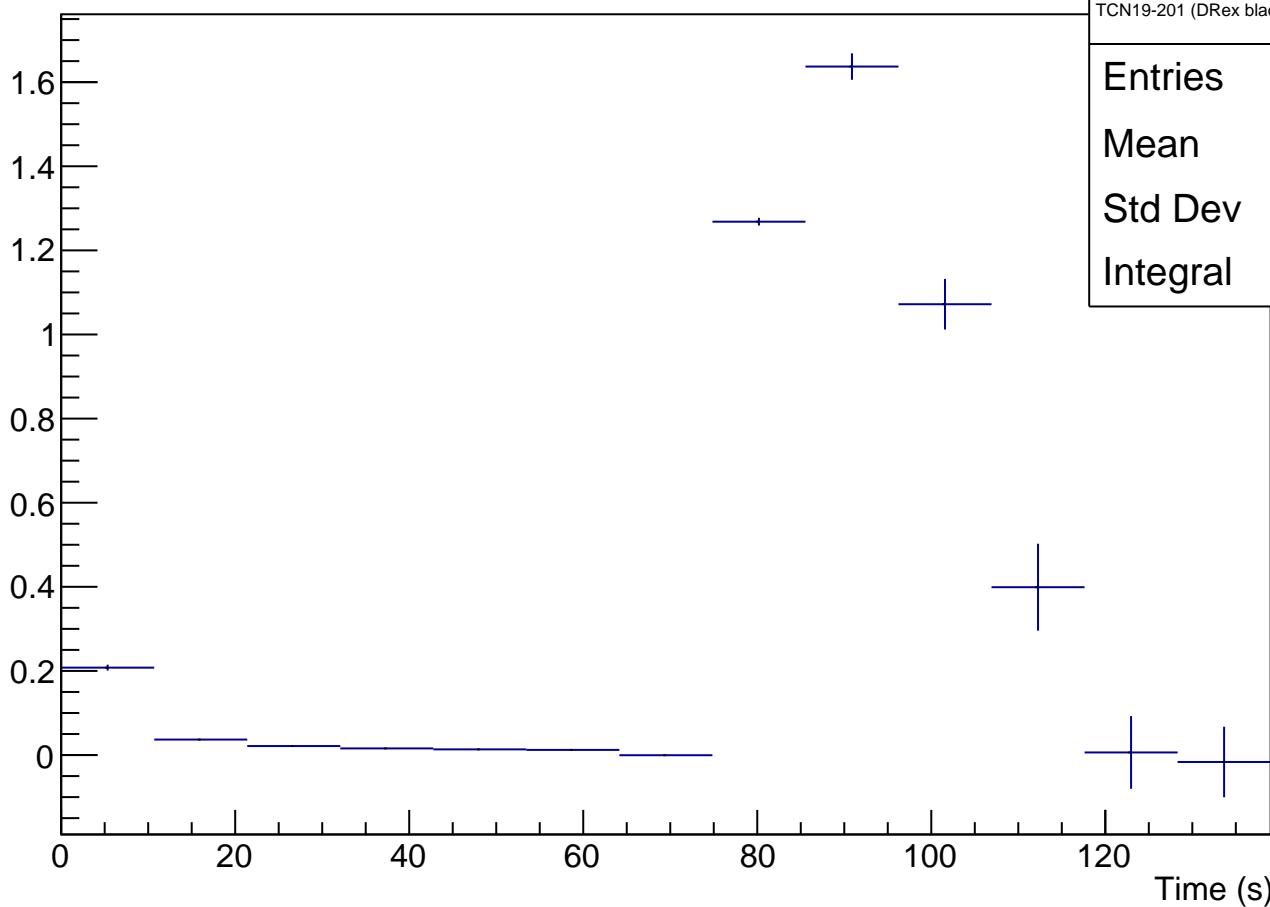

TCN19-201 (DRex black, 97cm)

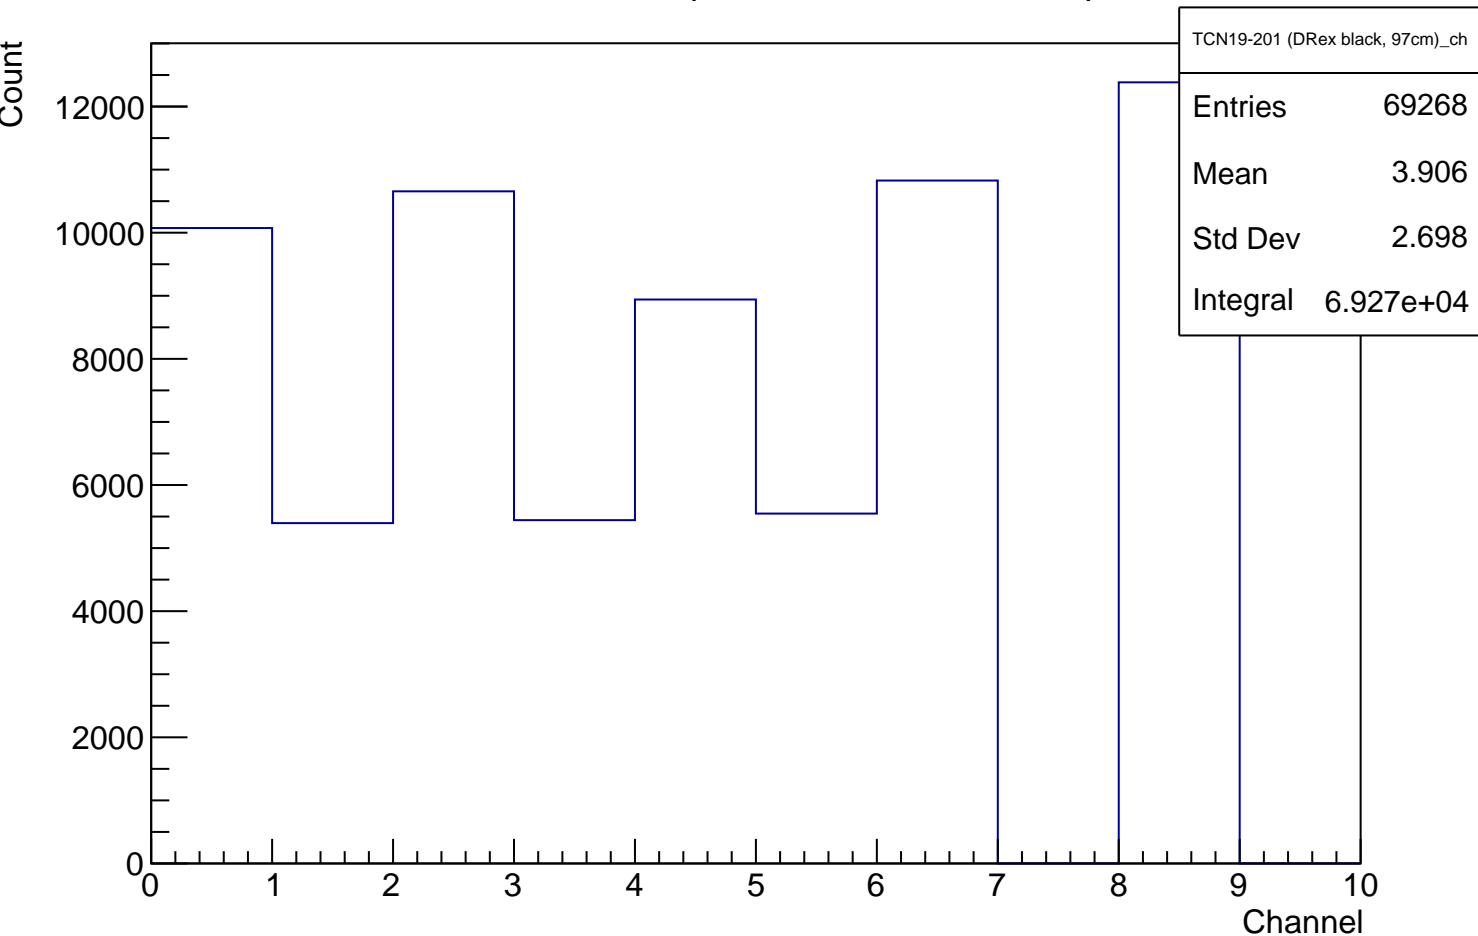

Li6 window

Frequency

1
0.8
0.6
0.4
0.2
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 40

Mean 0

Std Dev 0

Integral 0