




TCN19-201 (DRex black, 20cm), transmission normalized during prestorage


UCN-count-to-monitor ratio

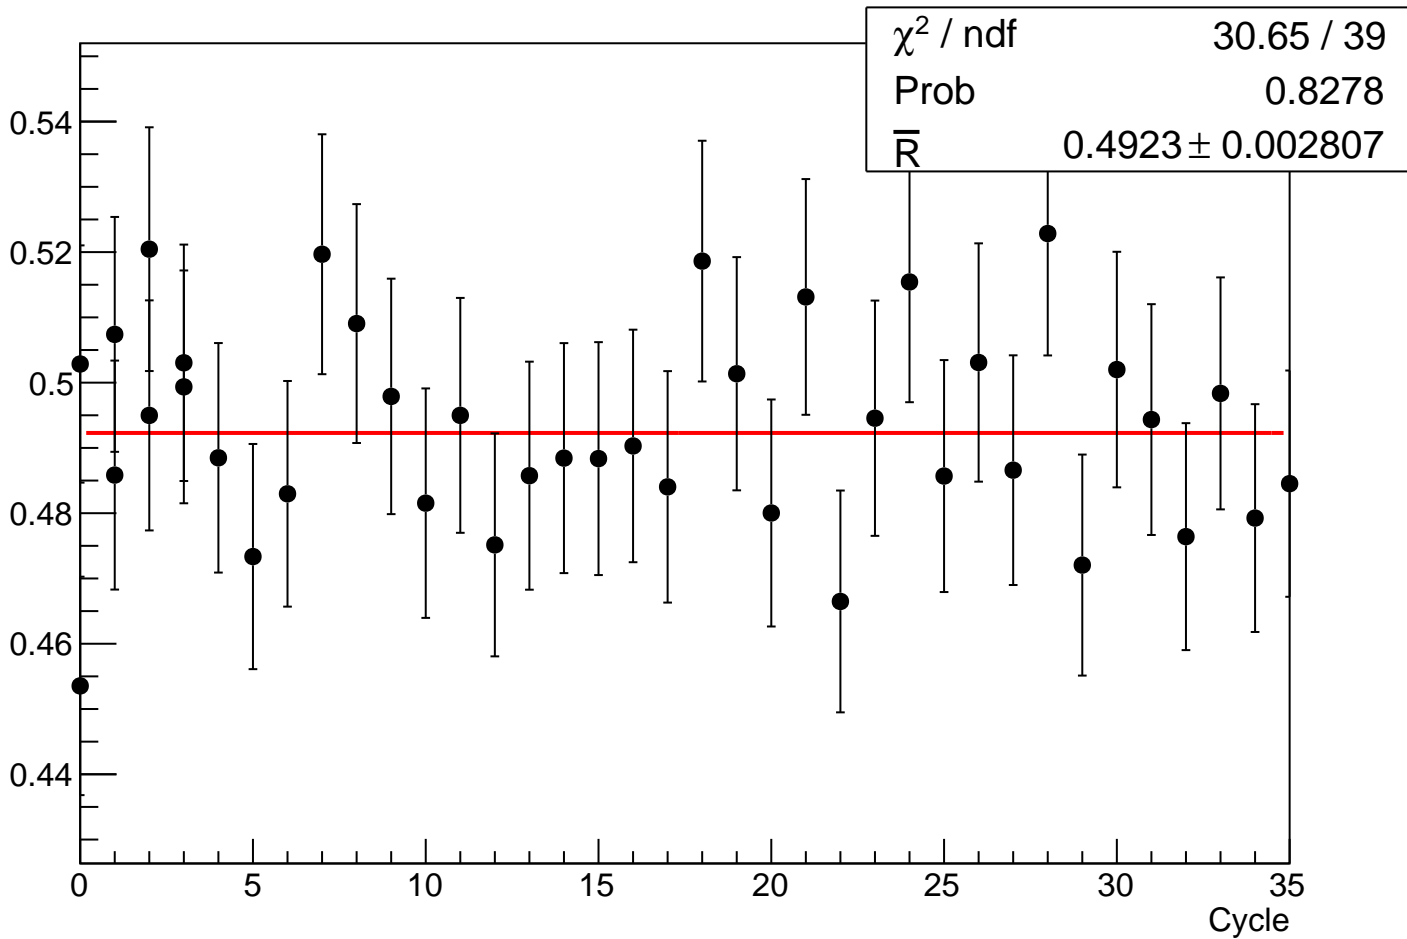


# Graph

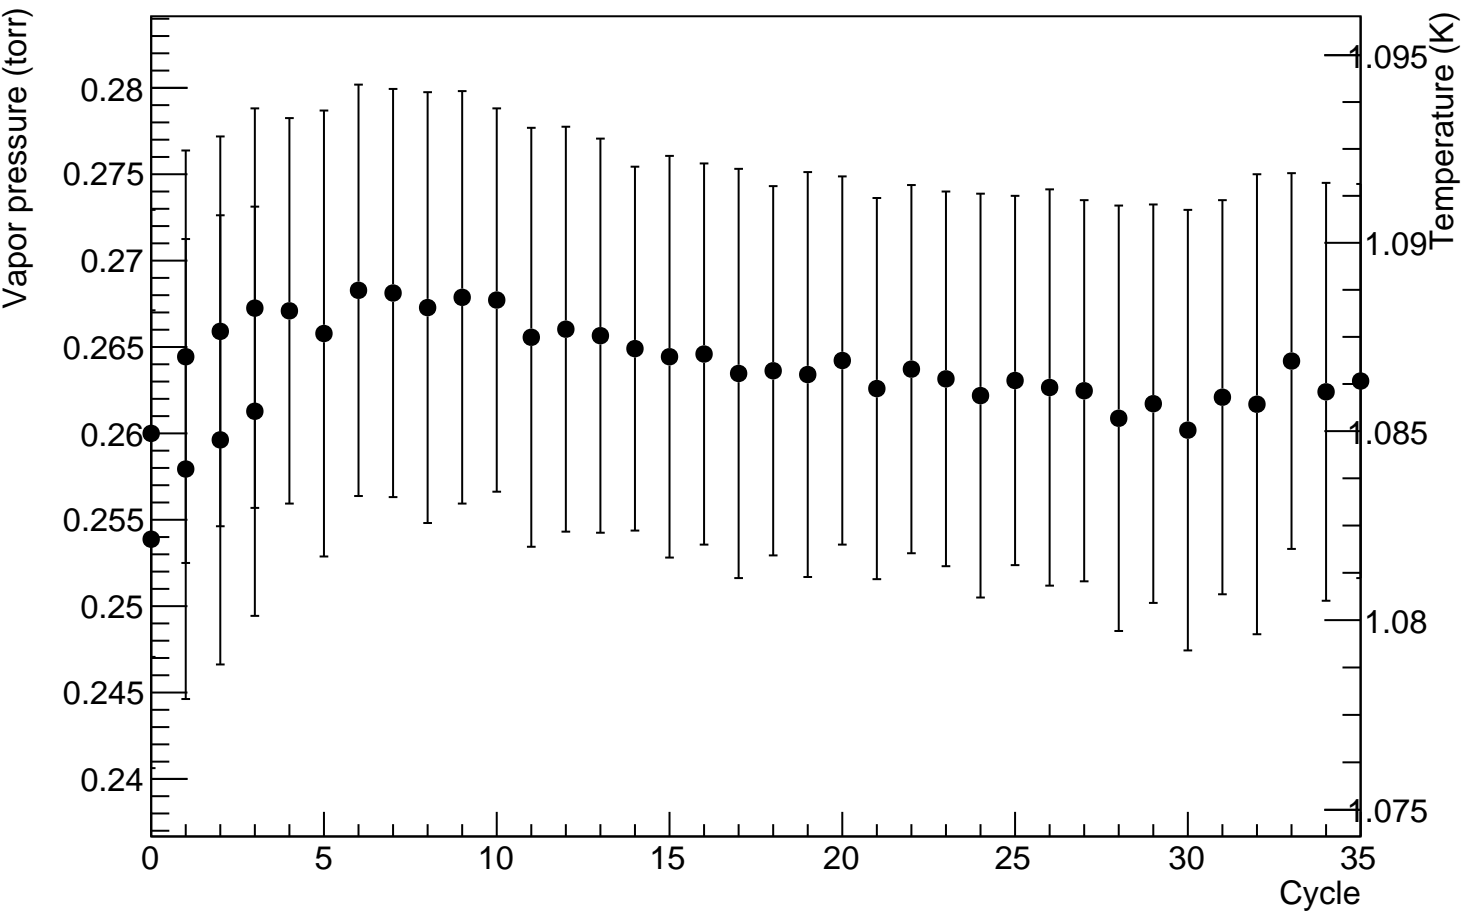


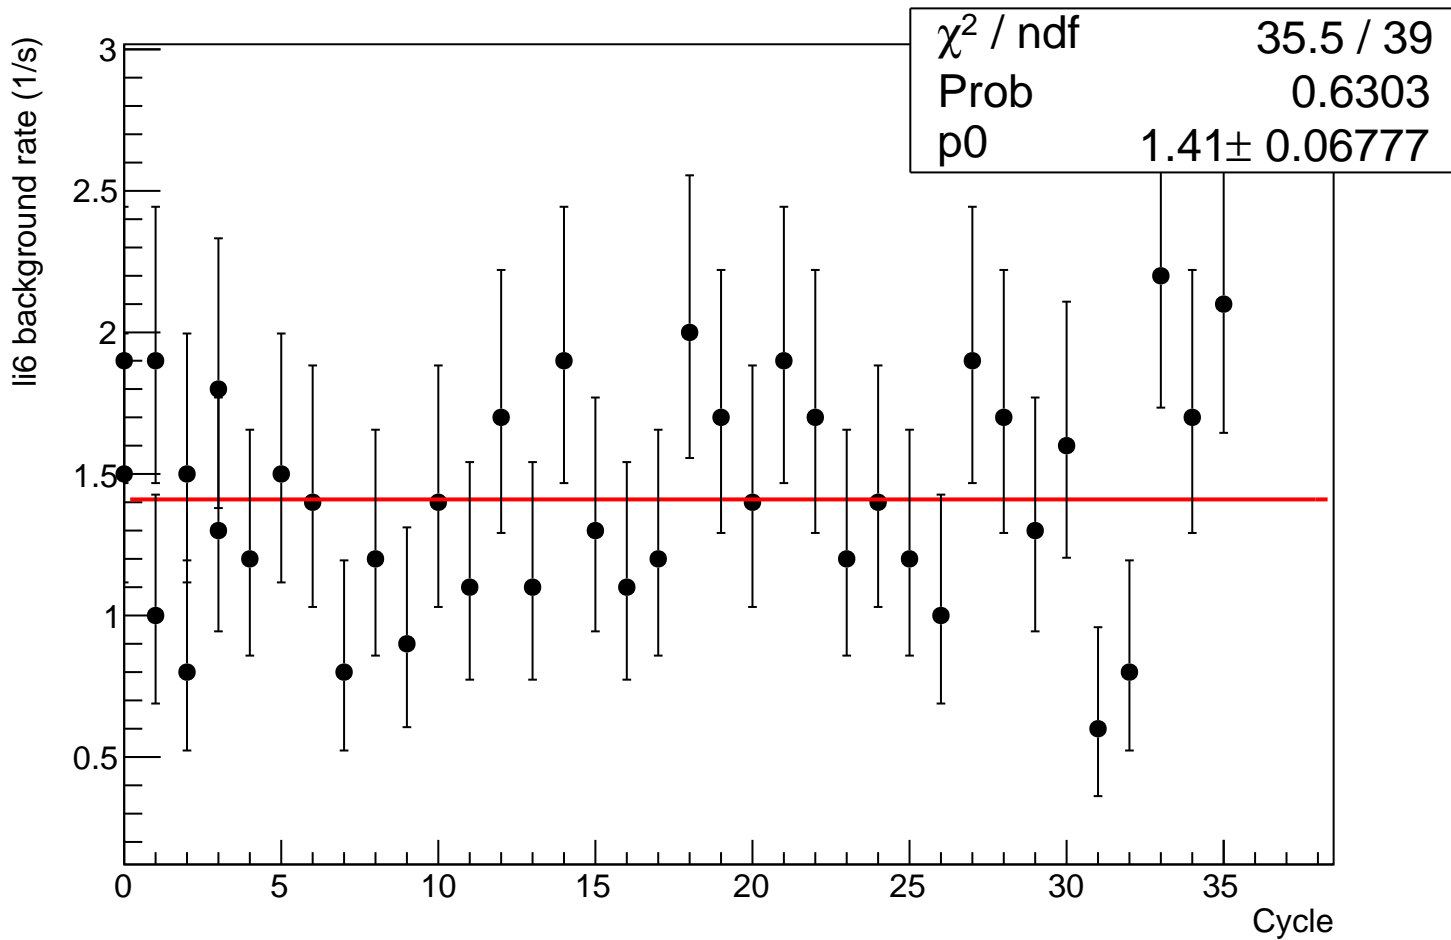

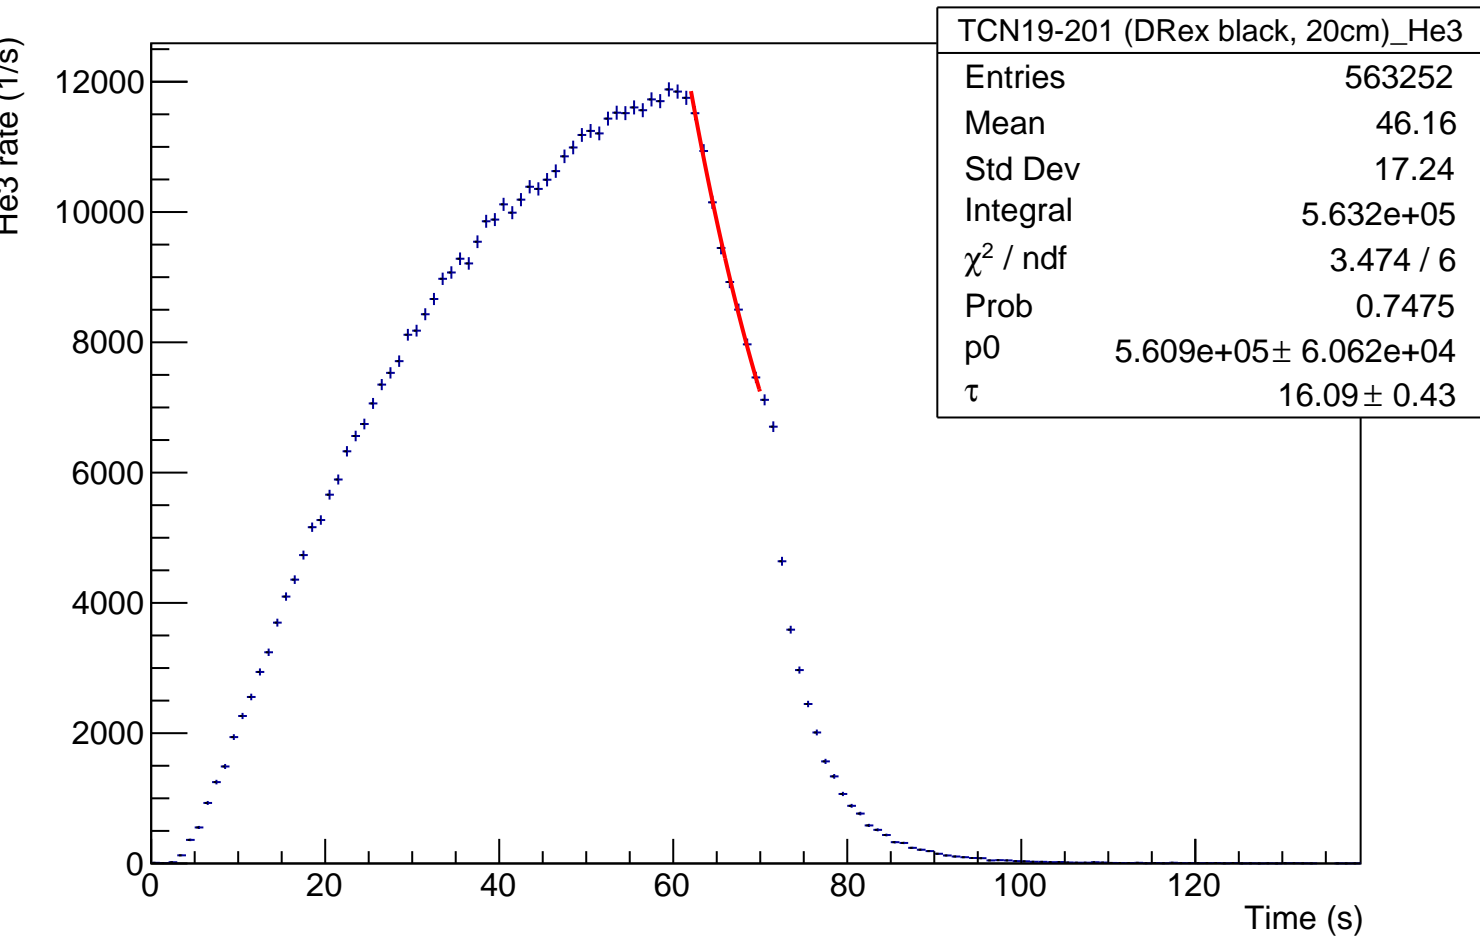

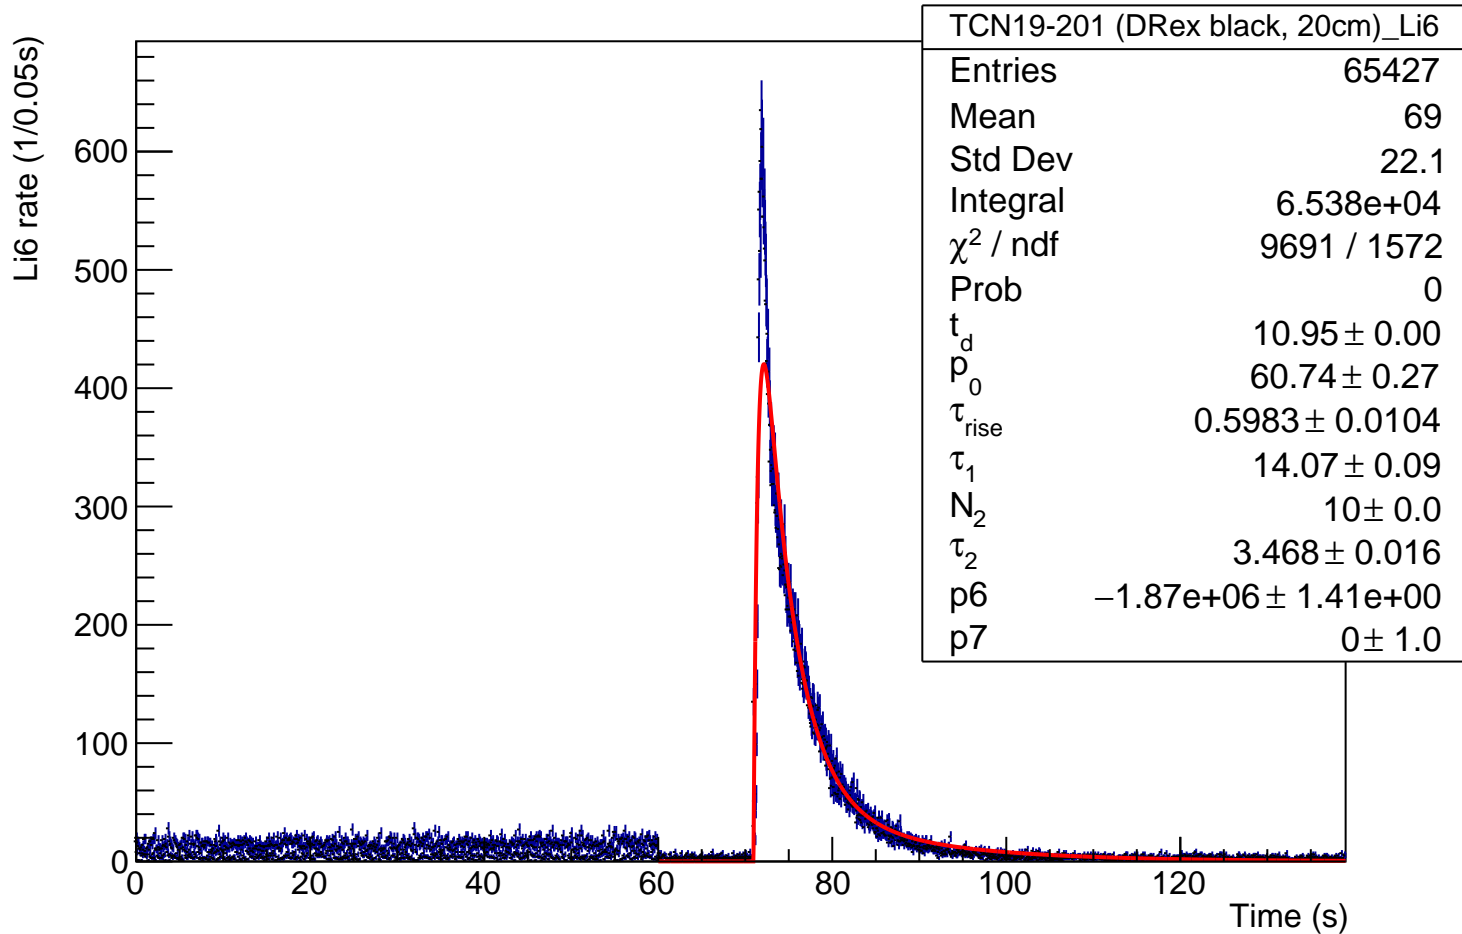

Normalized Li6 rate (1/0.05s)

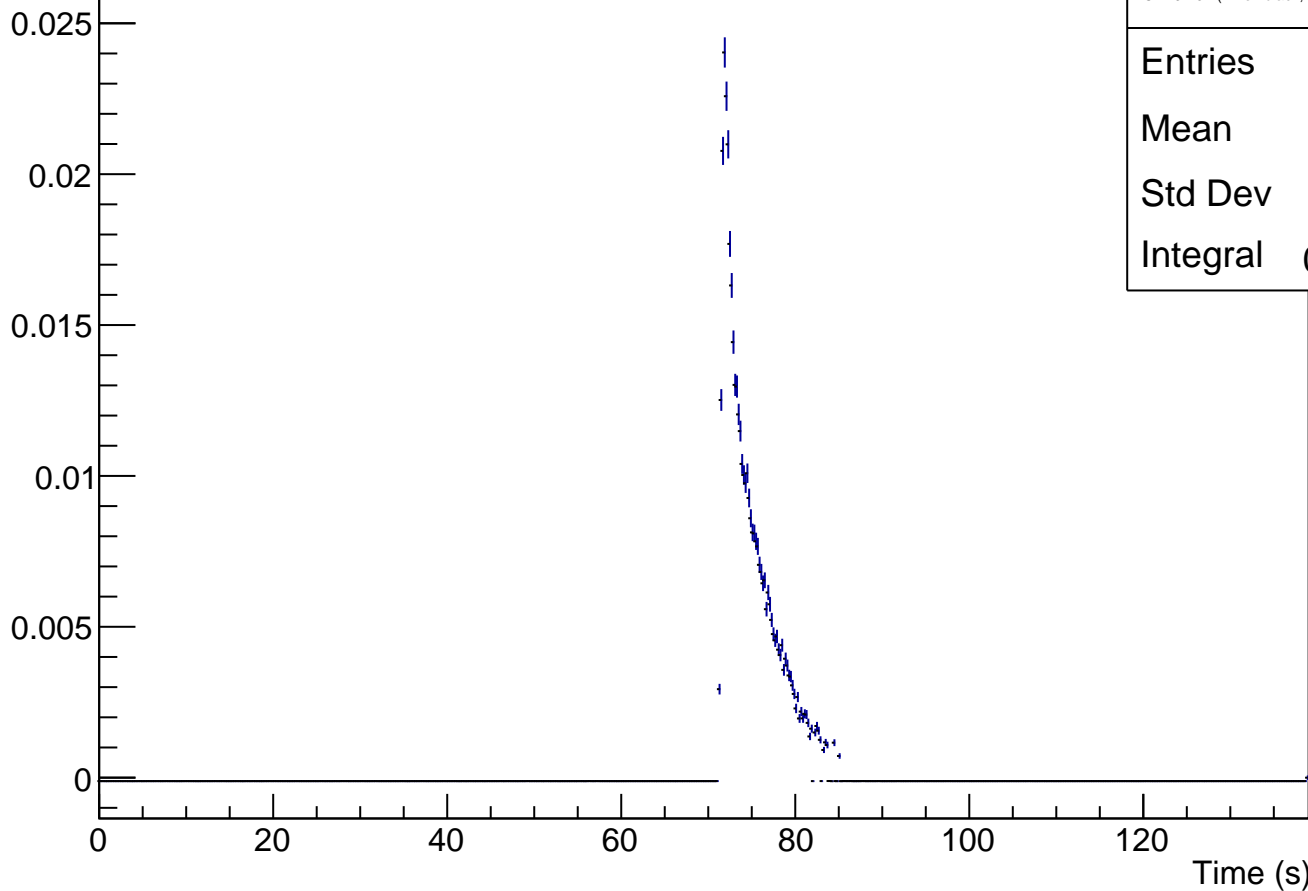

TCN19-201 (DRex black, 20cm)\_Li6\_norm


Entries 50223

Mean 68.93


Std Dev 18.31

Integral 0.3506

Ratio of cumulated rates

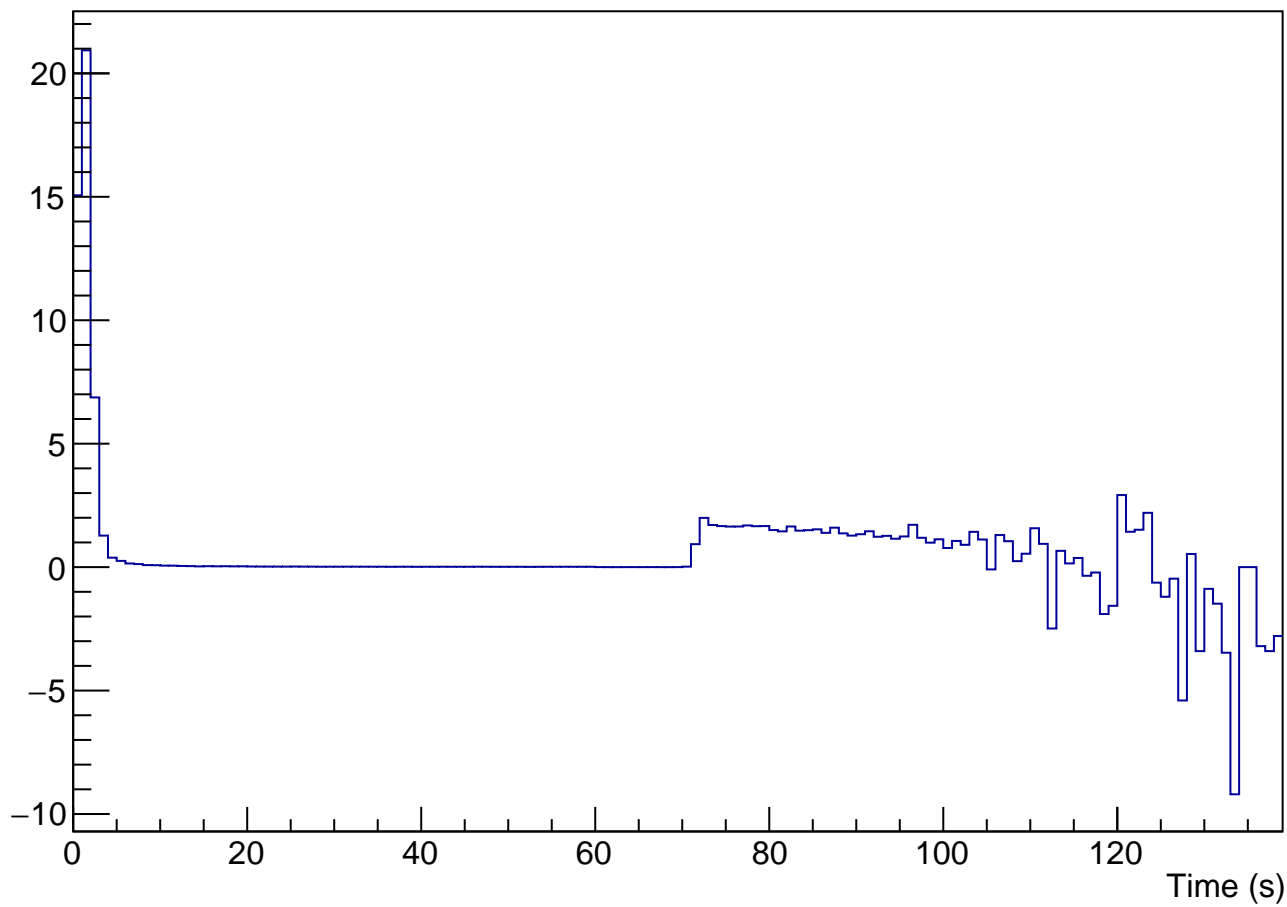


Average rate ratio

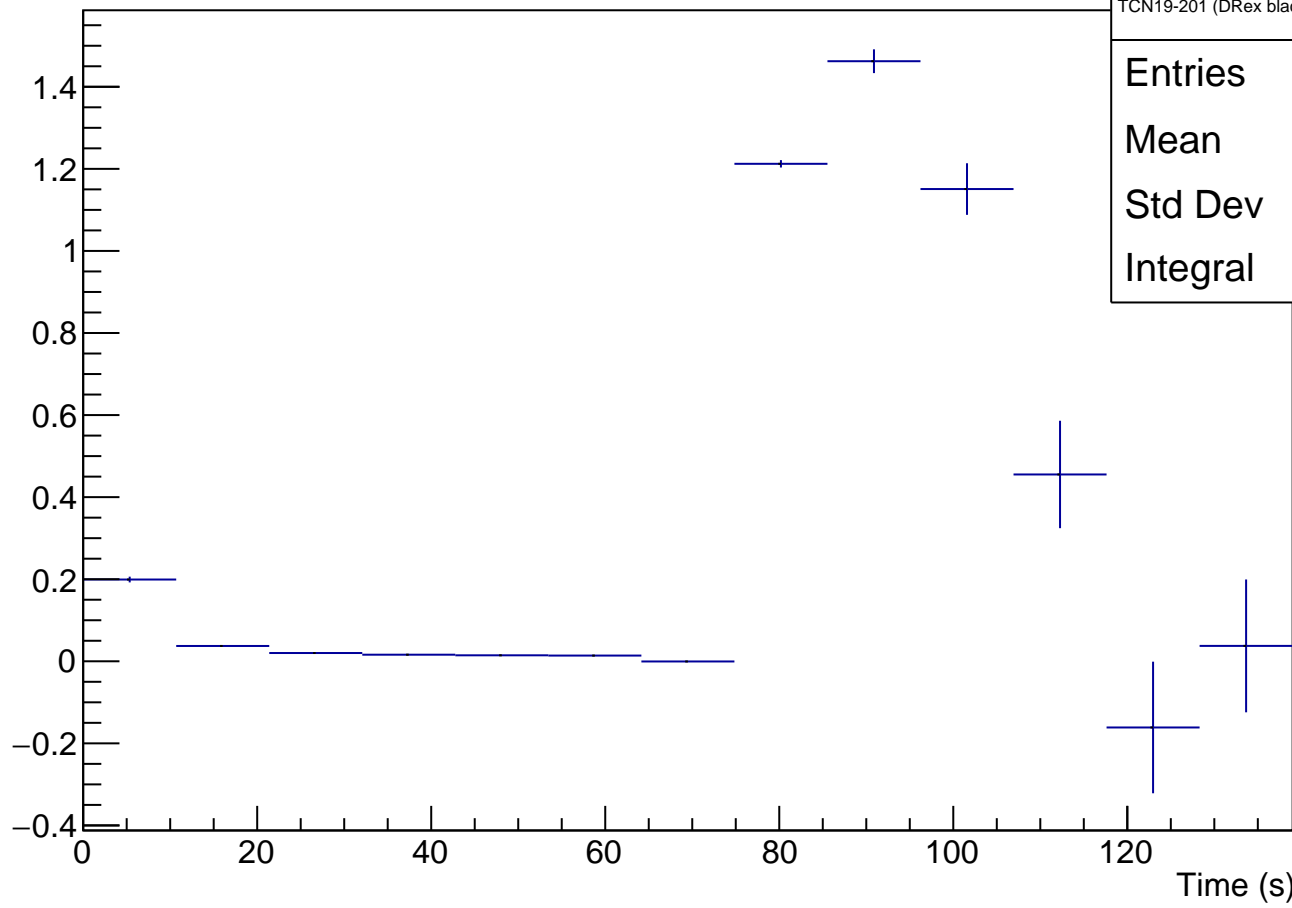

TCN19-201 (DRex black, 20cm)_ratio	
Entries	161
Mean	86.81
Std Dev	22.22
Integral	4.458



# TCN19-201 (DRex black, 20cm)

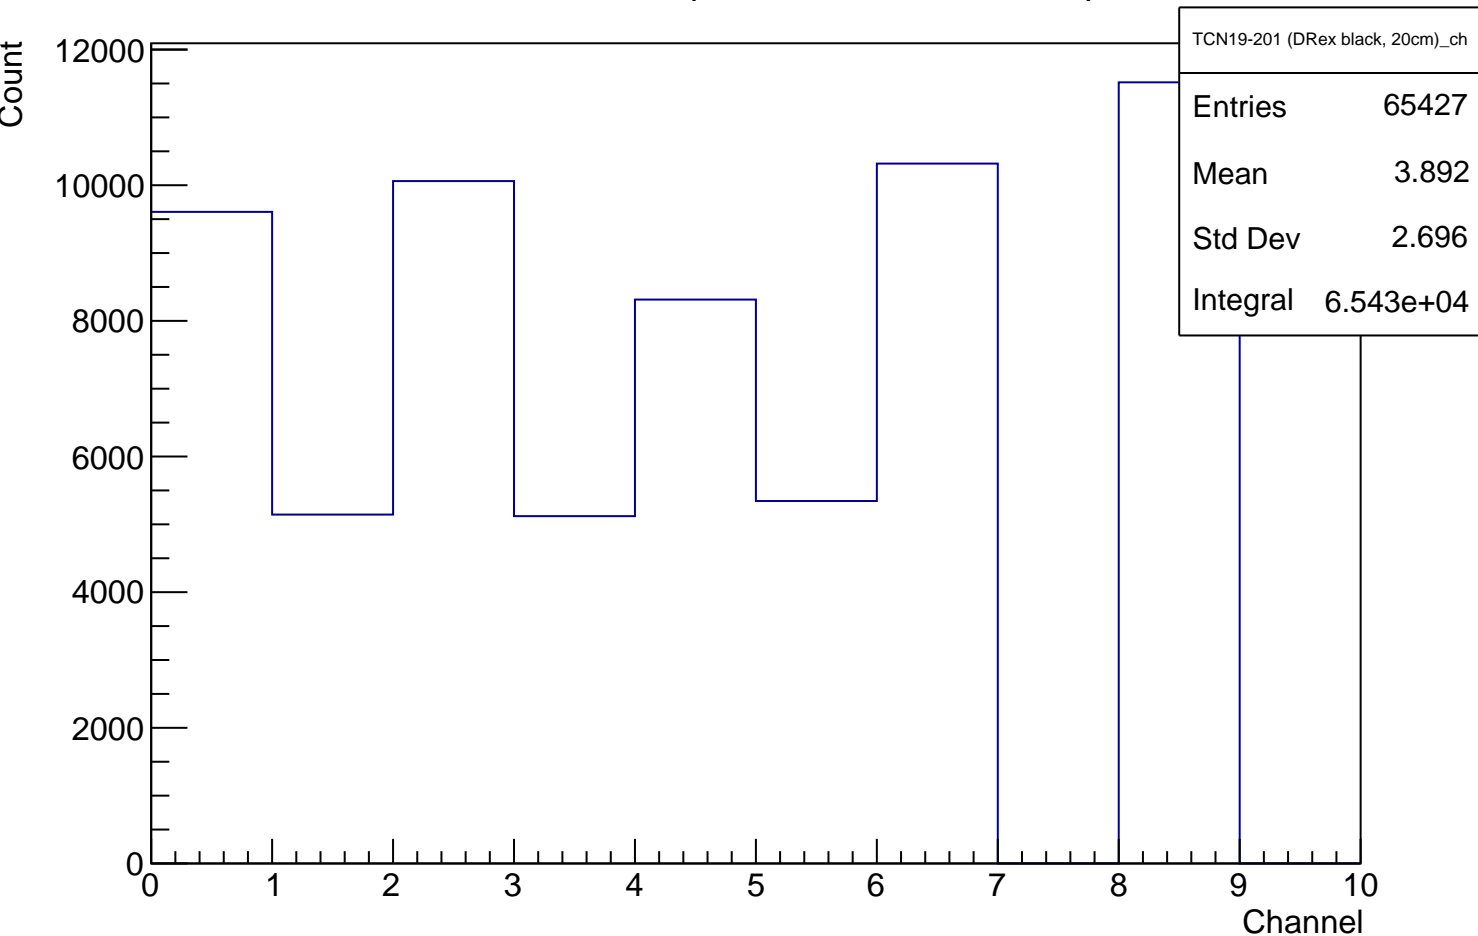

# Li6 window

Frequency

1  
0.8  
0.6  
0.4  
0.2  
0

0 0.5 1 1.5 2 2.5 3 3.5 4 4.5 5

Time after valve opened (s)

li6window

Entries 40

Mean 0

Std Dev 0

Integral 0