

M.SC. ENGG. THESIS

# OVERCOMING THROUGHPUT DEGRADATION IN MULTI-RADIO COGNITIVE RADIO NETWORKS

by

TANVIR AHMED KHAN (1014052013)

Submitted to

Department of Computer Science & Engineering

(In partial fulfilment of the requirements for the degree of  
Master of Science in Computer Science & Engineering)



Department of Computer Science & Engineering

Bangladesh University of Engineering & Technology (BUET)

Dhaka 1000

June 10, 2017

*Dedicated to my loving parents*

## AUTHOR'S CONTACT

---

Tanvir Ahmed Khan

Lecturer,

Department of Computer Science & Engineering,  
Bangladesh University of Engineering & Technology (BUET), Dhaka.

Email: [takhan@cse.buet.ac.bd](mailto:takhan@cse.buet.ac.bd), [takhandipu@gmail.com](mailto:takhandipu@gmail.com)

The thesis titled “Overcoming Throughput Degradation in Multi-Radio Cognitive Radio Networks”, submitted by Tanvir Ahmed Khan, Roll No. **1014052013**, Session October 2014, to the Department of Computer Science & Engineering, Bangladesh University of Engineering & Technology, has been accepted as satisfactory in partial fulfilment of the requirements for the degree of Master of Science in Computer Science & Engineering and approved as to its style and contents. Examination held on June 10, 2017.

## Board of Examiners

1. \_\_\_\_\_

Dr. A. B. M. Alim Al Islam

Assistant Professor

Department of Computer Science & Engineering

Bangladesh University of Engineering & Technology, Dhaka.

Chairman  
(Supervisor)

2. \_\_\_\_\_

Dr. M. Sohel Rahman

Head and Professor

Department of Computer Science & Engineering

Bangladesh University of Engineering & Technology, Dhaka.

Member  
(Ex-Officio)

3. \_\_\_\_\_

Dr. A.K.M. Ashikur Rahman

Professor

Department of Computer Science & Engineering

Bangladesh University of Engineering & Technology, Dhaka.

Member

4. \_\_\_\_\_

Dr. Mahmuda Naznin

Professor

Department of Computer Science & Engineering

Bangladesh University of Engineering & Technology, Dhaka.

Member

5. \_\_\_\_\_

Dr. Md. Abdur Razzaque

Professor

Department of Computer Science & Engineering

University of Dhaka, Dhaka.

Member  
(External)

# Candidate's Declaration

This is hereby declared that the work titled “Overcoming Throughput Degradation in Multi-Radio Cognitive Radio Networks”, is the outcome of research carried out by me under the supervision of Dr. A. B. M. Alim Al Islam, in the Department of Computer Science & Engineering, Bangladesh University of Engineering & Technology, Dhaka 1000. It is also declared that this thesis or any part of it has not been submitted elsewhere for the award of any degree or diploma.

---

Tanvir Ahmed Khan  
Candidate

# Acknowledgment

Foremost, I express my heart-felt gratitude to my supervisor, Dr. A. B. M. Alim Al Islam, for his constant supervision of this work. He helped me a lot in every aspect of this work and guided me with proper directions whenever I sought one. His patient hearing of my ideas, critical analysis of my observations and detecting flaws (and amending thereby) in my thinking and writing have made this thesis a success.

I would also want to thank the members of my thesis committee: Dr. M. Sohel Rahman, Dr. A.K.M. Ashikur Rahman, Dr. Mahmuda Naznin, and specially the external member Dr. Md. Abdur Razzaque, for their encouragements, insightful comments, and valuable suggestions.

I am also thankful to Chowdhury Sayeed Hyder (Software Engineer, DS SQL Engineering, Microsoft, Redmond, WA, USA.). I sought help from him a number of occasions regarding simulation set-up and performance evaluation of this thesis. In addition, I am grateful to Md. Jahidul Islam (PhD Candidate, University of Minnesota -Twin Cities), Novia Nurain (Assistant Professor, CSE-UIU), Abdus Salam Azad (Lecturer, CSE-BUET), and Md. Ishat-E-Rabban (Lecturer, CSE-BUET) for their help and valuable suggestions regarding the writing and presentation of this thesis.

Last but not the least, I remain ever grateful to my beloved parents, who always exists as sources of inspiration behind every success of mine.

# Abstract

In recent years, Cognitive Radio Networks (CRNs) have been widely investigated to solve the spectrum scarcity problem. However, little research efforts have been spent in incorporating multiple radios for CRNs. Existing studies propose several medium access control (MAC) and routing protocols for Cognitive Multi-Radio Networks (CMRNs), however, none of them focuses on enhancing throughput in the network to the best of our knowledge. Therefore, in this paper, we propose a feedback-based multi-radio exploitation approach for CRNs where information obtained from lower layers (Physical layer and Data Link layer) is incorporated in the process of decision making in an upper layer (Application layer) to enhance network throughput. We implement our proposed approach in `ns-3` to measure different performance metrics including throughput, delay, and drop ratio. We compare the performance against that of existing multi-radio approaches. Our simulation results suggest that the proposed feedback-based approach always achieves substantially improved network throughput compared to existing approaches, in parallel to achieving improved delay and drop-ratio in most of the cases.

# Contents

<i>Board of Examiners</i>	ii
<i>Candidate's Declaration</i>	iii
<i>Acknowledgment</i>	iv
<i>Abstract</i>	v
<b>1 Introduction</b>	<b>1</b>
1.1 Background and Motivation . . . . .	1
1.2 Summary of Contributions . . . . .	3
<b>2 Related Work</b>	<b>4</b>
<b>3 System Model and Problem Definition</b>	<b>7</b>
<b>4 Feedback-based Multi-radio Exploitation Approach</b>	<b>9</b>
4.1 Overview of The Proposed Approach . . . . .	9
4.2 Radio Selection Based on Packet Transmission Ratio . . . . .	9
4.3 Channel Selection Based on Channel Utilization Ratio . . . . .	11
4.4 Variants of Our Proposed Approach . . . . .	11
<b>5 Experimental Evaluation</b>	<b>15</b>
5.1 Simulation Settings . . . . .	16
5.2 Simulation Results . . . . .	16
5.3 Simulation Findings . . . . .	21





# List of Figures

3.1	System model of a CMRN . . . . .	8
4.1	High-level overview of the proposed approach . . . . .	10
5.1	Average network throughput with varying number of radios for various application data rates . . . . .	17
5.2	Average end-to-end delay with varying number of radios for various application data rates . . . . .	18
5.3	Average packet drop ratio with varying number of radios for various application data rates . . . . .	19
5.4	Application layer packet delivery ratio with varying number of radios for various application data rates . . . . .	20

# List of Tables

4.1	Several variants of the proposed feedback-based approach . . . . .	14
5.1	Performance improvement achieved using the radio feedback-based approach with respect to the approaches proposed by Khan et al., [1] and Zhong et al., [2] . . . . .	21
5.2	Performance improvement achieved using the channel feedback-based approach with respect to the approaches proposed by Khan et al., [1] and Zhong et al., [2] . . . . .	22
5.3	Performance improvement achieved using the radio channel feedback-based approach with respect to the approaches proposed by Khan et al., [1] and Zhong et al., [2] . . . . .	22

# List of Algorithms

1	<i>sendPacket</i> : SU agent sending a packet, $p$ . . . . .	12
2	<i>startSensing</i> : SU's radio sensing its channel . . . . .	12
3	<i>startSwitching</i> : SU's radio changing its channel . . . . .	12
4	<i>transmitPacket</i> : SU's radio transmitting a packet, $p$ . . . . .	12
5	<i>receiveAckPacket</i> : SU's radio receiving an Ack packet, $p$ . . . . .	12
6	<i>getSelectedRadio</i> : Selects an SU radio to send a packet . . . . .	13
7	<i>getSelectedChannel</i> : Selects a new channel to switch for an SU radio over the <i>availableChannels</i> . . . . .	13

# Chapter 1

## Introduction

### 1.1 Background and Motivation

The famous spectrum scarcity problem along with significant spectrum under-utilization in traditional spectrum management has lead towards the notion of dynamic spectrum access [3] through cognitive radios. A *cognitive radio* monitors its operational electromagnetic environment to dynamically adjust its operating parameters [4]. Thus, a cognitive radio is capable of accessing temporal free spectrum. The architecture of the Cognitive Radio Networks (CRNs) comprises of two types of users. The first type refers to *primary users* (PUs), who possess licenses to operate in the spectrum bands. The second type refers to *secondary users* (SUs), who are unlicensed and employ cognitive radios to opportunistically access instantaneous spectrum holes.

On the other hand, classical wireless networks frequently adopt the notion of deploying users with multiple radios [5, 6]. Such deployment of multiple radios improves capacity of the networks [7, 5], enhances loss resilience [8], and enables heterogeneous wireless access for smart devices [9]. However, this augmentation also demands modified routing, medium-access, and link-layer protocols [10, 11]. Nonetheless, as such deployment of multiple radios in wireless nodes is known to improve the performance of a user and deployment of cognitive radios also aims to improve the performance of secondary users through spectrum utilization, it is intuitive that simultaneous utilization of both these techniques, i.e., Cognitive Multi-Radio Networks (CMRNs), will result in significantly improved network performance. Therefore, the notion of exploiting multiple radios in CRNs to supplement the dynamic spectrum access has been proposed in the contemporary literature. Existing studies in

this regard present that such multi-radio deployment in CRNs improves delay up to a certain point, however, throughput always degrades with an increase in the number of radios per secondary user [1]. Therefore, the main motivation behind this study is to examine how to improve network throughput while equipping secondary users with multiple radios.

The main challenge of improving total network throughput in CMRNs lies on the silent features of the architecture of CRNs. In CRNs, nodes generally have limited spectrum knowledge covering only its own neighborhood. Thus, the knowledge is conventionally gathered in a distributed manner. Therefore, graph-based and MILP optimization-based solutions [12, 13] for improving throughput can not be directly incorporated due to their nature of performing centralized computations. Moreover, the relation between two different performance metrics (throughput and delay) may be opposing in nature [14] and improving one of them may result in degradation of the another. Consequently, a trade-off between these two metrics demands special attention in CMRNs in road to improving throughput.

Most of the existing studies on CMRNs fail to solve our research problem, as they overlook the effect of utilizing multiple radios on different performance metrics. The studies [15, 16, 2, 17] usually integrate MAC and routing protocols for the multi-radio network architectures and solve the channel assignment problem for multi-channel scenario. While assigning multiple channels among multiple radios, the existing studies either randomly select the channels [1] or only rank the channels [2]. Due to all these reasons, to the best of our knowledge, no existing research study provides a viable solution for enhancing throughput in CMRNs.

To this end, in this paper, we propose to integrate feedback obtained from lower layers (Physical layer and Data Link layer) in the process of decision making in an upper layer (Application layer) to enhance network throughput. Here, to obtain lower layer feedback, we keep different packet counters for radios as well as channels in each secondary user. Using values of these counters, we rank all available radios and channels of a secondary user. Subsequently, based on the ranking, we make packet queuing decisions from the Application layer and channel switching decisions from the Data link layer while retaining a stochastic flavor. We implement our proposed feedback-based approach in `ns-3` to evaluate its performance in terms of throughput along with delay and drop ratio. Our simulation results demonstrate that the proposed approach can achieve significant improvement in terms of all the performance metrics in most of the cases.

## 1.2 Summary of Contributions

Based on our study in this paper, we make the following set of contributions:

- We propose a feedback-based multi-radio exploitation approach, along with several variants, to solve the throughput degradation problem in CMRNs.
- We implement the proposed approach and its variants in **ns-3** to demonstrate their radio selection and channel selection policies.
- We compare performance of our proposed approach against that of existing approaches in the literature. Comparative results confirm significant improvement over existing approaches through using our proposed approach.

## Chapter 2

# Related Work

Traditional analog model for spectrum management resulted into the inefficient utilization of most radio frequency spectrum [18]. While several mobile network spectrum bands are highly congested, other spectrum bands like TV space and non-commercial radio bands are overly under-utilized. Moreover, these utilization varies depending on time and place resulting into spectrum hole [19]. Subsequently, the notion of cognitive radio was proposed to exploit these temporal and spatial spectrum holes.

Cognitive radio is a special kind of radio with two unique attributes, cognitive capability and reconfigurability [3, 20, 21]. Cognitive capability enables cognitive radio to sense its radio environment. The radio environment sensing process involves observing the power in various spectrum bands as well as identifying temporal and spatial spectrum holes [3]. On the other hand, reconfigurability helps cognitive radio to communicate over various spectrum bands to improve spectrum utilization based on its spectrum awareness [22].

Based on these two special characteristics, the primary objective of cognitive radio can be best understood from its widely adopted definition [23]:

A cognitive radio is a radio or system that senses its operational electromagnetic environment and can dynamically and autonomously adjust its radio operating parameters to modify system operation, such as maximize throughput, mitigate interference, facilitate interoperability, access secondary markets.

Existing studies on CMRNs mainly investigate how to incorporate multiple radios in dynamic spectrum sharing scenario. These studies mainly propose medium access control protocols [24, 15],

routing protocols [25, 16], and channel assignment [26, 2] for CMRNs. Zhu et al., present a spectrum-tree based on-demand routing protocol that considers multi-radio nodes [25]. Such nodes belong to multiple spectrum-trees and are called overlapping nodes. As these nodes simultaneously work in different spectrum-trees, they can be used for inter-spectrum routing. The study shows that the proposed approach significantly reduces the average end-to-end delay. Besides, Feng et al., propose a novel spectrum handoff scheduling approach for multi-hop CMRNs [16]. This study presents a routing protocol with the help of aging-based priority assignment to minimize the latency. Thus none of these approaches addresses the problem of overcoming throughput degradation problem in CMRNs.

Ahmadi et al., present one of the earliest CRN studies involving multiple radios, which considers two sender radios for each secondary user [26]. This study strives to solve channel assignment problem for the scenario. However, as there is only one receiver radio for each user in the proposed network model and channels are assigned to the receiver radio, the corresponding channel assignment problem becomes close to the single-radio channel assignment problem. This is because, as in single-radio scenario, only one channel needs to be assigned for each receiver node and the node can not exploit multiple available channels while receiving packets. Further, the study always uses a fixed number of transmitter radios (two) and do not investigate performance of the network for varying numbers of radios.

Another CMRN study [2] by Zhong et al., aims to solve the channel assignment problem for CMRNs. Here, their proposed channel assignment approach assigns multiple channels among multiple radios available for secondary users. Despite ranking channels, while assigning them among radios, the approach does not consider the state of those radios. Besides, the paper does not provide any analysis on throughput with an increase in the number of radios.

The analysis of any performance metric based on an increase in the number of radios in CRNs is first presented in the study [17] by Li et al., to the best of our knowledge. The study presents a rendezvous channel establishment approach for CMRNs. It shows that the maximum time to rendezvous reduces with an increase in the number of radios used in CRNs. However, the study does not provide any solution on how these radios will be used for data transmission and its subsequent effect on performance metrics such as throughput and delay.

Later, Khan et al., [1] propose another CMRN architecture where each secondary user employs multiple radios for data transmission. The study shows that per packet average end-to-end delay gets improved at the cost of throughput degradation with an increase in the number of radios. This



study does the radio-channel assignment in a random manner and does not avoid inter-user channel interface. Thus, this study fails to improve throughput with an increase in the number of radios.

In summary, none of the existing studies focuses on enhancing throughput in CMRNs. Therefore, we attempt to propose a new channel assignment approach to enhance throughput in CMRNs in this paper. Before presenting the approach, we first elaborate our system model and problem formulation.

## Chapter 3

# System Model and Problem Definition

We consider a cognitive radio network (as described in fig. 3.1) having  $n$  primary users and  $m$  secondary users in our analysis. For the sake of simplicity, we assume that  $n$  primary users use  $n$  distinct spectrum channels. Primary users randomly become active and inactive in their respective channel following a Poisson process [27]. Besides, each of the  $m$  secondary users has at least 2 radios. Here, one radio is for control purpose, and remaining ones are for data communication and channel sensing activities. There is a dedicated control channel for the control radios, which we assume not to be used by any of the primary users. This dedicated channel is utilized into time slots. Each time slot has  $m$  sub-slots, one for each of the secondary users. In each sub-slot, the respective secondary user's control radio transmits its current communication parameters to avoid hidden terminal and synchronization problems. We assume that there is no inter-channel interference among the data channels. Also, we only consider single-hop data communication for secondary users.

Under the presented system model, our research question is how to efficiently use the available multiple data transmission radios to get enhanced total network throughput while limiting end-to-end delay. As there is no central authority in the considered system model, solution of the problem must be distributed. Besides, the decision making must also be online as the primary and secondary users' behavior can dynamically vary and thus can not be predicted beforehand. Considering these aspects, we propose a new solution in the next chapter.

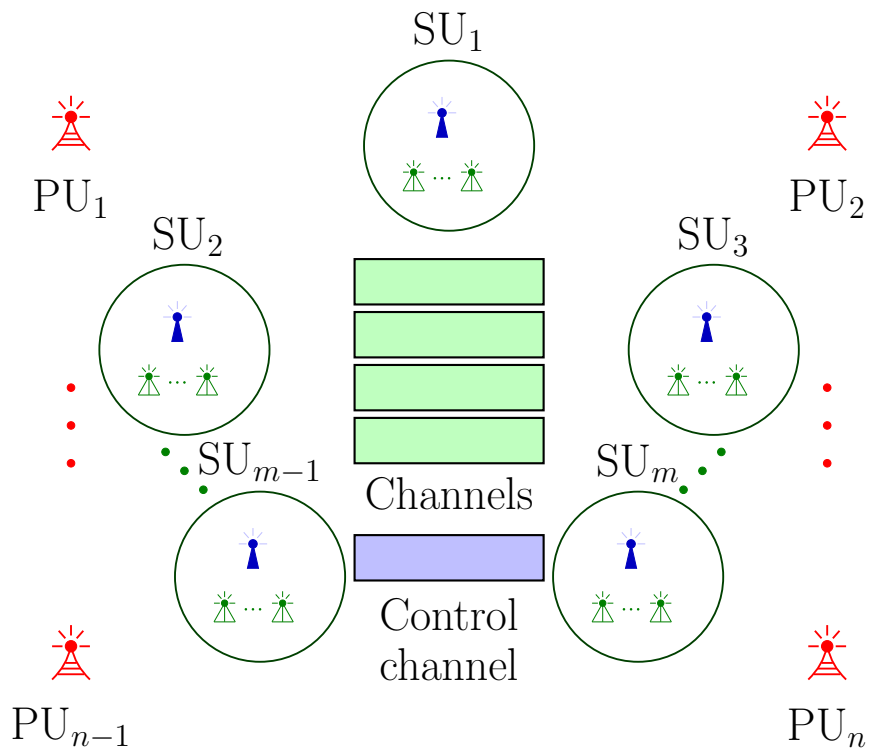


Figure 3.1: System model of a CMRN

## Chapter 4

# Feedback-based Multi-radio Exploitation Approach

Our proposed approach consists of mainly two different types of feedbacks. Firstly, we measure packet transmission ratio for each radio to evaluate radio performance. Secondly, we calculate channel utilization ratio for each channel to assess corresponding channel condition.

### 4.1 Overview of The Proposed Approach

We present a brief overview of our proposed feedback-based approach in fig. 4.1. As SUs are equipped with multiple radios, a single radio is first selected to send an application layer packet. The radio selection process as described in section 4.2 is based on packet transmission ratio. The selected radio then senses the PU activity on its current channel. If the current channel is idle, it transmits the packet following an standard CSMA-CA protocol. However, if the current channel is busy, then the radio selects another channel and starts switching to that channel. The channel selection process is based on channel utilization ratio and is described in section 4.3.

### 4.2 Radio Selection Based on Packet Transmission Ratio

When SUs are equipped with multiple data transmission radios, the first issue comes into play is to select the radio for transmitting data packets. For this selection, our proposed approach maintains two counters for each radio namely `pktQueued` denoting the number of packets queued for the radio and

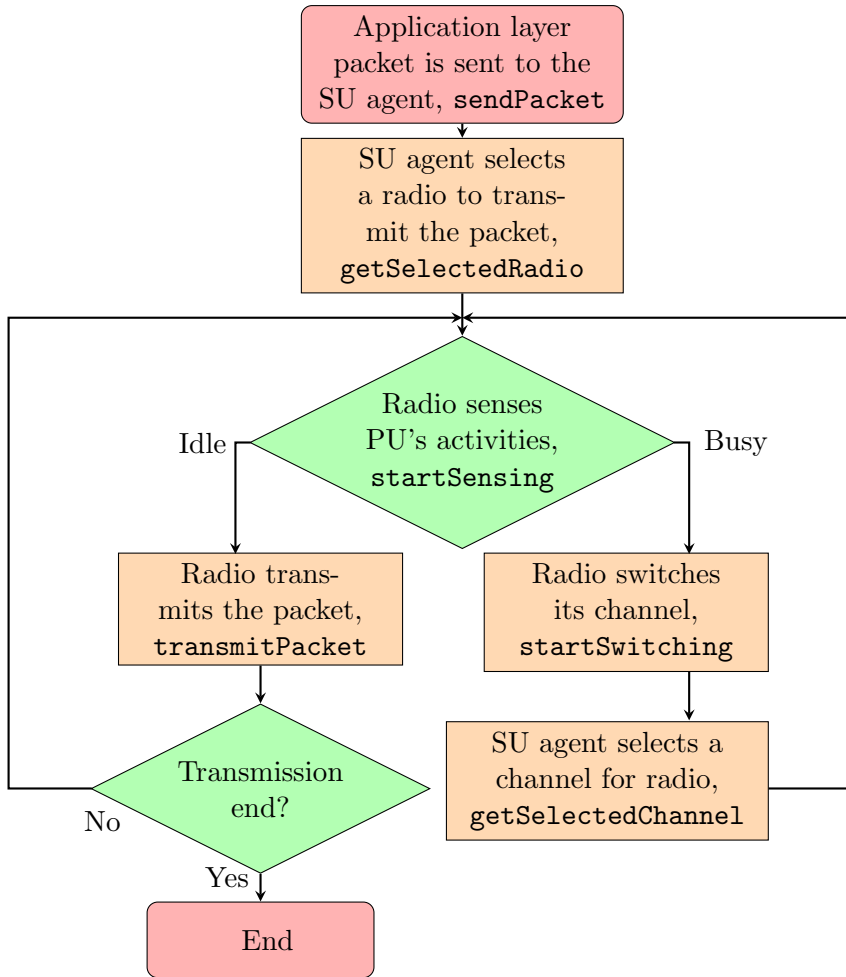


Figure 4.1: High-level overview of the proposed approach

`pktSent` denoting the number of packets already transmitted by the radio. Whenever the Application layer of an SU sends a packet for transmission to the lower layers, the secondary user agent calculates the ratio between `pktSent` and `pktQueued` for each radio. We define the ratio as Packet Transmission Ratio, `sentQueuedRatio`. Subsequently, we normalize values of the ratio to rank the radios in a uniform manner. A larger value of such packet transmission ratio implies that the corresponding radio has been successful to transmit more packets than others. Using these packet transmission ratios as the weights, our proposed approach conducts a weighted lottery to select radios for transmission of packets.

At the beginning of the packet transmission process, an SU's radio senses its current channel. If the cognitive radio finds that the current channel is busy, then the radio starts a channel switching

process. At the beginning of the channel switching process, the SU agent lists all the channels currently not used by any radio of the corresponding SU. If no such channel can be found, the radio is reported as Off and the queued packets are discarded as dropped. Otherwise, a channel is selected from the list of available channels, `availableChannels` based on current channel utilization ratio. We present the selection process along with the definition of the channel utilization ratio next.

### 4.3 Channel Selection Based on Channel Utilization Ratio

In our proposed approach, each SU keeps two counters for each channel. First, `pktTransmitted` counts the number of packets transmitted in the channel by the corresponding SU radios. Besides, `pktReceived` counts the number of packets successfully received by the corresponding receiver. The counter, `pktReceived` is incremented after reception of each acknowledgment packet. When a switching radio requires selecting a channel among `availableChannels`, the SU agent calculates the ratio between `pktReceived` and `pktTransmitted` for each channel on the list, `availableChannels`. We define the ratio as Channel Utilization Ratio, `RxTxRatio`. We normalize this ratio to rank the channels in a uniform manner. Using these channel utilization ratios as the weights, the SU agent conducts a weighted lottery to select the channel to switch over.

The last two important aspects of our feedback-based multi-radio exploitation approach are the reactivation of Off radios and probabilistic channel switching. Radios marked Off at the beginning of a channel switching process, are reactivated probabilistically by the radio selection process. While calculating packet transmission ratio from `pktSent` and `pktQueued`, in the case of Off radios, the ratio is multiplied by `wakeUpProbability` to make it less likely to be selected as the next radio for sending a packet. Though, if selected, the Off radio is reported as On and it starts its cognitive cycle through the channel sensing process. The probabilistic channel switching implies that radios do not always switch after finding their current channel busy. The channel switching process occurs at a probability of `switchingProbability`.

### 4.4 Variants of Our Proposed Approach

We create three variants of our proposed approach introducing radio and channel selection based on a random variable following a uniform distribution. While selecting the next radio for data packet transmission, we can randomly select any one of data radios ignoring the packet transmission ratios.

---

**Algorithm 1** *sendPacket*: SU agent sending a packet,  $p$ 


---

```

1: function sendPacket
2:    $radioIndex \leftarrow getSelectedRadio()$ 
3:    $pktQueued[radioIndex] \leftarrow$ 
        $1 + pktQueued[radioIndex]$ 
4:    $radioStatus[radioIndex] \leftarrow On$ 
5:   startSensing( $radioIndex$ )

```

---

**Algorithm 2** *startSensing*: SU's radio sensing its channel

---

```

1: function startSensing( $radioIndex$ )
2:   if  $currentChannel[radioIndex]$  is Busy then
3:     startSwitching( $radioIndex$ )
4:   else
5:     transmitPacket( $radioIndex$ )

```

---

**Algorithm 3** *startSwitching*: SU's radio changing its channel

---

```

1: function startSwitching( $radioIndex$ )
2:   Stop the switching process and return with the probability  $(1 - switchingProbability)$ 
3:    $availableChannels \leftarrow$  all the channels currently not used by any radio of the SU
4:   if  $availableChannels = \emptyset$  then
5:      $radioStatus[radioIndex] \leftarrow Off$ 
6:     dropPacket()
7:   else
8:      $channelIndex \leftarrow$ 
        $getSelectedChannel(availableChannels)$ 
9:      $currentChannel[radioIndex] \leftarrow channelIndex$ 
10:     $channels[channelIndex] \leftarrow Used$ 
11:    startSensing( $radioIndex$ )

```

---

**Algorithm 4** *transmitPacket*: SU's radio transmitting a packet,  $p$ 


---

```

1: function transmitPacket( $radioIndex$ )
2:    $pktSent[radioIndex] \leftarrow pktSent[radioIndex] + 1$ 
3:    $pktTransmitted[currentChannel[radioIndex]] \leftarrow$ 
        $pktTransmitted[currentChannel[radioIndex]]$ 
        $+ 1$ 
4:   encapsulate  $radioIndex$  within the packet,  $p$  and transmit it following CSMA-CA

```

---

**Algorithm 5** *receiveAckPacket*: SU's radio receiving an Ack packet,  $p$ 


---

```

1: function receivePacket( $p$ )
2:    $radioIndex \leftarrow$  the radio index extracted from the packet
3:   if  $radioIndex =$  current radio's index then
4:      $pktReceivedRadio[radioIndex] \leftarrow$ 
        $pktReceivedRadio[radioIndex] + 1$ 
5:      $pktReceived[currentChannel[radioIndex]] \leftarrow$ 
        $pktReceived[currentChannel[radioIndex]] + 1$ 

```

---

---

**Algorithm 6** *getSelectedRadio*: Selects an SU radio to send a packet

---

```

1: function getSelectedRadio
2:    $k \leftarrow$  the number of radios
3:    $sentQueuedRatio[0 \dots k] \leftarrow$  a new array of floating point values
4:    $total \leftarrow 0.0$ 
5:   for  $r = 1$  to  $k$  do
6:      $sentQueuedRatio[r] \leftarrow \frac{(1 + pktSent[r])}{(1 + pktQueued[r])}$ 
7:     if  $radioStatus[r] = Off$  then
8:        $sentQueuedRatio[r] \leftarrow$ 
        $sentQueuedRatio[r] \times wakeUpProbability$ 
9:      $total \leftarrow total + sentQueuedRatio[r]$ 
10:  for  $r = 1$  to  $k$  do
11:     $sentQueuedRatio[r] \leftarrow \frac{sentQueuedRatio[r]}{total}$ 
12:   $radioIndex \leftarrow$  winner of the weighted lottery among all the radios with weight,
   $sentQueuedRatio$ 
13:  return  $radioIndex$ 

```

---



---

**Algorithm 7** *getSelectedChannel*: Selects a new channel to switch for an SU radio over the *availableChannels*

---

```

1: function getSelectedChannel(availableChannels)
2:    $k \leftarrow$  the number of channels in availableChannels
3:    $RxTxRatio[0 \dots k] \leftarrow$  a new array of floating point values
4:    $total \leftarrow 0.0$ 
5:   for  $r = 1$  to  $k$  do
6:      $RxTxRatio[r] \leftarrow \frac{(1 + pktReceived[r])}{(1 + pktTransmitted[r])}$ 
7:      $total \leftarrow total + RxTxRatio[r]$ 
8:   for  $r = 1$  to  $k$  do
9:      $RxTxRatio[r] \leftarrow \frac{RxTxRatio[r]}{total}$ 
10:   $channelIndex \leftarrow$  winner of the weighted lottery among all the channels in availableChannels
  with weight,  $RxTxRatio$ 
11:  return  $channelIndex$ 

```

---



Table 4.1: Several variants of the proposed feedback-based approach

Variant name	Radio selection policy	Channel selection policy
Radio feedback	Weighted lottery based on radio transmission ratio	Unweighted lottery
Channel feedback	Unweighted lottery	Weighted lottery based on channel utilization ratio
Radio channel feedback	Weighted lottery based on radio transmission ratio	Weighted lottery based on channel utilization ratio

Similarly, the next channel to switch can also be chosen randomly from the available channels irrespective of the channel utilization ratio. We define this random radio and channel selection policy as unweighted lottery. From this unweighted lottery, we devise three variants of our proposed approach as described in table 4.1. The approach of randomly selecting both the radio and the channel has not be listed as the variants of the proposed approach as that approach is quite similar to the approach proposed by Zhong et al., [2].

## Chapter 5

# Experimental Evaluation

Our proposed system requires wireless devices with multiple networking interface modules. Each of these modules must also have cognitive capability to ensure the basic requirements of our proposed architecture. The development of such devices involves a highly complex level of sophistication and fabrication. Such a development of cognitive radio networks in real setup is still under research. Therefore, we evaluate the performance of our proposed feedback-based multi-radio exploitation approach through extensive discrete-event simulation using ns-3.

We implement our proposed approach on top of the Cognitive radio extension for ns-3 namely CRE-NS3 [28]. We modify the cognitive module of CRE-NS3 to incorporate our feedback-based approach. The existing cognitive module of CRE-NS3 provides three interfaces for each device namely control interface, transmitter interface, and receiver interface. The transmitter and receiver interfaces of the module emulate a real cognitive transceivers. Therefore, we introduce the functionality of varying number of cognitive transceivers through varying the number of the transmitter and receiver interfaces.

Using the modified simulator, we implement our proposed approach and evaluate its performance on the basis of four performance metrics – total network throughput, end-to-end delay, packet drop ratio, and application layer packet delivery ratio. Besides, we measure values of these metrics for two existing CMRN protocols and compared them against that obtained using several variants of our proposed approach. We briefly describe our simulation settings below before presenting the evaluation results.

## 5.1 Simulation Settings

We consider that arrival and departure of a PU follow a Poisson process [29]. Accordingly, we consider an exponential distribution for both inter-arrival time and service time. Hence we adopt the mean time between two successive arrivals to be 5 seconds and the mean service time to be 2 seconds. Besides, we consider that each secondary user enables a constant bit rate application where the data transmission rate is varied from 1 Mbps to 32 Mbps. Here, each secondary user is equipped with a variable number of radios. Each of the radios consists of one transmitter interface and one receiver interface. The transmitter interface transmits data over any of the eleven orthogonal channels that conventionally operate with OFDM WiFi mode having 18Mbps data rate. For each transmitter interface or radio, we associate a drop-tail queue with a maximum capacity of 100 packets, each of 1KB in size. These interfaces have a transmission range of 130m and a sensing range of 250m. To ensure that the destination users are reachable from the source users, we place the destinations at an average distance of 80m from the sources. Maintaining such average distance, primary users and secondary users are placed randomly in an area of 500m×500m. Here, we vary the number of secondary users from 12 to 40 with a granularity of 4. For each such settings, we perform 99 simulation iterations, each of 50 seconds, and then take average results of all the iterations. It is to be noted here that the maximum iteration count for obtaining 95% confidence interval according to Monte Carlo Sampling [30] is found to be 61 in our experiment settings.

We carefully set the various parameters used in our proposed feedback-based approach. The channel switching probability of SU radios, `switchingProbability` is set as 0.75 and the reactivation probability of switched-off radios, `wakeUpProbability` is set as 0.2. The channel sensing time for each of the cognitive radio is set as 0.01s while the channel switching time is set as 0.05s.

## 5.2 Simulation Results

We start presenting our simulation results for a topology having 11 primary users and 24 secondary users. Here, we vary the application data rate from the source of a flow over secondary users from 1 Mbps to 32 Mbps. Fig. 5.1, 5.2, and 5.3 show the performance of several variants of our proposed approach and other existing approaches.

Fig. 5.1 depicts total network throughput for all the approaches in response to a variation in the number of radios for different application data rates. In most of the cases, our proposed approaches

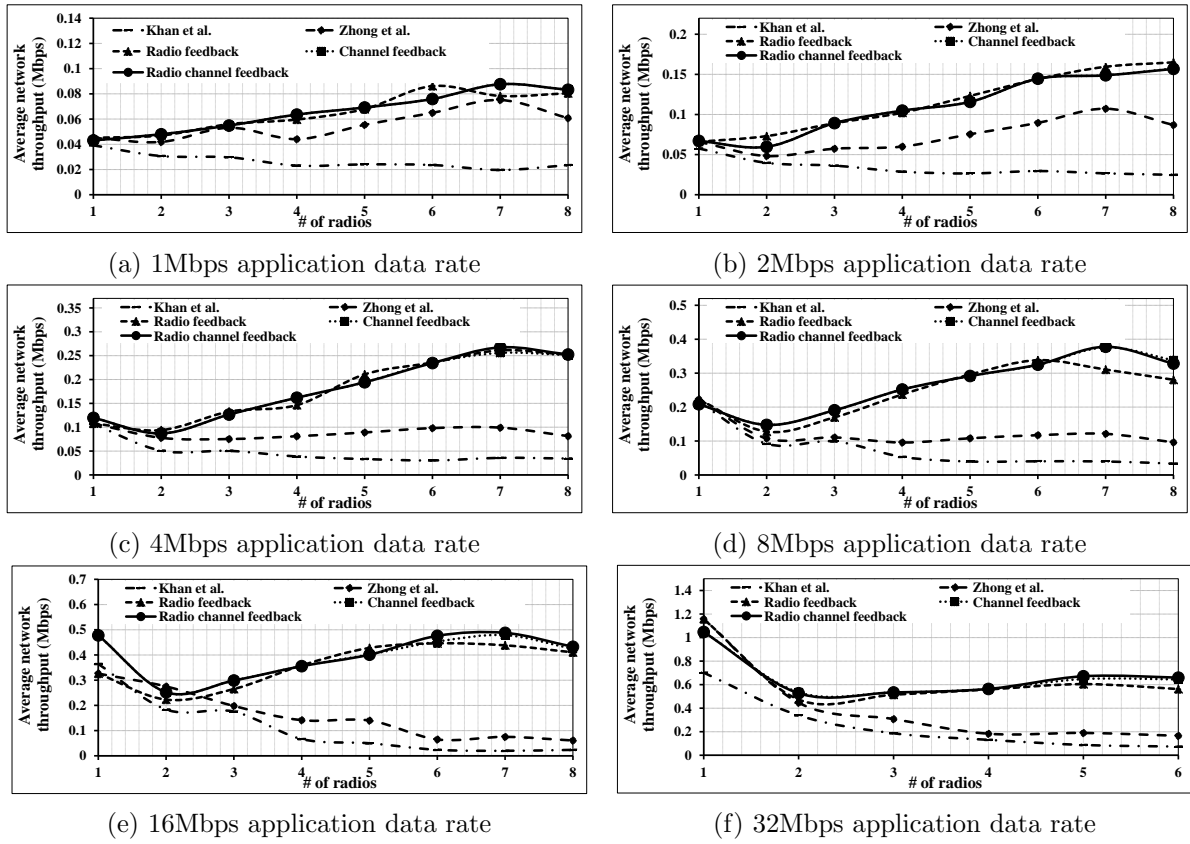


Figure 5.1: Average network throughput with varying number of radios for various application data rates

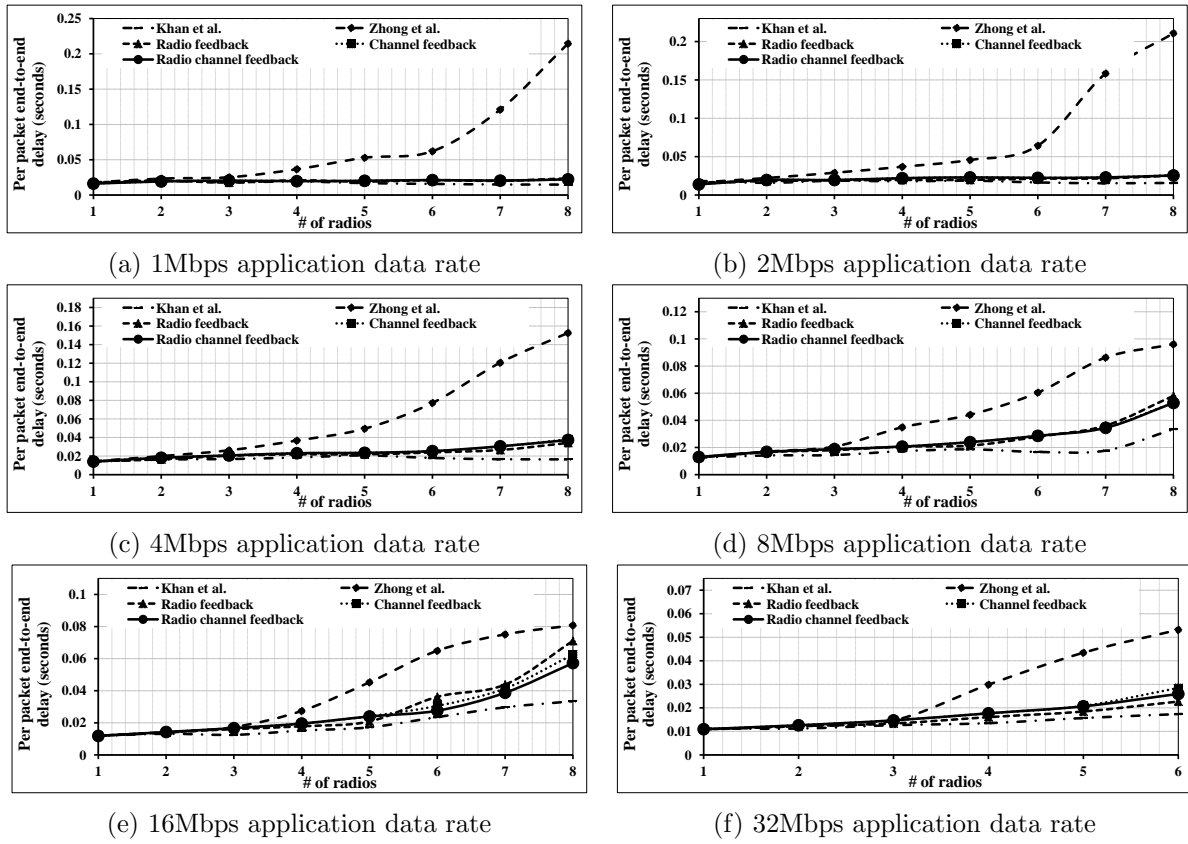


Figure 5.2: Average end-to-end delay with varying number of radios for various application data rates

obtain significantly higher network throughput than the existing ones. Here, at lower data rates (1-8 Mbps), total network throughput increases with an increase in the number of radios. After reaching an optimal point, throughput starts degrading. At higher data rates (16 and 32 Mbps), the network throughput falls drastically from the single radio scenario and never again reaches the throughput obtained with single radio data transmission.

Fig. 5.2 illustrates that the feedback-based approaches experience significantly lower end-to-end delay than that achieved with the approach proposed by Zhong et al. [2]. However, delay using our proposed approach is higher than that achieved with the approach proposed by Khan et al. [1]. Here with our proposed approach, the delay becomes almost constant with an increase in the number of radios at lower application data rates (1-4Mbps). However, at higher data rates (8-32 Mbps), the delay rises with an increase in the number of radios per SU.

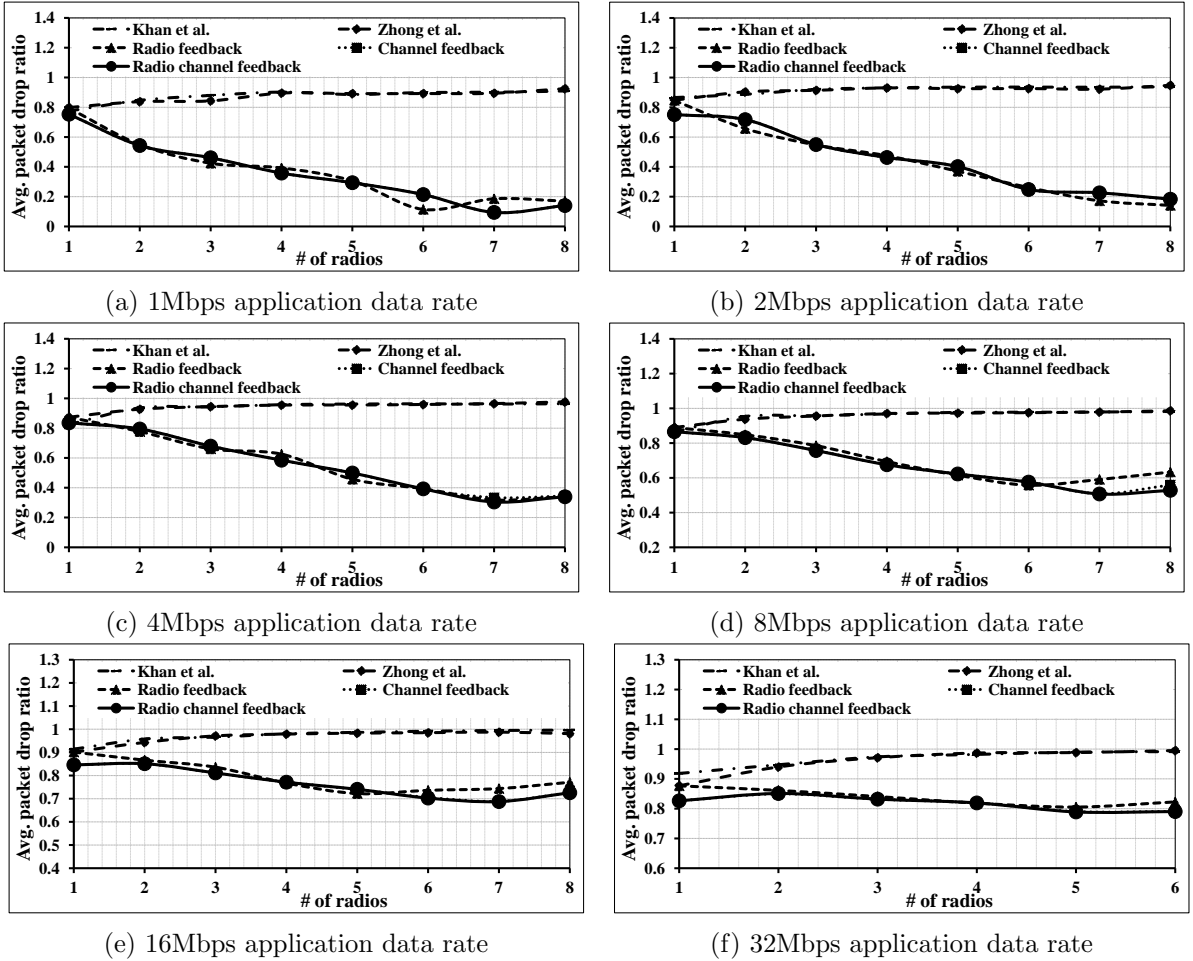


Figure 5.3: Average packet drop ratio with varying number of radios for various application data rates

Fig. 5.3 compares the average packet drop ratio of our proposed approaches against that of the existing approaches. As illustrated in fig. 5.3, the feedback-based approach achieves significantly lower packet drop ratios than all the existing ones. The feedback-based approach is also able to reduce the packet drop ratio significantly at lower data rates (1-8 Mbps) with the exploitation of multiple radios. However, at higher application data rates (16 and 32 Mbps), most of the packets get dropped resulting in high drop ratios. This explains why the network throughput at higher data rate does not improve even after the introduction of multiple data transmission radios.

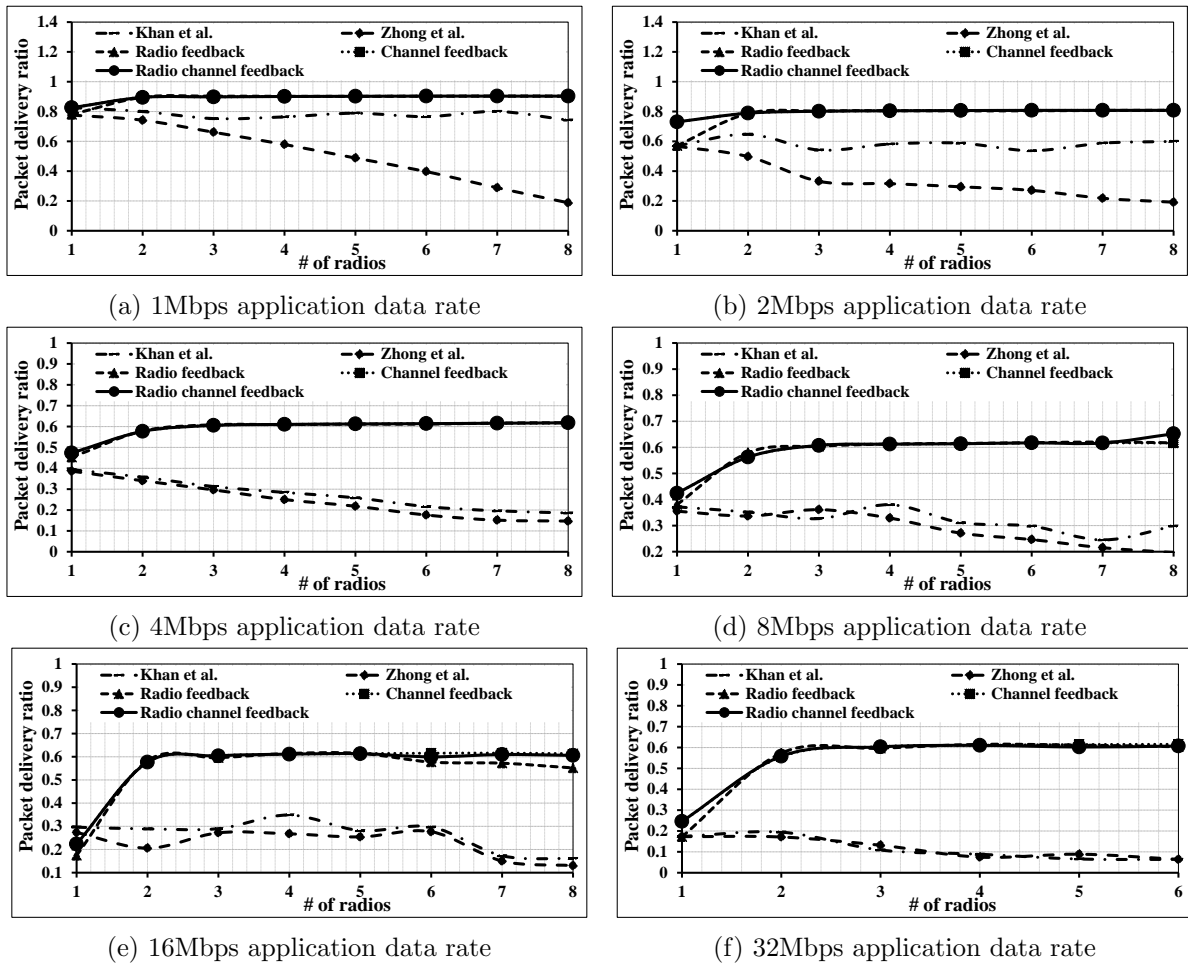


Figure 5.4: Application layer packet delivery ratio with varying number of radios for various application data rates

Fig. 5.4 shows the application layer packet delivery ratio of our proposed approaches against that of the existing approaches. Due to the efficient exploitation of multiple radios, our proposed approaches obtain significantly better packet delivery ratio than that achieved with the existing approaches.

Table 5.1, 5.2, and 5.3 summarize average performance improvement using feedback-based approaches in comparison to the approaches proposed by Khan et al., [1] and Zhong et al. [2]. The tables shows that the proposed approach outperforms the existing approaches in terms of all the performance metrics except end-to-end delay. In terms of total network throughput, the proposed approach obtains an average of 51% improvement over the two existing approaches. Moreover, the proposed approach decreases packet drop ratio on an average 35% and increases application layer packet delivery ratio on an average 32% compared to existing approaches. Even though, the feedback-based approach experiences the higher delay in some cases, in average, the delay is improved by 13% on an average.

Table 5.1: Performance improvement achieved using the radio feedback-based approach with respect to the approaches proposed by Khan et al., [1] and Zhong et al., [2]

Application data rate	% increase in throughput with respect to		% decrease in end-to-end delay with respect to		% decrease in packet drop ratio with respect to		% increase in application layer packet delivery ratio with respect to	
	Khan et al.	Zhong et al.	Khan et al.	Zhong et al.	Khan et al.	Zhong et al.	Khan et al.	Zhong et al.
1Mbps	55	14	-9	48	57	57	12	12
2Mbps	64	33	-10	50	52	54	24	27
4Mbps	66	44	-16	45	40	41	52	52
8Mbps	63	46	-17	32	26	26	42	43
16Mbps	62	48	-16	24	18	18	40	46
32Mbps	63	42	-13	28	13	12	69	73

### 5.3 Simulation Findings

Though we have performed discrete event simulations for various network topologies varying the number of secondary users from 12 to 40 with a granularity of 4, in this paper, due to space limitation, we have presented the simulation results for only one topology with 24 secondary users. Our proposed approach for CMRNs obtains similar results in case of other seven network topologies as well. Over all these topologies, our feedback-based approach improves total network throughput 51% and decrease packet drop ratio up to 35% on an average against that of existing approaches. Among three variants of our proposed approach, radio channel feedback approach marginally better over other variants.



Table 5.2: Performance improvement achieved using the channel feedback-based approach with respect to the approaches proposed by Khan et al., [1] and Zhong et al., [2]

Application data rate	% increase in throughput with respect to		% decrease in end-to-end delay with respect to		% decrease in packet drop ratio with respect to		% increase in application layer packet delivery ratio with respect to	
	Khan et al.	Zhong et al.	Khan et al.	Zhong et al.	Khan et al.	Zhong et al.	Khan et al.	Zhong et al.
1Mbps	55	15	-8	49	58	58	12	41
2Mbps	63	31	-15	48	51	51	27	55
4Mbps	66	44	-11	42	40	38	52	52
8Mbps	64	49	-16	31	30	30	44	48
16Mbps	68	55	-13	25	21	20	45	47
32Mbps	64	44	-16	23	15	15	73	68

Table 5.3: Performance improvement achieved using the radio channel feedback-based approach with respect to the approaches proposed by Khan et al., [1] and Zhong et al., [2]

Application data rate	% increase in throughput with respect to		% decrease in end-to-end delay with respect to		% decrease in packet drop ratio with respect to		% increase in application layer packet delivery ratio with respect to	
	Khan et al.	Zhong et al.	Khan et al.	Zhong et al.	Khan et al.	Zhong et al.	Khan et al.	Zhong et al.
1Mbps	55	15	-18	49	58	58	42	42
2Mbps	63	31	-15	49	51	51	58	58
4Mbps	66	44	-17	42	40	41	57	57
8Mbps	63	49	-17	31	29	30	49	50
16Mbps	68	55	-14	27	21	20	53	52
32Mbps	64	43	-13	23	15	15	73	73

## Chapter 6

# Conclusion

Cognitive radio networks suffer noteworthy throughput degradation with the introduction of multi-radio usage. We propose a feedback-based multi-radio exploitation approach for CRNs in this paper to overcome this throughput degradation. We implement the proposed approach in ns-3 to measure various performance metrics such as throughput, delay, packet delivery, and drop ratio over numerous network settings. Simulation results reveal that our proposed approach can significantly increase total network throughput and decrease packet drop ratio compared to other existing techniques. Furthermore, the feedback-based approach can be used to find the number of radios needed to experience a delicate tradeoff between network throughput and delay for applications maintaining different data rates. In future, we plan to formulate analytical models of our proposed approach and implement the approach in real testbed.

# Bibliography

- [1] Tanvir Ahmed Khan, Chowdhury Sayeed Hyder, and ABM Islam. Towards exploiting a synergy between cognitive and multi-radio networking. In *Wireless and Mobile Computing, Networking and Communications (WiMob), 2015 IEEE 11th International Conference on*, pages 370–377. IEEE, 2015.
- [2] Xiaoxiong Zhong, Yang Qin, and Li Li. Capacity analysis in multi-radio multi-channel cognitive radio networks: A small world perspective. *Wireless Personal Communications*, 79(3):2209–2225, 2014.
- [3] Ian F Akyildiz, Won-Yeol Lee, Mehmet C Vuran, and Shantidev Mohanty. Next generation/dynamic spectrum access/cognitive radio wireless networks: a survey. *Computer Networks*, 50(13):2127–2159, 2006.
- [4] J. Mitola and Jr. Maguire, G.Q. Cognitive radio: making software radios more personal. *Personal Communications, IEEE*, 6(4):13–18, 1999.
- [5] Paramvir Bahl, Atul Adya, Jitendra Padhye, and Alec Walman. Reconsidering wireless systems with multiple radios. *ACM SIGCOMM Computer Communication Review*, 34(5):39–46, 2004.
- [6] Atul Adya, Paramvir Bahl, Jitendra Padhye, Alec Wolman, and Lidong Zhou. A multi-radio unification protocol for ieee 802.11 wireless networks. In *Broadband Networks, 2004. BroadNets 2004. Proceedings. First International Conference on*, pages 344–354. IEEE, 2004.
- [7] Richard Draves, Jitendra Padhye, and Brian Zill. Routing in multi-radio, multi-hop wireless mesh networks. In *Proceedings of the 10th annual international conference on Mobile computing and networking*, pages 114–128. ACM, 2004.

- [8] Allen Miu, Hari Balakrishnan, and Can Emre Koksal. Improving loss resilience with multi-radio diversity in wireless networks. In *Proceedings of the 11th annual international conference on Mobile computing and networking*, pages 16–30. ACM, 2005.
- [9] Wei Song and Weihua Zhuang. Performance analysis of probabilistic multipath transmission of video streaming traffic over multi-radio wireless devices. *Wireless Communications, IEEE Transactions on*, 11(4):1554–1564, 2012.
- [10] Pradeep Kyasanur and Nitin H Vaidya. Routing and link-layer protocols for multi-channel multi-interface ad hoc wireless networks. *ACM SIGMOBILE Mobile Computing and Communications Review*, 10(1):31–43, 2006.
- [11] Avhishek Chatterjee, Supratim Deb, Kanthi Nagaraj, and Vikram Srinivasan. Low delay mac scheduling for frequency-agile multi-radio wireless networks. 2013.
- [12] Anh Tuan Hoang and Ying-Chang Liang. Downlink channel assignment and power control for cognitive radio networks. *IEEE Transactions on Wireless Communications*, 7(8), 2008.
- [13] Ejaz Ahmed, Abdullah Gani, Saeid Abolfazli, Liu Jie Yao, and Samee U Khan. Channel assignment algorithms in cognitive radio networks: Taxonomy, open issues, and challenges. *IEEE Communications Surveys & Tutorials*, 18(1):795–823, 2014.
- [14] A El Gamal, James Mammen, Balaji Prabhakar, and Devavrat Shah. Throughput-delay trade-off in wireless networks. In *INFOCOM 2004. Twenty-third Annual Joint Conference of the IEEE Computer and Communications Societies*, volume 1. IEEE, 2004.
- [15] Antonio De Domenico, Emilio Calvanese Strinati, and Maria-Gabriella Di Benedetto. A survey on mac strategies for cognitive radio networks. *IEEE Communications Surveys & Tutorials*, 14(1):21–44, 2012.
- [16] Wei Feng, Jiannong Cao, Chisheng Zhang, and Chuda Liu. Joint optimization of spectrum hand-off scheduling and routing in multi-hop multi-radio cognitive networks. In *Distributed Computing Systems, 2009. ICDCS’09. 29th IEEE International Conference on*, pages 85–92. IEEE, 2009.
- [17] Guyue Li, Zhaoquan Gu, Xiao Lin, Haosen Pu, and Qiang-sheng Hua. Deterministic distributed rendezvous algorithms for multi-radio cognitive radio networks. In *Proceedings of the 17th ACM*

- international conference on Modeling, analysis and simulation of wireless and mobile systems*, pages 313–320. ACM, 2014.
- [18] Václav Valenta, Roman Maršálek, Geneviève Baudoin, Martine Villegas, Martha Suarez, and Fabien Robert. Survey on spectrum utilization in europe: Measurements, analyses and observations. In *Cognitive Radio Oriented Wireless Networks & Communications (CROWNCOM), 2010 Proceedings of the Fifth International Conference on*, pages 1–5. IEEE, 2010.
- [19] Rahul Tandra, Shridhar Mubaraq Mishra, and Anant Sahai. What is a spectrum hole and what does it take to recognize one? *Proceedings of the IEEE*, 97(5):824–848, 2009.
- [20] Ryan W Thomas, Luiz A DaSilva, and Allen B MacKenzie. Cognitive networks. In *New Frontiers in Dynamic Spectrum Access Networks, 2005. DySPAN 2005. 2005 First IEEE International Symposium on*, pages 352–360. Ieee, 2005.
- [21] Simon Haykin. Cognitive radio: brain-empowered wireless communications. *IEEE journal on selected areas in communications*, 23(2):201–220, 2005.
- [22] Friedrich K Jondral. Software-defined radio: basics and evolution to cognitive radio. *EURASIP journal on wireless communications and networking*, 2005(3):275–283, 2005.
- [23] Federal Communications Commission et al. Notice of proposed rule making and order: Facilitating opportunities for flexible, efficient, and reliable spectrum use employing cognitive radio technologies. *ET docket*, (03-108):73, 2005.
- [24] Claudia Cormio and Kaushik R Chowdhury. A survey on mac protocols for cognitive radio networks. *Ad Hoc Networks*, 7(7):1315–1329, 2009.
- [25] Guo-Mei Zhu, Ian F Akyildiz, and Geng-Sheng Kuo. Stod-rp: A spectrum-tree based on-demand routing protocol for multi-hop cognitive radio networks. In *Global Telecommunications Conference, 2008. IEEE GLOBECOM 2008. IEEE*, pages 1–5. IEEE, 2008.
- [26] Maryam Ahmadi, Yanyan Zhuang, and Jianping Pan. Distributed robust channel assignment for multi-radio cognitive radio networks. In *Vehicular Technology Conference (VTC Fall), 2012 IEEE*, pages 1–5. IEEE, 2012.

- 
- [27] Sheldon M. Ross. *Introduction to Probability Models, Ninth Edition*. Academic Press, Inc., Orlando, FL, USA, 2006.
  - [28] Abdulla Al-Ali and Kaushik Chowdhury. Simulating dynamic spectrum access using ns-3 for wireless networks in smart environments. In *Sensing, Communication, and Networking Workshops (SECON Workshops), 2014 Eleventh Annual IEEE International Conference on*, pages 28–33. IEEE, 2014.
  - [29] Junghyun Heo, Jungchae Shin, Jihee Nam, Yutae Lee, Joon Goo Park, and Ho-Shin Cho. Mathematical analysis of secondary user traffic in cognitive radio system. In *Vehicular Technology Conference, 2008. VTC 2008-Fall. IEEE 68th*, pages 1–5. IEEE, 2008.
  - [30] Wayne L Winston. *Simulation modeling using@ RISK*. Duxbury, 2000.