



## RIP configuration in Packet Tracer

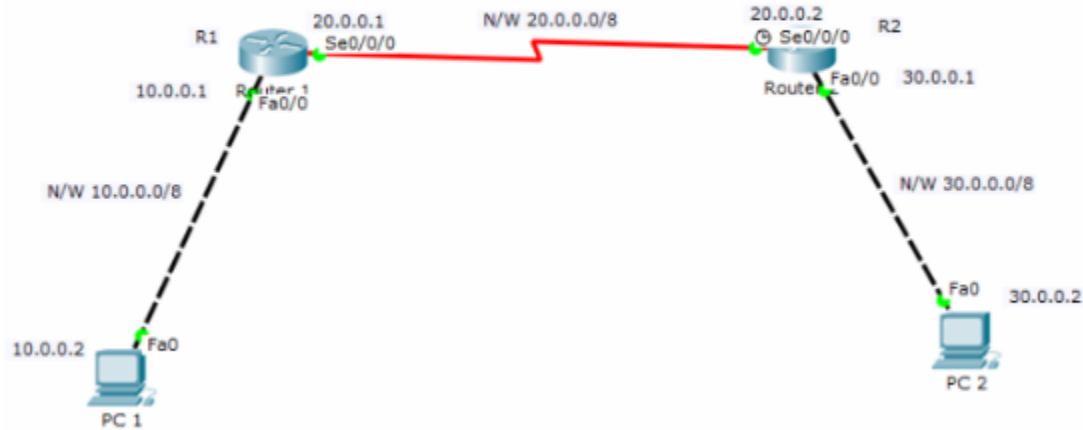

- Q.1 Build the network topology.
- Q.2 Configure IP addresses on the PCs and the routers.
- Q.3 Configure **RIPv2** on the routers
- Q.4 **Verify** RIP configuration. (*show ip route*)

## RIP configuration in Packet Tracer

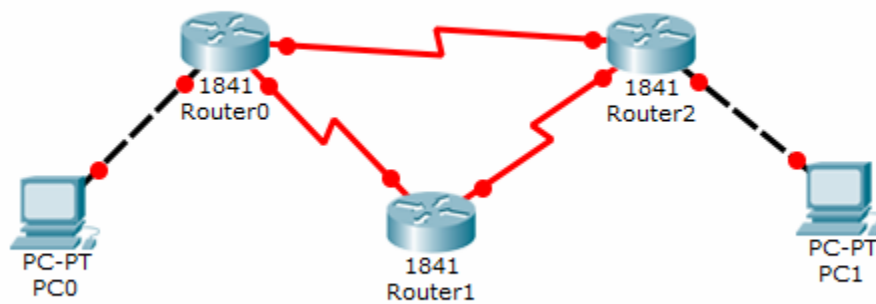

#### Initial IP configuration

| Device  | Interface     | IP Configuration | Connected with      |
|---------|---------------|------------------|---------------------|
| PC0     | Fast Ethernet | 10.0.0.2/8       | Router0's Fa0/1     |
| Router0 | Fa0/1         | 10.0.0.1/8       | PC0's Fast Ethernet |
| Router0 | S0/0/1        | 192.168.1.254/30 | Router2's S0/0/1    |
| Router0 | S0/0/0        | 192.168.1.249/30 | Router1's S0/0/0    |
| Router1 | S0/0/0        | 192.168.1.250/30 | Router0's S0/0/0    |
| Router1 | S0/0/1        | 192.168.1.246/30 | Router2's S0/0/0    |
| Router2 | S0/0/0        | 192.168.1.245/30 | Router1's S0/0/1    |
| Router2 | S0/0/1        | 192.168.1.253/30 | Router0's S0/0/1    |
| Router2 | Fa0/1         | 20.0.0.1/30      | PC1's Fast Ethernet |
| PC1     | Fast Ethernet | 20.0.0.2/30      | Router2's Fa0/1     |

Q.1 Build the network topology.

Q.2 Configure IP addresses on the PCs and the routers.

Q.3 Configure **RIP** on the routers

Q.4 **Verify** configuration.

Q.5 Now suppose route1 is down. We can simulate this situation by removing the cable attached between **Router0 [s0/0/1]** and **Router2 [s0/0/1]**.