

IoT Engineering

1: Introduction to the Internet of Things

CC BY-SA, Thomas Amberg, FHNW
(Screenshots considered fair use)

Slides: tmb.gr/iot-1

n|w

Overview

These slides introduce the *Internet of Things*.

Its definition and driving forces behind it.

The main use cases and how it is built.

2

Hands-on, 5': Defining IoT

What does *Internet of Things* mean to you?

Write down your personal definition.

What are typical use cases?

3

Internet of Things (IoT)

"Internet-connected computers, with sensors and actuators." — [@tamberg](#)

"Physical objects with a Web API." — [@hansamann](#)

IoT: "Global network of computers, sensors and actuators, connected through Internet protocols."

Web of Things: "RESTful Web services that measure or manipulate physical properties." — [@gsiot](#)

4

Drivers of IoT

Small, inexpensive, low power computers.

Small, inexpensive, low power sensors.

Short and long range connectivity.

Cloud computing and storage.

Standard (IoT) protocols.

5

Moore's law

"Moore's law is the observation that the number of transistors in a dense integrated circuit doubles about every two years." — [Wikipedia](#)

Gordon Moore, a founder of Intel, [noted this in 1965](#).


=> Computers become more powerful, less expensive.

=> Same power, smaller package, can be embedded.

But: Moore's law [is over](#) or [will be soon](#).

6

Moore's law

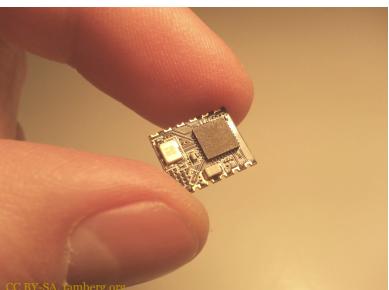

CC BY-SA, tumberg.org

7

Ubiquitous computing


"The idea of integrating computers seamlessly into the world at large [...] *Ubiquitous computing*"

"How do technologies disappear into the background?
The vanishing of electric motors may serve as an instructive example"

— Mark Weiser in [The Computer for the 21st Century](#)

8

Motors: 1 vs. n

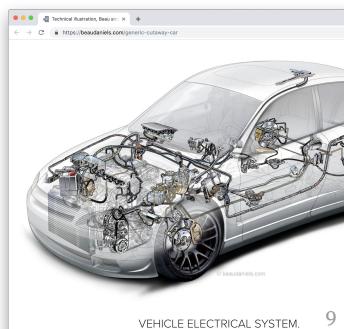

9

IoT high level use cases

IoT enables these core use cases, in different sectors:

Efficiency, e.g. trash bins let you know they are full.

Convenience, e.g. remotely preheat a holiday home.

New insights, e.g. a crowdsourced air quality map.

Sectors include connected consumer products,
citizen sensing, industrial IoT and many more.

11

Connectivity

Ability to communicate with another computer.

Personal area network (PAN), e.g. BLE, Zigbee.

Local area networks (LAN), e.g. Ethernet, Wi-Fi.

Wide area networks (WAN), e.g. 4/5G, LoRaWAN.

The range grows from "room" to "building" to "city",
e.g. BLE, 30m; Wi-Fi, 100m; LoRaWAN, 2-15km.

10

Connected products

Internet-connected consumer products, e.g.







[Nest](#), a connected, self-learning thermostat.


[Philips Hue](#), connected lights with a Web API.

[Withings Scale](#), logs your weight to a dashboard.


[Good Night Lamp](#), linked lamps to share presence.

12

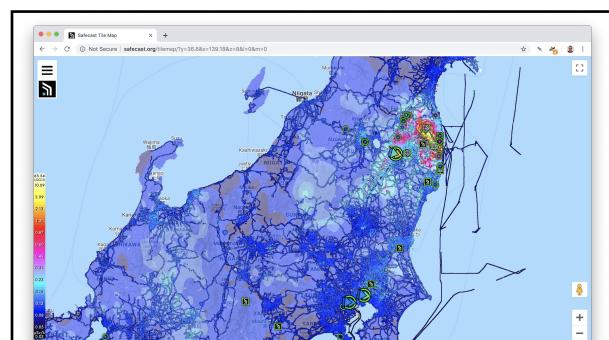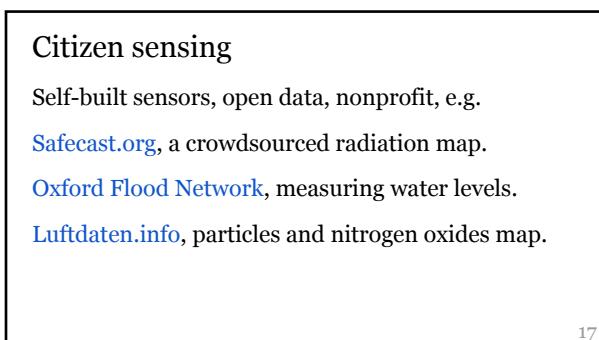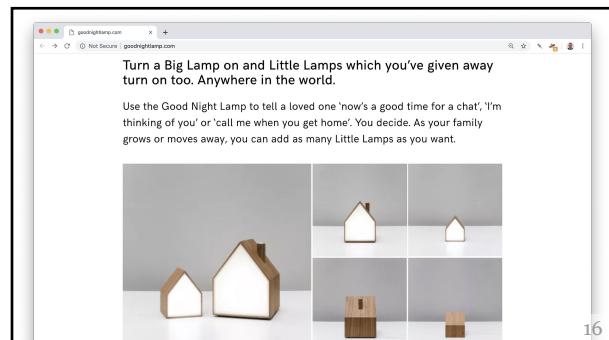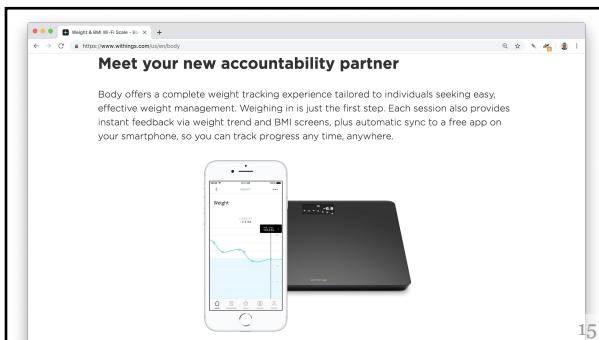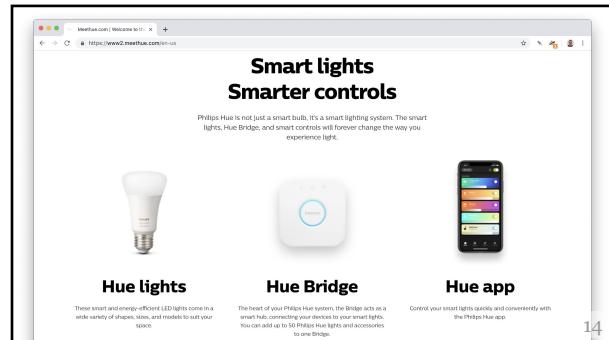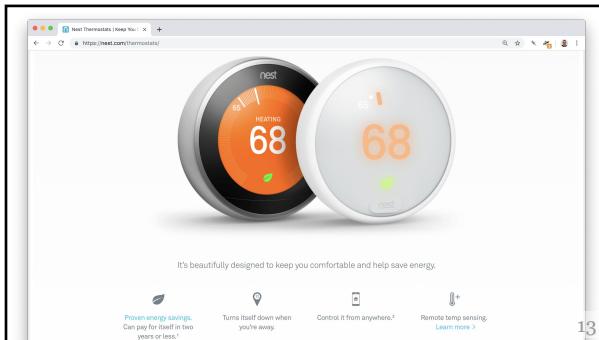

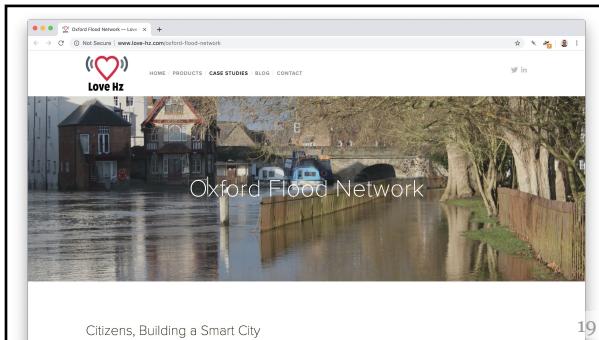

19

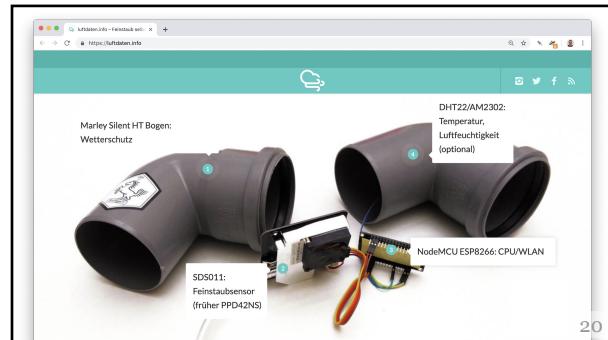


20

Industrial IoT

"Industrie 4.0" in German, cyber-physical systems.
E.g. [Rolls-Royce TotalCare](#), "engine as a service".
Predictive maintenance to know what *will* break.
Anomaly detection to find *unknown* issues.
Live feedback from *deployed* engines.

21

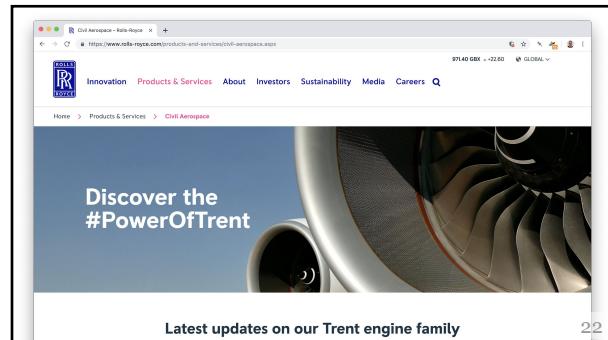


22

IoT reference model

Device, with sensors & actuators, the product, "thing".
Gateway, in the local network, also called hub, bridge.
Backend, in the cloud, also called IoT platform.
Client, app or service, or even a device.
User, local or remote, various roles.

23

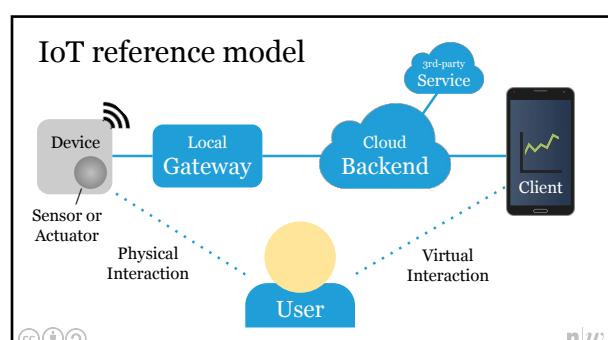


nw

Device

Embedded computer with sensors and actuators.
Connectivity on the chip or as an external module.
Microcontroller (MCU) with constrained resources.
Small, slow processor, limited memory, low power.

Often battery powered or even harvesting energy. 25

Device




CC BY-SA, tamberg.org

26

Sensors


Convert physical properties to electrical signals.
E.g. temperature, sound, light, distance, flow.

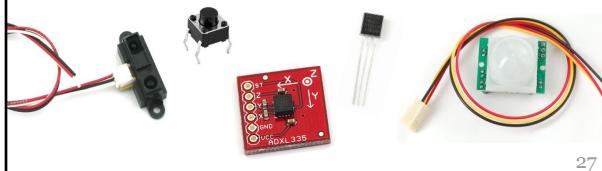

27

Actuators

Convert electrical signals to physical properties.
E.g. light, movement, sound, heat, current.

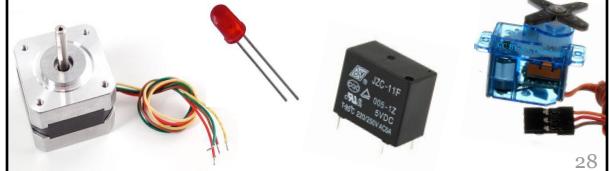

28

Gateway

Computer in the local network, with more resources.
Connects local devices/network to the Internet, e.g.
LoRaWAN to Wi-Fi gateway, TTN indoor gateway.
Zigbee to Ethernet gateway, Philips Hue bridge.
Or a normal Wi-Fi router for Wi-Fi devices.
Can be transparent, or convert payloads. 29

Backend


Backend server, (Web) service endpoint in the cloud.
Receives data from devices, sends them commands.
Provides data to clients, forwards their commands.
Must be highly available, scalable, high bandwidth.
Can provide storage, data analysis, call 3rd-parties.

30

Client

Client app, e.g. dashboard or 3rd-party service client.
Reads measurement data from devices via backend.
Writes control data to the device via the backend.
Multiple client apps can share one backend.

31

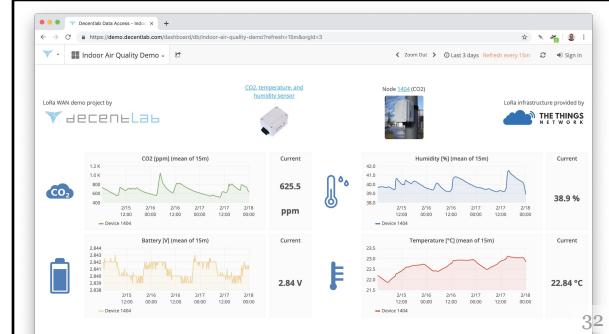

32

Hands-on, 15': Deconstructing IoT

Pick one of these connected products / IoT projects:
Nest, Hue, Withings, Good Night Lamp, Safecast,
Luftdaten, Oxford Flood Network, Rolls-Royce.
Draw a reference model of how it works.


Here is a connected door [example](#).

33

Connected product

The entirety of one or more devices, gateways, backends, apps and the services they represent.
E.g. ATM, "money, now".
Philips Hue, "smart lighting".
Kindle, "never be without a book".
Good Night Lamp, "share your presence".
Echo, "control your home, using just your voice".

34

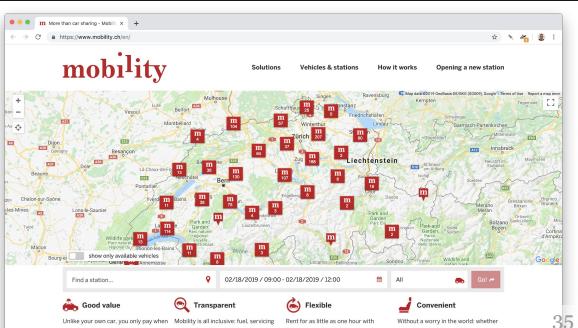

35

Architectural Patterns

Systems with various degrees of connectedness.
Physical computing, on device, no network.
App + accessory, local, personal area network.
Remote sensing, device via gateway to cloud to client.
Remote control, client via cloud via gateway to device.
Edge computing, on edge gateway or edge device.

36

Physical computing

On device sensing and control, no connectivity.

Sensor → Device, e.g. logging temperature.

Device → Actuator, e.g. time-triggered buzzer.

Sensor → Device → Actuator, e.g. RFID door lock.

A → B: measurement or control data flow.

37

App + accessory

Local area sensing and control, local connectivity.

Sensor → Device → Client app

E.g. blood sugar measurements.

Actuator ← Device ← Client app

E.g. insulin pump control data.

38

Remote sensing

Sensor → Device → Gateway → Backend → Client

E.g. air quality data via LoRaWAN* to shared map.

Or machine telemetry via 4/5G to analysis tool client.

*Involves an additional, non-transparent backend.

39

Remote control

Client → Backend → Gateway → Device → Actuator

E.g. app sends command via backend to dim a light.

Or a stormy weather service triggers a blind to go up.

Remote sensing and control can be combined*.

*This is sometimes called "physical mashup".

40

Edge computing

Sensor → Device → Edge GW → Device → Actuator.

Or single device: Sensor → Edge Device → Actuator.

Use cases: Low latency or big amounts of data.

E.g. FFT on local machine data trigger alerts.

41

Important IoT System Qualities

Security, to keep devices, network & backend secure.

Privacy, to keep people in control of their own data.

Interoperability, to become part of an ecosystem.

Openness, standards & open source build trust.

See, e.g. [betteriot.org principles](http://betteriot.org/principles) for guidance.

42

Your WiFi-connected thermostat can take down the whole Internet. We need new regulations.

The government has to get involved in the "Internet of Things."

By Bruce Schneier
Bruce Schneier is a security technologist and a lecturer at the Kennedy School of Government. His new book, "Click Here to Kill Everybody," will be published November 3, 2015.

Last month, popular websites like Twitter, Pinterest, Reddit and a few others went down for most of a day. The distributed denial-of-service attack that caused the vulnerabilities that made the attack possible was as much a failure of it was of technology. If we want to secure our increasingly computerized world, we need more government involvement in the security of the "Internet of Things." Increased regulation of what are now critical and life-threatening longer a question of if, it's a question of when.

From the [Post](#): Threats and other weird stuff from Bruce Schneier, via [Kurt](#).

As Bruce Schneier recently explained about IoT-device security, "The market can't fix this because neither the buyer nor the seller cares."

11:08 PM - 21 Oct 2016

BOSCH
Invented for life

No one can do IoT alone.
Openness and interoperability in the IoT

Ecosystems are the key to succeeding in the IoT. Our IoT platform leverages open source and standards.

ECLIPSE FOUNDATION

Members Working Groups Projects More Download


Eclipse Foundation announces Bosch as a strategic member
Ludwigsburg, Germany – November 3, 2015 – The Eclipse Foundation is pleased to announce that Bosch has become a strategic member of the

Summary

We defined IoT, understood the drivers behind it.
We looked at connected products in three sectors.
We know a simple reference model for IoT systems.
We've seen some patterns with varying connectivity.

Next: Microcontrollers, Sensors & Actuators.

45

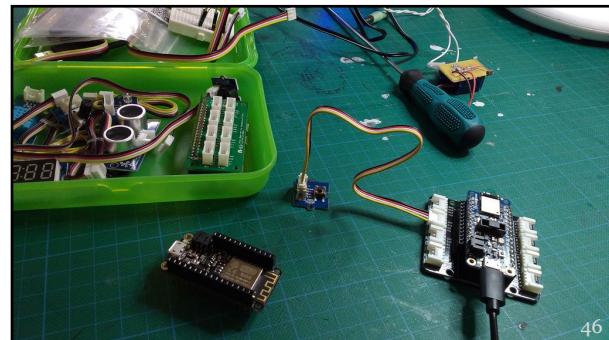

46

Homework, max. 3h

Install the Arduino IDE and set up microcontrollers:
Check the Wiki entry on [Installing the Arduino IDE](#).
Set up the Feather nRF52840 Express for Arduino.
Set up the Feather Huzzah ESP8266 for Arduino.

And take a first look at the [IoT Engineering Wiki](#).

47

Feedback or questions?

Write me on <https://fhnw-iot.slack.com/>
Or email thomas.amberg@fhnw.ch

Thanks for your time.

48