
DSDS (Dual Sim Dual Standby)

If two SIMs are on standby at the same time and one SIM goes into a call state, the other SIM becomes unavailable. The two SIMs automatically switch according to their use.


When testing a Dual Sim terminal with DM, each log file is created for each Sim as follows.

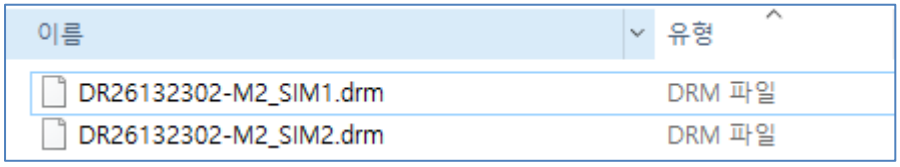

Create model


For analysis, the model creation method is as follows.


1. Select New>options>parsing>Qualcomm Dual SIM option and Concurrent merge option.

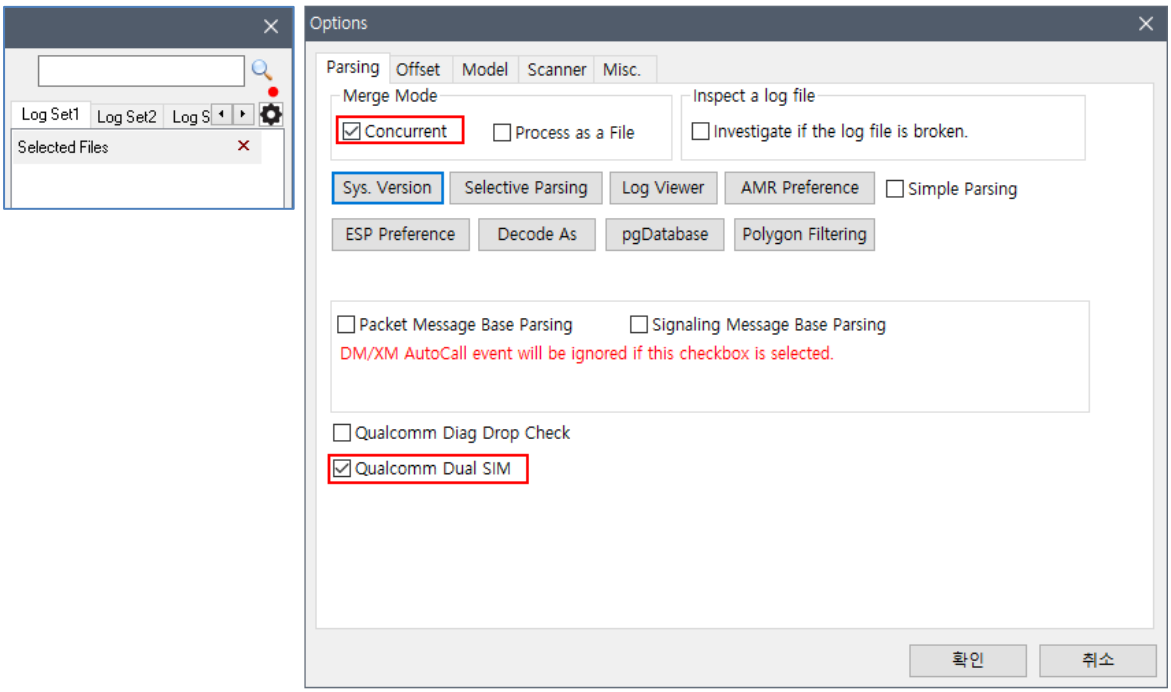


2. Create the model with both Sim1 and Sim2 log files selected.
3. You can check the Sim information in each analysis window.

TIME_STAMP	LTE KPI PCell Serving RSRP[dBm] Sim 1	LTE KPI Band Combination Sim 1	5G KPI PCell RF Serving SS-RSRP [dBm] Sim 2	5G KPI PCell RF Band Sim 2
2022-05-26 22:42:50.000000			-72.80	n48
2022-05-26 22:42:51.000000	-75.69	Band 5	-72.85	n48
2022-05-26 22:42:52.000000	-76.00	Band 5	-72.86	n48
2022-05-26 22:42:53.000000	-75.13	Band 5	-72.87	n48

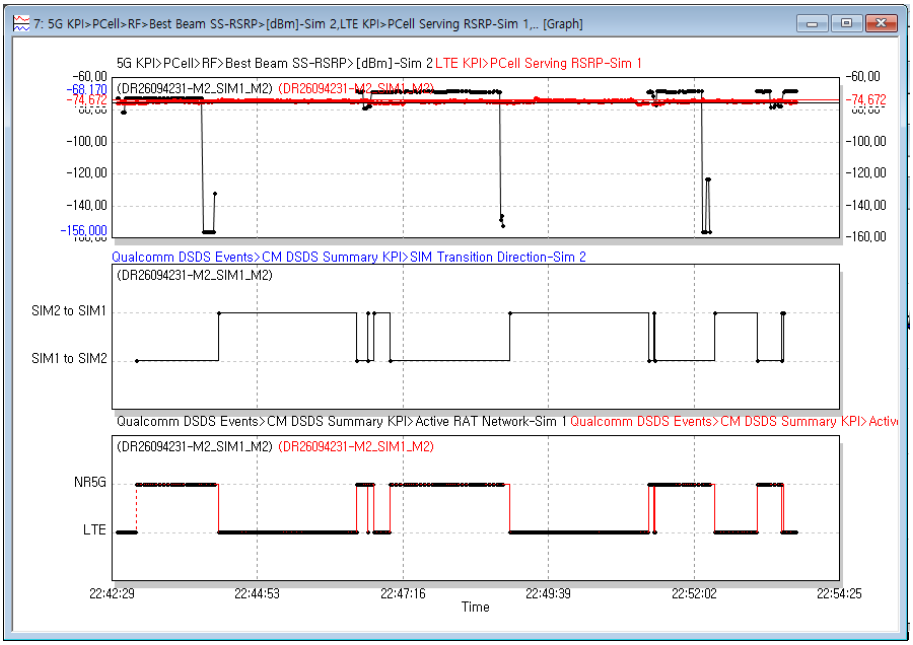
7: 5G KPI>PCell>RF>Best Beam SS-RSRP>[dBm]-Sim 2,LTE KPI>PCell Serving RSRP-Sim 1,... [Graph]
5G KPI>PCell>RF>Best Beam SS-RSRP>[dBm]-Sim 2
LTE KPI>PCell Serving RSRP-Sim 1
-60,00
-68,170
-74,672
-100,00
-120,00
-140,00
-156,000
(DR26094231-M2_SIM1_M2)
Qualcomm DSDS Events>CM DSDS Summary KPI>SIM Transition Direction-Sim 2
SIM2 to SIM1
SIM1 to SIM2
Qualcomm DSDS Events>CM DSDS Summary KPI>Active RAT Network-Sim 1
NR5G
LTE
22:42:29
22:44:53
22:47:16
22:49:39
22:52:02
22:54:25
Time

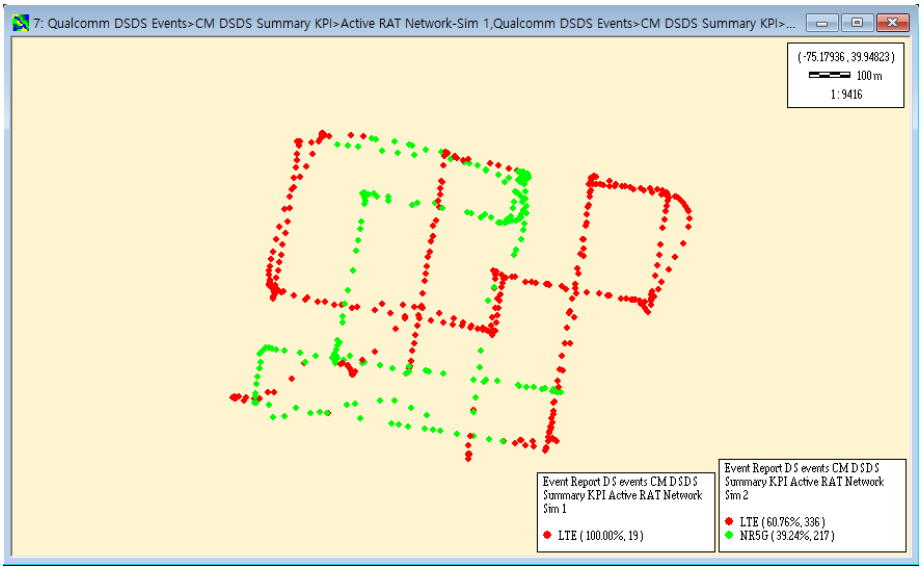
7: Qualcomm DSDS Events>CM DSDS Summary KPI>Active RAT Network-Sim 1,Qualcomm DSDS Events>CM DSDS Summary KPI>...
(-75.17936 , 39.94823)
100 m
1 : 9416
Event Report DS events CM DSDS Summary KPI Active RAT Network Sim 1
LTE (100.00%, 19)
Event Report DS events CM DSDS Summary KPI Active RAT Network Sim 2
LTE (60.76%, 336)
NR5G (39.24%, 217)


DSDS Parameters

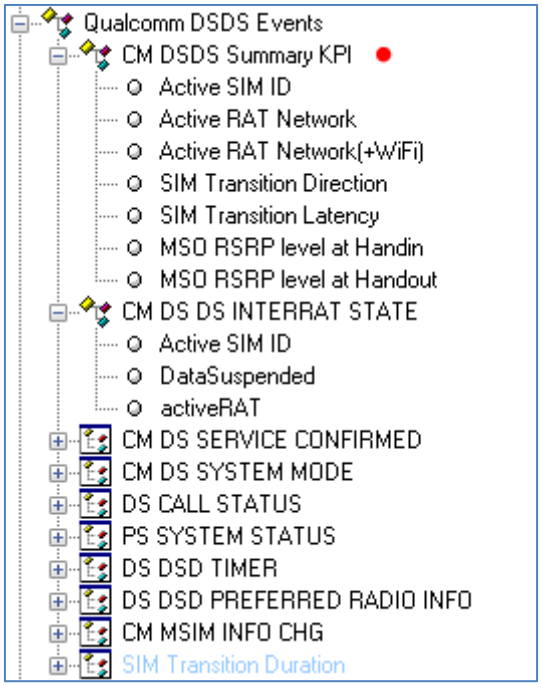

Parameters	Unit	Display Format	Enum or Comments
Active SIM ID		String	Refers to Qualcomm DSDS Events.CM MSIM INFO CHG.Default Data Subs. * Default Data Subs-Sim SYS_MODEM_AS_ID_1 is marked as Active SIM1. SYS_MODEM_AS_ID_2 is marked as Active SIM2.
Active RAT Network		String	The Active SIM ID corresponds to the Active RAT.
Active RAT Network(+WiFi)		String	WiFi additionally applied in the above Active RAT.
SIM Transition Direction		String	SIM1 to SIM2 SIM2 to SIM1
SIM Transition Latency	sec	third decimal place	Time difference that occurs during SIM Transition Direction
MSO RSRP level at Handin	dBm	second decimal place	RSRP corresponding to SIM2 active RAT immediately after SIM1 to SIM2
MSO RSRP level at Handout	dBm	second decimal place	RSRP corresponding to SIM2 active RAT just before SIM2 to SIM1 time

© Accuver Co., Ltd.

CM DSDS Summary Table

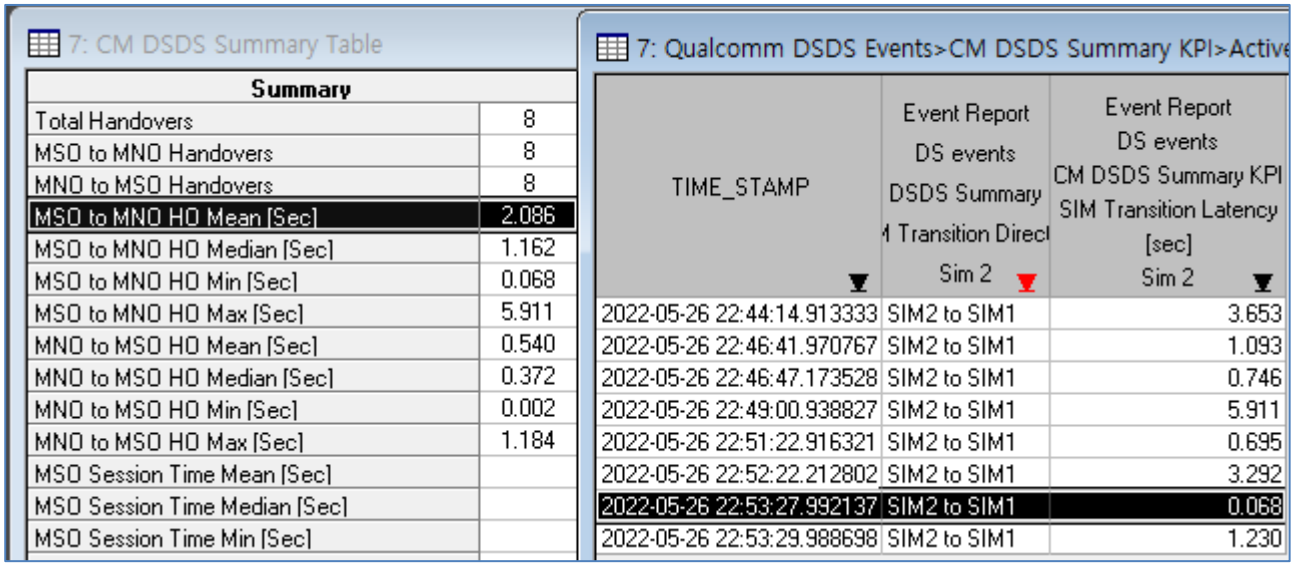


7: CM DSDS Summary Table

Summary	
Total Handovers	8
MSO to MNO Handovers	8
MNO to MSO Handovers	8
MSO to MNO HO Mean [Sec]	2.086
MSO to MNO HO Median [Sec]	1.162
MSO to MNO HO Min [Sec]	0.068
MSO to MNO HO Max [Sec]	5.911
MNO to MSO HO Mean [Sec]	0.540
MNO to MSO HO Median [Sec]	0.372
MNO to MSO HO Min [Sec]	0.002
MNO to MSO HO Max [Sec]	1.184
MSO Session Time Mean [Sec]	
MSO Session Time Median [Sec]	
MSO Session Time Min [Sec]	

7: Qualcomm DSDS Events>CM DSDS Summary KPI>Active

TIME_STAMP	Event Report DS events DSDS Summary Transition Direct Sim 2	Event Report DS events CM DSDS Summary KPI SIM Transition Latency [sec] Sim 2
2022-05-26 22:44:14.913333	SIM2 to SIM1	3.653
2022-05-26 22:46:41.970767	SIM2 to SIM1	1.093
2022-05-26 22:46:47.173528	SIM2 to SIM1	0.746
2022-05-26 22:49:00.938827	SIM2 to SIM1	5.911
2022-05-26 22:51:22.916321	SIM2 to SIM1	0.695
2022-05-26 22:52:22.212802	SIM2 to SIM1	3.292
2022-05-26 22:53:27.992137	SIM2 to SIM1	0.068
2022-05-26 22:53:29.988698	SIM2 to SIM1	1.230

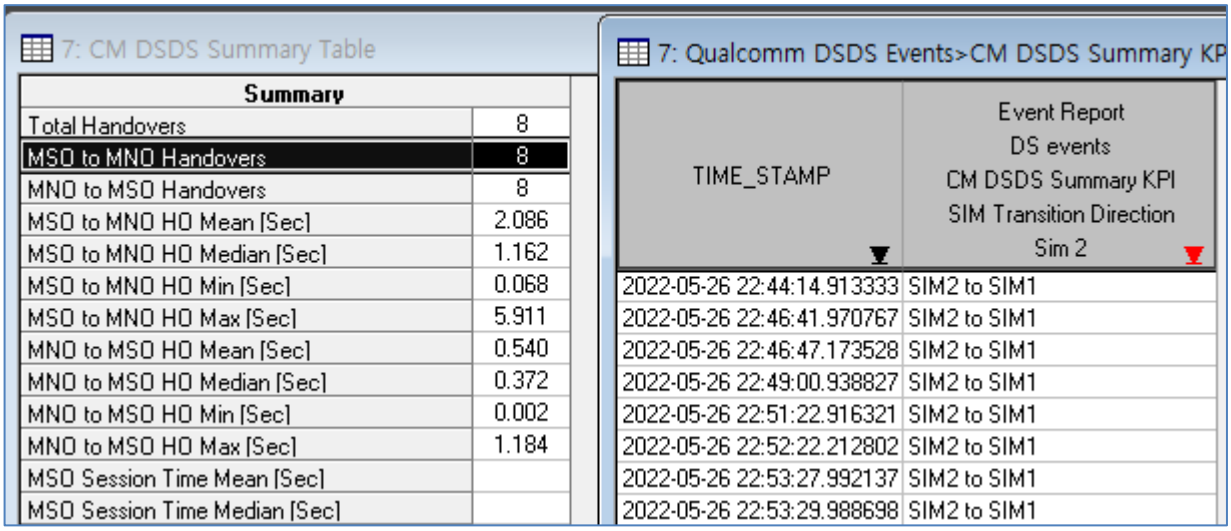

7: CM DSDS Summary Table

Summary	
Total Handovers	8
MSO to MNO Handovers	8
MNO to MSO Handovers	8
MSO to MNO HO Mean [Sec]	2.086
MSO to MNO HO Median [Sec]	1.162
MSO to MNO HO Min [Sec]	0.068
MSO to MNO HO Max [Sec]	5.911
MNO to MSO HO Mean [Sec]	0.540
MNO to MSO HO Median [Sec]	0.372
MNO to MSO HO Min [Sec]	0.002
MNO to MSO HO Max [Sec]	1.184
MSO Session Time Mean [Sec]	
MSO Session Time Median [Sec]	

7: Qualcomm DSDS Events>CM DSDS Summary KP

TIME_STAMP	Event Report DS events CM DSDS Summary KPI SIM Transition Direction Sim 2
2022-05-26 22:44:14.913333	SIM2 to SIM1
2022-05-26 22:46:41.970767	SIM2 to SIM1
2022-05-26 22:46:47.173528	SIM2 to SIM1
2022-05-26 22:49:00.938827	SIM2 to SIM1
2022-05-26 22:51:22.916321	SIM2 to SIM1
2022-05-26 22:52:22.212802	SIM2 to SIM1
2022-05-26 22:53:27.992137	SIM2 to SIM1
2022-05-26 22:53:29.988698	SIM2 to SIM1

Summary KPIs	Description or meaning	display format
Total Handovers	CM DSDS Summary KPI.SIM Transition Direction: number of occurrences	Integer
MSO to MNO Handovers	CM DSDS Summary KPI.SIM Transition Direction == SIM2 to SIM1: number of occurrences	Integer
MNO to MSO Handovers	CM DSDS Summary KPI.SIM Transition Direction == SIM1 to SIM2: number of occurrences	Integer

MSO to MNO HO Mean [Sec]	CM DSDS Summary KPI.SIM Transition Direction == SIM2 to SIM1: SIM Transition Latency Average	third decimal place
MSO to MNO HO Median [Sec]	CM DSDS Summary KPI.SIM Transition Direction == SIM2 to SIM1: SIM Transition Latency Median	third decimal place
MSO to MNO HO Min [Sec]	CM DSDS Summary KPI.SIM Transition Direction == SIM2 to SIM1: SIM Transition Latency Minimum	third decimal place
MSO to MNO HO Max [Sec]	CM DSDS Summary KPI.SIM Transition Direction == SIM2 to SIM1: SIM Transition Latency Maximum	third decimal place
MNO to MSO HO Mean [Sec]	CM DSDS Summary KPI.SIM Transition Direction == SIM1 to SIM2: SIM Transition Latency Average	third decimal place
MNO to MSO HO Median [Sec]	CM DSDS Summary KPI.SIM Transition Direction == SIM1 to SIM2: SIM Transition Latency Median	third decimal place
MNO to MSO HO Min [Sec]	CM DSDS Summary KPI.SIM Transition Direction == SIM1 to SIM2: SIM Transition Latency Minimum	third decimal place
MNO to MSO HO Max [Sec]	CM DSDS Summary KPI.SIM Transition Direction == SIM1 to SIM2: SIM Transition Latency Maximum	third decimal place
MSO Session Time Mean [Sec]	Active SIM ID==Active SIM2 && Active RAT Network(+WiFi)==(NR5G or LTE): Session Time Aveage	third decimal place
MSO Session Time Median [Sec]	Active SIM ID==Active SIM2 && Active RAT Network(+WiFi)==(NR5G or LTE): Session Time Median	third decimal place

© Accuver Co., Ltd.

MSO Session Time Min [Sec]	Active SIM ID==Active SIM2 && Active RAT Network(+WiFi)==(NR5G or LTE): Session Time Minimum	third decimal place
MSO Session Time Max [Sec]	Active SIM ID==Active SIM2 && Active RAT Network(+WiFi)==(NR5G or LTE): Session Time Maximum	third decimal place
MNO Session Time Mean [Sec]	Active SIM ID==Active SIM1 && Active RAT Network(+WiFi)==(NR5G or LTE): Session Time Aveage	third decimal place
MNO Session Time Median [Sec]	Active SIM ID==Active SIM1 && Active RAT Network(+WiFi)==(NR5G or LTE): Session Time Median	third decimal place
MNO Session Time Min [Sec]	Active SIM ID==Active SIM1 && Active RAT Network(+WiFi)==(NR5G or LTE): Session Time Minimum	third decimal place
MNO Session Time Max [Sec]	Active SIM ID==Active SIM1 && Active RAT Network(+WiFi)==(NR5G or LTE): Session Time Maximum	third decimal place
WiFi Session Time Mean [Sec]	Active RAT Network(+WiFi)==WiFi: Session Time Aveage	third decimal place
WiFi Session Time Median [Sec]	Active RAT Network(+WiFi)==WiFi: Session Time Median	third decimal place
WiFi Session Time Min [Sec]	Active RAT Network(+WiFi)==WiFi: Session Time Minimum	third decimal place
WiFi Session Time Max [Sec]	Active RAT Network(+WiFi)==WiFi: Session Time Maximum	third decimal place
Time on MSO [Sec]	The total time on MSO Session Time	third decimal place
Time on MNO [Sec]	The total time on MNO Session Time	third decimal place
Time on WiFi [Sec]	The total time on WiFi Session Time	third decimal place

© Accuver Co., Ltd.

MSO RSRP Handin Mean [dBm]	CM DSDS Summary KPI.MSO RSRP level at Handin: Average RSRP for Hand-in	second decimal place
MSO RSRP Handin Median [dBm]	CM DSDS Summary KPI.MSO RSRP level at Handin: Median RSRP for Hand-in	second decimal place
MSO RSRP Handin Min [dBm]	CM DSDS Summary KPI.MSO RSRP level at Handin: Minimum RSRP for Hand-in	second decimal place
MSO RSRP Handin Max [dBm]	CM DSDS Summary KPI.MSO RSRP level at Handin: Maximum RSRP for Hand-in	second decimal place
MSO RSRP Handout Mean [dBm]	CM DSDS Summary KPI.MSO RSRP level at Handin: Average RSRP for Hand-out	second decimal place
MSO RSRP Handout Median [dBm]	CM DSDS Summary KPI.MSO RSRP level at Handin: Median RSRP for Hand-out	second decimal place
MSO RSRP Handout Min [dBm]	CM DSDS Summary KPI.MSO RSRP level at Handin: Minimum RSRP for Hand-out	second decimal place
MSO RSRP Handout Max [dBm]	CM DSDS Summary KPI.MSO RSRP level at Handin: Maximum RSRP for Hand-out	second decimal place