


Jak to zrobić?

Tworzymy sekcję dla drukarek w konfiguracji:

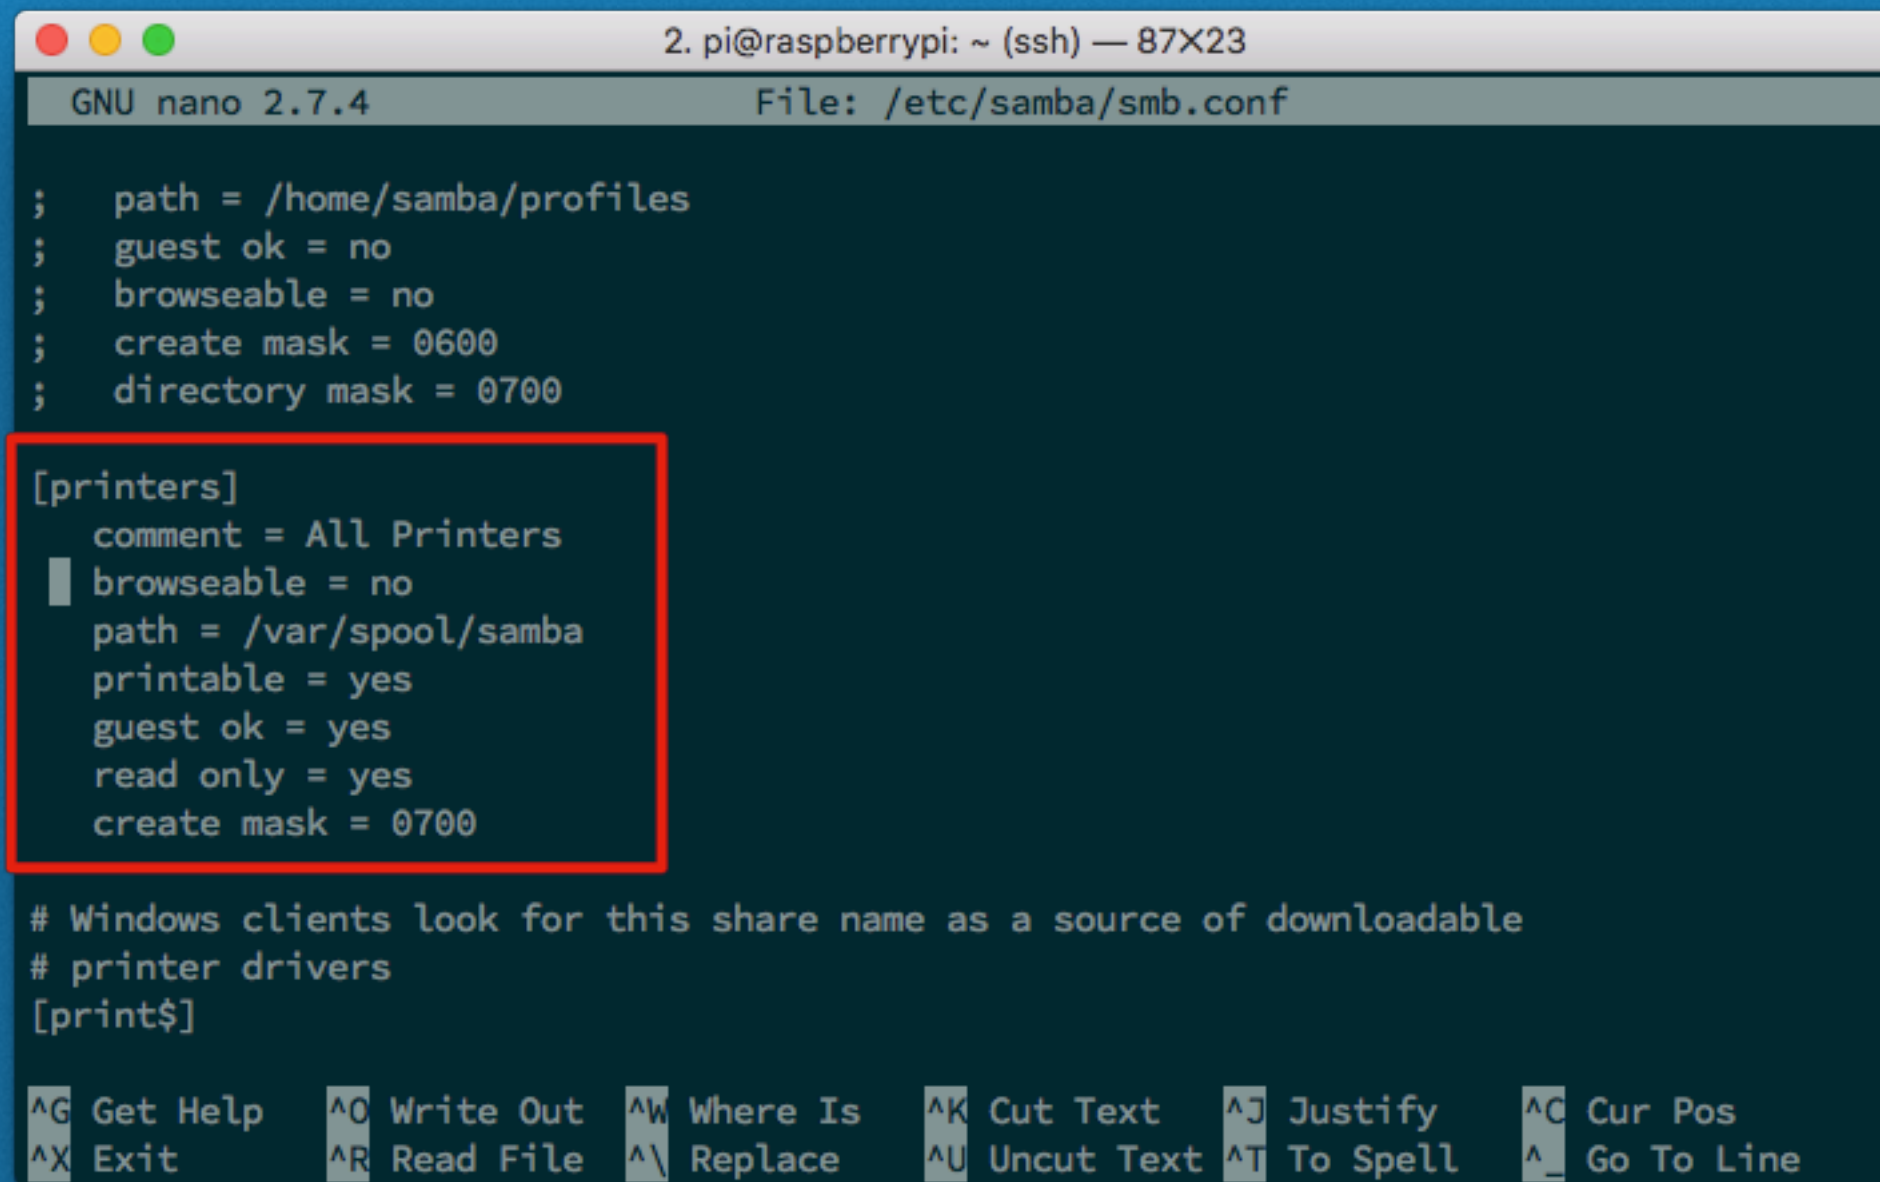

```
2. pi@raspberrypi: ~ (ssh) — 87X23
GNU nano 2.7.4 File: /etc/samba/smb.conf

; path = /home/samba/profiles
; guest ok = no
; browseable = no
; create mask = 0600
; directory mask = 0700

[printers]
  comment = All Printers
  browseable = no
  path = /var/spool/samba
  printable = yes
  guest ok = yes
  read only = yes
  create mask = 0700

# Windows clients look for this share name as a source of downloadable
# printer drivers
[print$]
```

^G Get Help ^O Write Out ^W Where Is ^K Cut Text ^J Justify ^C Cur Pos
^X Exit ^R Read File ^\ Replace ^U Uncut Text ^T To Spell ^_ Go To Line

Jak to zrobić?

Raspberry powinno zostać wykryte w sieci domowej:

