

SUNKA®

PRODUCT CATALOGUE

Sealed Lead-Acid & Lithium-Ion Rechargeable Batteries

4V | 6V | 12V Lead-Acid + 18650 Li-ion



POWER YOU CAN TRUST,
EVERYDAY WITH SUNKA.

Product Overview

All SUNKA models in this catalogue at a glance. Page numbers refer to each model's detail page.

Model	Voltage	Capacity	Dimensions (mm)	Weight	Type	Page
RB404	4V	0.5Ah	n/a	n/a	Lead-Acid	4
RB405	4V	0.5Ah	n/a	n/a	Lead-Acid	4
RB410	4V	1.0Ah	n/a	n/a	Lead-Acid	4
RB460BS	4V	6.0Ah	70 x 47 x 101	0.55 kg	Lead-Acid	5
RB495BS	4V	9.5Ah	90 x 70 x 101	0.82 kg	Lead-Acid	6
RB613E	6V	1.3Ah	n/a	n/a	Lead-Acid	7
RB650BS	6V	5.5Ah	70 x 48 x 101	0.72 kg	Lead-Acid	8
RB670E	6V	7Ah	151 x 34 x 94	1.10 kg	Lead-Acid	9
RB6100E	6V	10Ah	151 x 50 x 94	1.56 kg	Lead-Acid	10
RB1213E	12V	1.3Ah	n/a	n/a	Lead-Acid	11
RB1245E	12V	4.5Ah	90 x 70 x 101	1.35 kg	Lead-Acid	12
MR1232BS	12V	3.2Ah	134 x 67 x 61	1.25 kg	Lead-Acid	13
18650 1600mAh	3.7V	1600mAh	65 x 18 (dia.)	n/a	Li-ion	14
18650 2000mAh	3.7V	2000mAh	65 x 18 (dia.)	n/a	Li-ion	15
18650 2200mAh	3.7V	2200mAh	65 x 18 (dia.)	n/a	Li-ion	16

Lead-acid dimensions are L x W x H (H = container height, excluding terminals). "n/a" = not specified on the source datasheet.

Applications Guide

Find the right SUNKA battery for your use case.

Use case	Suitable models
Emergency Lighting	RB404, RB405, RB410, RB460BS, RB495BS, RB613E, RB650BS, RB670E, RB6100E, RB1213E, RB1245E, MR1232BS, 18650 1600mAh, 18650 2000mAh, 18650 2200mAh
UPS Systems	RB404, RB405, RB410, RB460BS, RB495BS, RB613E, RB650BS, RB670E, RB6100E, RB1213E, RB1245E, MR1232BS, 18650 1600mAh, 18650 2000mAh
Security & Alarm	RB404, RB405, RB410, RB460BS, RB495BS, RB613E, RB650BS, RB670E, RB6100E, RB1213E, RB1245E, MR1232BS
Toys & Ride-on Vehicles	RB404, RB405, RB410, RB460BS, RB495BS, RB613E, RB650BS, RB670E, RB1213E, MR1232BS
Medical Equipment	RB460BS, RB495BS, RB650BS, RB670E, RB6100E, RB1245E, MR1232BS
Solar & Renewable Energy	RB495BS, RB613E, RB650BS, RB670E, RB6100E, RB1213E, MR1232BS
Portable Devices	RB495BS, RB650BS, MR1232BS, 18650 1600mAh, 18650 2200mAh
Electric Vehicles & Golf Carts	RB495BS, RB650BS, RB670E, RB6100E
Speakers	RB404, RB405, RB410
Mosquito Racket	RB404, RB405, RB410
Inverters	RB404, RB405, RB410
LED Flashlights	18650 1600mAh, 18650 2000mAh, 18650 2200mAh
Solar Lighting	18650 1600mAh, 18650 2000mAh, 18650 2200mAh
Power Banks	18650 1600mAh, 18650 2000mAh, 18650 2200mAh
Security Equipment	18650 1600mAh, 18650 2000mAh, 18650 2200mAh
Power Tools	18650 1600mAh, 18650 2000mAh, 18650 2200mAh
Medical Devices	18650 1600mAh, 18650 2000mAh, 18650 2200mAh
Wireless Equipment	18650 1600mAh, 18650 2000mAh, 18650 2200mAh
DIY Battery Packs	18650 1600mAh, 18650 2200mAh
E-Bikes / Scooters	18650 1600mAh, 18650 2000mAh
Toys & Electronics	RB1245E

RB404 / RB405 / RB410

4V Lead-Acid Rechargeable Battery

4V | 0.5 - 1.0Ah



SUNKA compact sealed lead-acid rechargeable batteries: small size, big power. Safe, reliable and long lasting, with sealed leak-proof construction.

KEY FEATURES

- Long lasting - high quality plates for extended battery life
- Safe & leak-proof - sealed construction prevents leaks and spills
- Rechargeable - efficient performance with reliable power backup
- Eco-friendly - sealed lead-acid batteries are recyclable & safe
- Maintenance-free sealed design, long service life

SPECIFICATIONS

Model	RB404	RB405	RB410
Nominal Voltage	4V	4V	4V
Capacity	0.5Ah	0.5Ah	1.0Ah
Battery Type	Sealed Lead-Acid (SLA)	Sealed Lead-Acid (SLA)	Sealed Lead-Acid (SLA)
Dimensions (L x W x H)	Not specified	Not specified	Not specified
Weight	Not specified	Not specified	Not specified

Detailed dimensions, weight and charging data were not provided for this compact series.

APPLICATIONS / USE CASES

Emergency Lighting	Toys & Ride-on Vehicles	Speakers	Mosquito Racket
UPS Systems	Inverters	Security & Alarm	

RB460BS

4V Lead-Acid Rechargeable Battery

4V | 6.0Ah



SUNKA RB460BS is a sealed lead-acid rechargeable battery with reliable performance, long service life and maintenance-free operation. Ideal for a wide range of standby and portable applications.

KEY FEATURES

- Maintenance-free sealed design
- Reliable performance and long service life
- Leak-proof construction for safe operation
- Recyclable and environmentally friendly
- Wide range of standby and portable applications


SPECIFICATIONS

Model	RB460BS
Nominal Voltage	4V
Nominal Capacity (20HR)	6.0Ah
Battery Type	Sealed Lead-Acid
Dimensions (L x W x H)	70 x 47 x 101 mm
Weight (Approx.)	0.55 kg
Terminal Type	T1
Design Life	3 - 5 Years

CHARGING (CONSTANT VOLTAGE, 25 C)

Cycle use	4.80V - 5.00V
Standby use	4.50V - 4.60V
Max. charging current	1.80A

DIMENSIONS

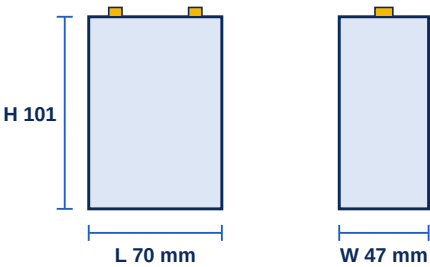

Approx. weight: 0.55 kg
Dimensions in mm. L = length, W = width, H = height.

APPLICATIONS / USE CASES

UPS Systems	Emergency Lighting	Security & Alarm	Toys & Ride-on Vehicles
Medical Equipment			

RB495BS

4V Lead-Acid Rechargeable Battery

4V | 9.5Ah



Reliable and maintenance-free power solution for a wide range of applications.

KEY FEATURES

- Maintenance-free - sealed construction, no water topping-up
- High reliability - stable performance and long service life
- Eco-friendly - sealed lead-acid battery is recyclable
- Wide operating range - performs well in various environments


SPECIFICATIONS

Model	RB495BS
Nominal Voltage	4V
Nominal Capacity (20HR)	9.5Ah
Dimensions (L x W x H)	90 x 70 x 101 mm
Approx. Weight	0.82 kg
Terminal Type	T1 / T2 (Optional)
Container Material	ABS (UL94-HB)

CHARGING (CONSTANT VOLTAGE, 25 C)

Cycle use	4.70V - 4.90V
Standby use	4.50V - 4.80V
Max. charging current	2.85A

DIMENSIONS

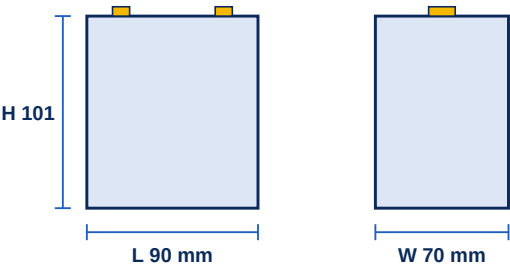

Approx. weight: 0.82 kg
Dimensions in mm. L = length, W = width, H = height.

APPLICATIONS / USE CASES

Emergency Lighting	Security & Alarm	UPS Systems	Toys & Ride-on Vehicles
Medical Equipment	Solar & Renewable Energy	Electric Vehicles & Golf Carts	Portable Devices

RB613E

6V Lead-Acid Rechargeable Battery

6V | 1.3Ah



SUNKA sealed lead-acid rechargeable battery designed for dependable performance and long service life in a wide range of applications.

KEY FEATURES

- Reliable performance - consistent and stable power output
- Long service life - designed for extended cycle and standby life
- Maintenance-free - sealed construction, no need to add water
- Eco-friendly - recyclable and environmentally safe

SPECIFICATIONS

Model	RB613E (6V1.3AH)
Nominal Voltage	6V
Nominal Capacity (20HR)	1.3Ah
Battery Dimensions	Not specified in source

CHARGING (CONSTANT VOLTAGE, 25 C)

Cycle use	7.20V - 7.50V
Standby use	6.75V - 6.90V
Max. charging current	0.39A

PACKING INFORMATION

Quantity per carton	30 PCS
Gross weight (G.W.)	8.10 kg
Net weight (N.W.)	8.00 kg
Carton dimension (L x W x H)	305 x 135 x 145 mm

Battery body dimensions were not listed on the source datasheet (carton dimensions are given under Packing information).

APPLICATIONS / USE CASES

UPS Systems	Security & Alarm	Emergency Lighting	Toys & Ride-on Vehicles
Solar & Renewable Energy			

RB650BS

6V Lead-Acid Rechargeable Battery

6V | 5.5Ah



Reliable and maintenance-free power solution for a wide range of applications.

KEY FEATURES

- Maintenance-free - sealed construction, no water topping-up
- High reliability - stable performance and long service life
- Eco-friendly - sealed lead-acid battery is recyclable
- Wide operating range - performs well in various environments


SPECIFICATIONS

Model	RB650BS
Nominal Voltage	6V
Nominal Capacity (20HR)	5.5Ah
Dimensions (L x W x H)	70 x 48 x 101 mm
Approx. Weight	0.72 kg
Terminal Type	T1 / T2 (Optional)
Container Material	ABS (UL94-HB)

CHARGING (CONSTANT VOLTAGE, 25 C)

Cycle use	7.20V - 7.50V
Standby use	6.75V - 6.90V
Max. charging current	1.65A

DIMENSIONS

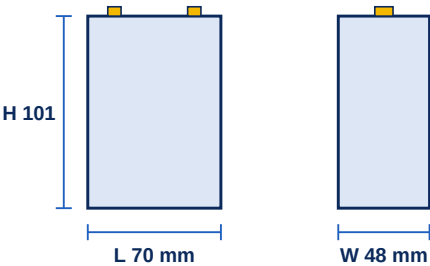

Approx. weight: 0.72 kg
Dimensions in mm. L = length, W = width, H = height.

APPLICATIONS / USE CASES

Emergency Lighting	Security & Alarm	UPS Systems	Toys & Ride-on Vehicles
Medical Equipment	Solar & Renewable Energy	Electric Vehicles & Golf Carts	Portable Devices

RB670E

6V Lead-Acid Rechargeable Battery

6V | 7Ah



SUNKA RB670E is a valve regulated lead-acid battery designed for dependable performance and long service life in a wide range of applications.

KEY FEATURES

- Maintenance-free - sealed construction, no need to add water
- Long service life - designed for long-lasting performance
- High reliability - stable performance and low self-discharge
- Environment friendly - fully recyclable, safe and eco-friendly

SPECIFICATIONS

Model	RB670E (6V 7Ah)
Nominal Voltage	6V
Nominal Capacity (10HR)	7Ah (7.0Ah at 20HR per carton sheet)
Dimensions (L x W x H x TH)	151 x 34 x 94 x 100 mm
Approx. Weight	1.10 kg (2.43 lbs)
Terminal Type	F1 (Faston Tab 187)
Container Material	ABS (UL94-HB)
Internal Resistance (fully charged)	Approx. 16 mOhm
Nominal Operating Temp.	25 C +/- 5 C

CHARGING (CONSTANT VOLTAGE, 25 C)

Float charging voltage (25 C)	6.75V - 6.90V
Cyclic charging voltage (25 C)	7.20V - 7.50V
Max. charging current	2.1A


RATED CAPACITY & TEMPERATURE

10HR (0.7A, 1.80V/cell)	7.00Ah
5HR (1.26A, 1.75V/cell)	6.30Ah
1HR (4.2A, 1.60V/cell)	4.20Ah
Discharge temp.	-20 C ~ 60 C
Charge temp.	-10 C ~ 60 C
Storage temp.	-20 C ~ 60 C

PACKING INFORMATION

Quantity per carton	10 PCS
Gross weight (G.W.)	9.50 kg
Net weight (N.W.)	9.00 kg
Carton dimension (L x W x H)	320 x 193 x 127 mm

DIMENSIONS

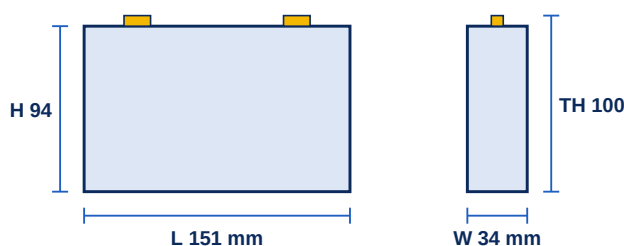

Approx. weight: 1.10 kg

Dimensions in mm. L = length, W = width, H = height, TH = total height incl. terminals.

APPLICATIONS / USE CASES

UPS Systems	Security & Alarm	Emergency Lighting	Toys & Ride-on Vehicles
Solar & Renewable Energy	Electric Vehicles & Golf Carts	Medical Equipment	

RB6100E

6V Lead-Acid Rechargeable Battery

6V | 10Ah



SUNKA RB6100E is a valve regulated lead-acid battery: maintenance-free, reliable and built for long-lasting performance.

KEY FEATURES

- Maintenance-free - sealed construction, no need to add water
- Long service life - designed for long-lasting performance
- High reliability - stable performance and low self-discharge
- Environment friendly - fully recyclable, safe and eco-friendly

SPECIFICATIONS

Model	RB6100E (6V 10Ah)
Nominal Voltage	6V
Nominal Capacity (10HR)	10Ah
Dimensions (L x W x H x TH)	151 x 50 x 94 x 100 mm
Approx. Weight	1.56 kg (3.44 lbs)
Terminal Type	F1 (Faston Tab 187)
Container Material	ABS (UL94-HB)
Internal Resistance (fully charged)	Approx. 12 mOhm
Nominal Operating Temp.	25 C +/- 5 C


CHARGING (CONSTANT VOLTAGE, 25 C)

Float charging voltage (25 C)	6.75V - 6.90V
Cyclic charging voltage (25 C)	7.20V - 7.50V
Max. charging current	3.0A

RATED CAPACITY & TEMPERATURE

10HR (1.0A, 1.80V/cell)	10.0Ah
5HR (1.8A, 1.75V/cell)	9.0Ah
1HR (6.0A, 1.60V/cell)	6.0Ah
Discharge temp.	-20 C ~ 60 C
Charge temp.	-10 C ~ 60 C
Storage temp.	-20 C ~ 60 C

DIMENSIONS

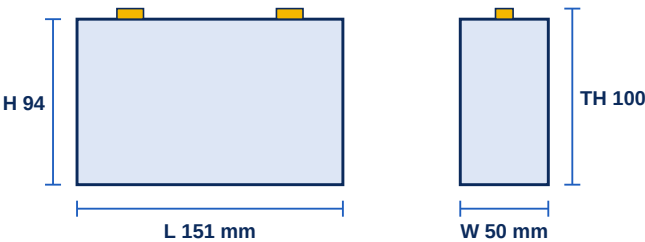

Approx. weight: 1.56 kg
Dimensions in mm. L = length, W = width, H = height, TH = total height incl. terminals.

APPLICATIONS / USE CASES

UPS Systems	Security & Alarm	Emergency Lighting	Electric Vehicles & Golf Carts
Solar & Renewable Energy	Medical Equipment		

RB1213E

12V Lead-Acid Rechargeable Battery

12V | 1.3Ah



SUNKA sealed lead-acid rechargeable battery designed for dependable performance and long service life in a wide range of applications.

KEY FEATURES

- Reliable performance - consistent and stable power output
- Long service life - designed for extended cycle and standby life
- Maintenance-free - sealed construction, no need to add water
- Eco-friendly - recyclable and environmentally safe

SPECIFICATIONS

Model	RB1213E (12V1.3AH)
Nominal Voltage	12V
Nominal Capacity (20HR)	1.3Ah
Battery Dimensions	Not specified in source

CHARGING (CONSTANT VOLTAGE, 25 C)

Standby use	13.50V - 13.80V
Cycle use	14.40V - 15.00V
Max. charging current	0.39A

PACKING INFORMATION

Quantity per carton	20 PCS
Gross weight (G.W.)	10.50 kg
Net weight (N.W.)	10.00 kg
Carton dimension (L x W x H)	235 x 205 x 146 mm

Battery body dimensions were not listed on the source datasheet (carton dimensions are given under Packing information).

APPLICATIONS / USE CASES

UPS Systems	Security & Alarm	Emergency Lighting	Toys & Ride-on Vehicles
Solar & Renewable Energy			

RB1245E

12V Lead-Acid Rechargeable Battery

12V | 4.5Ah



SUNKA RB1245E is a maintenance-free sealed lead-acid battery engineered for reliable performance and long service life in a wide range of applications.

KEY FEATURES

- Maintenance-free operation
- Sealed construction with leak-proof design
- High reliability and long service life
- Low self-discharge rate
- Wide operating temperature range
- Rechargeable and recyclable

SPECIFICATIONS

Model	RB1245E
Nominal Voltage	12V
Nominal Capacity (20HR)	4.5Ah
Dimensions (L x W x H)	90 x 70 x 101 mm
Total Height (with terminals)	107 mm
Approx. Weight	1.35 kg (2.98 lbs)
Terminal Type	F1 (Faston Tab 187)
Internal Resistance (fully charged)	Approx. 35 mOhm
Self-Discharge (25 C)	3% per month


CHARGING (CONSTANT VOLTAGE, 25 C)

Cycle use (constant voltage)	14.4V - 15.0V
Standby use (constant voltage)	13.5V - 13.8V
Max. charging current	1.35A

TEMPERATURE PERFORMANCE

Capacity at 40 C	102%
Capacity at 25 C	100%
Capacity at 0 C	85%
Capacity at -15 C	65%
Discharge temp.	-15 C ~ 50 C
Charge temp.	-10 C ~ 40 C
Storage temp.	-20 C ~ 40 C

DIMENSIONS

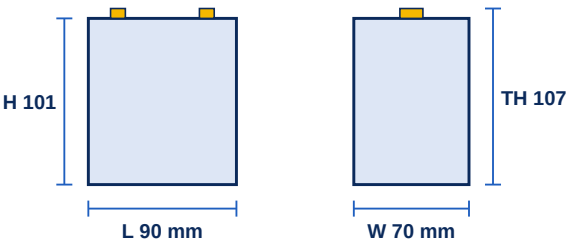

Approx. weight: 1.35 kg
Dimensions in mm. L = length, W = width, H = height, TH = total height incl. terminals.

APPLICATIONS / USE CASES

UPS Systems	Security & Alarm	Emergency Lighting	Medical Equipment
Toys & Electronics			

MR1232BS

12V Lead-Acid Rechargeable Battery

12V | 3.2Ah



SUNKA sealed lead-acid batteries are designed for reliable performance, long service life and maintenance-free operation for a wide range of applications.

KEY FEATURES

- Reliable performance - high quality lead plates and advanced SLA technology
- Maintenance-free - sealed construction, no need to add water
- Long service life - designed for standby and cyclic applications
- Eco-friendly - must be recycled or disposed of properly
- Constant power - excellent discharge performance, wide operating temperature range

SPECIFICATIONS

Model	MR1232BS
Nominal Voltage	12V
Capacity (20HR)	3.2Ah
Battery Type	Sealed Lead-Acid (SLA)
Terminal Type	T1 (Faston Tab 4.8mm)
Dimensions (L x W x H)	134 x 67 x 61 mm (approx.)
Weight	Approx. 1.25 kg
Case Material	ABS (UL94-HB)
Color	Gray

CHARGING (CONSTANT VOLTAGE, 25 C)

Cycle use (as printed)	13.5V - 13.8V
Standby use (as printed)	14.4V - 15.0V
Max. charging current	0.96A

DIMENSIONS



CAUTION

- Do not short circuit the battery terminals.
- Do not charge in a sealed container.
- Do not incinerate.
- Flush with water at once if contact is made with electrolyte (acid).

Dimensions in mm. L = length, W = width, H = height.

APPLICATIONS / USE CASES

UPS Systems	Emergency Lighting	Security & Alarm	Toys & Ride-on Vehicles
Medical Equipment	Portable Devices	Solar & Renewable Energy	

18650 - 1600mAh

Rechargeable Lithium-Ion Battery (18650)

3.7V | 1600mAh



High performance 18650 Li-ion battery delivering reliable power, long cycle life and excellent energy density for a wide range of applications.

KEY FEATURES

- High capacity - 1600mAh for longer runtime and dependable performance
- Rechargeable & economical - multiple charge cycles for cost savings
- Safe & reliable - built to quality standards for stable and safe operation
- Long cycle life - designed for hundreds of charge/discharge cycles
- Environment friendly - reduces waste and environmental impact
- OEM / ODM available - custom branding, packaging and production
- Stable voltage, low self-discharge, wide temperature performance

SPECIFICATIONS

Model	18650
Nominal Voltage	3.7V
Capacity	1600mAh
Energy	5.92Wh
Battery Chemistry	Lithium-Ion
Cell Size (Dia. x Length)	18 mm x 65 mm
Certification Marking	IS 16046:2018
Rechargeable	Yes
Cycle Life	Long-life rechargeable design


COMPLIANCE

IS 16046:2018 | CE certified | RoHS compliant | UN38.3 compliant | REACH compliant (marks shown on datasheet)

PACKING INFORMATION

Packing quantity	500 PCS / CTN
Carton size	69 x 33 x 28 cm
Gross weight	18.0 kg / ctn
Net weight	16.5 kg / ctn
Packing type	Export carton

DIMENSIONS

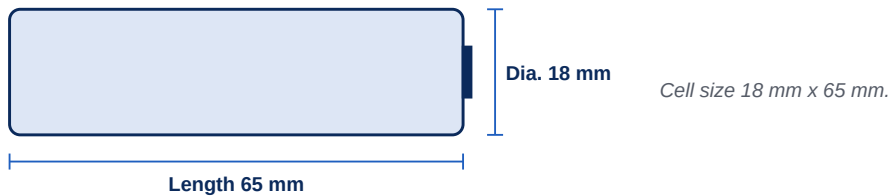

APPLICATIONS / USE CASES

LED Flashlights	Emergency Lighting	Solar Lighting	Power Banks
Security Equipment	Power Tools	Medical Devices	Wireless Equipment
DIY Battery Packs	Portable Devices	E-Bikes / Scooters	UPS Systems

18650 - 2000mAh

Rechargeable Lithium-Ion Battery (18650)

3.7V | 2000mAh



High performance 18650 Li-ion battery delivering reliable power, long cycle life and excellent energy density for a wide range of applications.

KEY FEATURES

- High capacity - 2000mAh for longer runtime and dependable performance
- Rechargeable & economical - multiple charge cycles for cost savings
- Safe & reliable - built to quality standards for stable and safe operation
- Long cycle life - designed for hundreds of charge/discharge cycles
- Environment friendly - reduces waste and environmental impact
- OEM / ODM available - custom branding, packaging and production
- Stable voltage, low self-discharge, wide temperature performance


SPECIFICATIONS

Model	18650
Nominal Voltage	3.7V
Capacity	2000mAh
Energy	7.40Wh
Battery Chemistry	Lithium-Ion
Cell Size (Dia. x Length)	18 mm x 65 mm
Certification Marking	IS 16046:2018
Rechargeable	Yes
Cycle Life	Long-life rechargeable design

PACKING INFORMATION

Packing quantity	500 PCS / CTN
Carton size	69 x 33 x 28 cm
Gross weight	18.0 kg / ctn
Net weight	16.5 kg / ctn
Packing type	Export carton

DIMENSIONS

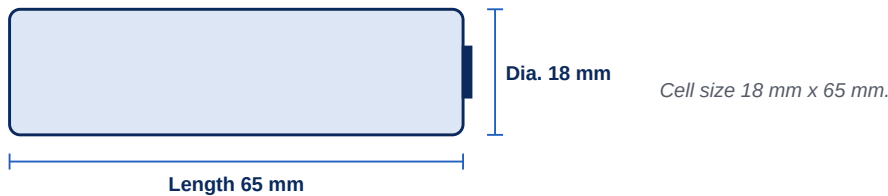

APPLICATIONS / USE CASES

LED Flashlights	Emergency Lighting	Solar Lighting	Power Banks
Security Equipment	Power Tools	Medical Devices	Wireless Equipment
E-Bikes / Scooters	UPS Systems		

18650 - 2200mAh

Rechargeable Lithium-Ion Battery (18650)

3.7V | 2200mAh



High performance 18650 Li-ion battery delivering reliable power, long cycle life and excellent energy density for a wide range of applications.

KEY FEATURES

- High capacity - 2200mAh for longer runtime and dependable performance
- Rechargeable & economical - multiple charge cycles for cost savings
- Safe & reliable - built to quality standards for stable and safe operation
- Long cycle life - designed for hundreds of charge/discharge cycles
- Environment friendly - reduces waste and environmental impact
- OEM / ODM available - custom branding, packaging and production
- Stable voltage, low self-discharge, wide temperature performance


SPECIFICATIONS

Model	18650
Nominal Voltage	3.7V
Capacity	2200mAh
Energy	8.14Wh
Battery Chemistry	Lithium-Ion
Cell Size (Dia. x Length)	18 mm x 65 mm
Certification Marking	IS 16046:2018
Rechargeable	Yes
Cycle Life	Long-life rechargeable design

PACKING INFORMATION

Packing quantity	500 PCS / CTN
Carton size	34 x 25 x 18 cm
Gross weight	Approx. 11.5 kg
Packing type	Export carton

DIMENSIONS

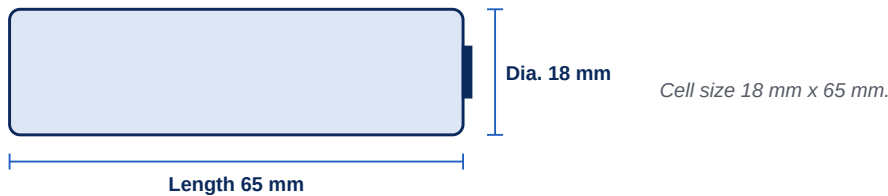

APPLICATIONS / USE CASES

LED Flashlights	Emergency Lighting	Solar Lighting	Power Banks
Security Equipment	Power Tools	Medical Devices	Wireless Equipment
Portable Devices	DIY Battery Packs		

Charging, Safety & Notes

LEAD-ACID BATTERY CARE

- Do not short circuit the battery terminals.
- Do not charge in a sealed container.
- Do not incinerate.
- Flush with water at once if contact is made with electrolyte (acid).
- Sealed lead-acid batteries must be recycled or disposed of properly.
- Charging values in this catalogue are constant-voltage figures at 25 C; do not exceed the stated maximum charging current.

PACKING SUMMARY

Model	Qty / carton	Gross wt.	Net wt.	Carton size
RB613E (6V 1.3Ah)	30 pcs	8.10 kg	8.00 kg	305 x 135 x 145 mm
RB670E (6V 7Ah)	10 pcs	9.50 kg	9.00 kg	320 x 193 x 127 mm
RB1213E (12V 1.3Ah)	20 pcs	10.50 kg	10.00 kg	235 x 205 x 146 mm
18650 1600mAh	500 pcs	18.0 kg	16.5 kg	69 x 33 x 28 cm
18650 2000mAh	500 pcs	18.0 kg	16.5 kg	69 x 33 x 28 cm
18650 2200mAh	500 pcs	Approx. 11.5 kg	n/a	34 x 25 x 18 cm

CARTON MARKING (LEAD-ACID PACKAGING)

This side up | Keep dry | Stack limit by number (6) | Recycle

DISCLAIMER

Specifications are compiled from SUNKA product sheets and are subject to change without prior notice. Please confirm final specifications with your SUNKA representative before ordering.