

Termojet®

WT400-A, is 4 in 1, multifunction design can use for a complete bathroom. Silent & Low water start level, with 1pc repair panel, can easy to take out the block



WT400-A

FEATURE



Intervention easier



Silent



Low start level

Watts (Consumption): 400 W

Electrical Supply: 220~240/50 Hz

Max Flow Rate: 116 L/min

Water Temperature: 1~75 °C




Horizontal Discharge: 80 m

Vertical Discharge: 8 m

Inlet Pipe: 1×100 mm/3×40 mm

Discharge Pipe: 23/28/32/44 mm

IP Rating: IPX4

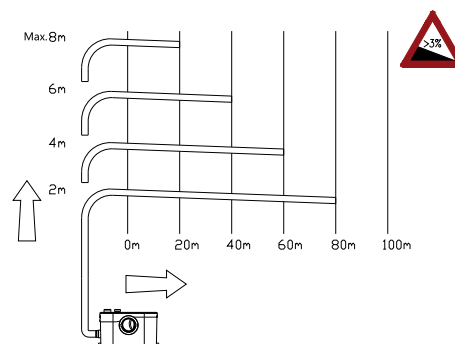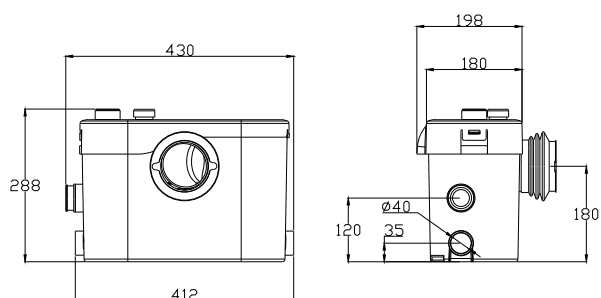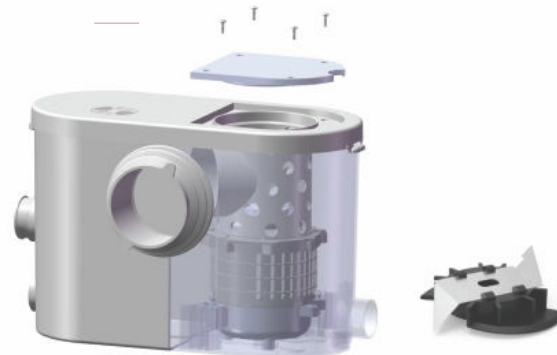

CE

Termojet®

WT400-B, is 4 in 1, design for wall hung toilet. Silent & Low water start level. With 1pc repair panel, can easy to take out the block



WT400-B

FEATURE



Intervention easier



Silent



Low start level



Watts (Consumption): 400 W

Electrical Supply: 220~240/50 Hz

Max Flow Rate: 116 L/min

Water Temperature: 1~75 °C




Horizontal Discharge: 80 m

Vertical Discharge: 8 m

Inlet Pipe: 1×100 mm/3×40 mm

Discharge Pipe: 23/28/32/44 mm

IP Rating: IPX4

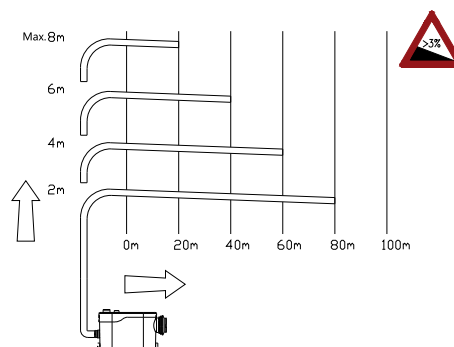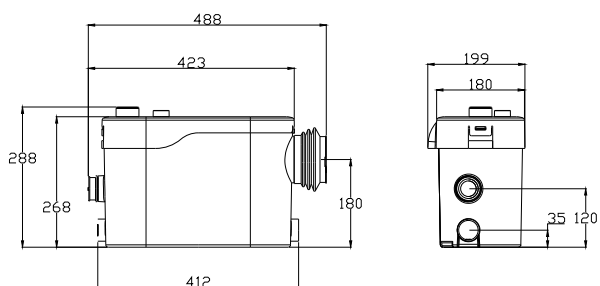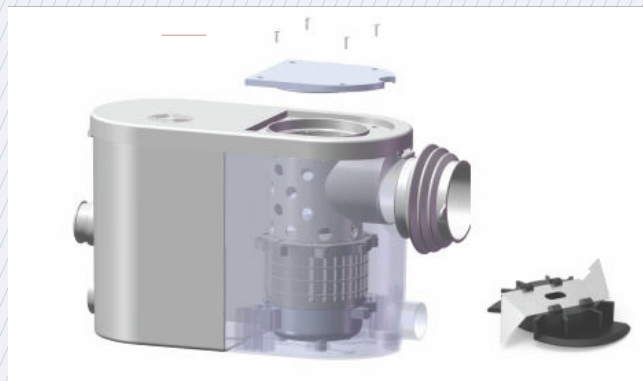

CE

Termojet®

WT400-C, is 3 in 1, without toilet connector, best for washing machine & bathtub. Silent & Low water start level, with 1pc repair panel, can easy to take out the block



WT400-C

FEATURE



Intervention easier



Silent



Low start level

Watts (Consumption): 400 W

Electrical Supply: 220~240/50 Hz

Max Flow Rate: 125 L/min

Water Temperature: 1~75 °C



Horizontal Discharge: 80 m

Vertical Discharge: 8 m

Inlet Pipe: 3×40 mm

Discharge Pipe: 23/28/32/44 mm

IP Rating: IPX4

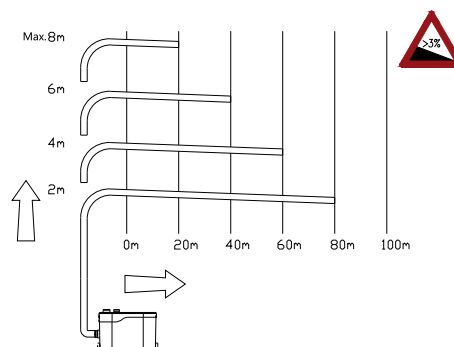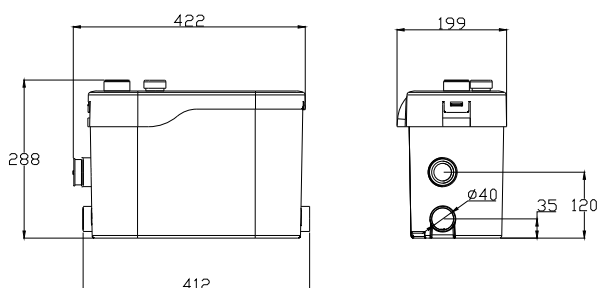

CE