

LE_BMS_A_V2 Fabrication Document

Layer Stack Legend


	Material	Layer	Thickness	Dielectric	Type	Gerber
	F,Paste				Paste Mask	
	F,Silkscreen				Legend	GBR
	F,Mask		0,02mm	Solder Resist	Solder Mask	GBR
	Copper	L1 (Sig, PWR)	0,07mm (2,00oz)		Signal	GBR
	Prepreg		0,1mm	FR4_7628	Dielectric	
	Copper	L2 (GND)	0,035mm (1,00oz)		Plane	GBR
	Core		1,21mm	FR4	Dielectric	
	Copper	L3 (Sig, PWR)	0,035mm (1,00oz)		Signal	GBR
	Prepreg		0,1mm	FR4_7628	Dielectric	
	Copper	L6 (Sig, PWR)	0,07mm (2,00oz)		Signal	GBR
	B,Mask		0,02mm	Solder Resist	Solder Mask	GBR
	B,Silkscreen				Legend	GBR
	B,Paste				Paste Mask	

Total thickness: 1,66mm
Note: external layer thicknesses are specified after plating

Impedance Table

Transmission Line	Impedance [ohms]	Tolerance [ohms]	Layer	Trace Width [mm]	Gap [mm]	Ref. Layers
Edge-Coupled Coated Microstrip	100	±10 %	L1	0,2032	0,28	L2

Top Fabrication (Scale 1:1)

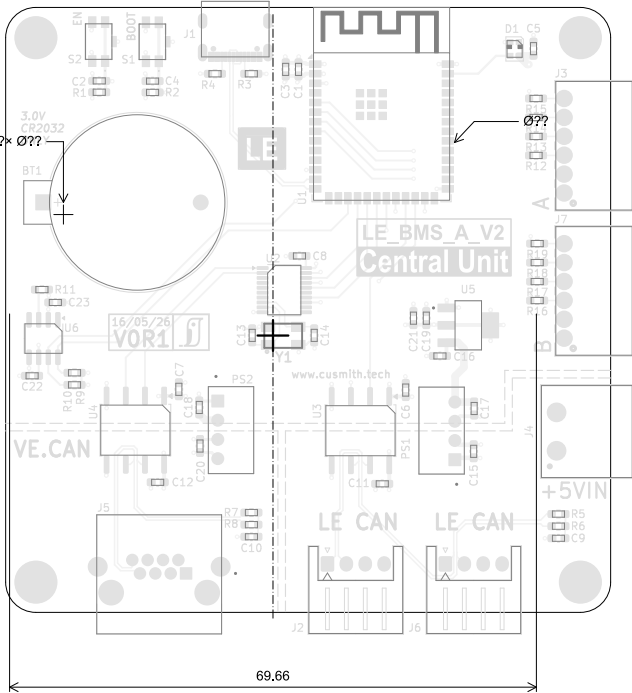

FABRICATION NOTES (UNLESS OTHERWISE SPECIFIED)

- 1) FABRICATE PER IPC-6012A CLASS 2.
- 2) OUTLINE DEFINED IN SEPARATE GERBER FILE WITH "Edge_Cuts.GBR" SUFFIX.

DIMENSIONS OF CIRCUMSIZED RECTANGLE SHOWN ON THIS DRAWING FOR REFERENCE ONLY.
- 3) SEE SEPARATE DRILL FILES WITH ".DRL" SUFFIX FOR HOLE LOCATIONS.

SELECTED HOLE LOCATIONS SHOWN ON THIS DRAWING FOR REFERENCE ONLY.
- 4) SURFACE FINISH: IMMERSION GOLD
- 5) SOLDERMASK ON BOTH SIDES OF THE BOARD SHALL BE LPI, COLOR BLACK.
- 6) SILK SCREEN LEGEND TO BE APPLIED PER LAYER STACKUP USING YELLOW NON-CONDUCTIVE EPOXY INK.
- 7) ALL VIAS ARE TENTED ON BOTH SIDES UNLESS SOLDERMASK OPENED IN GERBER.
- 8) VENDOR SHOULD FOLLOW ROHS COMPLIANT PROCESS AND Pb FREE FOR MANUFACTURING
- 9) PCB MATERIAL REQUIREMENTS:

A. FLAMMABILITY RATING MUST MEET OR EXCEED UL94V-0 REQUIREMENTS.
B. Tg 170 C OR EQUIVALENT.
C. EQUIVALENT MATERIAL SHALL BE RoHS COMPLIANT, HALOGEN FREE AND APPROVED BY COMPANY NAME.
- 10) DESIGN GEOMETRY MINIMUM FEATURE SIZES:

BOARD SIZE80.000 × 80.000 mm
BOARD THICKNESS1.660 mm
TRACE WIDTH0.200 mm
TRACE TO TRACE0.200 mm
MIN. HOLE (PTH)0.300 mm
MIN. HOLE (NPTH)0.650 mm
ANNULAR RING0.150 mm
COPPER TO HOLE0.150 mm
COPPER TO EDGE0.250 mm
HOLE TO HOLE0.254 mm
- 11) REFER TO IMPEDANCE TABLE FOR IMPEDANCE CONTROL REQUIREMENTS.
- 12) CONFIRM SPACE WIDTHS AND SPACINGS.

All dimensions are in millimeters unless otherwise specified.

	Comments:		Company:		Variant:		Git Hash:		
			Company Name		CHECKED		84c2d8c		
			Board Name:			Project Name:			
			LE_BMS_A_V2			LE_V2			
	Sheet Title:		File Name:		Designer:		Date:		Revision:
Top Fabrication (Scale 1:1)		LE_BMS_A_V2.kicad_pcb		Author		2024-04-13		+ (Unreleased)	
Sheet Path:				Reviewer:		Size:		Sheet:	
						A4		1 of 10	