



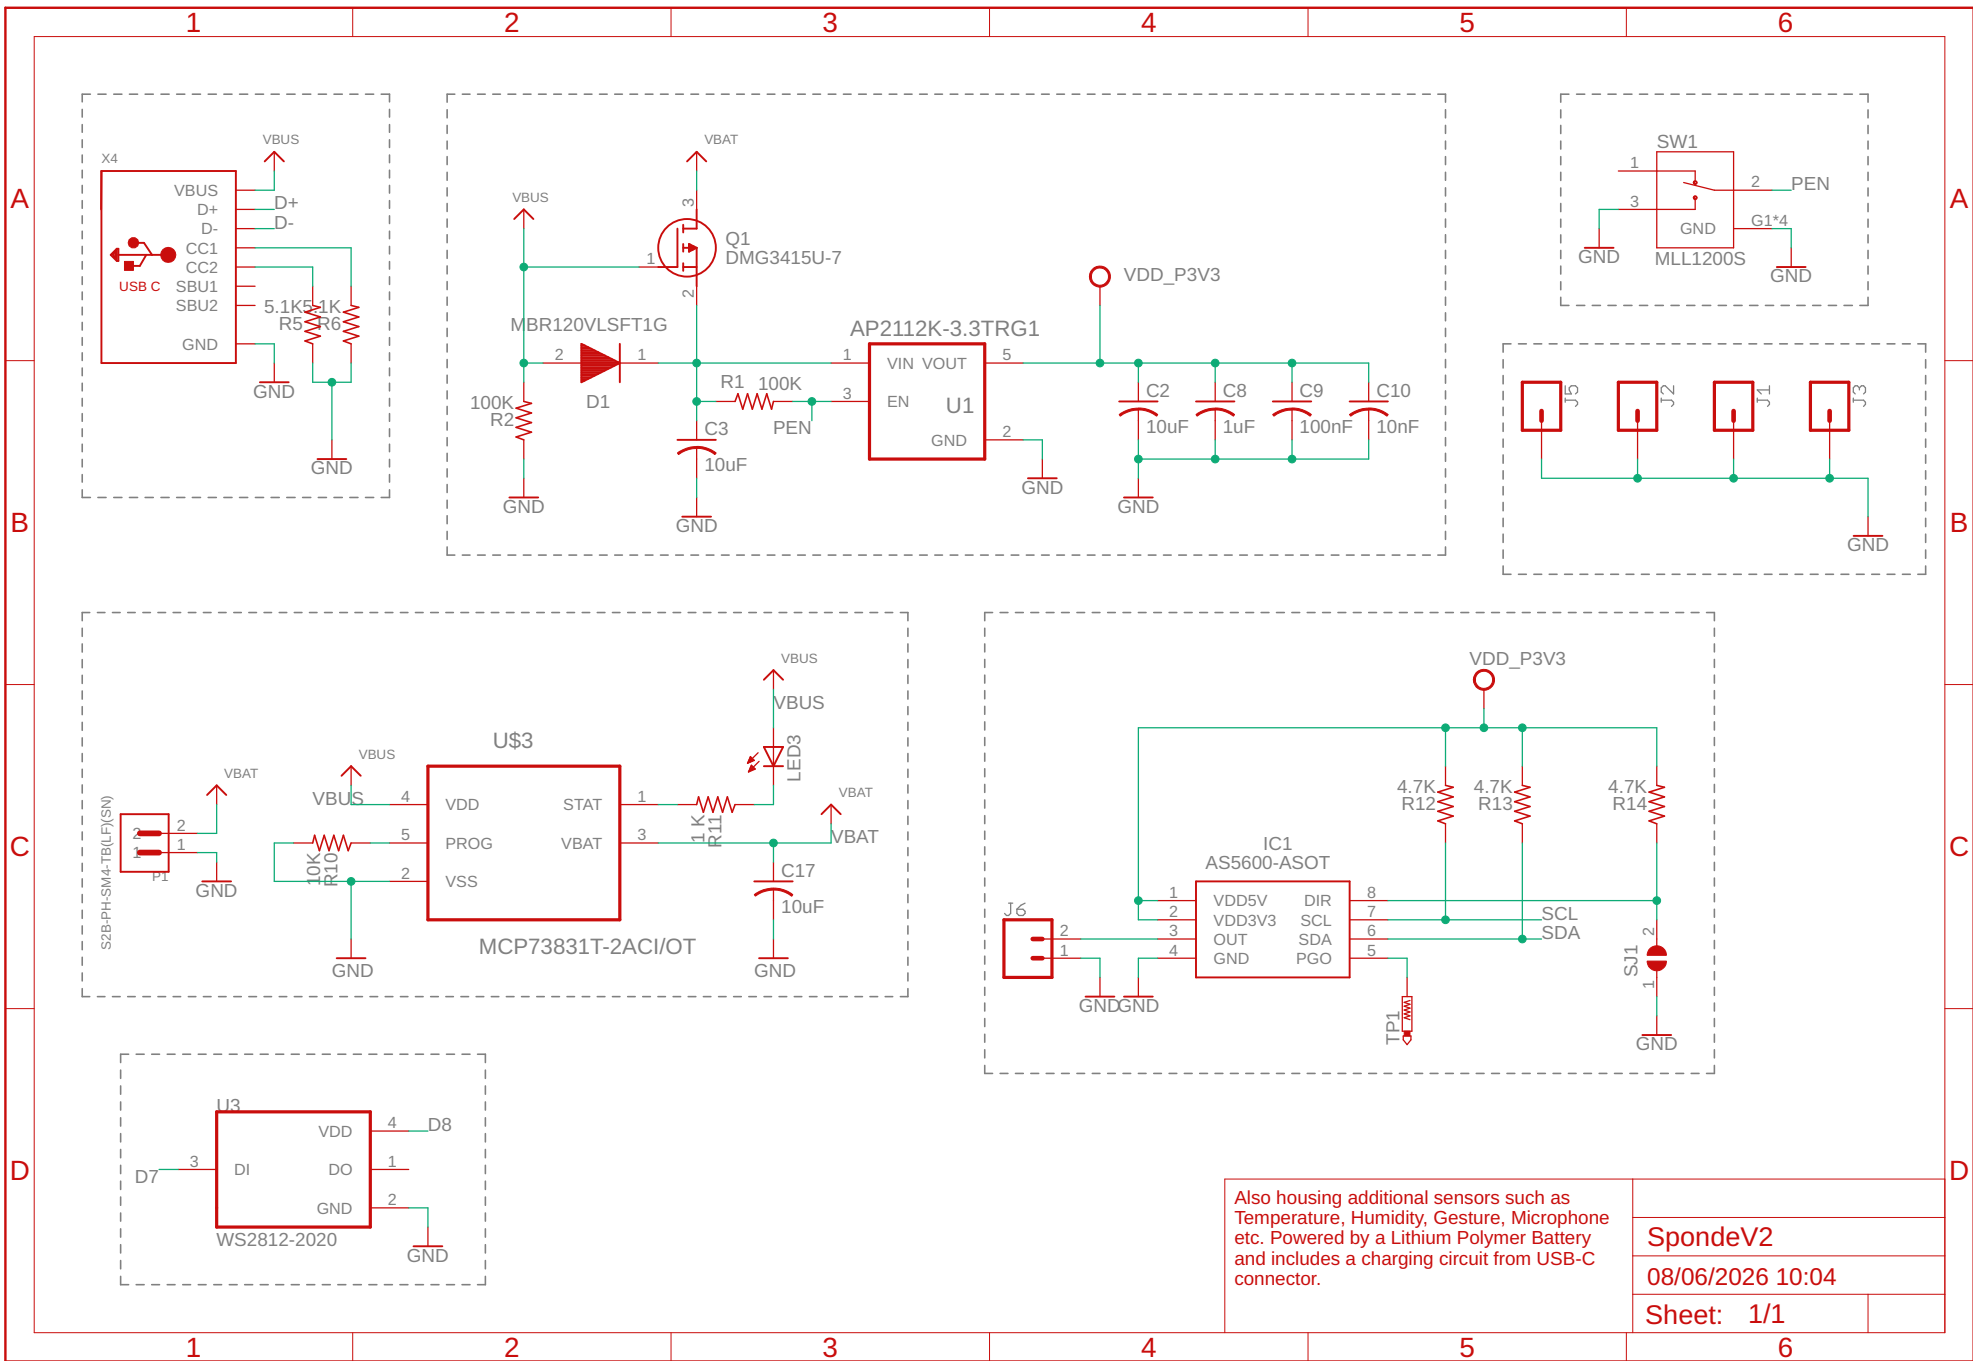

Also housing additional sensors such as Temperature, Humidity, Gesture, Microphone etc. Powered by a Lithium Polymer Battery and includes a charging circuit from USB-C connector.

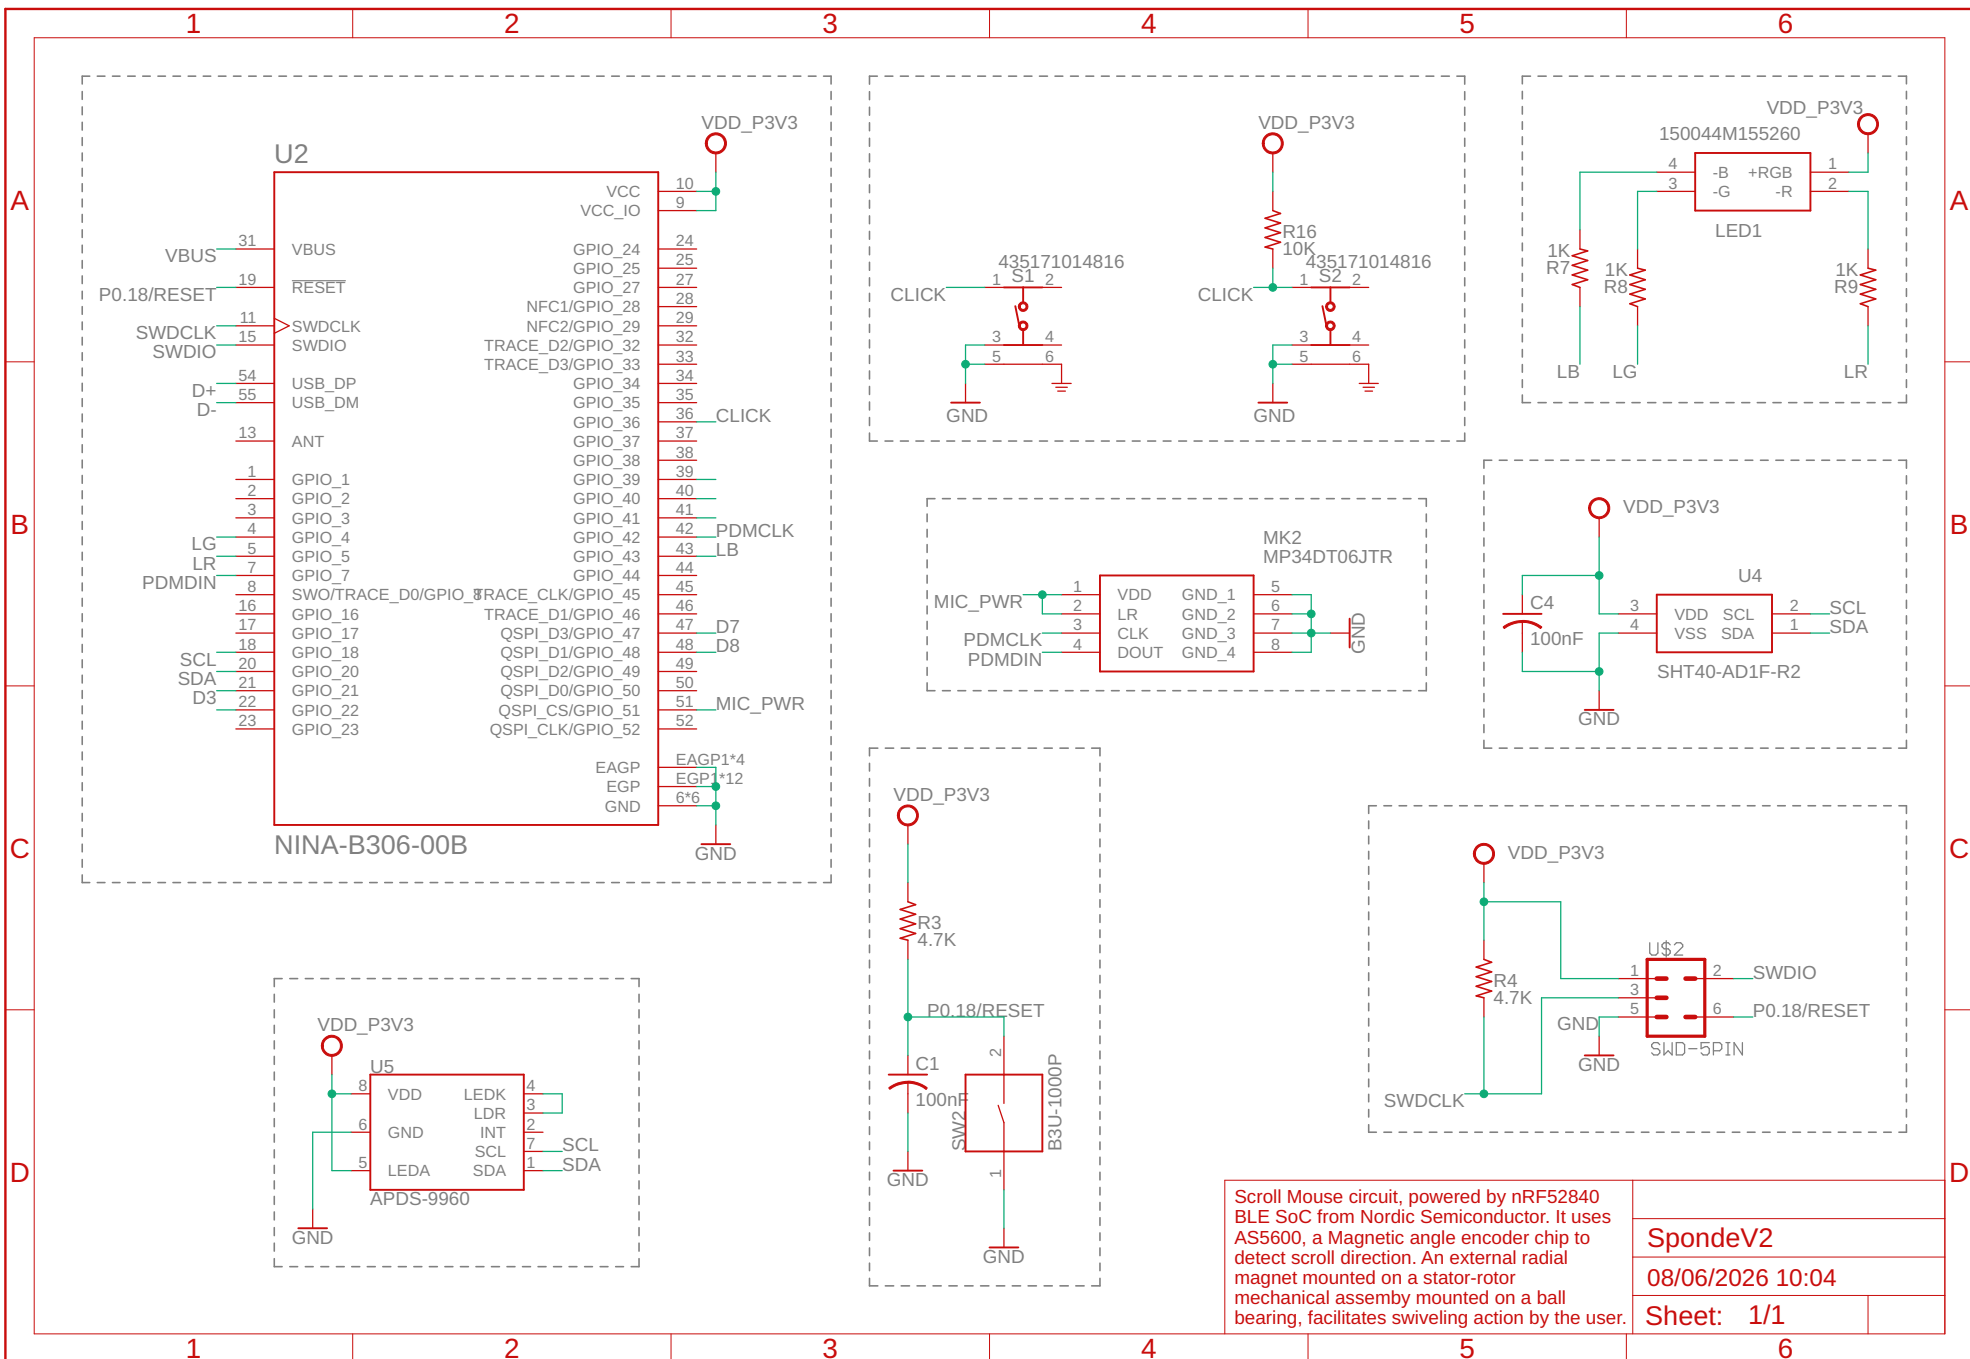

Scroll Mouse circuit, powered by nRF52840 BLE SoC from Nordic Semiconductor. It uses AS5600, a Magnetic angle encoder chip to detect scroll direction. An external radial magnet mounted on a stator-rotor mechanical assembly mounted on a ball bearing, facilitates swiveling action by the user.

SpondeV2

08/06/2026 10:04

Sheet: 1/1