


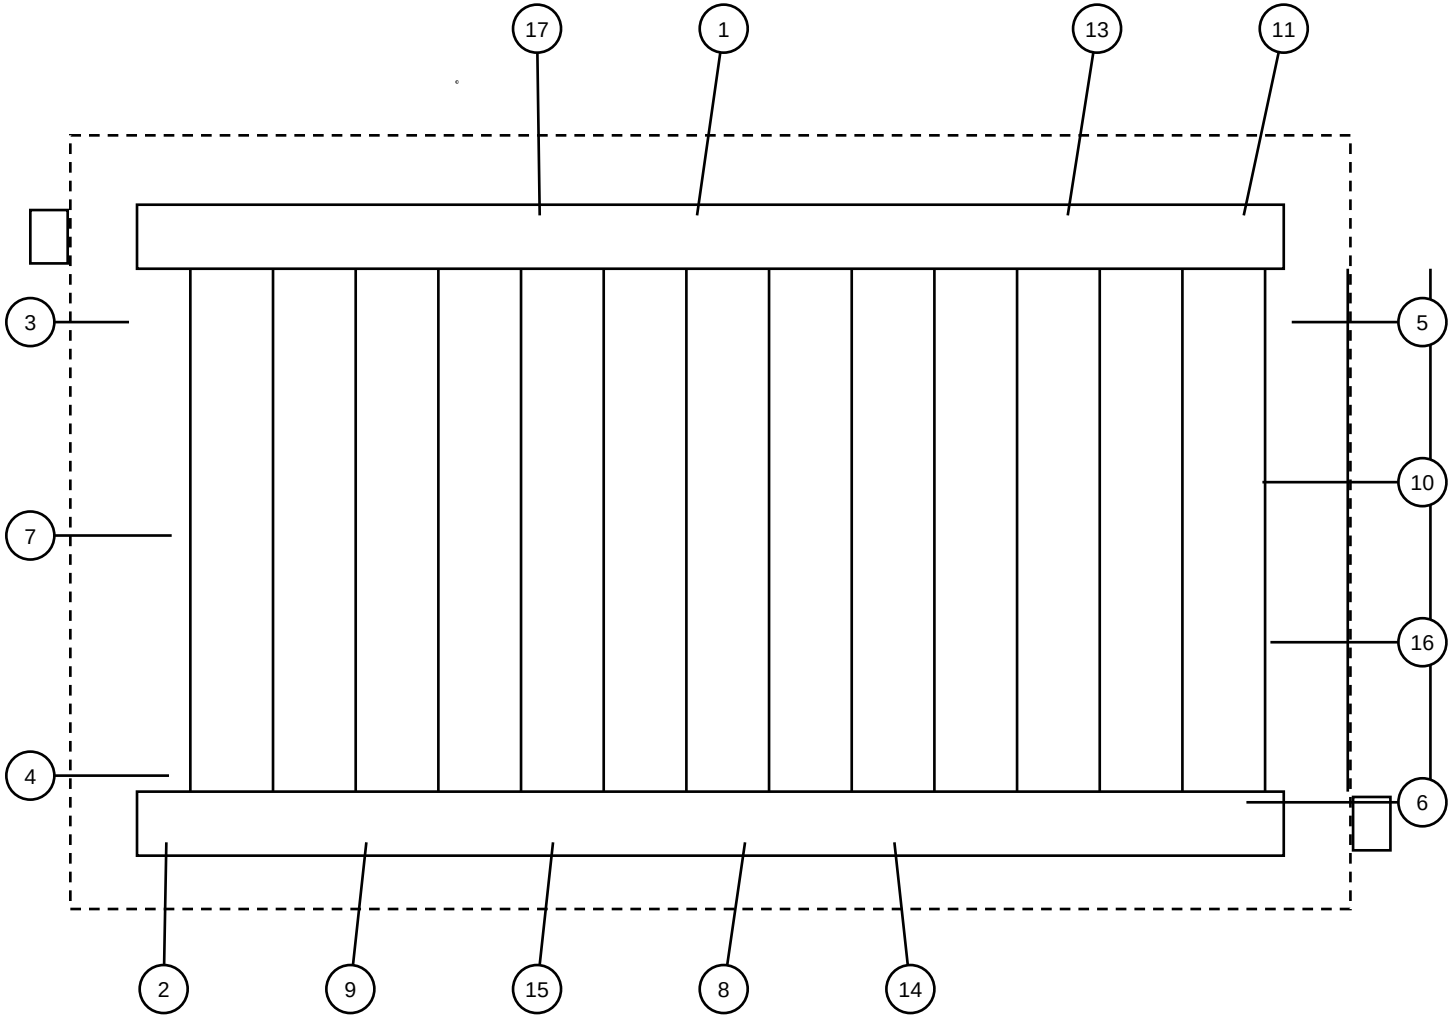

- NOTES:**
- 1. ALL DIMENSIONS ARE IN MM.
 - 2. ALL WELDING AS PER IBR / ASME SEC I.
 - 3. INSULATE WITH 100 THK MINERAL WOOL AND CLAD WITH 0.6 THK ALUMINIUM SHEET.
 - 4. PAINT: ONE COAT RED OXIDE PRIMER.
 - 5. TUBE QTY IS PER BANK. TYPICAL FOR 4 BANKS.

Pos	Description	Material Spec	Qty
1	INLET HEADER 219.1 OD X 8.0 THK	SA 106 GR.B	1
2	OUTLET HEADER 219.1 OD X 8.0 THK	SA 106 GR.B	1
3	ECONOMISER TUBE 38.1 OD X 3.6 THK	SA 210 GR.A1	122
4	RETURN BEND 38.1 OD	SA 210 GR.A1	48
5	TUBE SUPPORT PLATE 12 THK	IS 2062 GR.B	13
6	INLET FLANGE 200 NB CL.150	SA 105	1
7	OUTLET FLANGE 200 NB CL.150	SA 105	1
8	DRAIN VALVE 25 NB	SA 105	2
9	VENT VALVE 15 NB	SA 105	1
10	THERMOWELL 1/2 NPT	SS 316	2
11	PRESSURE TAPPING 1/2 NB	SA 105	2
12	STUD BOLT M20 X 90 WITH 2 NUTS	SA 193 B7	16
13	LIFTING LUG 16 THK	IS 2062 GR.B	4
14	CASING PLATE 3 THK	IS 2062	17
15	EXPANSION JOINT 600 X 600	FABRIC	1
16	NAME PLATE	SS 304	1
17	INSPECTION D00R 300 X 300	IS 2062	2

ECONOMISER ASSEMBLY

DRG NO : EC-02-GA-001
DRG REV : B
SCALE : NTS SIZE : A3
SAMPLE (SYNTHETIC) DRAWING