


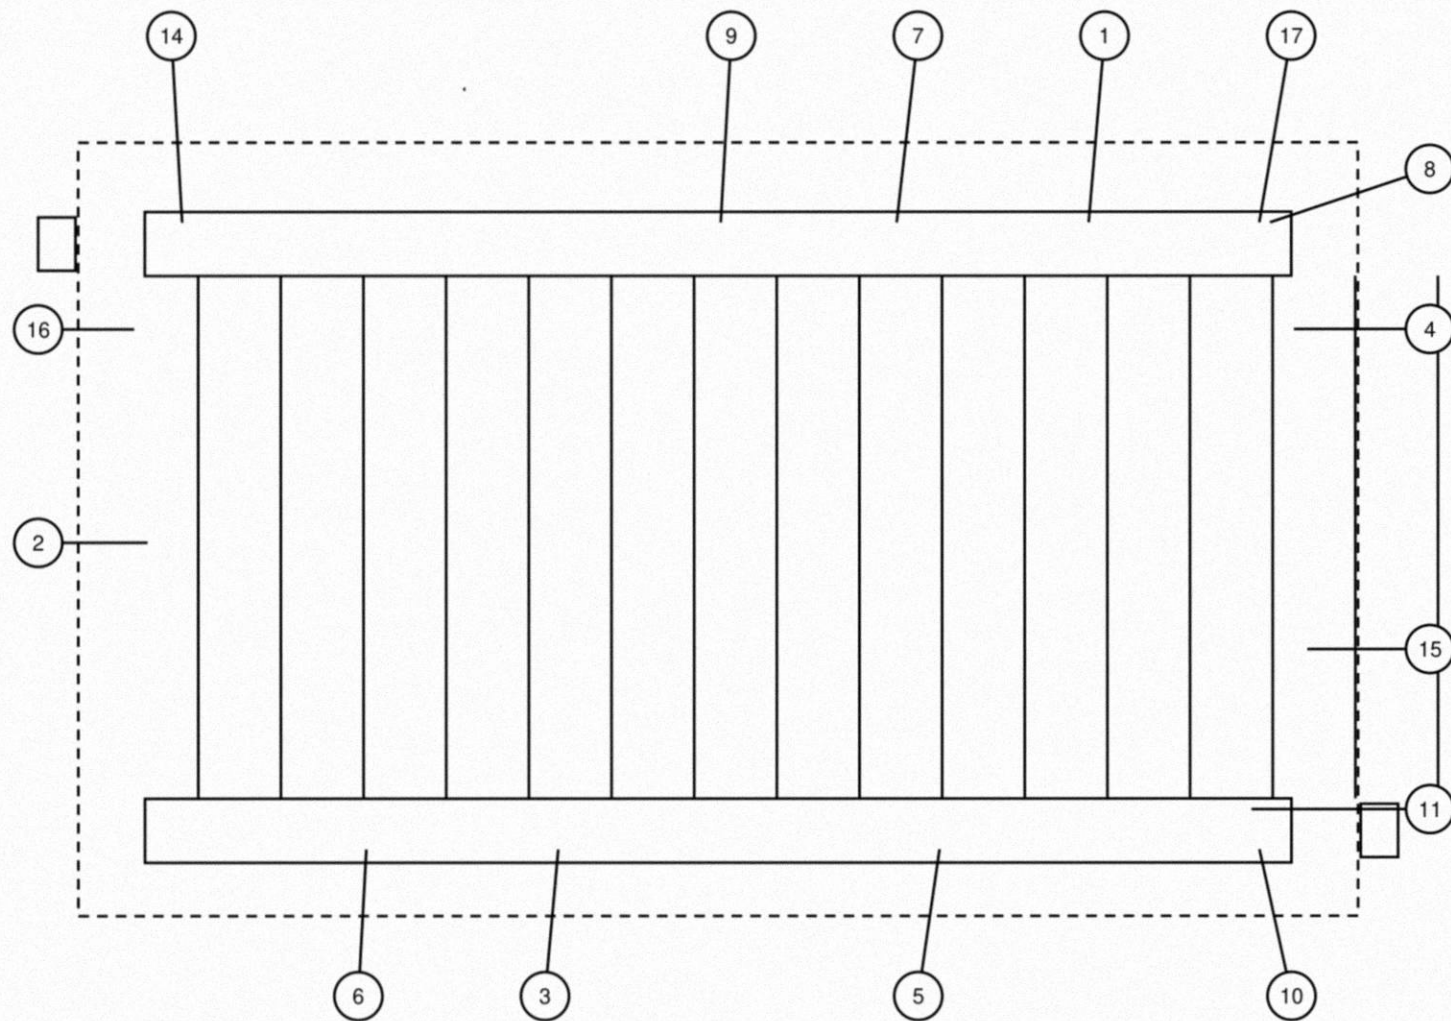

NOTES:

- 1. ALL DIMENSIONS ARE IN MM.
- 2. ALL WELDING AS PER IBR / ASME SEC I.
- 3. INSULATE WITH 100 THK MINERAL WOOL AND CLAD WITH 0.6 THK ALUMINIUM SHEET.
- 4. PAINT: ONE COAT RED OXIDE PRIMER.
- 5. TUBE QTY IS PER BANK. TYPICAL FOR 4 BANKS.

Sr No	Part Description	Material	Size	Qty
1	INLET HEADER 219.1 OD X 8.0 THK	SA 106 GR.B		1
2	OUTLET HEADER 219.1 OD X 8.0 THK	SA 106 GR.B		1
3	ECONOMISER TUBE 38.1 OD X 3.6 THK	SA 210 GR.A1		114
4	TUBE SUPPORT PLATE 12 THK	IS 2062 GR.B		10
5	INLET FLANGE 200 NB CL.150	SA 105		1
6	OUTLET FLANGE 200 NB CL.150	SA 105		1
7	SAFETY VALVE 50 NB	SA 216 WCB		1
8	DRAIN VALVE 25 NB	SA 105		2
9	VENT VALVE 15 NB	SA 105		1
10	THERMOWELL 1/2 NPT	SS 316		2
11	PRESSURE TAPPING 1/2 NB	SA 105		2
12	GASKET 200 NB CL.150	SS 304 + GRAPHITE		2
13	STUD BOLT M20 X 90 WITH 2 NUTS	SA 193 B7		16
14	LIFTING LUG 16 THK	IS 2062 GR.B		4
15	EXPANSION JOINT 600 X 600	FABRIC		1
16	NAME PLATE	SS 304		1
17	INSPECTION DOOR 300 X 300	IS 2062		2

ECONOMISER ASSEMBLY

DRG NO : EC-06-GA-001
DRG REV : B
SCALE : NTS SIZE : A3
SAMPLE (SYNTHETIC) DRAWING