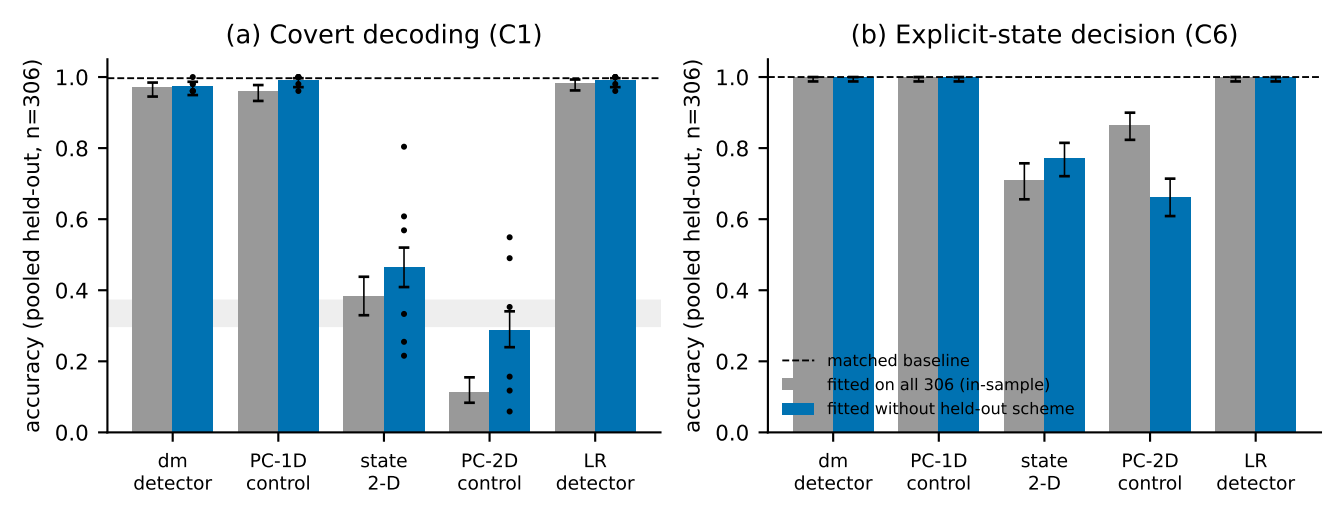
(a) Covert decoding (C1)
(b) Explicit-state decision (C6)
accuracy (pooled held-out, n=306)
1.0
0.8
0.6
0.4
0.2
0.0
dm detector
PC-1D control
state 2-D
PC-2D control
LR detector
matched baseline
fitted on all 306 (in-sample)
fitted without held-out scheme