YUVRAJ
OVERSEAS PVT. LTD.
An IATF 16949:2016 Certified Company

PROCRIMP™
By
YUVRAJ

One Piece Hydraulic Hose Fittings

PRODUCT CATALOUGE

PROCRIMP™

By
YUVRAJ

CONTENTS

05 About Us

06 Warning Instructions

07 Crimping Instruction Manual

09 Fittings Part-Code Decodification

13 P2 Series

49 P4 Series

101 P6 Series

138 Notes

140 Contact Information

ABOUT US

YUVRAJ OVERSEAS

Yuvraj Overseas Pvt Ltd is one of India's biggest manufacturers of Hydraulic Hose-End Fittings, Adapters and Cold Forgings. Yuvraj is an IATF 16949 & ISO 9001 certified company catering to Global OEMs, Hose manufacturers and MRO customers in various sectors.

With a modest beginning in 1993, Yuvraj Overseas has now grown into one of India's leading manufacturer. With over three decades of experience and a commitment to excellence, we have built a strong reputation for precision, quality and reliability.

Today, we continue to uphold the highest standards of quality and innovation, ensuring our products consistently meet the demands of the global market. Our in-house Cold Forging, Machining, Bending and Electroplating facilities give us an edge in being competitive and innovative. We offer Zinc plating as standard, with a rust resistance of 250 hours white rust and 600 hours red-rust, and optional Zinc-Nickel, with a rust resistance of over 1000 hours, for more demanding applications, both developed internally.

Cold-Forging Plant

CNC Machining

Automated Electroplating

Fitting Assembly Pre-Crimping

PROCRIMP™ By YUVRAJ

WARNING INSTRUCTIONS

All products are part of an engineered system and must be assembled and used strictly in accordance with the specified instructions and limitations.

Hose fittings must comply with applicable international standards including SAE, ISO, EN, DIN, BS, and UNI. Any other application or deviation from these standards is strictly prohibited.

Failure to follow the prescribed instructions and limitations may result in premature hose assembly failure, potentially leading to property damage, serious injury, or loss of life.

The limited warranty applies only when hose and fittings are specifically engineered, manufactured, and used according to the defined process specifications.

Hose assemblies certified by DNV, Lloyd's, and ABS must be used in full compliance with the respective certification standards. Any other use is strictly prohibited.

Yuvraj Overseas Pvt. Ltd. does not have direct access to all end users of its products and therefore cannot directly distribute product safety and usage information to them.

Accordingly, sellers and distributors of Yuvraj Overseas Pvt. Ltd. products are responsible for providing a copy of these warnings and precautions to all end users.

The data provided in this catalog is for reference purposes only and is not binding. Yuvraj Overseas Pvt. Ltd. reserves the right to modify specifications without prior notice.

PROCRIMP™ By YUVRAJ

CRIMPING INSTRUCTION MANUAL

PREPARATION STEPS

01 CUT THE HOSE

Ensure the hydraulic hose is cut SQUARELY (0°) using a metallic cutting blade.



DO'S

PROPERLY CUT HOSE

DONT'S

ANGLED/ROUGH CUT

02 CLEAN THE HOSE

Thoroughly clean internal and external surfaces to remove all debris and contaminants.

TOOLS

CLEANING BRUSHES

AIR GUN

FOAM PROJECTILE TOOL

ASSEMBLY & CRIMPING

03 INSERT THE FITTING

Identify and mark the required insertion depth, then insert the lubricated fitting until the mark is aligned

DO NOT USE HAMMER OR FORCE!

04 CRIMP THE ASSEMBLY

Crimp as per the final crimp diameter tolerance. Use correct die sets and align with scribe mark.

FITTING SHOWING CRIMP LENGTH

CRIMPING MACHINE DIE SET

Note: Always double-check alignment before crimping.

⚠ GENERAL SAFETY INSTRUCTIONS

A. WEAR PPE

B. WORK IN A VENTILATED AREA

C. KEEP AREA CLEAN

D. USE PROPER TOOLS

E. CUT SQUARELY

F. BEWARE OF FLYING DEBRIS

G. CLEAN HOSE ENDS

H. ALIGN COMPONENTS

I. CRIMP TO CORRECT LENGTH

J. FOLLOW CRIMP SPECS

K. INSPECT ASSEMBLY

L. PRESSURE-TEST THE HOSE

M. AVOID DAMAGED PARTS

N. TRAIN PERSONNEL

PROCRIMP™ By YUVRAJ

PROCRIMP™
By
YUVRAJ

FITTINGS PART-CODE DECODIFICATION

P2FDKL9-16-36-105-Ni/6L

FITTING TYPES	
SINGLE-PC FITTINGS	P
TWO-PC FITTINGS	T
INTERLOCK FITTINGS	L
RESUABLE FITTINGS	R
WATERBLAST FITTINGS	W
TEFLON FITTINGS	E
FITTING CONNCECTION TYPE	
BSP	BSP
METRIC 24 CONE ORING - LIGHT	DKL
METRIC MALE - LIGHT	CEL
METRIC 24 CONE ORING - HEAVY	DKS
METRIC MALE - HEAVY	CES
SAE 45	SAE
METRIC STANDPIPE - S	RSS
JIC 37	JIC
ORFS	ORS
JIS	JIS
NPTF MALE	MNPT
NPTF SWIVEL MALE	MNPX
NPSM	NPS
CODE 61	F3K
CODE 62	F6K
KOMATSU FLANGE	KFL
CAT FLANGE	F9K

HOSE TYPES	
WIRE-BRAID (R1/R2)	2
Textile-Braid	3
SPIRAL (4SP, 4SH)	4
SIX SPIRAL (R13, R15)	6
THERMOPLASTIC	7
WATERBLAST 800 BAR	W2
WATERBLAST 1100 BAR	W4
WATERBLAST 1400 BAR	W6
STRAIGHT OR BEND	
STRAIGHT	(BLANK)
45 BEND	4
90 BEND	9
90 LONG DROP	9L
Custom Drop heights	A Suffix will be added at the end mentioning the drop height
HOSE DASH SIZE	
THREAD SIZE	
PLATING STANDARDS	
Zinc-Trivalent plating	Blank
Zinc-Nickel Plating	Ni
MATERIALS	
Carbon Steel	Blank
SS304	4
SS316	6
SS316L	6L

P2 SERIES

For Wire-Braid Hoses
Non-Skive

P4 SERIES

For Multi-Spiral Hoses
Non-Skive

P6 SERIES

For 6 Spiral Hoses
Non-Skive

P2 SERIES

For Wire-Braid Hoses
Non-Skive

PRODUCT	PART CODE	WIRE-BRAID HOSE FITTINGS	PAGE
NPTF-NPSM	MNPT	NPTF MALE (60° CONE SEAT)	15
	MNPX	NPTF MALE SWIVEL (60° CONE SEAT)	16
JIC	MJIC	JIC 37° MALE	17
	JIC	JIC 37° FEMALE SWIVEL	18
	JIC4	JIC 37° FEMALE SWIVEL - 45° ELBOW	19
	JIC9	JIC 37° FEMALE SWIVEL - 90° ELBOW	20
ORFS	MORS	ORFS MALE	21
	ORS	ORFS FEMALE SWIVEL	22
	ORS4	ORFS FEMALE SWIVEL - 45° ELBOW	23
	ORS9	ORFS FEMALE SWIVEL - 90° ELBOW	24
SAE	MSAE	SAE 45° MALE	25
	SAE	SAE 45° FEMALE SWIVEL	26
	SAE9	SAE 45° FEMALE SWIVEL - 90° ELBOW	27
	MORB	O-RING BOSS MALE	28
	MORX	O-RING BOSS MALE SWIVEL	29
JIS	JIS	JIS FEMALE SWIVEL (60° CONE - JAPANESE)	30
	KOM	JAPANESE “KOM” FEMALE SWIVEL 60° CONE	31
	KOM4	JAPANESE “KOM” FEMALE SWIVEL 60° CONE - 45° ELBOW	32
	KOM9	JAPANESE “KOM” FEMALE SWIVEL 60° CONE - 90° ELBOW	33
BSP-BSPT	MBPT	BSPT TAPERED MALE 60° CONE	34
	MBPP	BSP MALE 60° CONE	35
	BPS	BSP FEMALE SWIVEL 60° CONE	36
	BSP4	BSP FEMALE SWIVEL 60° CONE - 45° ELBOW	37
	BSP9	BSP FEMALE SWIVEL 60° CONE - 90° ELBOW	38
METRIC	CEL	METRIC LIGHT MALE (24° CONE SEAT)	39
	DKL	METRIC LIGHT FEMALE SWIVEL (24° CONE SEAT)	40
	DKL4	METRIC LIGHT FEMALE SWIVEL - 45° ELBOW (24° CONE SEAT)	41
	DKL9	METRIC LIGHT FEMALE SWIVEL - 90° ELBOW (24° CONE SEAT)	42
	CES	METRIC HEAVY MALE (24° CONE SEAT)	43
	DKS	METRIC HEAVY FEMALE SWIVEL (24° CONE SEAT)	44
	DKS4	METRIC HEAVY FEMALE SWIVEL - 45° ELBOW (24° CONE SEAT)	45
	DKS9	METRIC HEAVY FEMALE SWIVEL - 90° ELBOW (24° CONE SEAT)	46
STAPLE LOK	STPL	STAPLE-LOK	47

PROCRIMP™ By YUVRAJ

NPTF R2

FOR WIRE BRAID HOSES - NO SKIVE

- NPTF
- NPTF MALE (60° CONE SEAT) - MNPT

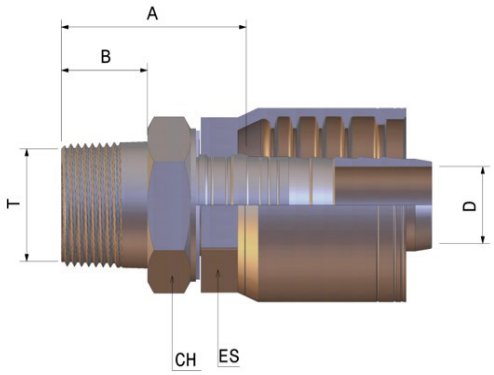

CODE	Ø HOSE			T	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2MNPT-0402	6	1/4"	4	1/8" - 27	4	0.157	28.38	1.117	10	0.394	14	0.551	9/16"	14	0.551	9/16"
P2MNPT-0404	6	1/4"	4	1/4" - 18	4	0.157	34.18	1.346	14.3	0.563	17	0.669	11/16"	14	0.551	9/16"
P2MNPT-0406	6	1/4"	4	3/8" - 18	4	0.157	34.18	1.346	14.3	0.563	19	0.748	3/4"	14	0.551	9/16"
P2MNPT-0408	6	1/4"	4	1/2" - 14	4	0.157	39.88	1.570	19	0.748	22	0.866	7/8"	14	0.551	9/16"
P2MNPT-0504	8	5/16"	5	1/4" - 18	5	0.197	34.18	1.346	14.3	0.563	17	0.669	11/16"	16	0.630	5/8"
P2MNPT-0506	8	5/16"	5	3/8" - 18	5	0.197	34.18	1.346	14.3	0.563	19	0.748	3/4"	16	0.630	5/8"
P2MNPT-0604	10	3/8"	6	1/4" - 18	6.4	0.252	34.18	1.346	14.3	0.563	19	0.748	3/4"	17	0.669	11/16"
P2MNPT-0606	10	3/8"	6	3/8" - 18	6.4	0.252	34.18	1.346	14.3	0.563	19	0.748	3/4"	17	0.669	11/16"
P2MNPT-0608	10	3/8"	6	1/2" - 14	6.4	0.252	39.88	1.570	19	0.748	22	0.866	7/8"	17	0.669	11/16"
P2MNPT-0804	12	1/2"	8	1/4" - 18	9	0.354	34.18	1.346	14.3	0.563	22	0.866	7/8"	22	0.866	7/8"
P2MNPT-0806	12	1/2"	8	3/8" - 18	9	0.354	35.18	1.385	14.3	0.563	22	0.866	7/8"	22	0.866	7/8""
P2MNPT-0808	12	1/2"	8	1/2" - 14	9	0.354	39.88	1.570	19	0.748	22	0.866	7/8"	22	0.866	7/8"
P2MNPT-0812	12	1/2"	8	3/4" - 14	9	0.354	42.38	1.669	19	0.748	32	1.260	1.1/4"	22	0.866	7/8"
P2MNPT-1008	16	5/8"	10	1/2" - 14	12	0.472	40.12	1.580	19	0.748	22	0.866	7/8"	25	0.984	1"
P2MNPT-1012	16	5/8"	10	3/4" - 14	12	0.472	42.62	1.678	19	0.748	32	1.260	1.1/4"	25	0.984	1"
P2MNPT-1208	19	3/4"	12	1/2" - 14	15.5	0.610	45.95	1.809	19	0.748	32	1.260	1.1/4"	30	1.181	1.3/16"
P2MNPT-1212	19	3/4"	12	3/4" - 14	15.5	0.610	45.95	1.809	19	0.748	32	1.260	1.1/4"	30	1.181	1.3/16"
P2MNPT-1216	19	3/4"	12	1" - 11.1/2	15.5	0.610	50.75	1.998	23.8	0.937	36	1.417	1.7/16"	30	1.181	1.3/16
P2MNPT-1612	25	1"	16	3/4" - 14	20	0.787	45.62	1.796	19	0.748	32	1.260	1.1/4"	41	1.614	1.5/8"
P2MNPT-1616	25	1"	16	1" - 11.1/2	20	0.787	50.42	1.985	23.8	0.937	36	1.417	1.7/16"	41	1.614	1.5/8"

NPTF SWIVEL

FOR WIRE BRAID HOSES - NO SKIVE

- NPTF
- NPTF MALE SWIVEL (60° CONE SEAT)

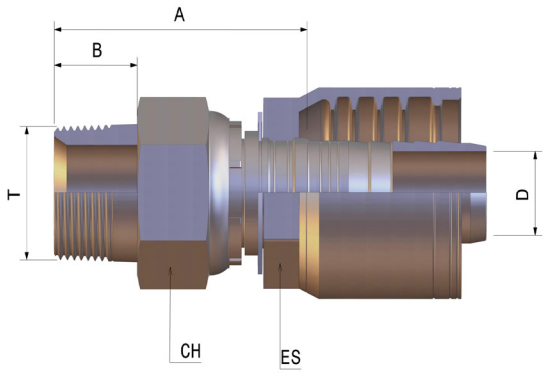

CODE	Ø HOSE			T	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2MNPX-0404	6	1/4"	4	1/4" - 18	4	0.16	55.2	2.17	14.8	0.58	19	0.748	3/4"	14	0.551	9/16"
P2MNPX-0406	6	1/4"	4	3/8" - 18	4	0.16	57.9	2.28	15	0.59	22	0.866	7/8"	14	0.551	9/16"
P2MNPX-0604	10	3/8"	6	1/4" - 18	6.4	0.25	55.2	2.17	14.8	0.58	19	0.748	3/4"	17	0.669	11/16"
P2MNPX-0606	10	3/8"	6	3/8" - 18	6.4	0.25	57.9	2.28	15	0.59	22	0.866	7/8"	17	0.669	11/16"
P2MNPX-0608	10	3/8"	6	1/2" - 14	6.4	0.25	63.9	2.52	19	0.75	27	1.063	1.1/16"	17	0.669	11/16"
P2MNPX-0806	12	1/2"	8	3/8" - 18	9	0.35	57.9	2.28	15	0.59	22	0.866	7/8"	22	0.866	7/8"
P2MNPX-0808	12	1/2"	8	1/2" - 14	9	0.35	63.9	2.52	19	0.75	27	1.063	1.1/16"	22	0.866	7/8"
P2MNPX-1208	19	3/4"	12	1/2" - 14	15.5	0.61	68.4	2.69	19	0.75	27	1.063	1.1/16"	30	1.181	1.3/16"
P2MNPX-1212	19	3/4"	12	3/4" - 14	15.5	0.61	76.4	3.01	19	0.75	36	1.417	1.7/16"	30	1.181	1.3/16"
P2MNPX-1616	25	1"	16	1" - 11.1/2	20	0.79	84.7	3.33	23.8	0.94	41	1.614	1.5/8"	41	1.614	1.5/8"

PROCRIMP™ By YUVRAJ

JIC MALE

FOR WIRE BRAID HOSES - NO SKIVE

- JIC
- JIC 37° MALE - MJIC

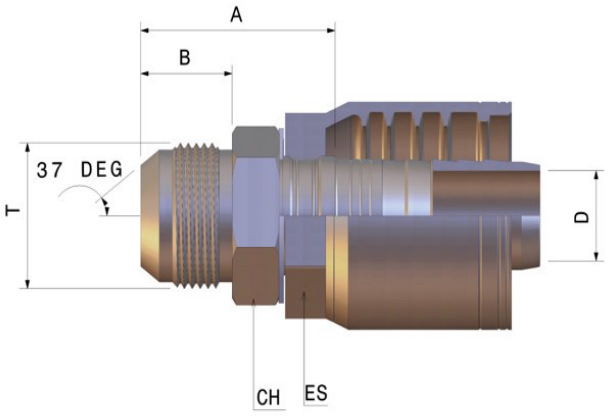

CODE	Ø HOSE			T	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2MJIC-0404	6	1/4"	4	7/16" - 20	4	0.16	32.4	1.28	14	0.55	14	0.551	9/16"	14	0.551	9/16"
P2MJIC-0405	6	1/4"	4	1/2" - 20	4	0.16	32.4	1.28	14	0.55	14	0.551	9/16"	14	0.551	9/16"
P2MJIC-0406	6	1/4"	4	9/16" - 18	4	0.16	34	1.34	14.1	0.56	17	0.669	11/16"	14	0.551	9/16"
P2MJIC-0408	6	1/4"	4	3/4" - 16	4	0.16	37.6	1.48	16.7	0.66	22	0.866	7/8"	14	0.551	9/16"
P2MJIC-0505	8	5/16"	5	1/2" - 20	5	0.20	32.4	1.28	14	0.55	14	0.551	9/16"	16	0.630	5/8"
P2MJIC-0506	8	5/16"	5	9/16" - 18	5	0.20	34	1.34	14.1	0.56	17	0.669	11/16"	16	0.630	5/8"
P2MJIC-0606	10	3/8"	6	9/16" - 18	6.4	0.25	34	1.34	14.1	0.56	17	0.669	11/16"	17	0.669	11/16"
P2MJIC-0608	10	3/8"	6	3/4" - 16	6.4	0.25	37.6	1.48	16.7	0.66	22	0.866	7/8"	17	0.669	11/16"
P2MJIC-0610	10	3/8"	6	7/8" - 14	6.4	0.25	40.2	1.58	19.3	0.76	24	0.945	15/16"	17	0.669	11/16"
P2MJIC-0806	12	1/2"	8	9/16" - 18	9	0.35	34	1.34	14.1	0.56	19	0.748	3/4"	22	0.866	7/8"
P2MJIC-0808	12	1/2"	8	3/4" - 16	9	0.35	37.6	1.48	16.7	0.66	22	0.866	3/4"	22	0.866	7/8"
P2MJIC-0810	12	1/2"	8	7/8" - 14	9	0.35	40.2	1.58	19.3	0.76	24	0.945	15/16"	22	0.866	7/8"
P2MJIC-0812	12	1/2"	8	1.1/16" - 12	9	0.35	43.8	1.72	21.9	0.86	30	1.181	1.3/16"	22	0.866	7/8"
P2MJIC-1008	16	5/8"	10	3/4" - 16	12	0.47	37.8	1.49	16.7	0.66	24	0.945	15/16"	25	0.984	1"
P2MJIC-1010	16	5/8"	10	7/8" - 14	12	0.47	40.4	1.59	19.3	0.76	24	0.945	15/16"	25	0.984	1"
P2MJIC-1012	16	5/8"	10	1.1/16" - 12	12	0.47	44	1.73	21.9	0.86	30	1.181	1.3/16"	25	0.984	1"
P2MJIC-1210	19	3/4"	12	7/8" - 14	15.5	0.61	43.7	1.72	19.3	0.76	27	1.063	1.1/16"	30	1.181	1.3/16"
P2MJIC-1212	19	3/4"	12	1.1/16" - 12	15.5	0.61	47.3	1.86	21.9	0.86	30	1.181	1.3/16"	30	1.181	1.3/16"
P2MJIC-1216	19	3/4"	12	1.5/16" - 12	15.5	0.61	50	1.97	23.1	0.91	36	1.417	1.7/16"	30	1.181	1.3/16"
P2MJIC-1616	25	1"	16	1.5/16" - 12	20	0.79	49.7	1.96	23.1	0.91	36	1.417	1.7/16"	41	1.614	1.5/8"
P2MJIC-1620	25	1"	16	1.5/8" - 12	20	0.79	50.9	2.00	24.3	0.96	46	1.811	1.13/16"	41	1.614	1.5/8"

JIC STR

FOR WIRE BRAID HOSES - NO SKIVE

- JIC
- JIC 37° FEMALE SWIVEL - JIC

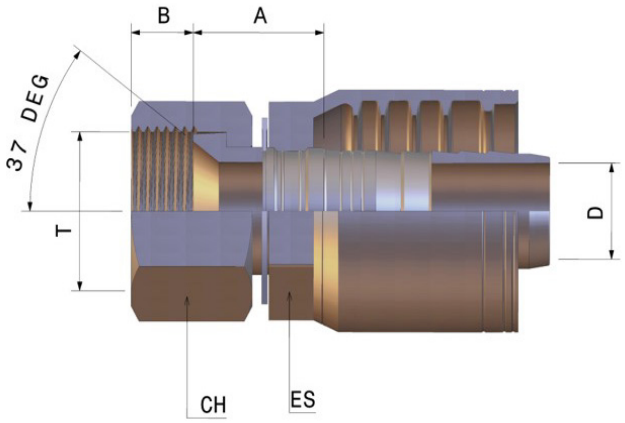

CODE	Ø HOSE			T	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2JIC-0404	6	1/4"	4	7/16" - 20	4	0.16	21.9	0.86	8.7	0.34	17	0.669	11/16"	14	0.551	9/16"
P2JIC-0405	6	1/4"	4	1/2" - 20	4	0.16	21.9	0.86	9.5	0.37	17	0.669	11/16"	14	0.551	9/16"
P2JIC-0406	6	1/4"	4	9/16" - 18	4	0.16	22.9	0.90	9.5	0.37	19	0.748	3/4"	14	0.551	9/16"
P2JIC-0505	8	5/16"	5	1/2" - 20	5	0.20	24.9	0.98	9.5	0.37	17	0.669	11/16"	16	0.630	5/8"
P2JIC-0506	8	5/16"	5	9/16" - 18	5	0.20	21.6	0.85	9.5	0.37	19	0.748	3/4"	16	0.630	5/8"
P2JIC-0606	10	3/8"	6	9/16" - 18	6.4	0.25	21.9	0.86	9.5	0.37	19	0.748	3/4"	17	0.669	11/16"
P2JIC-0608	10	3/8"	6	3/4" - 16	6.4	0.25	25.7	1.01	10.7	0.42	24	0.945	7/8"	17	0.669	11/16"
P2JIC-0808	12	1/2"	8	3/4" - 16	9	0.35	25.7	1.01	10.7	0.42	24	0.945	7/8"	22	0.866	7/8"
P2JIC-0810	12	1/2"	8	7/8" - 14	9	0.35	25.2	0.99	12.7	0.50	27	1.063	1.1/16"	22	0.866	7/8"
P2JIC-0812	12	1/2"	8	1.1/16" - 12	9	0.35	25.1	0.99	14.3	0.56	32	1.260	1.1/4"	22	0.866	7/8"
P2JIC-1010	16	5/8"	10	7/8" - 14	12	0.47	25.4	1.00	12.7	0.50	27	1.063	1.1/16"	25	0.984	1"
P2JIC-1012	16	5/8"	10	1.1/16" - 12	12	0.47	25.3	1.00	14.3	0.56	32	1.260	1.1/4"	25	0.984	1"
P2JIC-1212	19	3/4"	12	1.1/16" - 12	15.5	0.61	29.1	1.15	14.3	0.56	32	1.260	1.1/4"	30	1.181	1.3/16"
P2JIC-1216	19	3/4"	12	1.5/16" - 12	15.5	0.61	31.9	1.26	15.1	0.59	38	1.496	1.1/2"	30	1.181	1.3/16"
P2JIC-1616	25	1"	16	1.5/16" - 12	20	0.79	30.5	1.20	15.1	0.59	38	1.496	1.1/2"	41	1.614	1.5/8"

PROCRIMP™
By YUVRAJ

JIC 45

FOR WIRE BRAID HOSES - NO SKIVE

- JIC
- JIC 37° FEMALE SWIVEL - 45° ELBOW

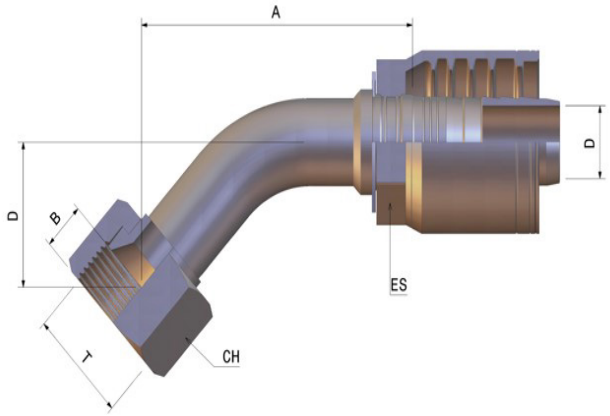

CODE	Ø HOSE			T	Drill ID (D)		A		B		Drop (D)		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2JIC4-0404	6	1/4"	4	7/16" - 20	4	0.16	59.6	2.35	8.7	0.34	17	0.67	17	0.669	11/16"	14	0.551	9/16"
P2JIC4-0405	6	1/4"	4	1/2" - 20	4	0.16	58.4	2.30	9.5	0.37	17.8	0.70	17	0.669	11/16"	14	0.551	9/16"
P2JIC4-0406	6	1/4"	4	9/16" - 18	4	0.16	57.9	2.28	9.5	0.37	18.2	0.72	19	0.748	3/4"	14	0.551	9/16"
P2JIC4-0505	8	5/16"	5	1/2" - 20	5	0.20	55.7	2.19	9.5	0.37	17.2	0.68	17	0.669	11/16"	16	0.630	5/8"
P2JIC4-0506	8	5/16"	5	9/16" - 18	5	0.20	55.1	2.17	9.5	0.37	17.1	0.67	19	0.748	3/4"	16	0.630	5/8"
P2JIC4-0606	10	3/8"	6	9/16" - 18	6	0.24	60.5	2.38	9.5	0.37	16.7	0.66	19	0.748	3/4"	17	0.669	11/16"
P2JIC4-0608	10	3/8"	6	3/4" - 16	6	0.24	65.9	2.59	10.7	0.42	18.3	0.72	24	0.945	7/8"	17	0.669	11/16"
P2JIC4-0610	10	3/8"	6	7/8" - 14	6	0.24	63.6	2.50	12.5	0.49	17.5	0.69	27	1.063	1.1/16"	17	0.669	11/16"
P2JIC4-0808	12	1/2"	8	3/4" - 16	9	0.35	68.9	2.71	10.7	0.42	20.3	0.80	24	0.945	7/8"	22	0.866	7/8"
P2JIC4-0810	12	1/2"	8	7/8" - 14	9	0.35	73.1	2.88	12.5	0.49	21.3	0.84	27	1.063	1.1/16"	22	0.866	7/8"
P2JIC4-1010	16	5/8"	10	7/8" - 14	12	0.47	83.7	3.30	12.5	0.49	21.9	0.86	27	1.063	1.1/16"	25	0.984	1"
P2JIC4-1012	16	5/8"	10	1.1/16" - 12	12	0.47	82.9	3.26	14.3	0.56	24.8	0.98	32	1.260	1.1/4"	25	0.984	1"
P2JIC4-1212	19	3/4"	12	1.1/16" - 12	14	0.55	104	4.09	14.3	0.56	29	1.14	32	1.260	1.1/4"	30	1.181	1.3/16"
P2JIC4-1216	19	3/4"	12	1.5/16" - 12	14	0.55	102	4.02	15.1	0.59	29.2	1.15	38	1.496	1.1/2"	30	1.181	1.3/16"
P2JIC4-1616	25	1"	16	1.5/16" - 12	19	0.75	102	4.02	15.1	0.59	31.1	1.22	38	1.496	1.1/2"	41	1.614	1.5/8"

JIC 90

FOR WIRE BRAID HOSES - NO SKIVE

- JIC
- JIC 37° FEMALE SWIVEL - 90° ELBOW

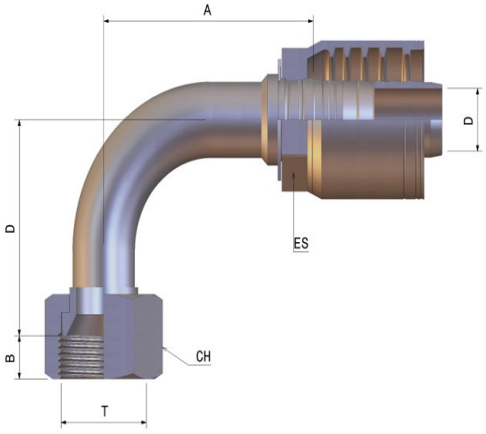

CODE	Ø HOSE			T	Drill ID (D)		A		B		Drop (D)		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2JIC9-0404	6	1/4"	4	7/16" - 20	4	0.16	38.4	1.51	8.7	0.34	35	1.38	17	0.669	11/16"	14	0.551	9/16"
P2JIC9-0405	6	1/4"	4	1/2" - 20	4	0.16	40.3	1.59	9.5	0.37	30	1.18	17	0.669	11/16"	14	0.551	9/16"
P2JIC9-0406	6	1/4"	4	9/16" - 18	4	0.16	38.7	1.52	9.5	0.37	30.6	1.20	19	0.748	3/4"	14	0.551	9/16"
P2JIC9-0505	8	5/16"	5	1/2" - 20	5	0.20	46.8	1.84	9.5	0.37	32.5	1.28	17	0.669	11/16"	16	0.630	5/8"
P2JIC9-0506	8	5/16"	5	9/16" - 18	5	0.20	47.6	1.87	9.5	0.37	33.4	1.31	19	0.748	3/4"	16	0.630	5/8"
P2JIC9-0606	10	3/8"	6	9/16" - 18	6	0.24	48.4	1.91	9.5	0.37	33.5	1.32	19	0.748	3/4"	17	0.669	11/16"
P2JIC9-0608	10	3/8"	6	3/4" - 16	6	0.24	44	1.73	10.7	0.42	37	1.46	24	0.945	7/8"	17	0.669	11/16"
P2JIC9-0610	10	3/8"	6	7/8" - 14	6	0.24	41.7	1.64	12.5	0.49	34.9	1.37	27	1.063	1.1/16"	17	0.669	11/16"
P2JIC9-0808	12	1/2"	8	3/4" - 16	9	0.35	46.7	1.84	10.7	0.42	41	1.61	24	0.945	7/8"	22	0.866	7/8"
P2JIC9-0810	12	1/2"	8	7/8" - 14	9	0.35	45.6	1.80	12.5	0.49	41.2	1.62	27	1.063	1.1/16"	22	0.866	7/8'
P2JIC9-0812	12	1/2"	8	1.1/16" - 12	9	0.35	47.2	1.86	14.3	0.56	41.5	1.63	32	1.260	1.1/4"	22	0.866	7/8"
P2JIC9-1010	16	5/8"	10	7/8" - 14	12	0.47	53.2	2.09	12.5	0.49	45	1.77	27	1.063	1.1/16"	25	0.984	1"
P2JIC9-1012	16	5/8"	10	1.1/16" - 12	12	0.47	54.3	2.14	14.3	0.56	45.5	1.79	32	1.260	1.1/4"	25	0.984	1"
P2JIC9-1212	19	3/4"	12	1.1/16" - 12	14	0.55	70.8	2.79	14.3	0.56	54	2.13	32	1.260	1.1/4"	30	1.181	1.3/16"
P2JIC9-1216	19	3/4"	12	1.5/16" - 12	14	0.55	73	2.87	15.1	0.59	56	2.20	38	1.496	1.1/2"	30	1.181	1.3/16"
P2JIC9-1616	25	1"	16	1.5/16" - 12	19	0.75	71.7	2.82	15.1	0.59	62	2.44	38	1.496	1.1/2"	41	1.614	1.5/8"

PROCRIMP™ By YUVRAJ

ORFS MALE

FOR WIRE BRAID HOSES - NO SKIVE

- ORFS
- ORFS MALE - MORS

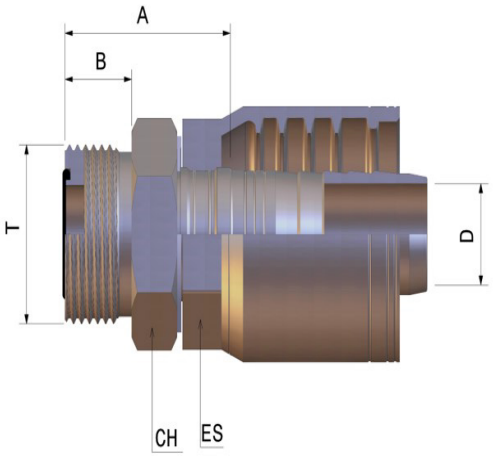

CODE	Ø HOSE			T	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2MORS-0404	6	1/4"	4	9/16" - 18	4	0.16	29.7	1.17	9.8	0.386	19	0.748	3/4"	14	0.551	9/16"
P2MORS-0406	6	1/4"	4	11/16" - 16	4	0.16	31.1	1.22	11.2	0.441	19	0.748	3/4"	14	0.551	9/16"
P2MORS-0606	10	3/8"	6	11/16" - 16	6.4	0.25	31.1	1.22	11.2	0.441	19	0.748	3/4"	17	0.669	11/16"
P2MORS-0608	10	3/8"	6	13/16" - 16	6.4	0.25	33.7	1.33	12.8	0.504	24	0.944	15/16"	17	0.669	11/16"
P2MORS-0808	12	1/2"	8	13/16" - 16	9	0.35	33.7	1.33	12.8	0.504	24	0.944	15/16"	22	0.866	7/8"
P2MORS-0810	12	1/2"	8	1" - 14	9	0.35	36.4	1.43	15.5	0.610	27	1.062	1.1/16"	22	0.866	7/8"
P2MORS-0812	12	1/2"	8	1.3/16" - 12	9	0.35	40.4	1.59	17	0.669	32	1.259	1.1/4"	22	0.866	7/8"
P2MORS-1010	16	5/8"	10	1" - 14	12	0.47	36.6	1.44	15.5	0.610	27	1.062	1.1/16"	25	0.984	1"
P2MORS-1012	16	5/8"	10	1.3/16" - 12	12	0.47	40.6	1.60	17	0.669	32	1.259	1.1/4"	25	0.984	1"
P2MORS-1210	19	3/4"	12	1" - 14	15.5	0.61	40	1.57	15.5	0.610	27	1.062	1.1/16"	30	1.181	1.3/16"
P2MORS-1212	19	3/4"	12	1.3/16" - 12	15.5	0.61	43.9	1.73	17	0.669	32	1.259	1.1/4"	30	1.181	1.3/16"
P2MORS-1216	19	3/4"	12	1.7/16" - 12	15.5	0.61	44.4	1.75	17.5	0.689	41	1.614	1.5/8"	30	1.181	1.3/16"
P2MORS-1616	25	1"	16	1.7/16" - 12	20	0.79	44.1	1.74	17.5	0.689	41	1.614	1.5/8"	41	1.614	1.5/8"

ORFS STR

FOR WIRE BRAID HOSES - NO SKIVE

- ORFS
- ORFS FEMALE SWIVEL LONG NECK

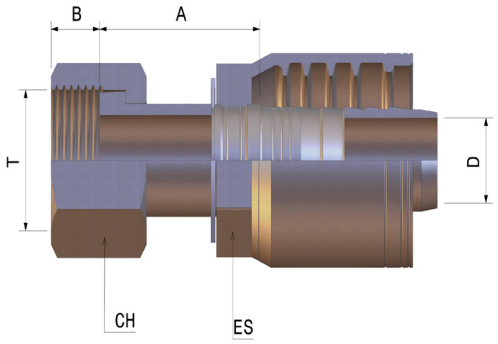

CODE	Ø HOSE			T	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2ORS-0404	6	1/4"	4	9/16" - 18	4	0.16	28	1.10	7.8	0.31	19	0.748	3/4"	14	0.551	9/16"
P2ORS-0406	6	1/4"	4	11/16" - 16	4	0.16	29.9	1.18	8.3	0.33	22	0.866	7/8"	14	0.551	9/16"
P2ORS-0506	8	5/16"	5	11/16" - 16	5	0.20	29.9	1.18	8.3	0.33	22	0.866	7/8"	16	0.630	5/8"
P2ORS-0606	10	3/8"	6	11/16" - 16	6.4	0.25	28.9	1.14	8.3	0.33	22	0.866	7/8"	17	0.669	11/16"
P2ORS-0608	10	3/8"	6	13/16" - 16	6.4	0.25	32.9	1.30	10.0	0.39	27	1.063	1.1/16"	17	0.669	11/16"
P2ORS-0808	12	1/2"	8	13/16" - 16	9	0.35	32.9	1.30	10.0	0.39	27	1.063	1.1/16"	22	0.866	7/8"
P2ORS-0810	12	1/2"	8	1" - 14	9	0.35	36.9	1.45	12.5	0.49	30	1.181	1.3/16"	22	0.866	7/8"
P2ORS-0812	12	1/2"	8	1.3/16" - 12	9	0.35	37.9	1.49	13.6	0.54	36	1.417	1.7/16"	22	0.866	7/8"
P2ORS-1010	16	5/8"	10	1" - 14	12	0.47	36.1	1.42	12.5	0.49	30	1.181	1.3/16"	25	0.984	1"
P2ORS-1012	16	5/8"	10	1.3/16" - 12	12	0.47	38.1	1.50	13.6	0.54	36	1.417	1.7/16"	25	0.984	1"
P2ORS-1212	19	3/4"	12	1.3/16" - 12	15.5	0.61	42.4	1.67	13.6	0.54	36	1.417	1.7/16"	30	1.181	1.3/16"
P2ORS-1216	19	3/4"	12	1.7/16" - 12	15.5	0.61	45.4	1.79	13.5	0.53	41	1.614	1.5/8"	30	1.181	1.3/16"
P2ORS-1616	25	1"	16	1.7/16" - 12	20	0.79	45.1	1.78	13.5	0.53	41	1.614	1.5/8"	41	1.614	1.5/8"

PROCRIMP™
By
YUVRAJ

ORFS 45

FOR WIRE BRAID HOSES - NO SKIVE

- ORFS
- ORFS FEMALE SWIVEL - 45° ELBOW

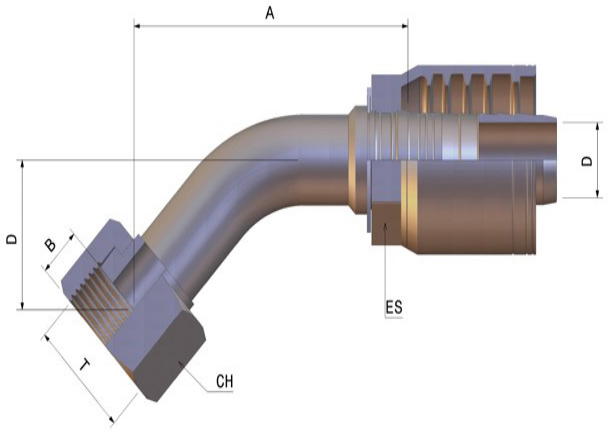

CODE	Ø HOSE			T	Drill ID (D)		A		B		Drop (D)		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2ORS4-0404	6	1/4"	4	9/16" - 18	4	0.16	55	2.17	7.8	0.31	16.3	0.64	19	0.748	3/4"	14	0.551	9/16"
P2ORS4-0406	6	1/4"	4	11/16" - 16	4	0.16	63.5	2.50	8.3	0.33	16	0.63	22	0.866	7/8"	14	0.551	9/16"
P2ORS4-0506	8	5/16"	5	11/16" - 16	5	0.20	57.3	2.26	8.3	0.33	19.2	0.76	22	0.866	7/8"	16	0.630	5/8"
P2ORS4-0606	10	3/8"	6	11/16" - 16	6	0.24	60.7	2.39	8.3	0.33	18.8	0.74	22	0.866	7/8"	17	0.669	11/16"
P2ORS4-0608	10	3/8"	6	13/16" - 16	6	0.24	60.5	2.38	10	0.39	18.9	0.74	27	1.063	1.1/16"	17	0.669	11/16"
P2ORS4-0808	12	1/2"	8	13/16" - 16	9	0.35	74.3	2.93	10	0.39	19.8	0.78	27	1.063	1.1/16"	22	0.866	7/8"
P2ORS4-0810	12	1/2"	8	1" - 14	9	0.35	78.9	3.11	12.5	0.49	21.5	0.85	30	1.181	1.3/16"	22	0.866	7/8"
P2ORS4-0812	12	1/2"	8	1.3/16" - 12	9	0.35	84.5	3.33	13.6	0.54	23.8	0.94	36	1.417	1.7/16"	22	0.866	7/8"
P2ORS4-1010	16	5/8"	10	1" - 14	12	0.47	79.1	3.11	12.5	0.49	23.6	0.93	30	1.181	1.3/16"	25	0.984	1"
P2ORS4-1012	16	5/8"	10	1.3/16" - 12	12	0.47	88.7	3.49	13.6	0.54	25.6	1.01	36	1.417	1.7/16"	25	0.984	1"
P2ORS4-1212	19	3/4"	12	1.3/16" - 12	14	0.55	97.7	3.85	13.6	0.54	28.5	1.12	36	1.417	1.7/16"	30	1.181	1.3/16"
P2ORS4-1216	19	3/4"	12	1.7/16" - 12	14	0.55	101	3.98	13.5	0.53	28.8	1.13	41	1.614	1.5/8"	30	1.181	1.3/16"
P2ORS4-1616	25	1"	16	1.7/16" - 12	19	0.75	103	4.06	13.5	0.53	29.5	1.16	41	1.614	1.5/8"	41	1.614	1.5/8"

ORFS 90

FOR WIRE BRAID HOSES - NO SKIVE

- ORFS
- ORFS FEMALE SWIVEL - 90° ELBOW

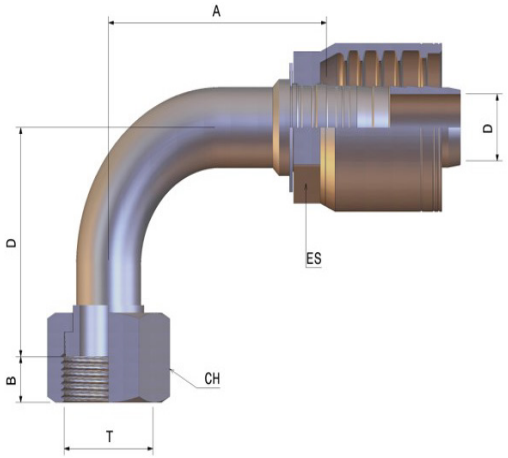

CODE	Ø HOSE			T	Drill ID (D)		A		B		Drop (D)		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2ORS9-0404	6	1/4"	4	9/16" - 18	4	0.16	44.3	1.74	7.8	0.31	27.5	1.08	19	0.748	11/16"	14	0.551	9/16"
P2ORS9-0406	6	1/4"	4	11/16" - 16	4	0.16	47.6	1.87	8.3	0.33	33.2	1.31	22	0.866	7/8"	14	0.551	9/16"
P2ORS9-0506	8	5/16"	5	11/16" - 16	5	0.20	47.9	1.89	8.3	0.33	35	1.38	22	0.866	7/8"	16	0.630	5/8"
P2ORS9-0606	10	3/8"	6	11/16" - 16	6	0.24	42.5	1.67	8.3	0.33	36	1.42	22	0.866	7/8"	17	0.669	11/16"
P2ORS9-0608	10	3/8"	6	13/16" - 16	6	0.24	41.5	1.63	10	0.39	35	1.38	27	1.063	15/16"	17	0.669	11/16"
P2ORS9-0808	12	1/2"	8	13/16" - 16	9	0.35	51.7	2.04	10	0.39	39.7	1.56	27	1.063	15/16"	22	0.866	7/8"
P2ORS9-0810	12	1/2"	8	1" - 14	9	0.35	46.9	1.85	12.5	0.49	40.7	1.60	30	1.181	1.3/16"	22	0.866	7/8"
P2ORS9-0812	12	1/2"	8	1.3/16" - 12	9	0.35	50.5	1.99	13.6	0.54	41.8	1.65	36	1.417	1.7/16"	22	0.866	7/8"
P2ORS9-1010	16	5/8"	10	1" - 14	12	0.47	52.4	2.06	12.5	0.49	47.7	1.88	30	1.181	1.3/16"	25	0.984	1"
P2ORS9-1012	16	5/8"	10	1.3/16" - 12	12	0.47	52.6	2.07	13.6	0.54	46	1.81	36	1.417	1.7/16"	25	0.984	1"
P2ORS9-1212	19	3/4"	12	1.3/16" - 12	14	0.55	66.2	2.61	13.6	0.54	56.4	2.22	36	1.417	1.7/16"	30	1.181	1.3/16"
P2O RS9-1216	19	3/4"	12	1.7/16" - 12	14	0.55	64.4	2.54	13.5	0.53	59.2	2.33	41	1.614	1.5/8"	30	1.181	1.3/16"
P2ORS9-1616	25	1"	16	1.7/16" - 12	19	0.75	72.2	2.84	13.5	0.53	61.5	2.42	41	1.614	1.5/8"	41	1.614	1.5/8"

PROCRIMP™
By
YUVRAJ

SAE MALE

FOR WIRE BRAID HOSES - NO SKIVE

- SAE
- SAE 45° MALE

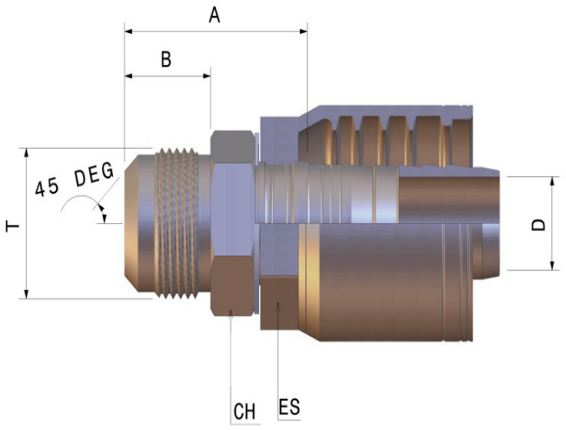

CODE	Ø HOSE			T	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2MSAE-0404	6	1/4"	4	7/16" - 20	4	0.16	29.9	1.18	12.7	0.50	14	0.551	9/16"	14	0.551	9/16"
P2MSAE-0606	10	3/8"	6	5/8" - 18	6.4	0.25	33.9	1.33	15.7	0.62	17	0.669	11/16"	17	0.669	11/16"
P2MSAE-0808	12	1/2"	8	3/4" - 16	9	0.35	38.4	1.51	19	0.75	22	0.866	7/8"	22	0.866	7/8"
P2MSAE-0810	12	1/2"	8	7/8" - 14	9	0.35	43.4	1.71	22.4	0.88	24	0.945	15/16"	22	0.866	7/8"
P2MSAE-1212	19	3/4"	12	1.1/16" - 14	15.5	0.61	54.9	2.16	25.4	1.00	30	1.181	1.1/16"	30	1.181	1.3/16"

SAE STR

FOR WIRE BRAID HOSES - NO SKIVE

- SAE
- SAE 45° FEMALE SWIVEL

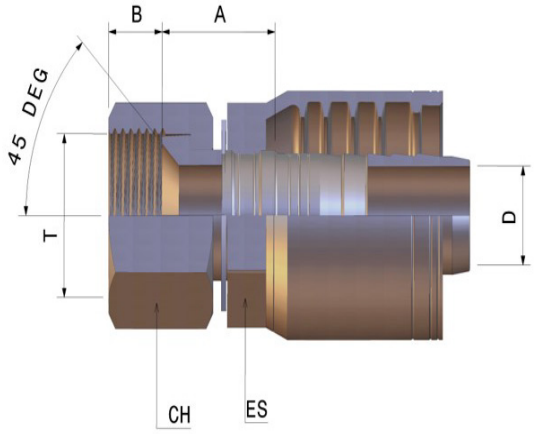

CODE	Ø HOSE			T	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2SAE-0404	6	1/4"	4	7/16" - 20	4	0.16	25.4	1.00	8.7	0.34	17	0.669	11/16"	14	0.551	9/16"
P2SAE-0405	6	1/4"	4	1/2" - 20	4	0.16	26.4	1.04	9.5	0.37	17	0.669	11/16"	14	0.551	9/16"
P2SAE-0406	6	1/4"	4	5/8" - 18	4	0.16	28.9	1.14	10.7	0.42	22	0.866	7/8"	14	0.551	9/16"
P2SAE-0606	10	3/8"	6	5/8" - 18	6.4	0.25	28.4	1.12	10.7	0.42	22	0.866	7/8"	17	0.669	11/16"
P2SAE-0608	10	3/8"	6	3/4" - 16	6.4	0.25	30.9	1.22	10.7	0.42	24	0.945	15/16"	17	0.669	11/16"
P2SAE-0610	10	3/8"	6	7/8" - 14	6.7	0.26	33.7	1.33	12.7	0.50	27	1.063	1.1/16"	17	0.669	11/16"
P2SAE-0808	12	1/2"	8	3/4" - 16	9	0.35	32.9	1.30	10.8	0.43	24	0.945	15/16"	22	0.866	7/8"
P2SAE-0810	12	1/2"	8	7/8" - 14	9	0.35	33.4	1.31	12.7	0.50	27	1.063	1.1/16"	22	0.866	7/8"
P2SAE-1012	16	5/8"	10	1.1/16" - 14	12	0.47	35.6	1.40	14.3	0.56	32	1.260	1.1/4"	25	0.984	1"
P2SAE-1212	19	3/4"	12	1.1/16" - 14	15.5	0.61	37.9	1.49	14.3	0.56	32	1.260	1.1/4"	30	1.181	1.1/16"

PROCRIMP™ By YUVRAJ

SAE 90

FOR WIRE BRAID HOSES - NO SKIVE

- SAE
- SAE 45° FEMALE SWIVEL - 90° ELBOW

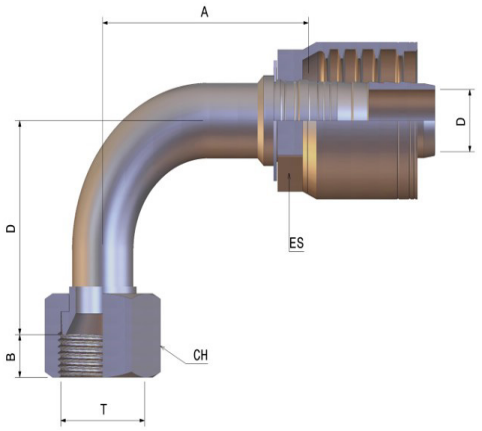

CODE	Ø HOSE			T	Drill ID (D)		A		B		Drop (D)		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2SAE9-0606	10	3/8"	6	5/8" - 18	6	0.24	49	1.93	10.7	0.42	34	1.34	22	0.866	7/8"	17	0.669	11/16"
P2SAE9-1212	19	3/4"	12	1.1/16" - 14	14	0.55	71	2.80	14.3	0.56	55	2.17	32	1.260	1.1/4"	30	1.181	1.3/16"

ORB MALE

FOR WIRE BRAID HOSES - NO SKIVE

- SAE
- O-RING BOSS MALE

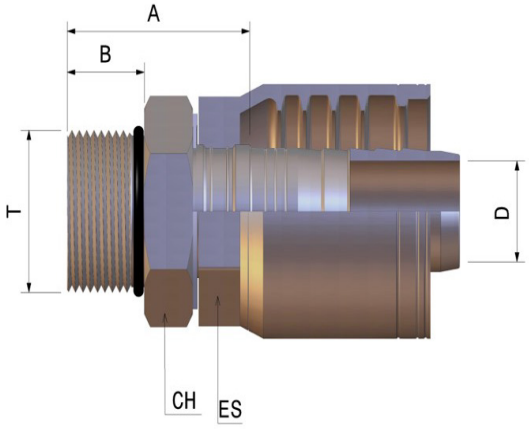

NPTF-NPSM
JIC
ORFS
SAE
JIS
BSP-BSPT
METRIC
STAPLE LOK

CODE	Ø HOSE			T	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2MORB-0404	6	1/4"	4	7/16" - 20	4	0.16	26.9	1.06	9.1	0.36	14	0.551	9/16"	14	0.551	9/16"
P2MORB-0405	6	1/4"	4	1/2" - 20	4	0.16	28.4	1.12	9.1	0.36	14	0.551	9/16"	14	0.551	9/16"
P2MORB-0406	6	1/4"	4	9/16" - 18	4	0.16	29.4	1.16	9.9	0.39	17	0.669	11/16"	14	0.551	9/16"
P2MORB-0606	10	3/8"	6	9/16" - 18	6.4	0.25	28.9	1.14	9.9	0.39	17	0.669	11/16"	17	0.669	11/16"
P2MORB-0608	10	3/8"	6	3/4" - 16	6.4	0.25	30.9	1.22	11.1	0.44	22	0.866	7/8"	17	0.669	11/16"
P2MORB-0610	10	3/8"	6	7/8" - 14	6.4	0.25	32.9	1.30	12.7	0.50	27	1.063	1.1/16"	17	0.669	11/16"
P2MORB-0808	12	1/2"	8	3/4" - 16	9	0.35	31.9	1.26	11.1	0.44	22	0.866	7/8"	22	0.866	7/8"
P2MORB-0810	12	1/2"	8	7/8" - 14	9	0.35	33.9	1.33	12.7	0.50	27	1.063	1.1/16"	22	0.866	7/8"
P2MORB-0812	12	1/2"	8	1.1/16" - 12	9	0.35	36.9	1.45	15.1	0.59	32	1.260	1.1/4"	22	0.866	7/8"
P2MORB-1008	16	5/8"	10	3/4" - 16	12	0.47	32.6	1.28	11.1	0.44	24	0.945	15/16"	25	0.984	1"
P2MORB-1010	16	5/8"	10	7/8" - 14	12	0.47	34.1	1.34	12.7	0.50	27	1.063	1.1/16"	25	0.984	1"
P2MORB-1012	16	5/8"	10	1.1/16" - 12	12	0.47	37.1	1.46	15	0.59	32	1.260	1.1/4"	25	0.984	1"
P2MORB-1212	19	3/4"	12	1.1/16" - 12	15.5	0.61	39.4	1.55	15	0.59	32	1.260	1.1/4"	30	1.181	1.3/16"
P2MORB-1216	19	3/4"	12	1.5/16" - 12	15.5	0.61	45.4	1.79	15.1	0.59	38	1.496	1.1/2"	30	1.181	1.3/16"
P2MORB-1616	25	1"	16	1.5/16" - 12	20	0.79	45.7	1.80	15.1	0.59	38	1.496	1.1/2"	41	1.614	1.5/8"

PROCRIMP™ By YUVRAJ

ORB MALE SWIVEL

FOR WIRE BRAID HOSES - NO SKIVE

- SAE
- O-RING BOSS MALE SWIVEL

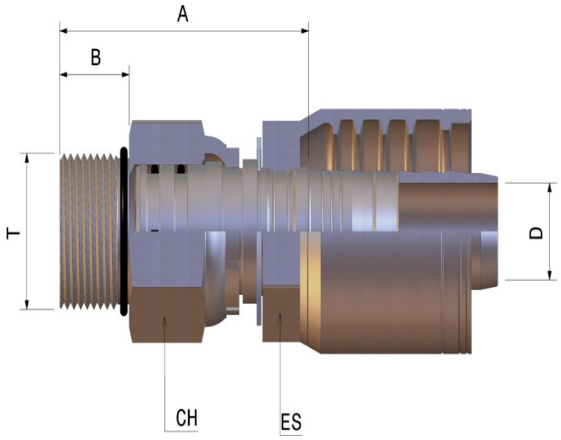

CODE	Ø HOSE			T	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2MORX-0404	6	1/4"	4	7/16" - 20	4	0.16	55.2	2.17	9.1	0.36	17	0.669	11/16"	14	0.551	9/16"
P2MORX-0406	6	1/4"	4	9/16" - 18	4	0.16	56.6	2.23	9.9	0.39	22	0.866	7/8"	14	0.551	9/16"
P2MORX-0606	10	3/8"	6	9/16" - 18	6.4	0.25	56.6	2.23	9.9	0.39	22	0.866	7/8"	17	0.669	11/16"
P2MORX-0608	10	3/8"	6	3/4" - 16	6.4	0.25	69.9	2.75	11.1	0.44	27	1.063	1.1/16"	17	0.669	11/16"
P2MORX-0808	12	1/2"	8	3/4" - 16	9	0.35	70.4	2.77	11.1	0.44	27	1.063	1.1/16"	22	0.866	7/8"
P2MORX-0810	12	1/2"	8	7/8" - 14	9	0.35	72.4	2.85	12.7	0.50	27	1.063	1.1/16"	22	0.866	7/8"
P2MORX-0812	12	1/2"	8	1.1/16" - 12	9	0.35	78.9	3.11	15	0.59	36	1.417	1.7/16"	22	0.866	7/8"
P2MORX-1010	16	5/8"	10	7/8" - 14	12	0.47	72.4	2.85	12.7	0.50	27	1.063	1.1/16"	25	0.984	1"
P2MORX-1212	19	3/4"	12	1.1/16" - 12	15.5	0.61	78.9	3.11	15	0.59	36	1.417	1.7/16"	30	1.181	1.3/16"

JIS STR

FOR WIRE BRAID HOSES - NO SKIVE

- JIS
- JIS FEMALE SWIVEL (60° CONE JAPANESE “T” STYLE TERMINATION)

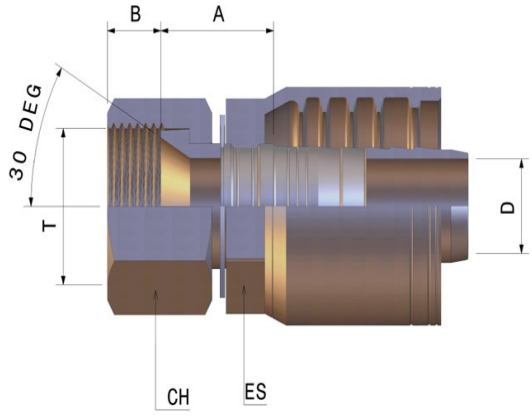

CODE	Ø HOSE			T	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2JIS-0404	6	1/4”	4	1/4” - 19	4	0.16	24.7	0.97	8	0.31	19	0.748	11/16"	14	0.551	9/16”
P2JIS-0606	10	3/8”	6	3/8” -19	6.4	0.25	23.9	0.94	9.5	0.37	22	0.866	7/8”	17	0.669	11/16”
P2JIS-0808	12	1/2”	8	1/2” - 14	9	0.35	25.9	1.02	11	0.43	27	1.063	1.1/16”	22	0.866	7/8"
P2JIS-1212	19	3/4”	12	3/4” - 14	15.5	0.61	31.8	1.25	12.5	0.49	32	1.260	1.1/4”	30	1.181	1.3/16”
P2JIS-1616	25	1”	16	1” - 11	20	0.79	32.1	1.26	14	0.55	38	1.496	1.1/2”	41	1.614	1.5/8"

PROCRIMP™
By
YUVRAJ

KOM STR

FOR WIRE BRAID HOSES - NO SKIVE

- JIS
- JAPANESE “KOM” STYLE TERMINATION FEMALE SWIVEL 60° CONE

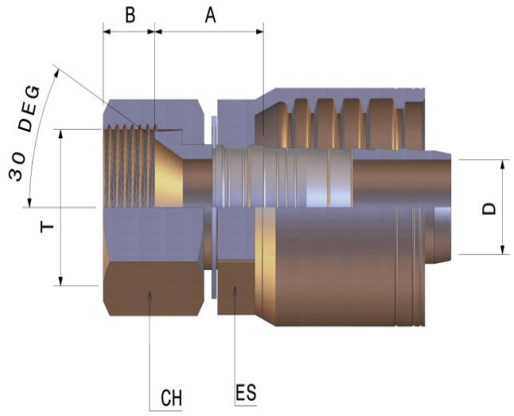

CODE	Ø HOSE			T	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2KOM-0412	6	1/4”	4	M12X1,5	4	0.16	27.9	1.10	8.7	0.34	17	0.669	11/16”	14	0.551	9/16”
P2KOM-0414	6	1/4”	4	M14X1,5	4	0.16	28.9	1.14	10	0.39	19	0.748	3/4”	14	0.551	9/16"
P2KOM-0616	10	3/8”	6	M16X1,5	6.4	0.25	27.4	1.08	9.3	0.37	22	0.866	7/8"	17	0.669	11/16"
P2KOM-0618	10	3/8”	6	M18X1,5	6.4	0.25	28.4	1.12	11.5	0.45	24	0.945	15/16”	17	0.669	11/16"
P2KOM-0620	10	3/8”	6	M20X1,5	6.4	0.25	29.9	1.18	11.2	0.44	27	1.063	1.1/16"	17	0.669	11/16"
P2KOM-0622	10	3/8”	6	M22X1,5	6.4	0.25	29.9	1.18	14	0.55	27	1.063	1.1/16"	17	0.669	11/16"
P2KOM-0822	12	1/2”	8	M22X1,5	9	0.35	31.9	1.26	14	0.55	27	1.063	1.1/16"	22	0.866	7/8"
P2KOM-0824	12	1/2”	8	M24X1,5	9	0.35	33.4	1.31	15.1	0.59	32	1.260	1.1/4"	22	0.866	7/8"
P2KOM-1024	16	5/8”	10	M24X1,5	12	0.47	33.6	1.32	15.1	0.59	32	1.260	1.1/4"	25	0.984	1"
P2KOM-1224	19	3/4”	12	M24X1,5	15.5	0.61	36.8	1.45	15.1	0.59	32	1.260	1.1/4"	30	1.181	1.1/16"
P2KOM-1230	19	3/4”	12	M30X1,5	15.5	0.61	39.9	1.57	18.3	0.72	36	1.417	1.7/16"	30	1.181	1.1/16"
P2KOM-1233	19	3/4”	12	M33X1,5	15.5	0.61	38.9	1.53	21.3	0.84	41	1.614	1.5/8"	30	1.181	1.1/16"
P2KOM-1633	25	1”	16	M33X1,5	20	0.79	41.3	1.63	21.3	0.84	41	1.614	1.5/8"	41	1.614	1.5/8"
P2KOM-1636	25	1”	16	M36X1,5	20	0.79	42.6	1.68	16	0.63	46	1.811	1.13/16"	41	1.614	1.5/8”

KOM 45

FOR WIRE BRAID HOSES - NO SKIVE

- JIS
- JAPANESE “KOM” STYLE TERMINATION FEMALE SWIVEL 60° CONE - 45° ELBOW

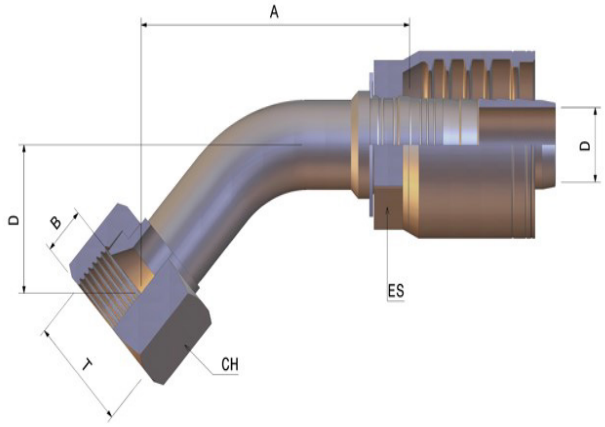

CODE	Ø HOSE			T	Drill ID (D)		A		B		Drop (D)		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2KOM4-0414	6	1/4”	4	M14X1,5	4	0.16	58	2.28	10	0.39	18.2	0.72	19	0.748	3/4”	14	0.551	9/16"
P2KOM4-0618	10	3/8”	6	M18X1,5	6.4	0.25	65	2.56	11.5	0.45	18.5	0.73	24	0.945	15/16”	17	0.669	11/16"
P2KOM4-0812	12	1/2”	8	M22X1,5	9	0.35	71	2.80	14	0.55	20.5	0.81	27	1.063	1.1/16”	22	0.866	7/8"
P2KOM4-1018	16	5/8”	10	M24X1,5	12	0.47	83	3.27	15.1	0.59	21.9	0.86	32	1.260	1.1/4”	25	0.984	1"
P2KOM4-1214	19	3/4”	12	M30X1,5	14	0.55	98	3.86	18.3	0.72	29	1.14	36	1.417	1.7/16”	30	1.181	1.3/16"

PROCRIMP™
By
YUVRAJ

KOM 90

FOR WIRE BRAID HOSES - NO SKIVE

- JIS
- JAPANESE “KOM” STYLE TERMINATION
  FEMALE SWIVEL 60° CONE - 90° ELBOW

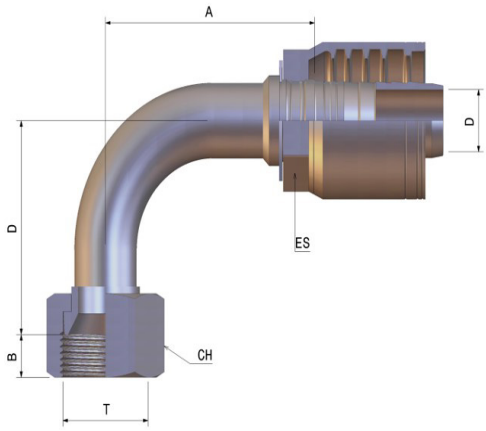

CODE	Ø HOSE			T	Drill ID (D)		A		B		Drop (D)		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2KOM4-0414	6	1/4”	4	M14X1,5	4	0.16	58	2.28	10	0.39	18.2	0.72	19	0.748	3/4”	14	0.551	9/16"
P2KOM4-0618	10	3/8”	6	M18X1,5	6.4	0.25	65	2.56	11.5	0.45	18.5	0.73	24	0.945	15/16”	17	0.669	11/16"
P2KOM4-0812	12	1/2”	8	M22X1,5	9	0.35	71	2.80	14	0.55	20.5	0.81	27	1.063	1.1/16”	22	0.866	7/8"
P2KOM4-1018	16	5/8”	10	M24X1,5	12	0.47	83	3.27	15.1	0.59	21.9	0.86	32	1.260	1.1/4”	25	0.984	1"
P2KOM4-1214	19	3/4”	12	M30X1,5	14	0.55	98	3.86	18.3	0.72	29	1.14	36	1.417	1.7/16”	30	1.181	1.3/16"

BSPT MALE

FOR WIRE BRAID HOSES - NO SKIVE

- BSP
- BSPT TAPERED MALE 60° CONE

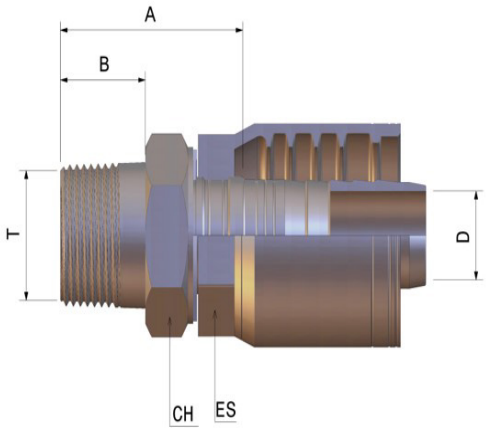

CODE	Ø HOSE			T	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2MBPT-0402	6	1/4"	4	1/8" - 28	4	0.16	28.4	1.12	10	0.39	14	0.551	9/16"	14	0.551	9/16"
P2MBPT-0404	6	1/4"	4	1/4" - 19	4	0.16	34.2	1.35	14.3	0.56	17	0.669	11/16"	14	0.551	9/16"
P2MBPT-0406	6	1/4"	4	3/8" - 19	4	0.16	34.2	1.35	14.3	0.56	19	0.748	3/4"	14	0.551	9/16"
P2MBPT-0506	8	5/16"	5	3/8" - 19	5	0.20	34.2	1.35	14.3	0.56	19	0.748	3/4"	16	0.630	5/8"
P2MBPT-0604	10	3/8"	6	1/4" - 19	6.4	0.25	34.2	1.35	14.3	0.56	17	0.669	11/16"	17	0.669	11/16"
P2MBPT-0606	10	3/8"	6	3/8" - 19	6.4	0.25	34.2	1.35	14.3	0.56	19	0.748	3/4"	17	0.669	11/16"
P2MBPT-0608	10	3/8"	6	1/2" - 14	6.4	0.25	39.9	1.57	19	0.75	22	0.866	7/8"	17	0.669	11/16"
P2MBPT-0806	12	1/2"	8	3/8" - 19	9	0.35	35.2	1.39	14.3	0.56	22	0.866	7/8"	22	0.866	7/8"
P2MBPT-0808	12	1/2"	8	1/2" - 14	9	0.35	39.9	1.57	19	0.75	22	0.866	7/8"	22	0.866	7/8"
P2MBPT-1008	12	1/2"	8	3/4" - 14	9	0.35	42.4	1.67	19	0.75	32	1.260	1.1/4"	22	0.866	7/8"
P2MBPT-1012	16	5/8"	10	3/4" - 14	12	0.47	42.6	1.68	19	0.75	32	1.260	1.1/4"	25	0.984	1"
P2MBPT-1212	19	3/4"	12	3/4" - 14	15.5	0.61	46.0	1.81	19	0.75	32	1.260	1.1/4"	30	1.181	1.3/16"
P2MBPT-1616	25	1"	16	1" - 11	20	0.79	50.4	1.99	23.8	0.94	41	1.614	1.5/8"	41	1.614	1.5/8"

PROCRIMP™
By
YUVRAJ

BSP MALE

FOR WIRE BRAID HOSES - NO SKIVE

- BSP
- BSP MALE 60° CONE

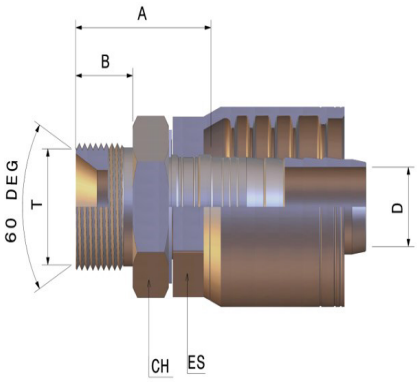

CODE	Ø HOSE			T	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2MBPP-0402	6	1/4"	4	1/8" - 28	4	0.16	26.4	1.04	8	0.31	14	0.551	9/16"	14	0.551	9/16"
P2MBPP-0404	6	1/4"	4	1/4" - 19	4	0.16	30.9	1.22	11	0.43	19	0.748	3/4"	14	0.551	9/16"
P2MBPP-0406	6	1/4"	4	3/8" - 19	4	0.16	31.9	1.26	12	0.47	22	0.866	7/8"	14	0.551	9/16"
P2MBPP-0408	6	1/4"	4	1/2" - 14	4	0.16	34.9	1.37	14	0.55	27	1.063	1.1/16"	14	0.551	9/16"
P2MBPP-0504	8	5/16"	5	1/4" - 19	5	0.20	30.9	1.22	11	0.43	19	0.748	3/4"	16	0.630	5/8"
P2MBPP-0506	8	5/16"	5	3/8" - 19	5	0.20	31.9	1.26	12	0.47	22	0.866	7/8"	16	0.630	5/8"
P2MBPP-0508	8	5/16"	5	1/2" - 14	5	0.20	34.9	1.37	14	0.55	27	1.063	1.1/16"	16	0.630	5/8"
P2MBPP-0604	10	3/8"	6	1/4" - 19	6.4	0.25	30.9	1.22	11	0.43	19	0.748	3/4"	17	0.669	11/16"
P2MBPP-0606	10	3/8"	6	3/8" - 19	6.4	0.25	31.9	1.26	12	0.47	22	0.866	7/8"	17	0.669	11/16"
P2MBPP-0608	10	3/8"	6	1/2" - 14	6.4	0.25	34.9	1.37	14	0.55	27	1.063	1.1/16"	17	0.669	11/16"
P2MBPP-0806	12	1/2"	8	3/8" - 19	9	0.35	32.9	1.29	12	0.47	22	0.866	7/8"	22	0.866	7/8"
P2MBPP-0808	12	1/2"	8	1/2" - 14	9	0.35	34.9	1.37	14	0.55	27	1.063	1.1/16"	22	0.866	7/8"
P2MBPP-0808-BULK	12	1/2"	8	1/2" - 14	9	0.35	53.9	2.12	33	1.30	27	1.063	1.1/16"	22	0.866	7/8"
P2MBPP-0810	12	1/2"	8	5/8" - 14	9	0.35	36.9	1.45	16	0.63	30	1.181	1.3/16"	22	0.866	7/8"
P2MBPP-0812	12	1/2"	8	3/4" - 14	9	0.35	39.4	1.55	16	0.63	32	1.260	1.1/4"	22	0.866	7/8"
P2MBPP-1008	16	5/8"	10	1/2" - 14	12	0.47	35.1	1.38	14	0.55	27	1.063	1.1/16"	25	0.984	1"
P2MBPP-1010	16	5/8"	10	5/8" - 14	12	0.47	37.1	1.46	16	0.63	30	1.181	1.3/16"	25	0.984	1"
P2MBPP-1010-BULK	16	5/8"	10	5/8" - 14	12	0.47	54.1	2.13	33	1.30	30	1.181	1.3/16"	25	0.984	1"
P2MBPP-1012	16	5/8"	10	3/4" - 14	12	0.47	39.6	1.56	16	0.63	32	1.260	1.1/4"	25	0.984	1"
P2MBPP-1212	19	3/4"	12	3/4" - 14	15.5	0.61	43.0	1.69	16	0.63	32	1.260	1.1/4"	30	1.181	1.3/16"
P2MBPP-1216	19	3/4"	12	1" - 11	15.5	0.61	46.0	1.81	19	0.75	41	1.614	1.5/8"	30	1.181	1.3/16"
P2MBPP-1616	25	1"	16	1" - 11	20	0.79	45.6	1.80	19	0.75	41	1.614	1.5/8"	41	1.614	1.5/8"
P2MBPP-1620	25	1"	16	1.1/4" - 11	20	0.79	46.6	1.84	20	0.79	50	1.969	2"	41	1.614	1.5/8"

BSP STR

FOR WIRE BRAID HOSES - NO SKIVE

- BSP
- BSP FEMALE SWIVEL 60° CONE

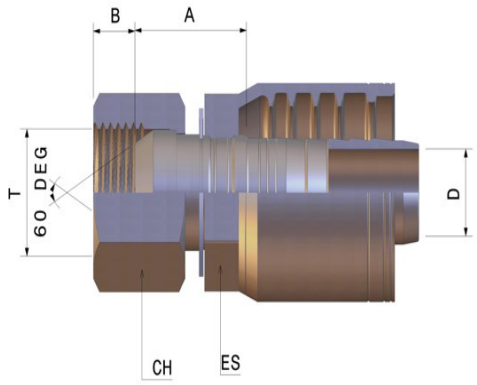

CODE	Ø HOSE			T	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2BSP-0403	6	1/4"	4	1/8" - 28	4	0.16	26.1	1.03	4.3	0.17	14	0.551	9/16"	14	0.551	9/16"
P2BSP-0404	6	1/4"	4	1/4" - 19	4	0.16	24.7	0.97	5.2	0.20	19	0.748	3/4"	14	0.551	9/16"
P2BSP-0406	6	1/4"	4	3/8" - 19	4	0.16	23.9	0.94	6	0.24	22	0.866	7/8"	14	0.551	9/16"
P2BSP-0506	8	5/16"	5	3/8" - 19	5	0.20	24.9	0.98	6	0.24	22	0.866	7/8"	16	0.630	5/8"
P2BSP-0508	8	5/16"	5	1/2" - 14	5	0.20	26.9	1.06	6.5	0.26	27	1.063	1.1/16"	16	0.630	5/8"
P2BSP-0606	10	3/8"	6	3/8" - 19	6.4	0.25	23.9	0.94	6	0.24	22	0.866	7/8"	17	0.669	11/16"
P2BSP-0608	10	3/8"	6	1/2" - 14	6.4	0.25	26.9	1.06	6.5	0.26	27	1.063	1.1/16"	17	0.669	11/16"
P2BSP-0808	12	1/2"	8	1/2" - 14	9	0.35	25.9	1.02	6.5	0.26	27	1.063	1.1/16"	22	0.866	7/8"
P2BSP-0810	12	1/2"	8	5/8" - 14	9	0.35	27.2	1.07	9.7	0.38	30	1.181	1.3/16"	22	0.866	7/8"
P2BSP-0812	12	1/2"	8	3/4" - 14	9	0.35	28.7	1.13	8.7	0.34	32	1.260	1.1/4"	22	0.866	7/8"
P2BSP-1010	16	5/8"	10	5/8" - 14	12	0.47	26.4	1.04	9.7	0.38	30	1.181	1.3/16"	25	0.984	1"
P2BSP-1012	16	5/8"	10	3/4" - 14	12	0.47	28.1	1.11	8.7	0.34	32	1.260	1.1/4"	25	0.984	1"
P2BSP-1212	19	3/4"	12	3/4" - 14	15.5	0.61	31.8	1.25	8.7	0.34	32	1.260	1.1/4"	30	1.181	1.3/16"
P2BSP-1216	19	3/4"	12	1" - 11	15.5	0.61	33.5	1.32	10.5	0.41	41	1.614	1.5/8"	30	1.181	1.3/16"
P2BSP-1616	25	1"	16	1" - 11	20	0.79	32.1	1.26	10.5	0.41	41	1.614	1.5/8"	41	1.614	1.5/8"
P2BSP-1620	25	1"	16	1.1/4" - 11	20	0.79	39.0	1.54	10.1	0.40	50	1.969	2"	41	1.614	1.5/8"

PROCRIMP™ By YUVRAJ

BSP 45

FOR WIRE BRAID HOSES - NO SKIVE

- BSP
- BSP FEMALE SWIVEL 60° CONE 45° ELBOW

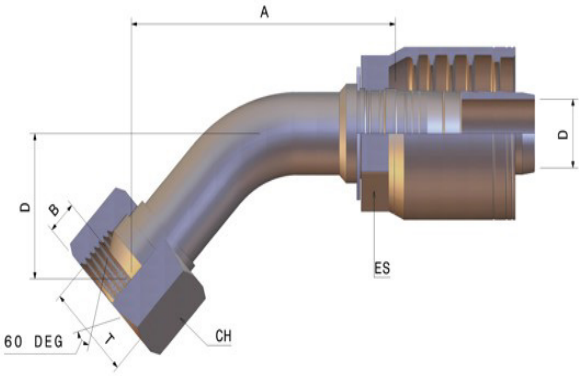

CODE	Ø HOSE			T	Drill ID (D)		A		B		Drop (D)		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2BSP4-0404	6	1/4"	4	1/4" - 19	4	0.16	57.5	2.26	5.2	0.20	17	0.67	19	0.748	3/4"	14	0.551	9/16"
P2BSP4-0406	6	1/4"	4	3/8" - 19	4	0.16	58.6	2.31	6	0.24	17.8	0.70	22	0.866	7/8"	14	0.551	9/16"
P2BSP4-0506	8	5/16"	5	3/8" - 19	5	0.20	57.8	2.28	6	0.24	18.5	0.73	22	0.866	7/8"	16	0.629	5/8"
P2BSP4-0606	10	3/8"	6	3/8" - 19	6	0.24	61.4	2.42	6	0.24	20	0.79	22	0.866	7/8"	17	0.669	11/16"
P2BSP4-0608	10	3/8"	6	1/2" - 14	6	0.24	62.2	2.45	6.5	0.26	20.8	0.82	27	1.062	1.1/16"	17	0.669	11/16"
P2BSP4-0808	12	1/2"	8	1/2" - 14	9	0.35	70	2.76	6.5	0.26	22.3	0.88	27	1.062	1.1/16"	22	0.866	7/8"
P2BSP4-0810	12	1/2"	8	5/8" - 14	9	0.35	72.4	2.85	9.5	0.37	23.5	0.93	30	1.181	1.3/16"	22	0.866	7/8"
P2BSP4-1010	16	5/8"	10	5/8" - 14	12	0.47	78.5	3.09	9.7	0.38	26	1.02	30	1.181	1.3/16"	25	0.984	1"
P2BSP4-1012	16	5/8"	10	3/4" - 14	12	0.47	70	2.76	8.7	0.34	26.5	1.04	32	1.259	1.1/4"	25	0.984	1"
P2BSP4-1212	19	3/4"	12	3/4" - 14	14	0.55	98	3.86	8.7	0.34	29.8	1.17	32	1.259	1.1/4"	30	1.181	1.3/16"
P2BSP4-1216	19	3/4"	12	1" - 11	14	0.55	98.5	3.88	10.5	0.41	31	1.22	41	1.614	1.5/8"	30	1.181	1.3/16"
P2BSP4-1616	25	1"	16	1" - 11	19	0.75	100	3.94	10.5	0.41	35	1.38	41	1.614	1.5/8"	41	1.614	1.5/8"

BSP 90

FOR WIRE BRAID HOSES - NO SKIVE

- BSP
- BSP FEMALE SWIVEL 60° CONE 90° ELBOW

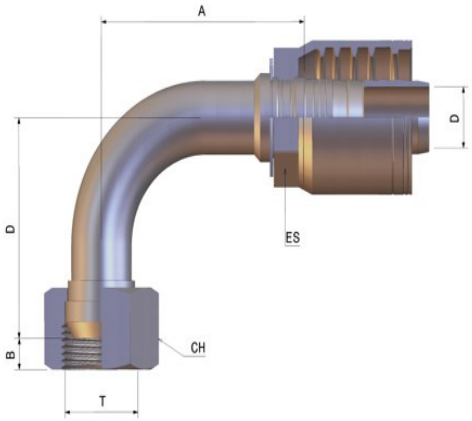

CODE	Ø HOSE			T	Drill ID (D)		A		B		Drop (D)		CH			ES		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2BSP9-0404	6	1/4"	4	1/4" - 19	4	0.16	38.6	1.52	5.2	0.20	30	1.18	19	0.748	3/4"	14	0.551	9/16"
P2BSP9-0406	6	1/4"	4	3/8" - 19	4	0.16	42	1.65	6	0.24	34.3	1.35	22	0.866	7/8"	14	0.551	9/16"
P2BSP9-0506	8	5/16"	5	3/8" - 19	5	0.20	42.4	1.67	6	0.24	35.5	1.40	22	0.866	7/8"	16	0.629	5/8"
P2BSP9-0606	10	3/8"	6	3/8" - 19	5	0.20	41	1.61	6	0.24	36	1.42	22	0.866	7/8"	17	0.669	11/16"
P2BSP9-0608	10	3/8"	6	1/2" - 14	6	0.24	41.7	1.64	6.5	0.26	36.5	1.44	27	1.062	1.1/16"	17	0.669	11/16"
P2BSP9-0808	12	1/2"	8	1/2" - 14	6	0.24	46.5	1.83	6.5	0.26	43	1.69	27	1.062	1.1/16"	22	0.866	7/8"
P2BSP9-0810	12	1/2"	8	5/8" - 14	9	0.35	48.2	1.90	9.5	0.37	45.2	1.78	30	1.181	1.3/16"	22	0.866	7/8"
P2BSP9-1010	16	5/8"	10	5/8" - 14	9	0.35	52	2.05	9.7	0.38	49	1.93	30	1.181	1.3/16"	25	0.984	1"
P2BSP9-1012	16	5/8"	10	3/4" - 14	12	0.47	54	2.13	8.7	0.34	51	2.01	32	1.259	1.1/4"	25	0.984	1"
P2BSP9-1212	19	3/4"	12	3/4" - 14	12	0.47	66	2.60	8.7	0.34	57	2.24	32	1.259	1.1/4"	30	1.181	1.3/16"
P2BSP9-1216	19	3/4"	12	1" - 11	14	0.55	65.1	2.56	10.5	0.41	57.5	2.26	41	1.614	1.5/8"	30	1.181	1.3/16"
P2BSP9-1616	25	1"	16	1" - 11	14	0.55	71.5	2.81	10.5	0.41	65.5	2.58	41	1.614	1.5/8"	41	1.614	1.5/8"

PROCRIMP™ By YUVRAJ

METRIC MALE -L

FOR WIRE BRAID HOSES - NO SKIVE

- METRIC
- METRIC LIGHT MALE (24° CONE SEAT)

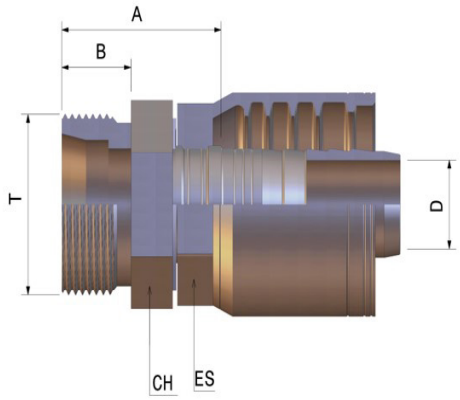

CODE	Ø HOSE			T	Pipe	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2CEL-0412	6	1/4"	4	M12X1,5	L6	4	0.16	30.38	1.20	12	0.47	14	0.551	9/16"	14	0.551	9/16"
P2CEL-0414	6	1/4"	4	M14X1,5	L8	4	0.11	29.88	1.18	10	0.39	14	0.551	9.16"	14	0.551	9/16"
P2CEL-0516	6	1/4"	4	M16X1,5	L10	4	0.16	30.88	1.22	11	0.43	17	0.669	11/16"	14	0.551	9/16"
P2CEL-0516	8	5/16"	5	M16X1,5	L10	5	0.14	30.88	1.22	11	0.43	17	0.669	11/16"	16	0.629	5/8"
P2CEL-0518	8	5/16"	5	M18X1,5	L12	5	0.20	30.88	1.22	11	0.43	19	0.748	3/4"	16	0.629	5/8"
P2CEL-0616	10	3/8"	6	M16X1,5	L10	6.4	0.18	30.88	1.22	11	0.43	17	0.669	11/16"	17	0.669	11/16"
P2CEL-0618	10	3/8"	6	M18X1,5	L12	6.4	0.25	30.88	1.22	11	0.43	19	0.748	3/4"	17	0.669	11/16"
P2CEL-0622	10	3/8"	6	M22X1,5	L15	6.4	0.18	32.88	1.29	12	0.47	22	0.866	7/8"	17	0.669	11/16"
P2CEL-0822	12	1/2"	8	M22X1,5	L15	9	0.25	32.88	1.29	12	0.47	22	0.866	7/8"	22	0.866	1"
P2CEL-1026	16	5/8"	10	M26X1,5	L18	12	0.47	33.12	1.30	12	0.47	27	1.063	1.1/16"	25	0.984	1"
P2CEL-1230	19	3/4"	12	M30X2	L22	15.5	0.44	40.95	1.61	14	0.55	32	1.260	1.1/4"	30	1.181	1.3/16"
P2CEL-1636	25	1"	16	M36X2	L28	20	0.79	40.62	1.60	14	0.55	36	1.417	1.7/16"	41	1.614	1.5/8"

METRIC DKO-L

FOR WIRE BRAID HOSES - NO SKIVE

- METRIC
- METRIC LIGHT FEMALE SWIVEL (24° CONE SEAT)

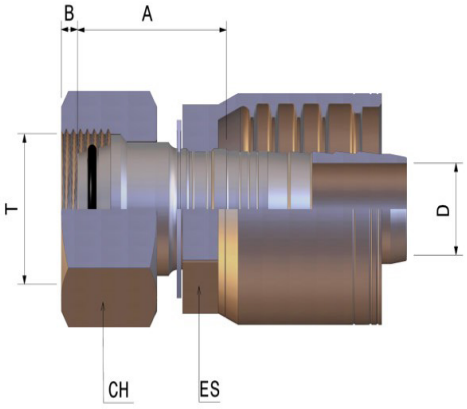

CODE	Ø HOSE			T	Pipe	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2DKL-0412	6	1/4"	4	M12X1,5	L6	4	0.16	32.24	1.27	0.7	0.03	14	0.551	9/16"	14	0.551	9/16"
P2DKL-0414	6	1/4"	4	M14X1,5	L8	4	0.16	32.18	1.27	1.3	0.05	17	0.669	11/16"	14	0.551	9/16"
P2DKL-0416	6	1/4"	4	M16X1,5	L10	4	0.16	33.83	1.33	1.8	0.07	19	0.748	3/4"	14	0.551	9/16"
P2DKL-0418	6	1/4"	4	M18X1,5	L12	4	0.16	33.37	1.31	2	0.08	22	0.866	7/8"	14	0.551	9/16"
P2DKL-0516	8	5/16"	5	M16X1,5	L10	5	0.20	33.83	1.33	1.8	0.07	19	0.748	3/4"	16	0.630	5/8"
P2DKL-0518	8	5/16"	5	M18X1,5	L12	5	0.20	33.37	1.31	2	0.08	22	0.866	7/8"	16	0.630	5/8"
P2DKL-0616	10	3/8"	6	M16X1,5	L10	6.4	0.25	33.83	1.33	1.8	0.07	19	0.748	3/4"	17	0.669	11/16"
P2DKL-0618	10	3/8"	6	M18X1,5	L12	6.4	0.25	33.38	1.31	2	0.08	22	0.866	7/8"	17	0.669	11/16"
P2DKL-0622	10	3/8"	6	M22X1,5	L15	6.4	0.25	35.01	1.38	1	0.04	27	1.063	1.1/16"	17	0.669	11/16"
P2DKL-0822	12	1/2"	8	M22X1,5	L15	9	0.35	35.01	1.38	1	0.04	27	1.063	1.1/16"	22	0.866	7/8"
P2DKL-0826	12	1/2"	8	M26X1,5	L18	9	0.35	36.02	1.42	1	0.04	32	1.260	1.1/4"	22	0.866	7/8"
P2DKL-1026	16	5/8"	10	M26X1,5	L18	12	0.47	35.66	1.40	1	0.04	32	1.260	1.1/4"	25	0.984	1"
P2DKL-1230	19	3/4"	12	M30X2	L22	15.5	0.61	41.6	1.64	2.25	0.09	36	1.417	1.7/16"	30	1.181	1.3/16"
P2DKL-1636	25	1"	16	M36X2	L28	20	0.79	42.2	1.66	3.7	0.15	41	1.614	1.5/8"	41	1.614	1.5/8"

PROCRIMP™
By
YUVRAJ

METRIC DKO-L 45

FOR WIRE BRAID HOSES - NO SKIVE

- METRIC
- METRIC LIGHT FEMALE SWIVEL - 45° ELBOW (24° CONE SEAT)

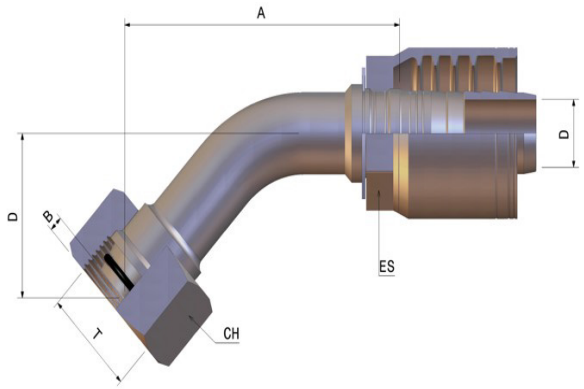

CODE	Ø HOSE			T	Pipe	Drill ID (D)		A		B		Drop (D)		CH			ES		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2DKL4-0412	6	1/4"	4	M12X1.5	L6	4	0.16	56.5	2.22	0.7	0.03	17	0.67	14	0.551	9.16"	14	0.551	9/16"
P2DKL4-0414	6	1/4"	4	M14X1.5	L8	4	0.16	57.5	2.26	1.3	0.05	18	0.71	17	0.669	11/16"	14	0.551	9/16"
P2DKL4-0416	6	1/4"	4	M16X1.5	L10	4	0.16	58.2	2.29	1.8	0.07	19.4	0.76	19	0.748	3/4"	14	0.551	9/16"
P2DKL4-0418	6	1/4"	4	M18X1.5	L12	4	0.16	59	2.32	2	0.08	20.5	0.81	22	0.866	7/8"	14	0.551	9/16"
P2DKL4-0516	8	5/16"	5	M16X1.5	L10	5	0.20	58.5	2.30	1.8	0.07	20.4	0.80	19	0.748	3/4"	16	0.629	5/8"
P2DKL4-0616	10	3/8"	6	M16X1.5	L10	6	0.24	59	2.32	1.8	0.07	20	0.79	19	0.748	3/4"	17	0.669	11/16"
P2DKL4-0618	10	3/8"	6	M18X1.5	L12	6	0.24	61	2.40	2	0.08	21	0.83	22	0.866	7/8"	17	0.669	11/16"
P2DKL4-0822	12	1/2"	8	M22X1.5	L15	9	0.35	65	2.56	1	0.04	24	0.94	27	1.062	1.1/16"	22	0.866	7/8"
P2DKL4-0826	12	1/2"	8	M26X1.5	L18	9	0.35	68	2.68	1	0.04	26	1.02	32	1.259	1.1/4"	22	0.866	7/8"
P2DKL4-1026	16	5/8"	10	M26X1.5	L18	12	0.47	78.5	3.09	1	0.04	29.1	1.15	32	1.259	1.1/4"	25	0.984	1"
P2DKL4-1230	19	3/4"	12	M30X2	L22	14	0.55	95	3.74	2.3	0.09	32	1.26	36	1.417	1.7/16"	30	1.181	1.3/16"
P2DKL4-1636	25	1"	16	M36X2	L28	19	0.75	108	4.25	3.7	0.15	37.5	1.48	41	1.614	1.5/8"	41	1.614	1.5/8"

METRIC DKO-L 90

FOR WIRE BRAID HOSES - NO SKIVE

- METRIC
- METRIC LIGHT FEMALE SWIVEL 90° ELBOW (24° CONE SEAT)

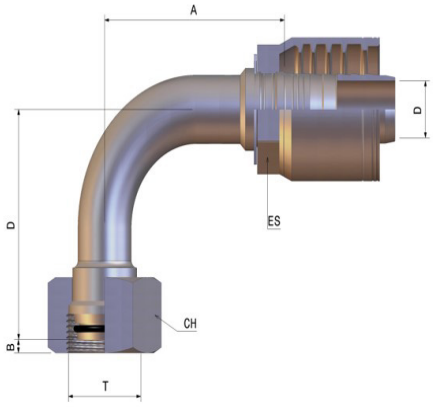

CODE	Ø HOSE			T	Pipe	Drill ID (D)		A		B		Drop (D)		CH			ES		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2DKL9-0412	6	1/4"	4	M12X1.5	L6	4	0.16	34	1.34	0.7	0.03	36	1.42	14	0.551	9/16"	14	0.551	9/16"
P2DKL9-0414	6	1/4"	4	M14X1.5	L8	4	0.16	36.5	1.44	1.3	0.05	34	1.34	17	0.669	11/16"	14	0.551	9/16"
P2DKL9-0416	6	1/4"	4	M16X1.5	L10	4	0.16	38	1.50	1.8	0.07	35	1.38	19	0.748	3/4"	14	0.551	9/16"
P2DKL9-0516	8	5/16"	5	M16X1.5	L10	5	0.20	40	1.57	1.8	0.07	36	1.42	19	0.748	3/4"	16	0.630	5/8"
P2DKL9-0518	8	5/16"	5	M18X1.5	L12	5	0.20	42.6	1.68	2	0.08	41.5	1.63	22	0.866	7/8"	16	0.630	5/8"
P2DKL9-0616	10	3/8"	6	M16X1.5	L10	6	0.24	40.7	1.60	1.8	0.07	40	1.57	19	0.748	3/4"	17	0.669	11/16"
P2DKL9-0618	10	3/8"	6	M18X1.5	L12	6	0.24	41.3	1.63	2	0.08	42	1.65	22	0.866	7/8"	17	0.669	11/16"
P2DKL9-0822	12	1/2"	8	M22X1.5	L15	9	0.35	48.1	1.89	1	0.04	44	1.73	27	1.062	1.1/16"	22	0.866	7/8"
P2DKL9-0826	12	1/2"	8	M26X1.5	L18	9	0.35	46.2	1.82	1	0.04	50	1.97	32	1.259	1.1/4"	22	0.866	7/8"
P2DKL9-1026	16	5/8"	10	M26X1.5	L18	12	0.47	55	2.17	1	0.04	52	2.05	32	1.259	1.1/4"	25	0.984	1"
P2DKL9-1230	19	3/4"	12	M30X2	L22	14	0.55	63.8	2.51	2.3	0.09	61	2.40	36	1.417	1.7/16"	30	1.181	1.3/16"
P2DKL9-1636	25	1"	16	M36X2	L28	19	0.75	67.5	2.66	3.7	0.15	70	2.76	41	1.614	1.5/8"	41	1.614	1.5/8"

PROCRIMP™ By YUVRAJ

METRIC MALE -S

FOR WIRE BRAID HOSES - NO SKIVE

- METRIC
- METRIC HEAVY MALE (24° CONE SEAT)

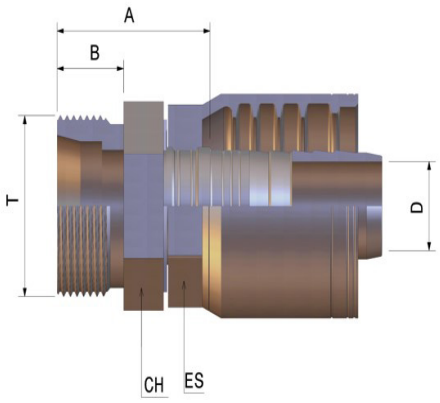

CODE	Ø HOSE			T	Pipe	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2CES-0414	6	1/4"	4	M14X1,5	S6	4	0.16	31.9	1.26	12	0.47	17	0.669	11/16"	14	0.551	9/16"
P2CES-0416	6	1/4"	4	M16X1,5	S8	4	0.16	31.9	1.26	12	0.47	17	0.669	11/16"	14	0.551	9/16"
P2CES-0418	6	1/4"	4	M18X1,5	S10	4	0.16	31.9	1.26	12	0.47	19	0.748	3/4"	14	0.551	9/16"
P2CES-0420	6	1/4"	4	M20X1,5	S12	4	0.16	32.9	1.29	12	0.47	22	0.866	7/8"	14	0.551	9/16"
P2CES-0518	8	5/16"	5	M18X1,5	S10	5	0.20	31.9	1.26	12	0.47	19	0.748	3/4"	16	0.630	5/8"
P2CES-0520	8	5/16"	5	M20X1,5	S12	5	0.20	32.9	1.29	12	0.47	22	0.866	7/8"	16	0.630	5/8"
P2CES-0618	10	3/8"	6	M18X1,5	S10	6.4	0.25	31.9	1.26	12	0.47	19	0.748	3/4"	17	0.669	11/16"
P2CES-0620	10	3/8"	6	M20X1,5	S12	6.4	0.25	32.9	1.29	12	0.47	22	0.866	7/8"	17	0.669	11/16"
P2CES-0622	10	3/8"	6	M22X1,5	S14	6.4	0.25	32.9	1.29	12	0.47	22	0.866	7/8"	17	0.669	11/16"
P2CES-0624	10	3/8"	6	M24X1,5	S16	6.4	0.25	34.9	1.37	14	0.55	24	0.945	15/16"	17	0.669	11/16"
P2CES-0824	12	1/2"	8	M24X1,5	S16	9	0.35	34.9	1.37	14	0.55	24	0.945	15/16"	22	0.866	7/8"
P2CES-1030	16	5/8"	10	M30X2	S20	12	0.47	39.6	1.56	16	0.63	32	1.260	1.1/4"	25	0.984	1"
P2CES-1230	19	3/4"	12	M30X2	S20	15.5	0.61	43.0	1.69	16	0.63	32	1.260	1.1/4"	30	1.181	1.3/16"
P2CES-1236	19	3/4"	12	M36X2	S25	15.5	0.61	45.0	1.77	18	0.71	36	1.417	1.7/16"	30	1.181	1.3/16"
P2CES-1636	25	1"	16	M36X2	S25	20	0.79	44.6	1.76	18	0.71	36	1.417	1.7/16"	41	1.614	1.5/8"
P2CES-1642	25	1"	16	M42X2	S30	20	0.79	46.6	1.84	20	0.79	46	1.811	1.13/16"	41	1.614	1.5/8"

METRIC DKO-S STR

FOR WIRE BRAID HOSES - NO SKIVE

- METRIC
- METRIC HEAVY FEMALE SWIVEL (24° CONE SEAT)

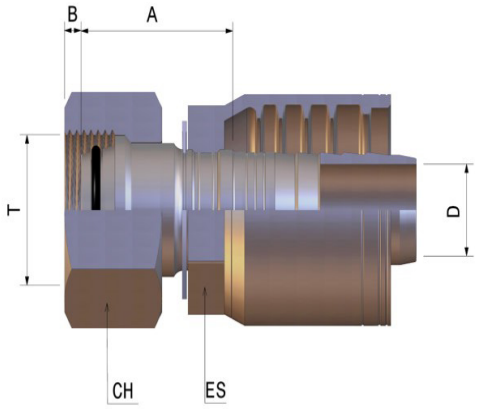

CODE	Ø HOSE			T	Pipe	Drill ID (D)		A		B		CH			ES		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2DKS-0414	6	1/4"	4	M14X1,5	S6	4	0.16	33.9	1.34	1.4	0.06	17	0.669	11/16"	14	0.551	9/16"
P2DKS-0416	6	1/4"	4	M16X1,5	S8	4	0.16	34.0	1.34	2.8	0.11	19	0.748	3/4"	14	0.551	9/16"
P2DKS-0418	6	1/4"	4	M18X1,5	S10	4	0.16	35.5	1.40	1.8	0.07	22	0.866	7/8"	14	0.551	9/16"
P2DKS-0520	8	5/16"	5	M20X1,5	S12	5	0.20	35.5	1.40	2	0.08	24	0.945	15/16"	16	0.630	5/8"
P2DKS-0618	10	3/8"	6	M18X1,5	S10	6.4	0.25	35.5	1.40	1.8	0.07	22	0.866	7/8"	17	0.669	11/16"
P2DKS-0620	10	3/8"	6	M20X1,5	S12	6.4	0.25	35.5	1.40	2	0.08	24	0.945	15/16"	17	0.669	11/16"
P2DKS-0622	10	3/8"	6	M22X1,5	S14	6.4	0.25	41.1	1.62	4	0.16	27	1.063	1.1/16"	17	0.669	11/16"
P2DKS-0824	12	1/2"	8	M24X1,5	S16	9	0.35	38.5	1.51	3	0.12	30	1.181	1.3/16"	22	0.866	7/8"
P2DKS-1030	16	5/8"	10	M30X2	S20	12	0.47	43.8	1.72	2.3	0.09	36	1.417	1.7/16"	25	0.984	1"
P2DKS-1230	19	3/4"	12	M30X2	S20	15.5	0.61	47.0	1.85	2.3	0.09	36	1.417	1.7/16"	30	1.181	1.3/16"
P2DKS-1236	19	3/4"	12	M36X2	S25	15.5	0.61	50.0	1.97	4.3	0.17	46	1.811	1.13/16"	30	1.181	1.3/16"
P2DKS-1632	25	1"	16	M36X2	S25	20	0.79	50.2	1.98	4.3	0.17	46	1.811	1.13/16"	41	1.614	1.5/8"
P2DKS-1642	25	1"	16	M42X2	S30	20	0.79	52.1	2.05	4.6	0.18	50	1.969	2"	41	1.614	1.5/8"

PROCRIMP™
By
YUVRAJ

METRIC DKO-S 45

FOR WIRE BRAID HOSES - NO SKIVE

- METRIC
- METRIC HEAVY FEMALE SWIVEL 45° ELBOW (24° CONE SEAT)

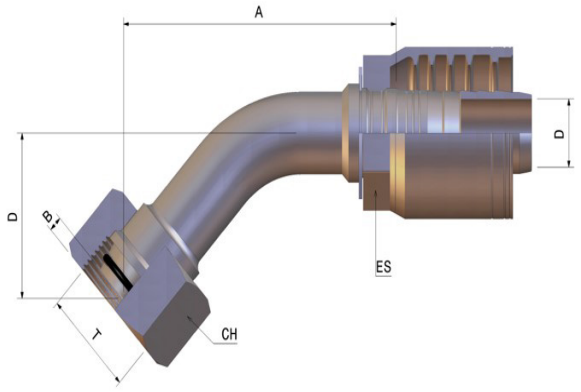

CODE	Ø HOSE			T	Pipe	Drill ID (D)		A		B		Drop (D)		CH			ES		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2DKS4-0414	6	1/4"	4	M14X1.5	S6	4	0.16	58	2.28	1.4	0,10	18	0.71	17	0.669	11/16"	14	0.551	9/16"
P2DKS4-0416	6	1/4"	4	M16X1.5	S8	4	0.16	59	2.32	2.8	0,10	19.5	0.77	19	0.748	3/4"	14	0.551	916"
P2DKS4-0418	6	1/4"	4	M18X1.5	S10	4	0.16	60	2.36	1.8	0,08	20.6	0.81	22	0.866	7/8"	14	0.551	9/16"
P2DKS4-0520	8	5/16"	5	M20X1.5	S12	5	0.20	61	2.40	2	0,08	22	0.87	24	0.945	15/16"	16	0.630	5/8"
P2DKS4-0620	10	3/8"	6	M20X1.5	S12	6	0.24	63	2.48	1.8	0,08	23	0.91	24	0.945	15/16"	17	0.669	11/16"
P2DKS4-0622	10	3/8"	6	M22X1.5	S14	6	0.24	64	2.52	4	0,16	24	0.94	27	1.063	1.1/16"	17	0.669	11/16"
P2DKS4-0824	12	1/2"	8	M24X1.5	S16	9	0.35	69	2.72	3	0,12	26	1.02	30	1.181	1.3/16"	22	0.866	7/8"
P2DKS4-1030	16	5/8"	10	M30X2	S20	12	0.47	84	3.31	2.3	0,14	30	1.18	36	1.417	1.7/16"	25	0.984	1"
P2DKS4-1230	19	3/4"	12	M30X2	S20	14	0.55	95	3.74	2.3	0,14	32	1.26	36	1.417	1.7/16"	30	1.181	1.3/16"
P2DKS4-1236	19	3/4"	12	M36X2	S25	14	0.55	101	3.98	4.3	0,12	36	1.42	46	1.811	1.13/16"	30	1.181	1.3/16"
P2DKS4-1636	25	1"	16	M36X2	S25	19	0.75	109	4.29	4.3	0,12	38	1.50	46	1.811	1.13/16"	41	1.614	1.5/8"
P2DKS4-1642	25	1"	16	M42X2	S30	19	0.75	127.7	5.03	4.6	0,24	45	1.77	50	1.969	2"	41	1.614	1.5/8"

METRIC DKO-S 90

FOR WIRE BRAID HOSES - NO SKIVE

- METRIC
- METRIC LIGHT FEMALE SWIVEL 90° ELBOW (24° CONE SEAT)

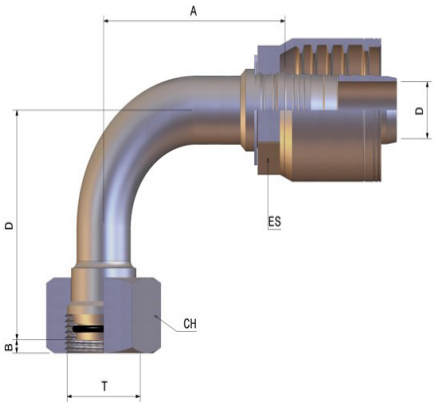

CODE	Ø HOSE			T	Pipe	Drill ID (D)		A		B		Drop (D)		CH			ES		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2DKS9-0414	6	1/4"	4	M14X1.5	S6	4	0.16	36.5	1.44	1.4	0.06	37	1.46	17	0.669	11/16"	14	0.551	9/16"
P2DKS9-0416	6	1/4"	4	M16X1.5	S8	4	0.16	37	1.46	2.8	0.11	35	1.38	19	0.748	3/4"	14	0.551	9/16"
P2DKS9-0418	6	1/4"	4	M18X1.5	S10	4	0.16	39	1.54	1.8	0.07	37	1.46	22	0.866	7/8"	14	0.551	9/16"
P2DKS9-0520	8	5/16"	5	M20X1.5	S12	5	0.20	40	1.57	2	0.08	41	1.61	24	0.945	15/16"	16	0.630	5/8"
P2DKS9-0620	10	3/8"	6	M20X1.5	S12	6	0.24	42	1.65	1.8	0.07	41.5	1.63	24	0.945	15/16"	17	0.669	11/16"
P2DKS9-0622	10	3/8"	6	M22X1.5	S14	6	0.24	46	1.81	4	0.16	42	1.65	27	1.063	1.1/16"	17	0.669	11/16"
P2DKS9-0824	12	1/2"	8	M24X1.5	S16	9	0.35	48	1.89	3	0.12	48.5	1.91	30	1.181	1.3/16"	22	0.866	7/8"
P2DKS9-1030	16	5/8"	10	M30X2	S20	12	0.47	49.5	1.95	2.3	0.09	56	2.20	36	1.417	1.7/16"	25	0.984	1"
P2DKS9-1230	19	3/4"	12	M30X2	S20	14	0.55	63.8	2.51	2.3	0.09	61	2.40	36	1.417	1.7/16"	30	1.181	1.3/16"
P2DKS9-1236	19	3/4"	12	M36X2	S25	14	0.55	59.7	2.35	4.3	0.17	62.5	2.46	46	1.811	1.13/16"	30	1.181	.3/16"
P2DKS9-1636	25	1"	16	M36X2	S25	19	0.75	67.5	2.66	4.3	0.17	70	2.76	46	1.811	1.13/16"	41	1.614	1.5/8"
P2DKS9-1642	25	1"	16	M42X2	S30	19	0.75	70	2.76	4.6	0.18	71	2.80	50	1.969	2"	41	1.614	1.5/8"

PROCRIMP™ By YUVRAJ

STAPLE LOK

FOR WIRE BRAID HOSES - NO SKIVE

- STAPLE LOCK
- STAPLE LOCK MALE

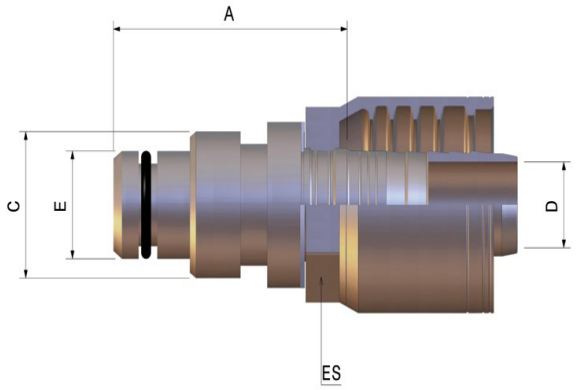

CODE	Ø HOSE			Drill ID (D)		A		C		E		ES		
	DN	INCH	SIZE	mm	in	mm	in	mm	in	mm	in	mm	in	in
P2STPL-0404	6	1/4"	4	4	0.16	42.6	1.68	14.9	0.59	9.9	0.39	14	0.55	9/16"
P2STPL-0406	6	1/4"	4	4	0.16	41.6	1.64	19.9	0.78	13.9	0.55	14	0.55	9/16"
P2STPL-0606	10	3/8"	6	6.4	0.25	41.6	1.64	19.9	0.78	13.9	0.55	17	0.67	11/16"
P2STPL-0808	12	1/2"	8	9	0.35	42.1	1.66	23.9	0.94	17.9	0.70	22	0.87	7/8"
P2STPL-1010	16	5/8"	10	12	0.47	43.1	1.70	25.9	1.02	20.9	0.82	25	0.98	1"
P2STPL-1212	19	3/4"	12	15.5	0.61	42.6	1.68	28.9	1.14	23.9	0.94	30	1.18	1.3/16"
P2STPL-1616	25	1"	16	20	0.79	51.1	2.01	38.8	1.53	30.9	1.22	41	1.61	1.5/8"

P4 SERIES

For Multi-Spiral Hoses
Non-Skive

PRODUCT	MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE	PAGE
NPTF	NPTF MALE (60° CONE SEAT)	52
JIC	JIC 37° MALE	53
	JIC 37° FEMALE SWIVEL	54
	JIC 37° FEMALE SWIVEL - 45° ELBOW	55
	JIC 37° FEMALE SWIVEL - 90° ELBOW	56
ORFS	ORFS MALE	57
	ORFS FEMALE SWIVEL	58
	ORFS FEMALE SWIVEL - 45° ELBOW	59
	ORFS FEMALE SWIVEL - 90° ELBOW	60
SAE	O-RING BOSS MALE	61
JIS	JIS FEMALE SWIVEL (60° CONE - JAPANESE "T" STYLE TERMINATION)	62
	JAPANESE "KOM" STYLE TERMINATION FEMALE SWIVEL 60° CONE	63
	JAPANESE "KOM" STYLE TERMINATION STRAIGHT FLANGE (FOR METRIC O-RING)	64
	JAPANESE "KOM" STYLE TERMINATION STRAIGHT FLANGE WITH 2 BOLT CLAMP (FOR METRIC O-RING)	65
	JAPANESE "KOM" STYLE TERMINATION - 45° ELBOW FLANGE (FOR METRIC O-RING)	66
	JAPANESE "KOM" STYLE TERMINATION - 45° ELBOW FLANGE WITH 2 BOLT CLAMP (FOR METRIC O-RING)	67
	JAPANESE "KOM" STYLE TERMINATION - 90° ELBOW FLANGE (FOR METRIC O-RING)	68
	JAPANESE "KOM" STYLE TERMINATION - 90° ELBOW FLANGE WITH 2 BOLT CLAMP (FOR METRIC O-RING)	69
BSP/BSPT	BSPT TAPERED MALE 60° CONE	70
	BSP MALE 60° CONE	71
	BSP FEMALE SWIVEL 60° CONE	72
	BSP FEMALE SWIVEL 60° CONE - 45° ELBOW	73
	BSP FEMALE SWIVEL 60° CONE - 90° ELBOW	74
METRIC	METRIC LIGHT MALE (24° CONE SEAT)	75
	METRIC LIGHT FEMALE SWIVEL (24° CONE SEAT)	76
	METRIC LIGHT FEMALE SWIVEL - 45° ELBOW (24° CONE SEAT)	77
	METRIC LIGHT FEMALE SWIVEL - 90° ELBOW (24° CONE SEAT)	78
	METRIC HEAVY MALE (24° CONE SEAT)	79
	METRIC HEAVY FEMALE SWIVEL (24° CONE SEAT)	80
	METRIC HEAVY FEMALE SWIVEL - 45° ELBOW (24° CONE SEAT)	81
	METRIC HEAVY FEMALE SWIVEL - 90° ELBOW (24° CONE SEAT)	82

SAE 3000 CODE 61	SAE 3000 CODE 61 STRAIGHT FLANGE	83
	SAE 3000 CODE 61 - 45° ELBOW FLANGE	84
	SAE 3000 CODE 61 - 90° ELBOW FLANGE	85
	SAE 3000 CODE 61 - 90° ELBOW FLANGE (LONG DROP)	86
SAE 6000 CODE 62	SAE 6000 CODE 62 STRAIGHT FLANGE	87
	SAE 6000 CODE 62 - 45° ELBOW FLANGE	88
	SAE 6000 CODE 62 - 90° ELBOW FLANGE	89
	SAE 6000 CODE 62 - 90° ELBOW FLANGE (LONG DROP)	90
SUPERCAT STYLE HIGH PRESSURE FLANGE	SUPERCAT STYLE STRAIGHT FLANGE	91
	SUPERCAT STYLE - 22.5° ELBOW FLANGE	92
	SUPERCAT STYLE - 30° ELBOW FLANGE	93
	SUPERCAT STYLE - 45° ELBOW FLANGE	94
	SUPERCAT STYLE - 60° ELBOW FLANGE	95
	SUPERCAT STYLE - 67.5° ELBOW FLANGE	96
	SUPERCAT STYLE - 90° ELBOW FLANGE	97
	SUPERCAT STYLE - 90° ELBOW FLANGE (LONG DROP)	97
STAPLE LOCK	STAPLE LOCK MALE	98

NPT SPIRAL

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- NPTF
- NPTF MALE (60° CONE SEAT)

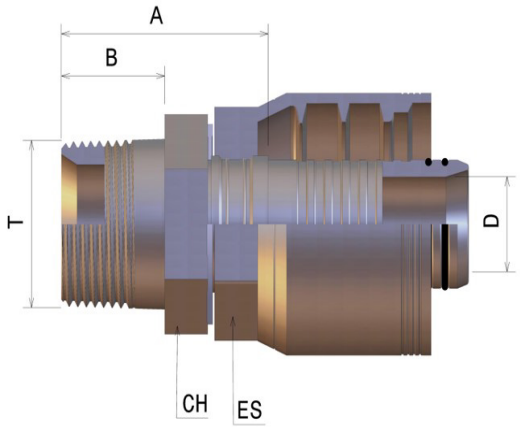

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4MNPT-0604	10	3/8"	6	1/4" - 18	6.4	0.25	34.2	1.35	14.3	0.56	17	0.669	11/16"	19	0.748	3/4"
P4MNPT-0606	10	3/8"	6	3/8" - 18	6.4	0.25	34.2	1.35	14.3	0.56	17	0.669	11/16"	19	0.748	3/4"
P4MNPT-0608	10	3/8"	6	1/2" - 14	6.4	0.25	39.9	1.57	19	0.75	17	0.669	11/16"	22	0.866	7/8"
P4MNPT-0806	12	1/2"	8	3/8" - 18	9	0.35	35.2	1.39	14.3	0.56	22	0.866	7/8"	22	0.866	7/8"
P4MNPT-0808	12	1/2"	8	1/2" - 14	9	0.35	39.9	1.57	19	0.75	22	0.866	7/8"	22	0.866	7/8"
P4MNPT-0810	12	1/2"	8	3/4" - 14	9	0.35	42.4	1.67	19	0.75	22	0.866	7/8"	32	1.260	1.1/4"
P4MNPT-1008	16	5/8"	10	1/2" - 14	12	0.47	40.1	1.58	19	0.75	25	0.984	1"	22	0.866	7/8"
P4MNPT-1012	16	5/8"	10	3/4" - 14	12	0.47	42.6	1.68	19	0.75	25	0.984	1"	32	1.260	1.1/4"
P4MNPT-1212	19	3/4"	12	3/4" - 14	14.3	0.56	46.0	1.81	19	0.75	30	1.181	1.3/16"	32	1.260	1.1/4"
P4MNPT-1216	19	3/4"	12	1" - 11.1/2	14.3	0.56	50.8	2.00	23.8	0.94	30	1.181	1.3/16"	36	1.417	1.7/16"
P4MNPT-1612	25	1"	16	3/4" - 14	19	0.75	45.6	1.80	19	0.75	41	1.614	1.5/8"	32	1.260	1.1/4"
P4MNPT-1616	25	1"	16	1" - 11.1/2	19	0.75	50.4	1.99	23.8	0.94	41	1.614	1.5/8"	36	1.417	1.7/16"
P4MNPT-1620	25	1"	16	1.1/4" - 11.1/2	19	0.75	51.2	2.02	25	0.98	41	1.614	1.5/8"	46	1.811	1.13/16"
P4MNPT-2020	31	1.1/4"	20	1.1/4" - 11.1/2	25	0.98	52.4	2.06	25	0.98	46	1.811	1.13/16"	46	1.811	1.13/16"
P4MNPT-2024	31	1.1/4"	20	1.1/2" - 11.1/2	25	0.98	54.7	2.15	26	1.02	46	1.811	1.13/16"	50	1.969	2"
P4MNPT-2424	38	1.1/2"	24	1.1/2" - 11.1/2	31	1.22	60.2	2.37	26	1.02	55	2.165	2.3/16"	50	1.969	2"
P4MNPT-3232	51	2"	32	2" - 11.1/2	40	1.57	64.1	2.52	26.5	1.04	70	2.756	2.3/4"	65	2.559	2.9/16"

PROCRIMP™ By YUVRAJ

MJIC SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- JIC
- JIC 37° MALE - MJIC

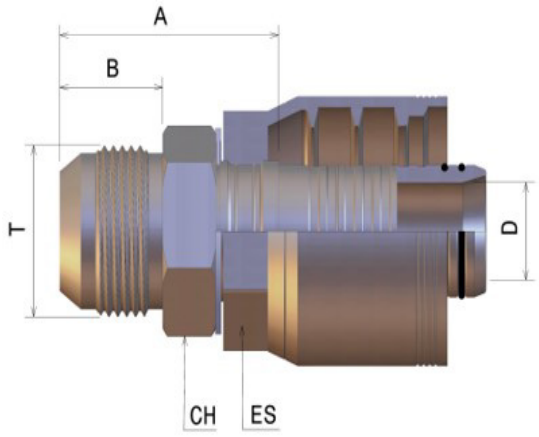

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4MJIC-0606	10	3/8"	6	9/16" - 18	6.4	0.25	34.0	1.34	14.1	0.56	17	0.669	11/16"	17	0.669	11/16"
P4MJIC-0608	10	3/8"	6	3/4" - 16	6.4	0.25	37.6	1.48	16.7	0.66	17	0.669	11/16"	22	0.866	7/8"
P4MJIC-0610	10	3/8"	6	7/8" - 14	6.4	0.25	40.2	1.58	19.3	0.76	17	0.669	11/16"	24	0.945	15/16"
P4MJIC-0806	12	1/2"	8	9/16" - 18	9	0.35	34.0	1.34	14.1	0.56	22	0.866	7/8"	19	0.748	3/4"
P4MJIC-0808	12	1/2"	8	3/4" - 16	9	0.35	37.6	1.48	16.7	0.66	22	0.866	7/8"	22	0.866	3/4"
P4MJIC-0810	12	1/2"	8	7/8" - 14	9	0.35	40.2	1.58	19.3	0.76	22	0.866	7/8"	24	0.945	15/16"
P4MJIC-0812	12	1/2"	8	1.1/16" - 12	9	0.35	43.8	1.72	21.9	0.86	22	0.866	7/8"	30	1.181	1.3/16"
P4MJIC-1008	16	5/8"	10	3/4" - 16	12	0.47	37.9	1.49	16.7	0.66	25	0.984	1"	24	0.945	15/16"
P4MJIC-1010	16	5/8"	10	7/8" - 14	12	0.47	40.4	1.59	19.3	0.76	25	0.984	1"	24	0.945	15/16"
P4MJIC-1012	16	5/8"	10	1.1/16" - 12	12	0.47	44.0	1.73	21.9	0.86	25	0.984	1"	30	1.181	1.3/16"
P4MJIC-1210	19	3/4"	12	7/8" - 14	14.3	0.56	43.8	1.72	19.3	0.76	30	1.181	1.3/16"	27	1.063	1.1/16"
P4MJIC-1212	19	3/4"	12	1.1/16" - 12	14.3	0.56	47.4	1.86	21.9	0.86	30	1.181	1.3/16"	30	1.181	1.3/16"
P4MJIC-1216	19	3/4"	12	1.5/16" - 12	14.3	0.56	50.1	1.97	23.1	0.91	30	1.181	1.3/16"	36	1.417	1.7/16"
P4MJIC-1616	25	1"	16	1.5/16" - 12	19	0.75	49.7	1.96	23.1	0.91	41	1.614	1.5/8"	36	1.417	1.7/16"
P4MJIC-1620	25	1"	16	1.5/8" - 12	19	0.75	50.9	2.00	24.3	0.96	41	1.614	1.5/8"	46	1.811	1.13/16"
P4MJIC-2020	31	1.1/4"	20	1.5/8" - 12	25	0.98	52.1	2.05	24.3	0.96	46	1.811	1.13/16"	46	1.811	1.13/16"
P4MJIC-2424	38	1.1/2"	24	1.7/8" - 12	31	1.22	62.3	2.45	27.5	1.08	55	2.165	2.3/16"	50	1.969	2"
P4MJIC-3232	51	2"	32	2.1/2" - 12	40	1.57	71.8	2.83	34	1.34	70	2.756	2.3/4"	65	2.559	2.9/16"

JIC FJX 1

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- JIC
- JIC 37° FEMALE SWIVEL

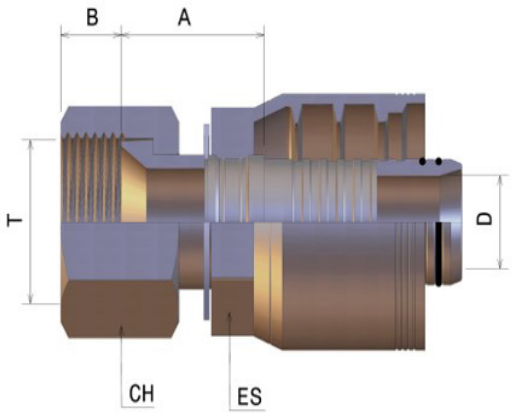

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4JIC-0606	10	3/8"	6	9/16" - 18	6.4	0.251	21.9	0.86	9.5	0.37	17	0.669	11/16"	19	0.748	3/4"
P4JIC-0608	10	3/8"	6	3/4" - 16	6.4	0.251	25.7	1.01	10.7	0.42	17	0.669	11/16"	24	0.944	15/16"
P4JIC-0610	10	3/8"	6	7/8" - 14	6.4	0.251	25.2	0.99	12.7	0,50	17	0.669	11/16"	27	1.062	1.1/16"
P4JIC-0808	12	1/2"	8	3/4" - 16	9	0.354	25.7	1.01	10.7	0.42	22	0.866	7/8"	24	0.944	15/16"
P4JIC-0810	12	1/2"	8	7/8" - 14	9	0.354	25.2	0.99	12.7	0.50	22	0.866	7/8"	27	1.062	1.1/16"
P4JIC-0812	12	1/2"	8	1.1/16" - 12	9	0.354	25.1	0.99	14.3	0.56	22	0.866	7/8"	32	1.259	1.1/4"
P4JIC-1010	16	5/8"	10	7/8" - 14	12	0.472	25.4	1.00	12.7	0.50	25	0.984	1"	27	1.062	1.1/16"
P4JIC-1012	16	5/8"	10	1.1/16" - 12	12	0.472	25.3	1.00	14.3	0.56	25	0.984	1"	32	1.259	1.1/4"
P4JIC-1212	19	3/4"	12	1.1/16" - 12	14.3	0.562	29.1	1.15	14.3	0.56	30	1.181	1.3/16"	32	1.259	1.1/4"
P4JIC-1216	19	3/4"	12	1.5/16" - 12	14.3	0.562	31.9	1.26	15.1	0.59	30	1.181	1..3/16"	41	1.614	1.5/8"
P4JIC-1616	25	1"	16	1.5/16" - 12	19	0.748	30.5	1.20	15.1	0.59	41	1.614	1.5/8"	41	1.614	1.5/8"
P4JIC-1620	25	1"	16	1.5/8" - 12	19	0.748	32.7	1.29	16	0.63	41	1.614	1.5/8"	50	1.968	2"
P4JIC-2020	31	1.1/4"	20	1.5/8" - 12	25	0.984	33.4	1.31	16	0.63	46	1.811	1.13/16"	50	1.968	2"
P4JIC-2024	31	1.1/4"	20	1.7/8" - 12	25	0.984	33.3	1.31	18.6	0.73	46	1.811	1.13/16"	55	2.165	2.3/16"
P4JIC-2424	38	1.1/2"	24	1.7/8" - 12	31	1.220	38.8	1.53	18.6	0.73	55	2.165	2.3/16"	55	2.165	2.3/16"
P4JIC-3232	51	2"	32	2.1/2" - 12	40	1.574	44.7	1.76	23.8	0.94	70	2.755	2.3/4"	75	2.952	3"

PROCRIMP By YUVRAJ

FJX 45

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- JIC
- JIC 37° FEMALE SWIVEL - 45° ELBOW

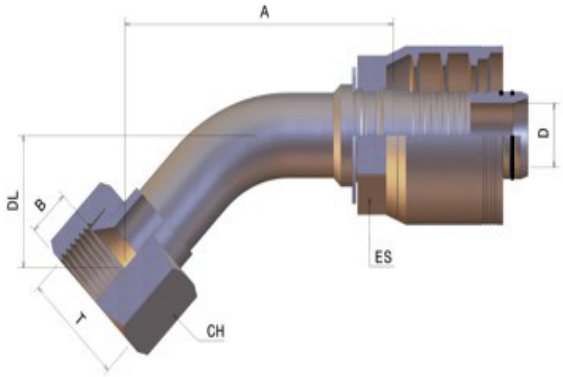

CODE	Ø HOSE			T	D		A		B		DL		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4JIC4-0606	10	3/8"	6	9/16" - 18	6	0.24	60.5	2.38	9.5	0.37	16.7	0.66	17	0.669	11/16"	19	0.748	3/4"
P4JIC4-0608	10	3/8"	6	3/4" - 16	6	0.24	65.9	2.59	10.7	0.42	18.3	0.72	17	0.669	11/16"	24	0.945	15/16"
P4JIC4-0808	12	1/2"	8	3/4" - 16	9	0.35	68.9	2.71	10.7	0.42	20.3	0.80	22	0.866	7/8"	24	0.945	15/16"
P4JIC4-0810	12	1/2"	8	7/8" - 14	9	0.35	73.1	2.88	12.5	0.49	21.3	0.84	22	0.866	7/8"	27	1.063	1.1/16"
P4JIC4-1010	16	5/8"	10	7/8" - 14	12	0.47	83.7	3.30	12.5	0.49	21.9	0.86	25	0.984	1"	27	1.063	1.1/16"
P4JIC4-1012	16	5/8"	10	1.1/16" - 12	12	0.47	82.9	3.26	14.3	0.56	24.8	0.98	25	0.984	1"	32	1.260	1.1/4"
P4JIC4-1212	19	3/4"	12	1.1/16" - 12	14	0.55	104	4.09	14.3	0.56	29	1.14	30	1.181	1.3/16"	32	1.260	1.1/4"
P4JIC4-1216	19	3/4"	12	1.5/16" - 12	14	0.55	102	4.02	15.1	0.59	29.2	1.15	30	1.181	1.3/16"	41	1.614	1.5/8"
P4JIC4-1616	25	1"	16	1.5/16" - 12	19	0.75	97.2	3.83	15.1	0.59	31.1	1.22	41	1.614	1.5/8"	41	1.614	1.5/8"
P4JIC4-1620	25	1"	16	1.5/8" - 12	19	0.75	97.1	3.82	16	0.63	29.11	1.15	41	1.614	1.5/8"	50	1.969	2"
P4JIC4-2020	31	1.1/4"	20	1.5/8" - 12	25	0.98	120	4.72	16	0.63	43	1.69	46	1.811	1.13/16"	50	1.969	2"
P4JIC4-2424	38	1.1/2"	24	1.7/8" - 12	31	1.22	146	5.75	18.5	0.73	44.5	1.75	55	2.165	2.3/16"	55	2.165	2.3/16"
P4JIC4-3232	51	2"	32	2.1/2" - 12	40	1.57	178.6	7.03	24	0.94	54.1	2.13	70	2.756	2.3/4"	75	2.953	–

FJX 90

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- JIC
- JIC 37° FEMALE SWIVEL- 90° ELBOW

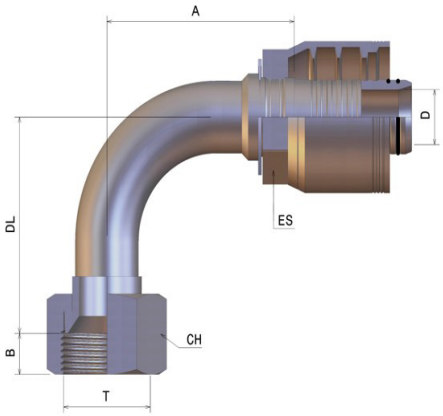

NPTF
JIC
ORFS
SAE
JIS
BSP-BSPT
METRIC
SAE 3000 CODE 61
SAE 6000 CODE 62
SUPERCAT STYLE HIGH PRESSURE FLANGE
STAPLE LOCK

CODE	Ø HOSE			T	D		A		B		DL		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4JIC9-0606	10	3/8"	6	9/16" - 18	6	0.24	48.4	1.91	9.5	0.37	33.5	1.32	17	0.669	11/16"	19	0.748	3/4"
P4JIC9-0608	10	3/8"	6	3/4" - 16	6	0.24	44	1.73	10.7	0.42	37	1.46	17	0.669	11/16"	24	0.945	15/16"
P4JIC9-0610	10	3/8"	6	7/8" - 14	6	0.24	41.7	1.64	12.5	0.49	35	1.38	17	0.669	11/16"	27	1.062	1.1/16"
P4JIC9-0808	12	1/2"	8	3/4" - 16	9	0.35	46.7	1.84	10.7	0.42	41	1.61	22	0.866	7/8"	24	0.945	15/16"
P4JIC9-0810	12	1/2"	8	7/8" - 14	9	0.35	45.6	1.80	12.5	0.49	41.2	1.62	22	0.866	7/8"	27	1.062	1.1/16"
P4JIC9-0812	12	1/2"	8	1.1/16" - 12	9	0.35	47.2	1.86	14.3	0.56	41.5	1.63	22	0.866	7/8"	32	1.260	1.1/4"
P4JIC9-1010	16	5/8"	10	7/8" - 14	12	0.47	53.2	2.09	12.5	0.49	45	1.77	25	0.984	1"	27	1.062	1.1/16"
P4JIC9-1012	16	5/8"	10	1.1/16" - 12	12	0.47	54.3	2.14	14.3	0.56	45.5	1.79	25	0.984	1"	32	1.260	1.1/4"
P4JIC9-1212	19	3/4"	12	1.1/16" - 12	14	0.55	70.8	2.79	14.3	0.56	54	2.13	30	1.181	1.3/16"	32	1.260	1.1/4"
P4JIC9-1216	19	3/4"	12	1.5/16" - 12	14	0.55	73	2.87	15.1	0.59	56	2.20	30	1.181	1.3/16"	41	1.614	1.5/8"
P4JIC9-1616	25	1"	16	1.5/16" - 12	19	0.75	71.7	2.82	15.1	0.59	61	2.40	41	1.614	1.5/8"	41	1.614	1.5/8"
P4JIC9-1620	25	1"	16	1.5/8" - 12	19	0.75	68	2.68	16	0.63	61.9	2.44	41	1.614	1.5/8"	50	1.969	2"
P4JIC9-2020	31	1.1/4"	20	1.5/8" - 12	25	0.98	79.5	3.13	16	0.63	77.3	3.04	46	1.811	1.13/16"	50	1.968	2"
P4JIC9-2024	31	1.1/4"	20	1.7/8" - 12	25	0.98	95.8	3.77	18.5	0.73	75.8	2.98	46	1.811	1.13/16"	55	2.165	2.3/16"
P4JIC9-2424	38	1.1/2"	24	1.7/8" - 12	31	1.22	97.2	3.83	18.5	0.73	99	3.90	55	2.165	2.3/16"	55	2.165	2.3/16"
P4JIC9-3232	51	2"	32	2.1/2" - 12	40	1.57	113	4.45	24	0.94	119.3	4.70	70	2.756	2.3/4"	75	2.953	--

PROCRIMP™ By YUVRAJ

ORFS M SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- ORFS
- ORFS MALE

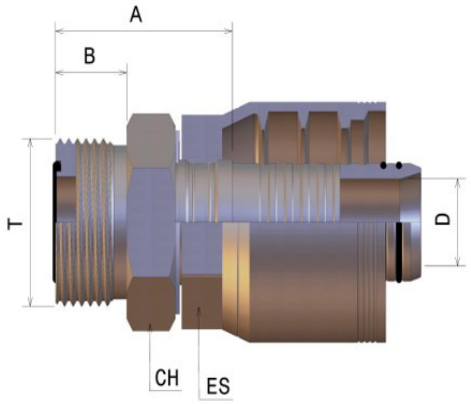

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4MORS-0606	10	3/8"	6	11/16" - 16	6.4	0.25	31.31	1.23	11.2	0.44	17	0.669	11/16"	19	0.748	3/4"
P4MORS-0608	10	3/8"	6	13/16" - 16	6.4	0.25	33.7	1.33	12.8	0.50	17	0.669	11/16"	22	0.866	7/8"
P4MORS-0808	12	1/2"	8	13/16" - 16	9	0.35	33.7	1.33	12.8	0.50	22	0.866	7/8"	22	0.866	7/8"
P4MORS-0810	12	1/2"	8	1" - 14	9	0.35	36.4	1.43	15.5	0.61	22	0.866	7/8"	27	1.063	1.1/16"
P4MORS-0812	12	1/2"	8	1.3/16" - 12	9	0.35	40.4	1.59	17	0.67	22	0.866	7/8"	32	1.260	1.1/4"
P4MORS-1010	16	5/8"	10	1" - 14	12	0.47	36.6	1.44	15.5	0.61	25	0.984	1"	27	1.063	1.1/16"
P4MORS-1012	16	5/8"	10	1.3/16" - 12	12	0.47	40.6	1.60	17	0.67	25	0.984	1"	32	1.260	1.1/4"
P4MORS-1210	19	3/4"	12	1" - 14	14.3	0.56	40	1.57	15.5	0.61	30	1.181	1.3/16"	27	1.063	1.1/16"
P4MORS-1212	19	3/4"	12	1.3/16" - 12	14.3	0.56	43.9	1.73	17	0.67	30	1.181	1.3/16"	32	1.260	1.1/4"
P4MORS-1216	19	3/4"	12	1.7/16" - 12	14.3	0.56	44.4	1.75	17.5	0.69	30	1.181	1.3/16"	41	1.614	1.5/8"
P4MORS-1616	25	1"	16	1.7/16" - 12	19	0.75	44.1	1.74	17.5	0.69	41	1.614	1.5/8"	41	1.614	1.5/8"
P4MORS-1620	25	1"	16	1.11/16" - 12	19	0.75	44.6	1.76	17.5	0.69	41	1.614	1.5/8"	46	1.811	1.13/16"
P4MORS-2020	31	1.1/4"	20	1.11/16" - 12	25	0.98	45.3	1.78	17.5	0.69	46	1.811	1.13/16"	46	1.811	1.13/16"
P4MORS-2424	38	1.1/2"	24	2" - 12	31	1.22	46.3	1.82	17.5	0.69	55	2.165	2.3/16"	55	2.165	2.3/16"

ORFS F SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- ORFS
- ORFS FEMALE SWIVEL

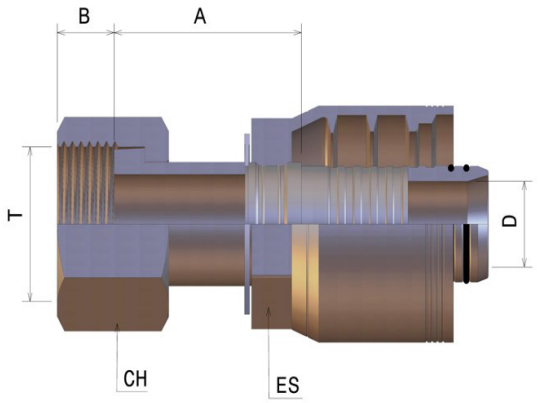

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4ORS-0606	10	3/8"	6	11/16" - 16	6.4	0.25	28.9	1.14	8.3	0.33	17	0.669	11/16"	22	0.866	7/8"
P4ORS-0608	10	3/8"	6	13/16" - 16	6.4	0.25	32.9	1.30	10	0.39	17	0.669	11/16"	27	1.063	1.1/16"
P4ORS-0808	12	1/2"	8	13/16" - 16	9	0.35	32.9	1.30	10	0.39	22	0.866	7/8"	27	1.063	1.1/16"
P4ORS-0810	12	1/2"	8	1" - 14	9	0.35	36.9	1.45	12.5	0.49	22	0.866	7/8"	30	1.181	1.3/16"
P4ORS-0812	12	1/2"	8	1.3/16" - 12	9	0.35	37.9	1.49	13.6	0.54	22	0.866	7/8"	36	1.417	1.7/16"
P4ORS-1010	16	5/8"	10	1" - 14	12	0.47	36.1	1.42	12.5	0.49	25	0.984	1"	30	1.181	1.3/16"
P4ORS-1012	16	5/8"	10	1.3/16" - 12	12	0.47	38.1	1.50	13.6	0.54	25	0.984	1"	36	1.417	1.7/16"
P4ORS-1212	19	3/4"	12	1.3/16" - 12	14.3	0.56	42.4	1.67	13.6	0.54	30	1.181	1.1/16"	36	1.417	1.7/16"
P4ORS-1216	19	3/4"	12	1.7/16" - 12	14.3	0.56	45.4	1.79	14.8	0.58	30	1.181	1.1/16"	41	1.614	1.5/8"
P4ORS-1616	25	1"	16	1.7/16" - 12	19	0.75	45.1	1.78	14.8	0.58	41	1.614	1.5/8"	41	1.614	1.5/8"
P4ORS-1620	25	1"	16	1.11/16" - 12	19	0.75	47.1	1.85	14.8	0.58	41	1.614	1.5/8"	50	1.969	2"
P4ORS-2020	31	1.1/4"	20	1.11/16" - 12	25	0.98	47.3	1.86	14.8	0.58	46	1.811	1.13/16"	50	1.969	2"
P4ORS-2024	31	1.1/4"	20	2" - 12	25	0.98	46.3	1.82	14.8	0.58	46	1.811	1.13/16"	60	2.362	2.3/8"
P4ORS-2424	38	1.1/2"	24	2" - 12	31	1.22	52.8	2.08	14.8	0.58	55	2.165	2.3/16"	60	2.362	2.3/8"

PROCRIMP™ By YUVRAJ

ORFS SP4 45

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- ORFS
- ORFS FEMALE SWIVEL - 45° ELBOW

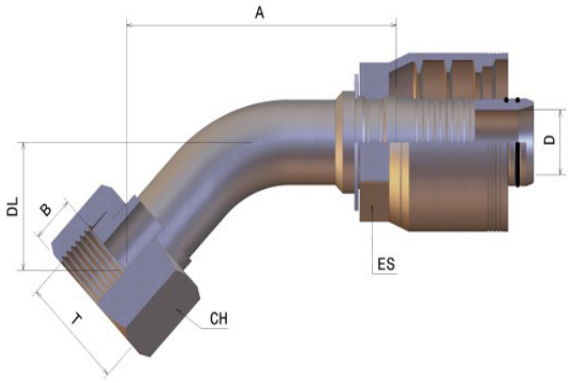

CODE	Ø HOSE			T	D		A		B		DL		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4ORS4-0606	10	3/8"	6	11/16" - 16	6	0.24	60.7	2.39	8.3	0.33	18.8	0.74	17	0.669	11/16"	22	0.866	7/8"
P4ORS4-0608	10	3/8"	6	13/16" - 16	6	0.24	60.5	2.38	10	0.39	19	0.75	17	0.669	11/16"	27	1.062	1.1/16"
P4ORS4-0808	12	1/2"	8	13/16" - 16	9	0.35	74.3	2.93	10	0.39	19.8	0.78	22	0.866	7/8"	27	1.062	1.1/16"
P4ORS4-0810	12	1/2"	8	1" - 14	9	0.35	78.9	3.11	12.5	0.49	21.5	0.85	22	0.866	7/8"	30	1.181	1.3/16"
P4ORS4-0812	12	1/2"	8	1.3/16" - 12	9	0.35	84.5	3.33	13.6	0.54	23.8	0.94	22	0.866	7/8"	36	1.417	1.7/16"
P4ORS4-1010	16	5/8"	10	1" - 14	12	0.47	79.1	3.11	12.5	0.49	23.6	0.93	25	0.984	1"	30	1.181	1.3/16"
P4ORS4-1012	16	5/8"	10	1.3/16" - 12	12	0.47	88.7	3.49	13.6	0.54	25.6	1.01	25	0.984	1"	36	1.417	1.7/16"
P4ORS4-1212	19	3/4"	12	1.3/16" - 12	14	0.55	97.7	3.85	13.6	0.54	28.5	1.12	30	1.181	1.1/16"	36	1.417	1.7/16"
P4ORS4-1216	19	3/4"	12	1.7/16" - 12	14	0.55	101	3.98	14.8	0.58	28.8	1.13	30	1.181	1.1/16"	41	1.614	1.5/8"
P4ORS4-1616	25	1"	16	1.7/16" - 12	19	0.75	103	4.06	14.8	0.58	29.5	1.16	41	1.614	1.5/8"	41	1.614	1.5/8"
P4ORS4-1620	25	1"	16	1.11/16" - 12	19	0.75	105.4	4.15	14.8	0.58	31.1	1.22	41	1.614	1.5/8"	50	1.968	2"
P4ORS4-2020	31	1.1/4"	20	1.11/16" - 12	25	0.98	120	4.72	14.8	0.58	37.5	1.48	46	1.811	1.13/16"	50	1.968	2"
P4ORS4-2424	38	1.1/2"	24	2" - 12	31	1.22	147	5.79	14.8	0.58	41	1.61	55	2.165	2.3/16"	60	2.362	2.3/8"

ORFS SP4 90

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- ORFS
- ORFS FEMALE SWIVEL- 90° ELBOW

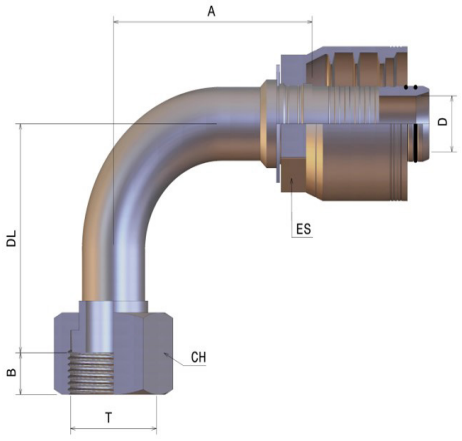

CODE	Ø HOSE			T	D		A		B		DL		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4ORS9-0606	10	3/8"	6	11/16" - 16	6	0.24	42.5	1.67	8.3	0.33	36	1.42	17	0.669	11/16"	22	0.866	7/8"
P4ORS9-0608	10	3/8"	6	13/16" - 16	6	0.24	41.5	1.63	10	0.39	35	1.38	17	0.669	11/16"	27	1.063	1.1/16"
P4ORS9-0808	12	1/2"	8	13/16" - 16	9	0.35	51.7	2.04	10	0.39	40	1.57	22	0.866	7/8"	27	1.063	1.1/16"
P4ORS9-0810	12	1/2"	8	1" - 14	9	0.35	47	1.85	12.5	0.49	40.7	1.60	22	0.866	7/8"	30	1.181	1.3/16"
P4ORS9-0812	12	1/2"	8	1.3/16" - 12	9	0.35	50.5	1.99	13.6	0.54	42	1.65	22	0.866	7/8"	36	1.417	1.7/16"
P4ORS9-1010	16	5/8"	10	1" - 14	12	0.47	52.4	2.06	12.5	0.49	47.7	1.88	25	0.984	1"	30	1.181	1.3/16"
P4ORS9-1012	16	5/8"	10	1.3/16" - 12	12	0.47	52.6	2.07	13.6	0.54	46	1.81	25	0.984	1"	36	1.417	1.7/16"
P4ORS9-1212	19	3/4"	12	1.3/16" - 12	14	0.55	66.2	2.61	13.6	0.54	56.4	2.22	30	1.181	1.1/16"	36	1.417	1.7/16"
P4ORS9-1216	19	3/4"	12	1.7/16" - 12	14	0.55	64.4	2.54	14.8	0.58	59.2	2.33	30	1.181	1.1/16"	41	1.614	1.5/8"
P4ORS9-1616	25	1"	16	1.7/16" - 12	19	0.75	72.2	2.84	14.8	0.58	61.5	2.42	41	1.614	1.5/8"	41	1.614	1.5/8"
P4ORS4-1620	25	1"	16	1.11/16" - 12	19	0.75	72.2	2.84	14.8	0.58	61.1	2.41	41	1.614	1.5/8"	50	1.969	2"
P4ORS9-2020	31	1.1/4"	20	1.11/16" - 12	25	0.98	85.6	3.37	14.8	0.58	77	3.03	46	1.811	1.13/16"	50	1.969	2"
P4ORS4-2424	38	1.1/2"	24	2" - 12	31	1.22	101	3.98	14.8	0.58	98	3.86	55	2.165	2.3/16"	60	2.362	2.3/8"

PROCRIMP By YUVRAJ

ORB SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- SAE
- O-RING BOSS MALE

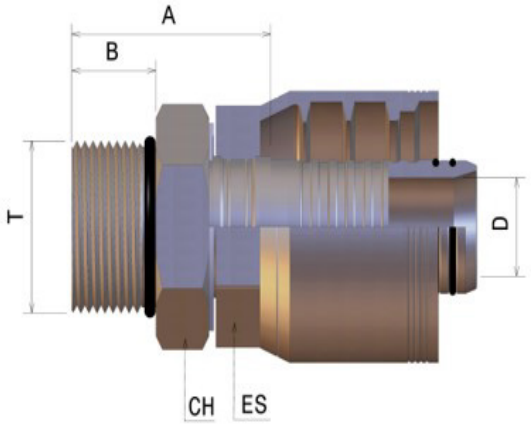

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P2MORB-0606	10	3/8"	6	9/16" - 18	6.4	0.25	28.9	1.14	9.9	0.39	17	0.669	11/16"	17	0.669	11/16"
P2MORB-0608	10	3/8"	6	3/4" - 16	6.4	0.25	30.9	1.22	11.1	0.44	17	0.669	11/16"	22	0.866	7/8"
P2MORB-0808	12	1/2"	8	3/4" - 16	9	0.35	31.9	1.26	11.1	0.44	22	0.866	7/8"	22	0.866	7/8"
P2MORB-1010	16	5/8"	10	7/8" - 14	12	0.47	34.1	1.34	12.7	0.50	25	0.984	1"	27	1.063	1.1/16"
P2MORB-1012	16	5/8"	10	1.1/16" - 12	12	0.47	37.1	1.46	15.1	0.59	25	0.984	1"	32	1.260	1.1/4"
P2MORB-1212	19	3/4"	12	1.1/16" - 12	14.3	0.56	39.4	1.55	15.1	0.59	30	1.181	1.3/16"	32	1.260	1.1/4"
P2MORB-1616	25	1"	16	1.5/16" - 12	19	0.75	45.7	1.80	15.1	0.59	41	1.614	1.5/8"	38	1.496	1.1/2"

JIS SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- JIS
- JIS FEMALE SWIVEL (60° CONE JAPANESE "T" STYLE TERMINATION)

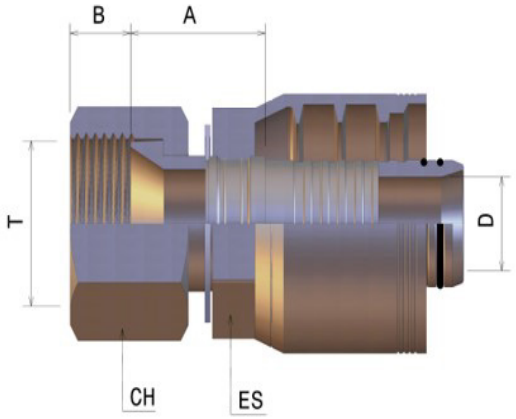

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4JIS-0606	10	3/8"	6	3/8" - 19	6.4	0.25	23.9	0.94	9.5	0.37	17	0.669	11/16"	22	0.866	7/8"
P4JIS-0808	12	1/2"	8	1/2" - 14	9	0.35	25.9	1.02	11	0.43	22	0.866	7/8"	27	1.063	1.1/16"
P4JIS-1212	19	3/4"	12	3/4" - 14	14.3	0.56	31.8	1.25	12.5	0.49	30	1.181	1.3/16"	32	1.260	1.1/4"
P4JIS-1616	25	1"	16	1" - 11	19	0.75	32.1	1.26	14	0.55	41	1.614	1.5/8"	38	1.496	1.1/2"

PROCRIMP™
By YUVRAJ

KOM SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- JIS
- JAPANESE “KOM” STYLE TERMINATION FEMALE SWIVEL 60° CONE

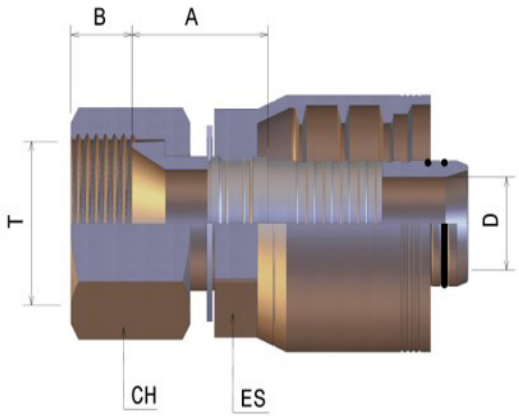

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4KOM-0614	10	3/8”	6	M14X1,5	6.4	0.25	28.9	1.14	10	0.39	17	0.669	11/16"	19	0.748	3/4”
P4KOM-0616	10	3/8”	6	M16X1,5	6.4	0.25	27.4	1.08	9.3	0.37	17	0.669	11/16"	22	0.866	7/8”
P4KOM-0618	10	3/8”	6	M18X1,5	6.4	0.25	28.4	1.12	11.5	0.45	17	0.669	11/16"	24	0.945	15/16”
P4KOM-0620	10	3/8”	6	M20X1,5	6.4	0.25	29.9	1.18	11.2	0.44	17	0.669	11/16"	27	1.063	1.1/16”
P4KOM-0622	10	3/8”	6	M22X1,5	6.4	0.25	29.9	1.18	14	0.55	17	0.669	11/16"	27	1.063	1.1/16”
P4KOM-0822	12	1/2”	8	M22X1,5	9	0.35	31.9	1.26	14	0.55	22	0.866	7/8”	27	1.063	1.1/16”
P4KOM-0824	12	1/2”	8	M24X1,5	9	0.35	33.4	1.31	15.1	0.59	22	0.866	7/8”	32	1.260	1.1/4”
P4KOM-1024	16	5/8”	10	M24X1,5	12	0.47	33.6	1.32	15.1	0.59	25	0.984	1"	32	1.260	1.1/4”
P4KOM-1224	19	3/4”	12	M24X1,5	14.3	0.56	36.8	1.45	15.1	0.59	30	1.181	1.1/16”	32	1.260	1.1/4”
P4KOM-1230	19	3/4”	12	M30X1,5	14.3	0.56	39.9	1.57	18.3	0.72	30	1.181	1.1/16"	36	1.417	1.7/16”
P4KOM-1233	19	3/4”	12	M33X1,5	14.3	0.56	38.9	1.53	21.3	0.84	30	1.181	1.1/16"	41	1.614	1.5/8”
P4KOM-1236	19	3/4”	12	M36X1,5	14.3	0.56	41.3	1.63	20	0.79	30	1.181	1.1/16"	46	1.811	1.13/16”
P4KOM-1633	25	1”	16	M33X1,5	19	0.75	41.3	1.63	21.3	0.84	41	1.614	1.5/8"	41	1.614	1.5/8”
P4KOM-1636	25	1”	16	M36X1,5	19	0.75	42.6	1.68	16	0.63	41	1.614	1.5/8”	46	1.811	1.13/16”
P4KOM-2036	31	1.1/4”	20	M36X1,5	25	0.98	48.8	1.92	20	0.79	46	1.811	1.13/16"	46	1.811	1.13/16”
P4KOM-2042	31	1.1/4”	20	M42X1,5	25	0.98	51.8	2.04	18.8	0.74	46	1.811	1.13/16"	55	2.165	2.3/16”
P4KOM-2442	38	1.1/2”	24	M42X1,5	31	1.22	56	2.20	18.8	0.74	55	2.165	2.3/16"	55	2.165	2.3/16”

KOM FL SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- JIS
- JAPANESE "KOM" STYLE TERMINATION STRAIGHT FLANGE (FOR METRIC O- RING)

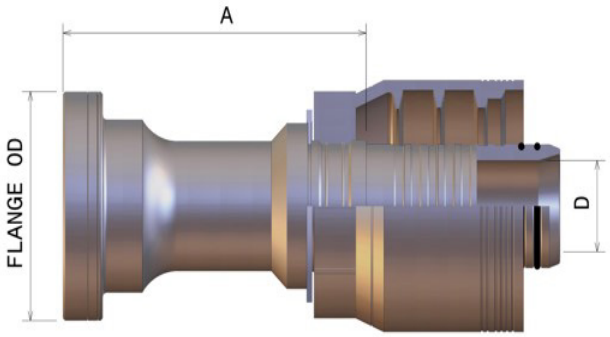

CODE	Ø HOSE			Flange Size	D		A		Flange OD	
	DN	INCH	SIZE		mm	in	mm	in	mm	in
P4KFL-1212	19	3/4"	12	3/4"	14.3	0.56	75.0	2.95	38	1.50
P4KFL-1216	19	3/4"	12	1"	14.3	0.56	80.5	3.17	44.5	1.75
P4KFL-1616	25	1"	16	1"	19	0.75	85.1	3.35	44.5	1.75
P4KFL-1620	25	1"	16	1.1/4"	19	0.75	86.4	3.40	50.8	2.00
P4KFL-2020	31	1.1/4"	20	1.1/4"	25	0.98	87.4	3.44	50.8	2.00
P4KFL-2424	38	1.1/2"	24	1.1/2"	31	1.22	97.8	3.85	60.3	2.37
P4KFL-3232	51	2"	32	2"	40	1.57	128.6	5.06	71.4	2.81

PROCRIMP™ By YUVRAJ

KOM FL 2 SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- JIS
- JAPANESE “KOM” STYLE TERMINATION STRAIGHT FLANGE WITH 2 BOLT CLAMP (FOR METRIC O-RING)

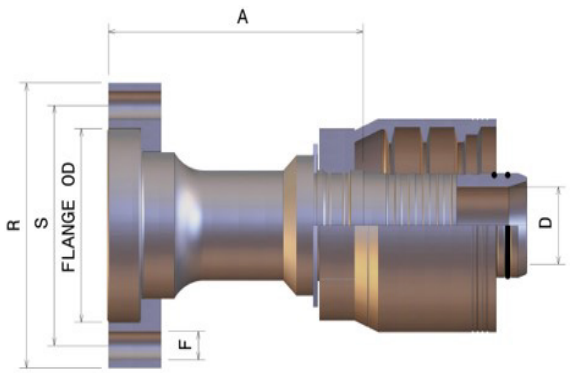

CODE	Ø HOSE			Flange Size	D		A		Flange OD		R		S		F	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
P4KFLB-1616	25	1”	16	1”	19	0.75	85.1	3.35	44.5	1.75	88	3.46	65	2.56	11	0.43
P4KFLB-2020	31	1.1/4”	20	1.1/4”	25	0.98	87.4	3.44	50.8	2.00	102	4.02	75	2.95	13.5	0.53
P4KFLB-2424	38	1.1/2”	24	1.1/2”	31	1.22	128.6	5.06	60.3	2.37	111	4.37	85	3.35	13.5	0.53

KOM FL45 SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- JIS
- JAPANESE "KOM" STYLE TERMINATION - 45° ELBOW FLANGE (FOR METRIC O- RING)

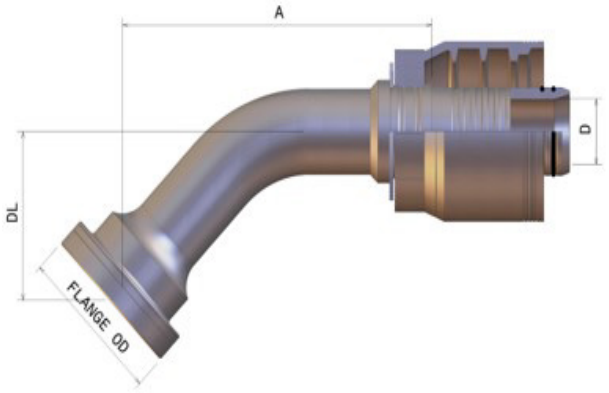

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in
P4KFL4-1212	19	3/4"	12	3/4"	14.3	0.56	107.1	4.22	38.1	1.50	36.2	1.43
P4KFL4-1216	19	3/4"	12	1"	14.3	0.56	106.3	4.19	44.5	1.75	33.9	1.33
P4KFL4-1616	25	1"	16	1"	19	0.75	125	4.92	44.5	1.75	35.6	1.40
P4KFL4-1620	25	1"	16	1.1/4"	19	0.75	124	4.88	50.8	2.00	38.1	1.50
P4KFL4-2020	31	1.1/4"	20	1.1/4"	25	0.98	130	5.12	50.8	2.00	42.3	1.67
P4KFL4-2424	38	1.1/2"	24	1.1/2"	31	1.22	163.2	6.43	60.3	2.37	48.8	1.92
P4KFL4-3232	51	2"	32	2"	40	1.57	210	8.27	71.4	2.81	62.2	2.45

PROCRIMP™ By YUVRAJ

KOM FL45 SP4 2

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- JIS
- JAPANESE “KOM” STYLE TERMINATION - 45° ELBOW FLANGE WITH 2 BOLT CLAMP (FOR METRIC O-RING)

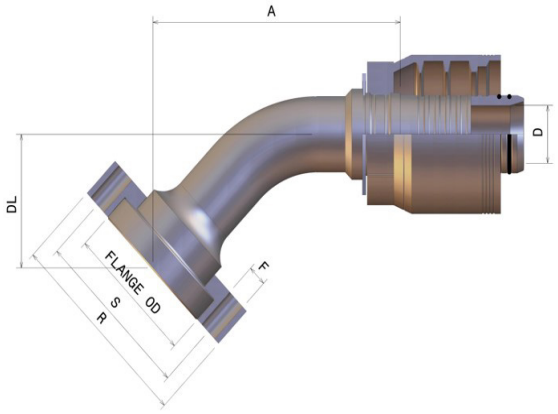

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL		R		S		F	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
P4K-FLB4-1616	25	1”	16	1”	19	0.75	123	4.84	44.5	1.75	35.6	1.40	88	3.46	65	2.56	11	0.43
P4K-FLB4-2020	31	1.1/4”	20	1.1/4”	25	0.98	130	5.12	50.8	2.00	42.3	1.67	102	4.02	75	2.95	13.5	0.53
P4K-FLB4-2424	38	1.1/2”	24	1.1/2”	31	1.22	163.2		60.3	2.37	48.8	1.92	111	4.37	85	3.35	13.5	0.53

KOM FL90 SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- JIS
- JAPANESE "KOM" STYLE TERMINATION - 90° ELBOW FLANGE (FOR METRIC O-RING)

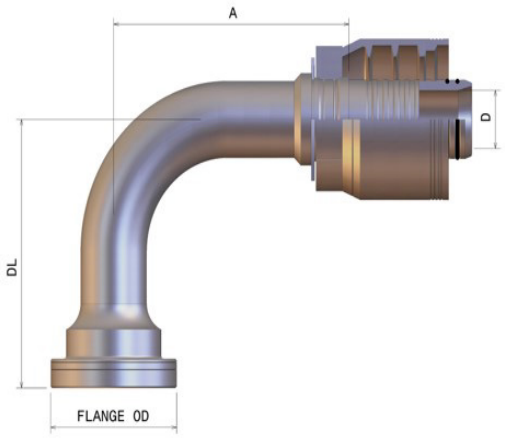

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in
P4KFL9-1212	19	3/4"	12	3/4"	14.3	0.56	69.1	2.72	38.1	1.50	71	2.80
P4KFL9-1216	19	3/4"	12	1"	14.3	0.56	72.3	2.85	44.5	1.75	62	2.44
P4KFL9-1616	25	1"	16	1"	19	0.75	85.1	3.35	44.5	1.75	67	2.64
P4KFL9-2020	31	1.1/4"	20	1.1/4"	25	0.98	105	4.13	50.8	2.00	81	3.19
P4KFL9-2424	38	1.1/2"	24	1.1/2"	31	1.22	114.5	4.51	60.3	2.37	98	3.86
P4KFL9-3232	51	2"	32	2"	40	1.57	137.7	5.42	71.4	2.81	128	5.04

PROCRIMP™ By YUVRAJ

KOM FL90 SP4 2

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- JIS
- JAPANESE “KOM” STYLE TERMINATION - 90° ELBOW FLANGE WITH 2 BOLT CLAMP (FOR METRIC O-RING)

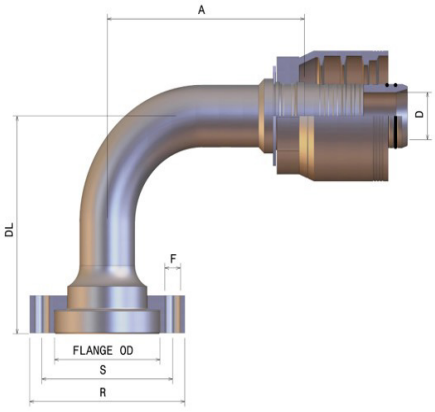

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL		R		S		F	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in
P4K-FLB9-1616	25	1”	16	1”	19	0.75	85.1	3.35	44.5	1.75	67	2.64	88	3.46	65	2.56	11	0.43
P4K-FLB9-2020	31	1.1/4”	20	1.1/4”	25	0.98	105	4.13	50.8	2.00	81	3.19	102	4.02	75	2.95	13.5	0.53
P4K-FLB9-2424	38	1.1/2”	24	1.1/2”	31	1.22	114.5	4.51	60.3	2.37	98	3.86	111	4.37	85	3.35	13.5	0.53

BSPT

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- BSPT
- BSPT TAPERED MALE - 60° CONE

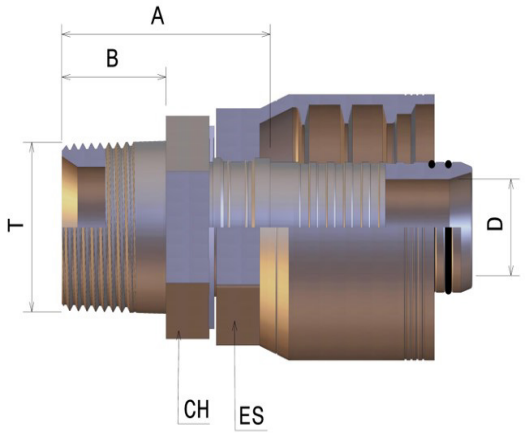

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4MBPT-0604	10	3/8"	6	1/4" - 19	6.4	0.25	34.2	1.35	14.3	0.56	17	0.669	11/16"	17	0.669	11/16"
P4MBPT-0606	10	3/8"	6	3/8" - 19	6.4	0.25	34.2	1.35	14.3	0.56	17	0.669	11/16"	19	0.748	3/4"
P4MBPT-0608	10	3/8"	6	1/2" - 14	6.4	0.25	39.9	1.57	19	0.75	17	0.669	11/16"	22	0.866	7/8"
P4MBPT-0808	12	1/2"	8	1/2" - 14	9	0.35	39.9	1.57	19	0.75	22	0.866	7/8"	22	0.866	7/8"
P4MBPT-1212	19	3/4"	12	3/4" - 14	14.3	0.56	46.0	1.81	19	0.75	30	1.181	1.3/16"	32	1.260	1.1/16"
P4MBPT-1216	19	3/4"	12	1" - 11	14.3	0.56	47.0	1.85	23.8	0.94	30	1.181	1.3/16"	41	1.614	1.5/8"
P4MBPT-1616	25	1"	16	1" - 11	19	0.75	50.4	1.99	23.8	0.94	41	1.614	1.5/8"	41	1.614	1.5/8"
P4MBPT-2016	31	1.1/4"	20	1" - 11	25	0.98	51.6	2.03	23.8	0.94	46	1.811	1.13/16"	41	1.614	1.5/8"
P4MBPT-2020	31	1.1/4"	20	1.1/4" - 11	25	0.98	52.4	2.06	24.6	0.97	46	1.811	1.13/16"	46	1.811	1.13/16"
P4MBPT-2424	38	1.1/2"	24	1.1/2" - 11	31	1.22	60.2	2.37	25.4	1.00	55	2.165	2.3/16"	50	1.969	2"
P4MBPT-3232	51	2"	32	2" - 11	40	1.57	64.1	2.52	26.2	1.03	70	2.756	2.3/4"	60	2.362	2.3/8"

PROCRIMP By YUVRAJ

BSPP

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- BSP
- BSP MALE 60° CONE

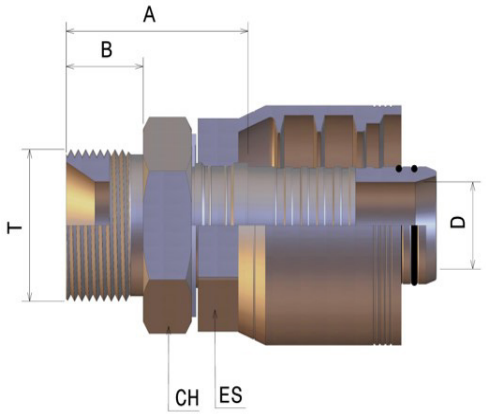

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4MBPP-0606	10	3/8"	6	3/8" - 19	6.4	0.25	31.9	1.26	12	0.47	17	0.669	11/16"	22	0.866	7/8"
P4MBPP-0608	10	3/8"	6	1/2" - 14	6.4	0.25	34.9	1.37	14	0.55	17	0.669	11/16"	27	1.063	1.1/16"
P4MBPP-0808	12	1/2"	8	1/2" - 14	9	0.35	34.9	1.37	14	0.55	22	0.866	7/8"	27	1.063	1.1/16"
P4MBPP-1010	16	5/8"	10	5/8" - 14	12	0.47	37.1	1.46	16	0.63	25	0.984	1"	30	1.181	1.3/16"
P4MBPP-1012	16	5/8"	10	3/4" - 14	12	0.47	39.6	1.56	16	0.63	25	0.984	1"	32	1.260	1.1/4"
P4MBPP-1212	19	3/4"	12	3/4" - 14	14.3	0.56	43.0	1.69	16	0.63	30	1.181	1.3/16"	32	1.260	1.1/4"
P4MBPP-1616	25	1"	16	1" - 11	19	0.75	45.6	1.80	19	0.75	41	1.614	1.5/8"	41	1.614	1.5/8"
P4MBPP-2020	31	1.1/4"	20	1.1/4" - 11	25	0.98	47.8	1.88	20	0.79	46	1.811	1.13/16"	50	1.969	2"
P4MBPP-2424	38	1.1/2"	24	1.1/2" - 11	31	1.22	56.8	2.24	22	0.87	55	2.165	2.3/16"	55	2.165	2.3/16"
P4MBPP-3232	51	2"	32	2" - 11	40	1.57	62.9	2.48	25	0.98	70	2.756	2.3/4"	70	2.756	2.3/4"

BSP F

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- BSP
- BSP FEMALE SWIVEL 60° CONE

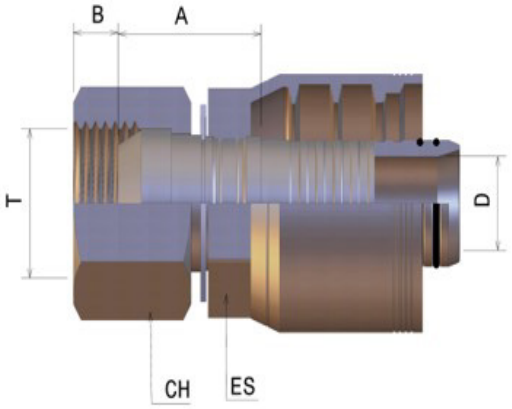

NPTF
JIC
ORFS
SAE
JIS
BSP-BSPT
METRIC
SAE 3000 CODE 61
SAE 6000 CODE 62
SUPERCAT STYLE HIGH PRESSURE FLANGE
STAPLE LOCK

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4BSP-0606	10	3/8"	6	3/8" - 19	6.4	0.25	23.9	0.94	6	0.24	17	0.669	11/16"	22	0.866	7/8"
P4BSP-0608	10	3/8"	6	1/2" - 14	6.4	0.25	26.9	1.06	6.5	0.26	17	0.669	11/16"	27	1.063	1.1/16"
P4BSP-0808	12	1/2"	8	1/2" - 14	9	0.35	25.9	1.02	6.5	0.26	22	0.866	7/8"	27	1.063	1.1/16"
P4BSP-0810	12	1/2"	8	5/8" - 14	9	0.35	27.2	1.07	9.7	0.38	22	0.866	7/8"	30	1.181	1.3.16"
P4BSP-1010	16	5/8"	10	5/8" - 14	12	0.47	26.4	1.04	9.7	0.38	25	0.984	1"	30	1.181	1.3/16"
P4BSP-1012	16	5/8"	10	3/4" - 14	12	0.47	28.1	1.11	8.7	0.34	25	0.984	1"	32	1.260	1.1/4"
P4BSP-1212	19	3/4"	12	3/4" - 14	14.3	0.56	31.8	1.25	8.7	0.34	30	1.181	1.3/16"	32	1.260	1.1/4"
P4BSP-1216	19	3/4"	12	1" - 11	14.3	0.56	33.5	1.32	10.5	0.41	30	1.181	1.3/16"	41	1.614	1.5/8"
P4BSP-1616	25	1"	16	1" - 11	19	0.75	32.1	1.26	10.5	0.41	41	1.614	1.5/8"	41	1.614	1.5/8"
P4BSP-1620	25	1"	16	1.1/4" - 11	19	0.75	36.2	1.43	10.1	0.40	41	1.614	1.5/8"	50	1.969	2"
P4BSP-2020	31	1.1/4"	20	1.1/4" - 11	25	0.98	39.2	1.54	10.1	0.40	46	1.811	1.13/16"	50	1.969	2"
P4BSP-2424	38	1.1/2"	24	1.1/2" - 11	31	1.22	43.3	1.70	12.5	0.49	55	2.165	2.3/16"	55	2.165	2.3/16"
P4BSP-3232	51	2"	32	2" - 11	40	1.57	46.2	1.82	16.1	0.63	70	2.756	2.3/4"	70	2.756	2.3/4"

PROCRIMP™ By YUVRAJ

BSP F 45 SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- BSP
- BSP FEMALE SWIVEL 60° CONE 45° ELBOW

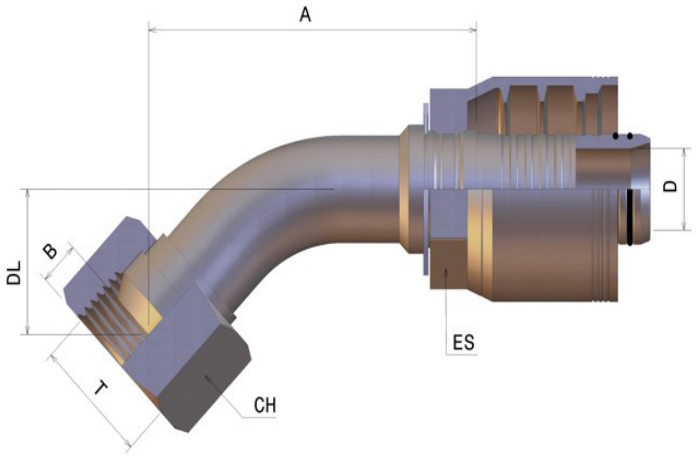

CODE	Ø HOSE			T	D		A		B		DL		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4BSP4-0606	10	3/8"	6	3/8" - 19	6.4	0.25	61.4	2.42	6	0.24	20	0.79	17	0.669	11/16"	22	0.866	7/8"
P4BSP4-0608	10	3/8"	6	1/2" - 14	6.4	0.25	62.2	2.45	6.5	0.26	20.8	0.82	17	0.669	11/16"	27	1.063	1.1/16"
P4BSP4-0808	12	1/2"	8	1/2" - 14	9	0.35	70	2.76	6.5	0.26	22.3	0.88	22	0.866	7/8"	27	1.063	1.1/16"
P4BSP4-1010	16	5/8"	10	5/8" - 14	12	0.47	78.5	3.09	9.7	0.38	26	1.02	25	0.984	1"	30	1.181	1.3/16"
P4BSP4-1012	16	5/8"	10	3/4" - 14	12	0.47	70	2.76	8.7	0.34	26.5	1.04	25	0.984	1"	32	1.260	1.1/4"
P4BSP4-1212	19	3/4"	12	3/4" - 14	14.3	0.56	98	3.86	8.7	0.34	29.8	1.17	30	1.181	1.3/16"	32	1.260	1.1/4"
P4BSP4-1616	25	1"	16	1" - 11	19	0.75	100	3.94	10.5	0.41	35	1.38	41	1.614	1.5/8"	41	1.614	1.5/8"
P4BSP4-2020	31	1.1/4"	20	1.1/4" - 11	25	0.98	121	4.76	10.1	0.40	42	1.65	46	1.811	1.13/16"	50	1.969	2"
P4BSP4-2424	38	1.1/2"	24	1.1/2" - 11	31	1.22	148	5.83	12.5	0.49	44.5	1.75	55	2.165	2.3/16"	55	2.165	2.3/16"
P4BSP4-3232	51	2"	32	2" - 11	40	1.57	173.7	6.84	16.1	0.63	61.2	2.41	70	2.756	2.3/4"	70	2.756	2.3/4"

BSP 90 SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- BSP
- BSP FEMALE SWIVEL 60° CONE 90° ELBOW

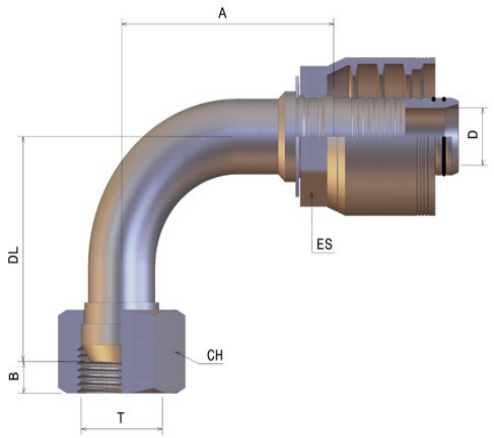

CODE	Ø HOSE			T	D		A		B		DL		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4BSP9-0606	10	3/8"	6	3/8" - 19	6.4	0.25	41	1.61	6	0.24	36	1.42	17	0.669	11/16"	22	0.866	7/8"
P4BSP9-0608	10	3/8"	6	1/2" - 14	6.4	0.25	41.7	1.64	6.5	0.26	36.5	1.44	17	0.669	11/16"	27	1.063	1.1/16"
P4BSP9-0808	12	1/2"	8	1/2" - 14	9	0.35	46.5	1.83	6.5	0.26	43	1.69	22	0.866	7/8"	27	1.063	1.1/16"
P4BSP9-1010	16	5/8"	10	5/8" - 14	12	0.47	52	2.05	9.7	0.38	49	1.93	25	0.984	1"	30	1.181	1.3/16"
P4BSP9-1012	16	5/8"	10	3/4" - 14	12	0.47	54	2.13	8.7	0.34	51	2.01	25	0.984	1"	32	1.260	1.1/4"
P4BSP9-1212	19	3/4"	12	3/4" - 14	14.3	0.56	66	2.60	8.7	0.34	57	2.24	30	1.181	1.3/16"	32	1.260	1.1/4"
P4BSP9-1216	19	3/4"	12	1" - 11	14.3	0.56	65.1	2.56	105	4.13	57.5	2.26	30	1.181	1.3/16"	41	1.614	1.5/8"
P4BSP9-1616	25	1"	16	1" - 11	19	0.75	71.5	2.81	10.5	0.41	65.5	2.58	41	1.614	1.5/8"	41	1.614	1.5/8"
P4BSP9-2020	31	1.1/4"	20	1.1/4" - 11	25	0.98	85.6	3.37	10.1	0.40	86	3.39	46	1.811	1.13/16"	50	1.969	2"
P4BSP9-2424	38	1.1/2"	24	1.1/2" - 11	31	1.22	98.5	3.88	12.5	0.49	97	3.82	55	2.165	2.3/16"	55	2.165	2.3/16"
P4BSP9-3232	51	2"	32	2" - 11	40	1.57	115.5	4.55	16.1	0.63	123	4.84	70	2.756	2.3/4"	70	2.756	2.3/4"

PROCRIMP™ By YUVRAJ

CEL SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- METRIC
- METRIC LIGHT MALE (24° CONE SEAT)

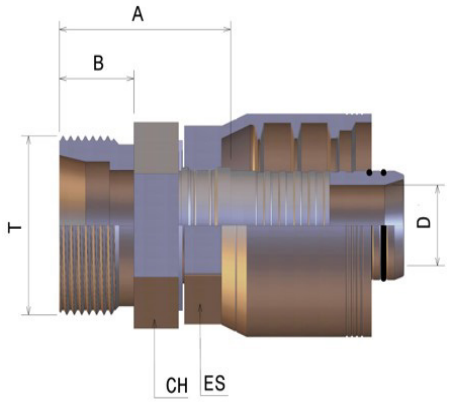

CODE	Ø HOSE			T	Pipe	D		A		B		ES			CH		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4CEL-0616	10	3/8"	6	M16X1.5	L10	6.4	0.25	30.9	1.22	11	0.43	17	0.669	11/16"	17	0.669	11/16"
P4CEL-0618	10	3/8"	6	M18X1.5	L12	6.4	0.25	30.9	1.22	11	0.43	17	0.669	11/16"	19	0.748	3/4"
P4CEL-0622	10	3/8"	6	M22X1.5	L15	6.4	0.25	32.9	1.30	12	0.47	17	0.669	11/16"	22	0.866	7/8"
P4CEL-0822	12	1/2"	8	M22X1.5	L15	9	0.35	32.9	1.30	12	0.47	22	0.866	7/8"	22	0.866	7/8"
P4CEL-1026	16	5/8"	10	M26X1.5	L18	12	0.47	33.1	1.30	12	0.47	25	0.984	1"	27	1.063	1.1/16"
P4CEL-1230	19	3/4"	12	M30X2	L22	14.3	0.56	40.9	1.61	14	0.55	30	1.181	1.3/16"	32	1.260	1.1/4"
P4CEL-1636	25	1"	16	M36X2	L28	19	0.75	40.6	1.60	14	0.55	41	1.614	1.5/8"	36	1.417	1.7/16"
P4CEL-2045	31	1.1/4"	20	M45X2	L35	25	0.98	43.8	1.72	16	0.63	46	1.811	1.13/16"	46	1.811	1.13/16"
P4CEL-2452	38	1.1/2"	24	M52X2	L42	31	1.22	50.8	2.00	16	0.63	55	2.165	2.3/16"	55	2.165	2.3/16"

DKO L SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- METRIC
- METRIC LIGHT FEMALE SWIVEL (24° CONE SEAT)

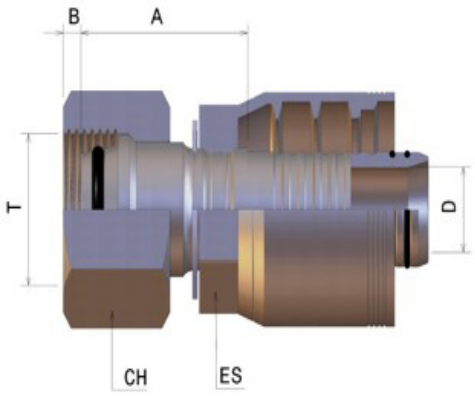

CODE	Ø HOSE			T	Pipe	D		A		B		ES			CH		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4DKL-0616	10	3/8"	6	M16X1.5	L10	6.4	0.25	33.8	1.33	1.8	0.07	17	0.669	11/16"	19	0.748	3/4"
P4DKL-0618	10	3/8"	6	M18X1.5	L12	6.4	0.25	33.4	1.31	2.0	0.08	17	0.669	11/16"	22	0.866	7/8"
P4DKL-0622	10	3/8"	6	M22X1.5	L15	6.4	0.25	35.0	1.38	1.0	0.04	17	0.669	11/16"	27	1.063	1.1/16"
P4DKL-0822	12	1/2"	8	M22X1.5	L15	9	0.35	35.0	1.38	1.0	0.04	22	0.866	7/8"	27	1.063	1.1/16"
P4DKL-0826	12	1/2"	8	M26X1.5	L18	9	0.35	36.0	1.42	1.0	0.04	22	0.866	7/8"	32	1.260	1.1/4"
P4DKL-1026	16	5/8"	10	M26X1.5	L18	12	0.47	35.7	1.40	1.0	0.04	25	0.984	1"	32	1.260	1.1/4"
P4DKL-1230	19	3/4"	12	M30X2	L22	14.3	0.56	41.6	1.64	2.3	0.09	30	1.181	1.3/16"	36	1.417	1.7/16"
P4DKL-1636	25	1"	16	M36X2	L28	19	0.75	52.2	2.06	3.7	0.15	41	1.614	1.5/8"	41	1.614	1.5/8"
P4DKL-2045	31	1.1/4"	20	M45X2	L35	25	0.98	48.0	1.89	3.8	0.15	46	1.811	1.13/16"	50	1.969	2"
P4DKL-2452	38	1.1/2"	24	M52X2	L42	31	1.22	54.5	2.15	4.6	0.18	55	2.165	2.3/16"	60	2.362	2.3/8"

PROCRIMP By YUVRAJ

DKO L SP4 45

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- METRIC
- METRIC LIGHT FEMALE SWIVEL 45° ELBOW (24° CONE SEAT)

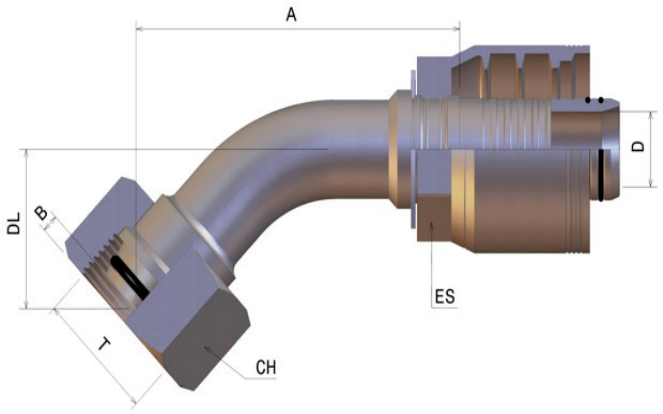

CODE	Ø HOSE			T	Pipe	D		A		B		DL		ES			CH		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4DKL4-0616	10	3/8"	6	M16X1.5	L10	6.4	0.25	59	2.323	1.8	0.07	20	0.79	17	0.669	11/16"	19	0.748	3/4"
P4DKL4-0618	10	3/8"	6	M18X1.5	L12	6.4	0.25	61	2.402	2	0.08	21	0.83	17	0.669	11/16"	22	0.866	7/8"
P4DKL4-0822	12	1/2"	8	M22X1.5	L15	9	0.35	65	2.559	1	0.04	24	0.94	22	0.866	7/8"	27	1.063	1.1/16"
P4DKL4-1026	16	5/8"	10	M26X1.5	L18	12	0.47	78.5	3.091	1	0.04	29.1	1.15	25	0.984	1"	32	1.260	1.1/4"
P4DKL4-1230	19	3/4"	12	M30X2	L22	14.3	0.56	95	3.740	2.3	0.09	32	1.26	30	1.181	1.3/16"	36	1.417	1.7/16"
P4DKL4-1636	25	1"	16	M36X2	L28	19	0.75	108	4.252	3.7	0.15	37.5	1.48	41	1.614	1.5/8"	41	1.614	1.5/8"
P4DKL4-2045	31	1.1/4"	20	M45X2	L35	25	0.98	129.3	5.091	3.8	0.15	44.7	1.76	46	1.811	1.13/16"	50	1.969	2"
P4DKL4-2452	38	1.1/2"	24	M52X2	L42	31	1.22	157	6.181	4.6	0.18	52	2.05	55	2.165	2.3/16"	60	2.362	2.3/8"

DKO L SP4 90

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- METRIC
- METRIC LIGHT FEMALE SWIVEL 90° ELBOW (24° CONE SEAT)

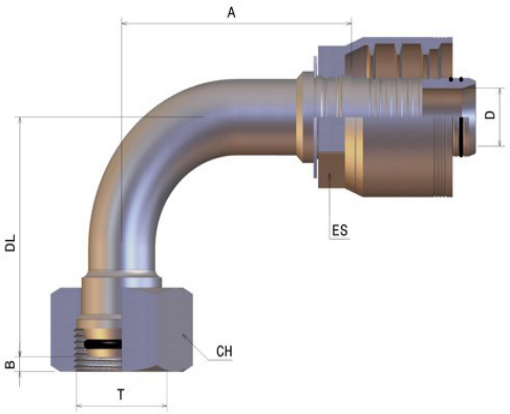

CODE	Ø HOSE			T	Pipe	D		A		B		DL		ES			CH		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4DKL9-0616	10	3/8"	6	M16X1.5	L10	6.4	0.25	40.65	1.60	1.8	0.07	40	1.57	17	0.669	11/16"	19	0.748	3/4"
P4DKL9-0618	10	3/8"	6	M18X1.5	L12	6.4	0.25	41.3	1.63	2	0.08	42	1.65	17	0.669	11/16"	22	0.866	7/8"
P4DKL9-0822	12	1/2"	8	M22X1.5	L15	9	0.35	48.1	1.89	1	0.04	44	1.73	22	0.866	7/8"	27	1.063	1.1/16"
P4DKL9-1026	16	5/8"	10	M26X1.5	L18	12	0.47	55	2.17	1	0.04	52	2.05	25	0.984	1"	32	1.260	1.1/4"
P4DKL9-1230	19	3/4"	12	M30X2	L22	14.3	0.56	63.8	2.51	2.3	0.09	61	2.40	30	1.181	1.3/16"	36	1.417	1.7/16"
P4DKL9-1636	25	1"	16	M36X2	L28	19	0.75	67.5	2.66	3.7	0.15	70	2.76	41	1.614	1.5/8"	41	1.614	1.5/8"
P4DKL9-2045	31	1.1/4"	20	M45X2	L35	25	0.98	89	3.50	3.8	0.15	85	3.35	46	1.811	1.13/16"	50	1.969	2"
P4DKL9-2452	38	1.1/2"	24	M52X2	L42	31	1.22	87.5	3.44	4.6	0.18	94.5	3.72	55	2.165	2.3/16"	60	2.362	2.3/8"

PROCRIMP™ By YUVRAJ

CEL SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- METRIC
- METRIC HEAVY MALE (24° CONE SEAT)

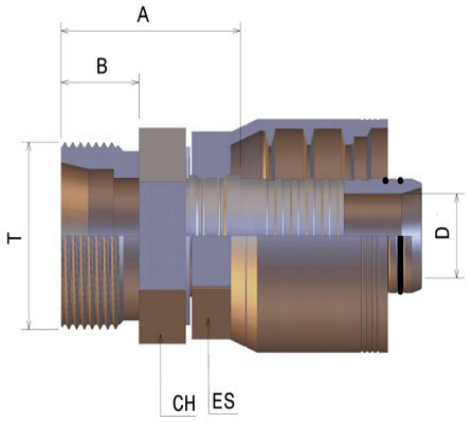

CODE	Ø HOSE			T	Pipe	D		A		B		ES			CH		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4CES-0618	10	3/8"	6	M18X1.5	S10	6.4	0.25	31.9	1.26	12	0.47	17	0.669	11/16"	19	0.748	3/4"
P4CES-0620	10	3/8"	6	M20X1.5	S12	6.4	0.25	32.9	1.29	12	0.47	17	0.669	11/16"	22	0.866	7/8"
P4CES-0622	10	3/8"	6	M22X1.5	S14	6.4	0.25	32.9	1.29	12	0.47	17	0.669	11/16"	22	0.866	7/8"
P4CES-0624	10	3/8"	6	M24X1.5	S16	6.4	0.25	34.9	1.37	14		17	0.669	11/16"	24	0.945	15/16"
P4CES-0824	12	1/2"	8	M24X1.5	S16	9	0.35	34.9	1.37	14	0.55	22	0.866	7/8"	24	0.945	15/16"
P4CES-1030	16	5/8"	10	M30X2	S20	12	0.47	39.6	1.56	16	0.63	25	0.984	1"	32	1.260	1.1/4"
P4CES-1230	19	3/4"	12	M30X2	S20	14.3	0.56	43.0	1.69	16	0.63	30	1.181	1.3/16"	32	1.260	1.1/4"
P4CES-1236	19	3/4"	12	M36X2	S25	14.3	0.56	45.0	1.77	18	0.71	30	1.181	1.3/16"	36	1.417	1.7/16"
P4CES-1636	25	1"	16	M36X2	S25	19	0.75	44.6	1.76	18	0.71	41	1.614	1.5/8"	36	1.417	1.7/16"
P4CES-1642	25	1"	16	M42X2	S30	19	0.75	46.6	1.84	20	0.79	41	1.614	1.5/8"	46	1.811	1.13/16"
P4CES-2052	31	1.1/4"	20	M52X2	S38	25	0.98	51.3	2.02	22	0.87	46	1.811	1.13/16"	55	2.165	2.3/16"
P4CES-2452	38	1.1/2"	24	M52X2	S38	31	1.22	56.8	2.24	22	0.87	55	2.165	2.3/16"	55	2.165	2.3/16"

DKO S SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- METRIC
- METRIC HEAVY FEMALE SWIVEL (24° CONE SEAT)

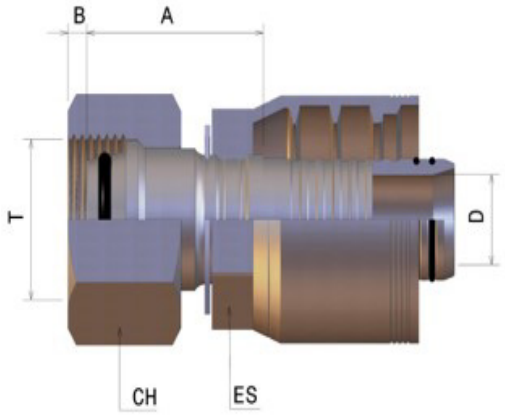

CODE	Ø HOSE			T	Pipe	D		A		B		ES			CH		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4DKS-0618	10	3/8"	6	M18X1.5	S10	6.4	0.25	35.5	1.40	1.8	0.07	17	0.669	11/16"	22	0.866	7/8"
P4DKS-0620	10	3/8"	6	M20X1.5	S12	6.4	0.25	35.5	1.40	2.0	0.08	17	0.669	11/16"	24	0.945	15/16"
P4DKS-0622	10	3/8"	6	M22X1.5	S14	6.4	0.25	41.1	1.62	4.0	0.16	17	0.669	11/16"	27	1.063	1.1/16"
P4DKS-0824	12	1/2"	8	M24X1.5	S16	9	0.35	38.5	1.51	3.0	0.12	22	0.866	7/8"	30	1.181	1.3/16"
P4DKS-1030	16	5/8"	10	M30X2	S20	12	0.47	43.8	1.72	2.3	0.09	25	0.984	1"	36	1.417	1.7/16"
P4DKS-1036	16	5/8"	10	M36X2	S25	12	0.47	46.8	1.84	4.3	0.17	25	0.984	1"	46	1.811	1,13/16"
P4DKS-1230	19	3/4"	12	M30X2	S20	14.3	0.56	47.0	1.85	2.3	0.09	30	1.181	1.3/16"	36	1.417	1.7/16"
P4DKS-1236	19	3/4"	12	M36X2	S25	14.3	0.56	50.0	1.97	4.3	0.17	30	1.181	1.3/16"	46	1.811	1.13/16"
P4DKS-1636	25	1"	16	M36X2	S25	19	0.75	50.2	1.98	4.3	0.17	41	1.614	1.5/8"	46	1.811	1.13/16"
P4DKS-1642	25	1"	16	M42X2	S30	19	0.75	52.1	2.05	4.6	0.18	41	1.614	1.5/8"	50	1.969	2"
P4DKS-2042	31	1.1/4"	20	M42X2	S30	25	0.98	53.2	2.09	6.5	0.26	46	1.811	1.13/16"	50	1.969	2"
P4DKS-2052	31	1.1/4"	20	M52X2	S38	25	0.98	56.8	2.24	6.3	0.25	46	1.811	1.13/16"	60	2.362	2.3/8"
P4DKS-2452	38	1.1/2"	24	M52X2	S38	31	1.22	63.2	2.49	7.8	0.31	55	2.165	2.3/16"	60	2.362	2.3/8"

PROCRIMP™ By YUVRAJ

DKO S SP4 45

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- METRIC
- METRIC HEAVY FEMALE SWIVEL 45° ELBOW (24° CONE SEAT)

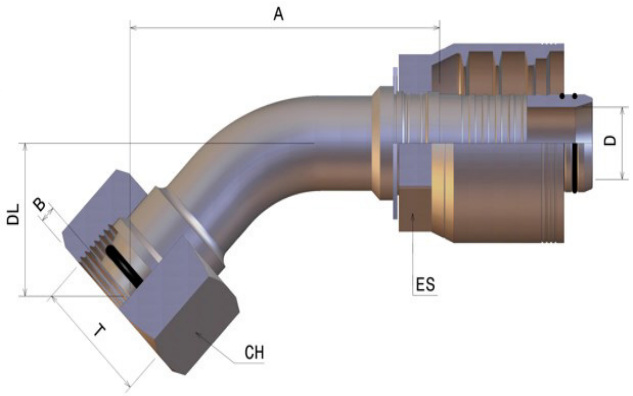

CODE	Ø HOSE			T	Pipe	D		A		B		DL		ES			CH		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4DKS4-0620	10	3/8"	6	M20X1.5	S12	6.4	0.25	63	2.48	1.8	0.07	23	0.91	17	0.669	11/16"	24	0.945	15/16"
P4DKS4-0622	10	3/8"	6	M22X1.5	S14	6.4	0.25	64	2.52	4	0.16	24	0.94	17	0.669	11/16"	27	1.063	1.1/16"
P4DKS4-0824	12	1/2"	8	M24X1.5	S16	9	0.35	69	2.72	3	0.12	26	1.02	22	0.866	7/8"	30	1.181	1.3/16"
P4DKS4-1030	16	5/8"	10	M30X2	S20	12	0.47	84	3.31	2.25	0.09	30	1.18	25	0.984	1"	36	1.417	1.7/16"
P4DKS4-1230	19	3/4"	12	M30X2	S20	14.3	0.56	95	3.74	2.25	0.09	32	1.26	30	1.181	1.3/16"	36	1.417	1.7/16"
P4DKS4-1236	19	3/4"	12	M36X2	S25	14.3	0.56	101	3.98	4.25	0.17	36	1.42	30	1.181	1.3/16"	46	1.811	1.13/16"
P4DKS4-1636	25	1"	16	M36X2	S25	19	0.75	109	4.29	4.25	0.17	38	1.50	41	1.614	1.5/8"	46	1.811	1.13"/16"
P4DKS4-1642	25	1"	16	M42X2	S30	19	0.75	127.7	5.03	4.55	0.18	45	1.77	41	1.614	1.5/8"	50	1.969	2"
P4DKS4-2052	31	1.1/4"	20	M52X2	S38	25	0.98	134	5.28	6.3	0.25	45.6	1.80	46	1.811	1.13/16"	60	2.362	2.3/8"
P4DKS4-2452	38	1.1/2"	24	M52X2	S38	31	1.22	157	6.18	7.8	0.31	52.2	2.06	55	2.165	2.3/16"	60	2.362	2.3/8"

DKO S SP4 90

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- METRIC
- METRIC HEAVY FEMALE SWIVEL 90° ELBOW (24° CONE SEAT)

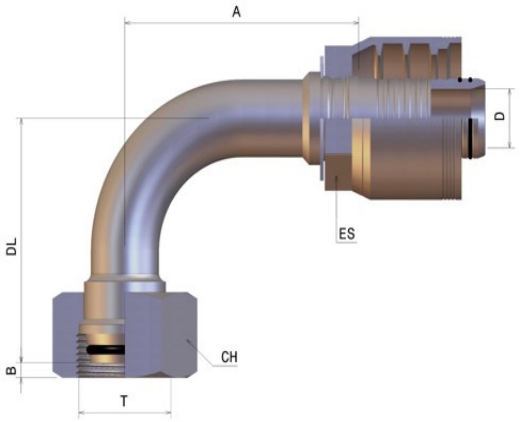

CODE	Ø HOSE			T	Pipe	D		A		B		DL		ES			CH		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P4DKS9-0620	10	3/8"	6	M20X1.5	S12	6	0.24	42	1.65	1.8	0.07	41.5	1.63	17	0.669	11/16"	24	0.945	15/16"
P4DKS9-0622	10	3/8"	6	M22X1.5	S14	6	0.24	46	1.81	4	0.16	42	1.65	17	0.669	11/16"	27	1.063	1.1/16"
P4DKS9-0824	12	1/2"	8	M24X1.5	S16	9	0.35	48	1.89	3	0.12	48.5	1.91	22	0.866	7/8"	30	1.181	1.3/16"
P4DKS9-1030	16	5/8"	10	M30X2	S20	12	0.47	49.5	1.95	2.3	0.09	56	2.20	25	0.984	1"	36	1.417	1.7/16"
P4DKS9-1230	19	3/4"	12	M30X2	S20	14	0.55	63.8	2.51	2.3	0.09	61	2.40	30	1.181	1.3/16"	36	1.417	1.7/16"
P4DKS9-1236	19	3/4"	12	M36X2	S25	14	0.55	59.7	2.35	4.3	0.17	62.5	2.46	30	1.181	1.3/16"	46	1.811	1.13/16"
P4DKS9-1636	25	1"	16	M36X2	S25	19	0.75	67.5	2.66	4.3	0.17	70	2.76	41	1.614	1.5/8"	46	1.811	1.13/16"
P4DKS9-1642	25	1"	16	M42X2	S30	19	0.75	70	2.76	4.6	0.18	71	2.80	41	1.614	1.5/8"	50	1.969	2"
P4DKS9-2052	31	1.1/4"	20	M52X2	S38	25	0.98	84	3.31	6.3	0.25	86.5	3.41	46	1.811	1.13/16"	60	2.362	2.3/8"
P4DKS9-2452	38	1.1/2"	24	M52X2	S38	31	1.22	87	3.43	7.8	0.31	96	3.78	55	2.165	2.3/16"	60	2.362	2.3/8"

PROCRIMP™ By YUVRAJ

FL61 SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- SAE 3000 CODE 61
- SAE 3000 CODE 61 STRAIGHT FLANGE

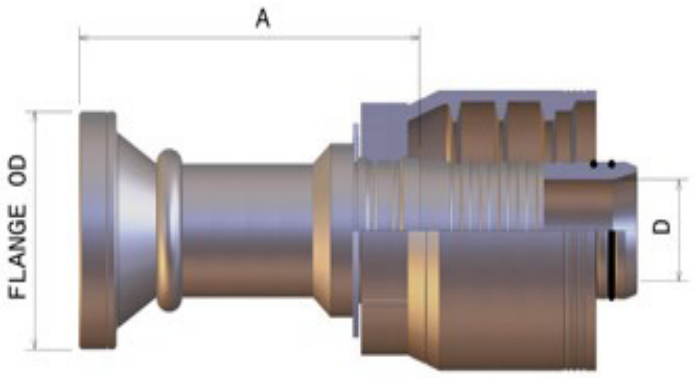

CODE	Ø HOSE			Flange Size	D		A		Flange OD	
	DN	INCH	SIZE		mm	in	mm	in	mm	in
P4F3K-0808	12	1/2"	8	1/2"	9	0.35	51.4	2.02	30.2	1.19
P4F3K-0812	12	1/2"	8	3/4"	9	0.35	71.2	2.80	38.1	1.50
P4F3K-1012	16	5/8"	10	3/4"	12	0.47	71.5	2.81	38.1	1.50
P4F3K-1212	19	3/4"	12	3/4"	14.3	0.56	74.8	2.94	38.1	1.50
P4F3K-1216	19	3/4"	12	1"	14.3	0.56	80.6	3.17	44.5	1.75
P4F3K-1220	19	3/4"	12	1.1/4"	14.3	0.56	81.2	3.20	50.8	2.00
P4F3K-1616	25	1"	16	1"	19	0.75	80.2	3.16	44.5	1.75
P4F3K-1620	25	1"	16	1.1/4"	19	0.75	80.9	3.19	50.8	2.00
P4F3K-1624	25	1"	16	1.1/2"	19	0.75	93.1	3.67	60.3	2.38
P4F3K-2016	31	1.1/4"	20	1"	25	0.98	82.9	3.26	44.5	1.75
P4F3K-2020	31	1.1/4"	20	1.1/4"	25	0.98	82	3.23	50.8	2.00
P4F3K-2024	31	1.1/4"	20	1.1/2"	25	0.98	94.3	3.71	60.3	2.38
P4F3K-2032	31	1.1/4"	20	2"	25	0.98	100.9	3.97	71.4	2.81
P4F3K-2424	38	1.1/2"	24	1.1/2"	31	1.22	101.6	4.00	60.3	2.38
P4F3K-2432	38	1.1/2"	24	2"	31	1.22	108.2	4.26	71.4	2.81
P4F3K-3232	51	2"	32	2"	40	1.57	110.2	4.34	71.4	2.81

FL61 SP4 45

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- SAE 3000 CODE 61
- SAE 3000 CODE 61 - 45° ELBOW FLANGE

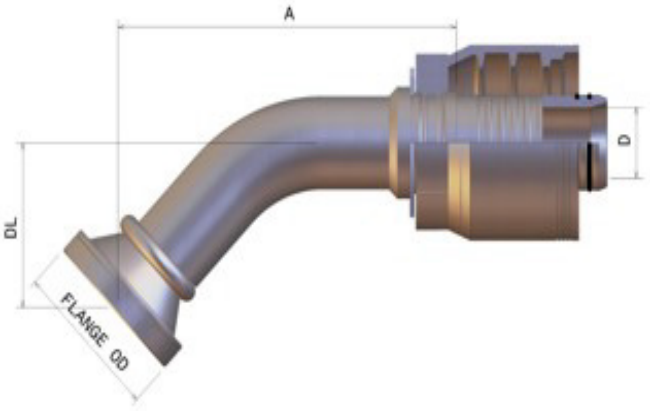

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in
P4F3K4-0808	12	1/2"	8	1/2"	9	0.35	84.5	3.33	30.2	1.19	25	0.98
P4F3K4-0812	12	1/2"	8	3/4"	9	0.35	94.3	3.71	38.1	1.50	28.5	1.12
P4F3K4-1012	16	5/8"	10	3/4"	12	0.47	104	4.09	38.1	1.50	29.8	1.17
P4F3K4-1212	19	3/4"	12	3/4"	14.3	0.56	107.1	4.22	38.1	1.50	31.2	1.23
P4F3K4-1216	19	3/4"	12	1"	14.3	0.56	106.3	4.19	44.45	1.75	29	1.14
P4F3K4-1616	25	1"	16	1"	19	0.75	125	4.92	44.45	1.75	35.6	1.40
P4F3K4-2020	31	1.1/4"	20	1.1/4"	25	0.98	122.6	4.83	50.8	2.00	48.5	1.91
P4F3K4-2424	38	1.1/2"	24	1.1/2"	31	1.22	163.2	6.43	60.33	2.38	51.1	2.01
P4F3K4-3232	51	2"	32	2"	40	1.57	210	8.27	71.4	2.81	62.2	2.45

PROCRIMP™ By YUVRAJ

FL61 SP4 90

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- SAE 3000 CODE 61
- SAE 3000 CODE 61 - 90° ELBOW FLANGE

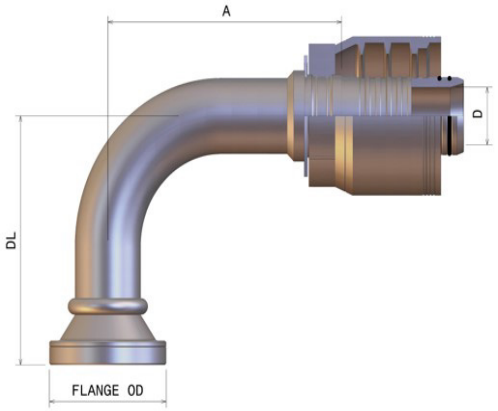

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in
P4F3K9-0808	12	1/2"	8	1/2"	9	0.35	54.5	2.15	30.2	1.19	48.5	1.91
P4F3K9-0812	12	1/2"	8	3/4"	9	0.35	55	2.17	38.1	1.50	74	2.91
P4F3K9-1012	16	5/8"	10	3/4"	12	0.47	56	2.20	38.1	1.50	72.5	2.85
P4F3K9-1212	19	3/4"	12	3/4"	14.3	0.56	69.1	2.72	38.1	1.50	71	2.80
P4F3K9-1216	19	3/4"	12	1"	14.3	0.56	72.3	2.85	44.45	1.75	64.5	2.54
P4F3K9-1616	25	1"	16	1"	19	0.75	85.1	3.35	44.45	1.75	67	2.64
P4F3K9-1620	25	1"	16	1.1/4"	19	0.75	87.7	3.45	50.8	2.00	70.1	2.76
P4F3K9-2020	31	1.1/4"	20	1.1/4"	25	0.98	89.2	3.51	50.8	2.00	76.3	3.00
P4F3K9-2024	31	1.1/4"	20	1.1/2"	25	0.98	92.1	3.63	60.33	2.38	92.8	3.65
P4F3K9-2424	38	1.1/2"	24	1.1/2"	31	1.22	114.5	4.51	60.33	2.38	98	3.86
P4F3K9-2432	38	1.1/2"	24	2"	31	1.22	123.1	4.85	71.4	2.81	108	4.25
P4F3K9-3232	51	2"	32	2"	40	1.57	137.7	5.42	71.4	2.81	128	5.04

FL61 SP4 90L

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- SAE 3000 CODE 61
- SAE 3000 CODE 61 - 90° ELBOW FLANGE (LONG DROP)

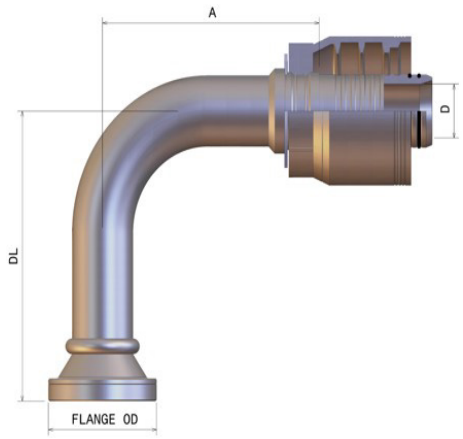

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in
P4F3K9-1212-95	19	3/4"	12	3/4"	14.3	0.56	69	2.72	38.1	1.50	95	3.74
P4F3K9-1212-100	19	3/4"	12	3/4"	14.3	0.56	69.2	2.72	38.1	1.50	100	3.94
P4F3K9-1212-125	19	3/4"	12	3/4"	14.3	0.56	69	2.72	38.1	1.50	125	4.92
P4F3K9-1216-100	19	3/4"	12	1"	14.3	0.56	72.3	2.85	44.4	1.75	100	3.94
P4F3K9-1216-120	19	3/4"	12	1"	14.3	0.56	72.5	2.85	44.4	1.75	120	4.72
P4F3K9-1616-120	25	1"	16	1"	19	0.75	85.1	3.35	44.4	1.75	120	4.72
P4F3K9-1620-120	25	1"	16	1.1/4"	19	0.75	87.8	3.46	50.8	2.00	120	4.72
P4F3K9-2020-100	31	1.1/4"	20	1.1/4"	25	0.98	89.3	3.52	50.8	2.00	100	3.94
P4F3K9-2020-120	31	1.1/4"	20	1.1/4"	25	0.98	89.3	3.52	50.8	2.00	120	4.72
P4F3K9-2020-130	31	1.1/4"	20	1.1/4"	25	0.98	89.3	3.52	50.8	2.00	130	5.12
P4F3K9-2020-170	31	1.1/4"	20	1.1/4"	25	0.98	89.3	3.52	50.8	2.00	170	6.69
P4F3K9-2024-117	31	1.1/4"	20	1.1/2"	25	0.98	92.1	3.63	60.3	2.37	117	4.61
P4F3K9-2024-130	31	1.1/4"	20	1.1/2"	25	0.98	92.1	3.63	60.3	2.37	130	5.12
P4F3K9-2024-170	31	1.1/4"	20	1.1/2"	25	0.98	92.1	3.63	60.3	2.37	170	6.69
P4F3K9-2424-150	38	1.1/2"	24	1.1/2"	31	1.22	114.6	4.51	60.3	2.37	150	5.91
P4F3K9-2424-170	38	1.1/2"	24	1.1/2"	31	1.22	114.5	4.51	60.3	2.37	170	6.69
P4F3K9-2432-114	38	1.1/2"	24	2"	31	1.22	123.2	4.85	71.4	2.81	114	4.49
P4F3K9-3232-165	51	2"	32	2"	40	1.57	137.8	5.43	71.4	2.81	165	6.50
P4F3K9-3232-203	51	2"	32	2"	40	1.57	137.6	5.42	71.4	2.81	203	7.99

PROCRIMP™ By YUVRAJ

FL62 SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- SAE 6000 CODE 62
- SAE 6000 CODE 62 STRAIGHT FLANGE

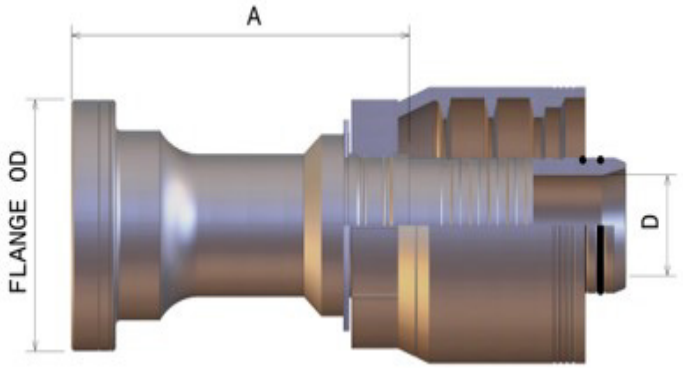

CODE	Ø HOSE			Flange Size	D		A		Flange OD	
	DN	INCH	SIZE		mm	in	mm	in	mm	in
P4F6K-0808	12	1/2"	8	1/2"	9	0.35	53.9	2.12	31.7	1.25
P4F6K-0812	12	1/2"	8	3/4"	9	0.35	76.5	3.01	41.3	1.63
P4F6K-1008	16	5/8"	10	1/2"	12	0.47	54.1	2.13	31.7	1.25
P4F6K-1012	16	5/8"	10	3/4"	12	0.47	76.7	3.02	41.3	1.63
P4F6K-1212	19	3/4"	12	3/4"	14.3	0.56	80	3.15	41.3	1.63
P4F6K-1216	19	3/4"	12	1"	14.3	0.56	85.1	3.35	47.6	1.87
P4F6K-1612	25	1"	16	3/4"	19	0.75	79.7	3.14	41.3	1.63
P4F6K-1616	25	1"	16	1"	19	0.75	84.8	3.34	47.6	1.87
P4F6K-1620	25	1"	16	1.1/4"	19	0.75	88.9	3.50	54	2.13
P4F6K-2016	31	1.1/4"	20	1"	25	0.98	87.9	3.46	47.6	1.87
P4F6K-2020	31	1.1/4"	20	1.1/4"	25	0.98	90	3.54	54	2.13
P4F6K-2024	31	1.1/4"	20	1.1/2"	25	0.98	106	4.17	63.5	2.50
P4F6K-2424	38	1.1/2"	24	1.1/2"	31	1.22	113.4	4.46	63.5	2.50
P4F6K-2432	38	1.1/2"	24	2"	31	1.22	125.1	4.93	79.4	3.13
P4F6K-3232	51	2"	32	2"	40	1.57	127	5.00	79.4	3.13

FL62 SP4 45

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- SAE 6000 CODE 62
- SAE 6000 CODE 62 - 45° ELBOW FLANGE

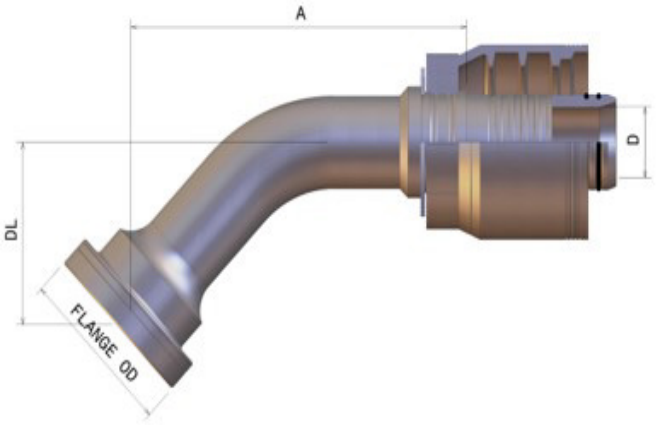

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in
P4F6K4-0808	12	1/2"	8	1/2"	9	0.35	76	2.99	31.7	1.25	22.3	0,92
P4F6K4-0812	12	1/2"	8	3/4"	9	0.35	98	3.86	41.3	1.63	30,0	1,18
P4F6K4-1012	16	5/8"	10	3/4"	12	0.47	101	3.98	41.3	1.63	29,0	1,14
P4F6K4-1212	19	3/4"	12	3/4"	14.3	0.56	105	4.13	41.3	1.63	39.5	1,10
P4F6K4-1216	19	3/4"	12	1"	14.3	0.56	109.6	4.31	47.6	1.87	35.6	1,33
P4F6K4-1616	25	1"	16	1"	19	0.75	125	4.92	47.6	1.87	41.2	1,21
P4F6K4-1620	25	1"	16	1.1/4"	19	0.75	117.8	4.64	54	2.13	48.7	1,54
P4F6K4-2020	31	1.1/4"	20	1.1/4"	25	0.98	115	4.53	54	2.13	50.6	1,72
P4F6K4-2024	31	1.1/4"	20	1.1/2"	25	0.98	148.2	5.83	63.5	2.50	58.6	1,89
P4F6K4-2424	38	1.1/2"	24	1.1/2"	31	1.22	144.6	5.69	63.5	2.50	59	1,85
P4F6K4-2432	38	1.1/2"	24	2"	31	1.22	178.6	7.03	79.4	3.13	65.2	2,27
P4F6K4-3232	51	2"	32	2"	40	1.57	205.2	8.08	79.4	3.13	70.4	2,52

PROCRIMP™ By YUVRAJ

FL62 SP4 90

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- SAE 6000 CODE 62
- SAE 6000 CODE 62 - 90° ELBOW FLANGE

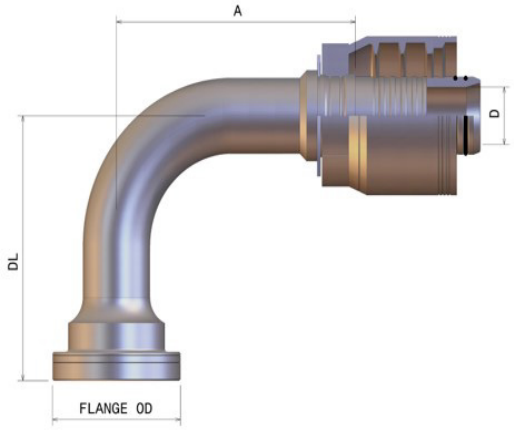

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in
P4F6K9-0808	12	1/2"	8	1/2"	9	0.35	52.8	2.08	31.7	1.25	44.3	1.74
P4F6K9-0812	12	1/2"	8	3/4"	9	0.35	59.2	2.33	41.3	1.63	58	2.28
P4F6K9-1012	16	5/8"	10	3/4"	12	0.47	68.4	2.69	41.3	1.63	60.1	2.37
P4F6K9-1212	19	3/4"	12	3/4"	14.3	0.56	74.8	2.94	41.3	1.63	62	2.44
P4F6K9-1216	19	3/4"	12	1"	14.3	0.56	69.3	2.73	47.6	1.87	64	2.52
P4F6K9-1616	25	1"	16	1"	19	0.75	84.8	3.34	47.6	1.87	75.5	2.97
P4F6K9-1620	25	1"	16	1.1/4"	19	0.75	80.3	3.16	54	2.13	72.8	2.87
P4F6K9-2020	31	1.1/4"	20	1.1/4"	25	0.98	85	3.35	54	2.13	93.2	3.67
P4F6K9-2024	31	1.1/4"	20	1.1/2"	25	0.98	117.5	4.63	63.5	2.50	89.3	3.52
P4F6K9-2424	38	1.1/2"	24	1.1/2"	31	1.22	116	4.57	63.5	2.50	108.7	4.28
P4F6K9-2432	38	1.1/2"	24	2"	31	1.22	118.7	4.67	79.4	3.13	117.5	4.63
P4F6K9-3232	51	2"	32	2"	40	1.57	116.2	4.57	79.4	3.13	132	5.20

FL62 SP4 90L

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- SAE 6000 CODE 62
- SAE 6000 CODE 62 - 90° ELBOW FLANGE (LONG DROP)

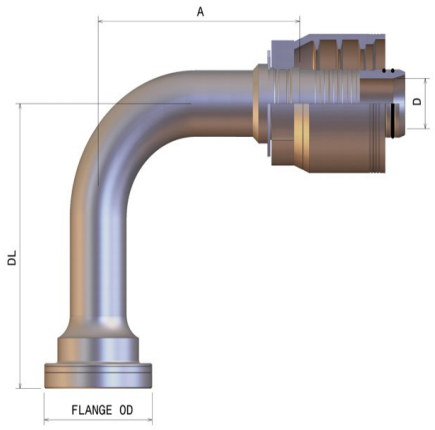

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in
P4F6K9-1616-120	25	1"	16	1"	19	0.75	84.8	3.34	47.6	1.87	120	4.72
P4F6K9-1620-120	25	1"	16	1.1/4"	19	0.75	82.2	3.24	54	2.13	120	4.72
P4F6K9-2020-130	31	1.1/4"	20	1.1/4"	25	0.98	86	3.39	54	2.13	130	5.12
P4F6K9-2020-150	31	1.1/4"	20	1.1/4"	25	0.98	86.4	3.40	54	2.13	150	5.91

PROCRIMP™ By YUVRAJ

SUPERCAT

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- SUPERCAT H.P. FLANGE
- SUPERCAT STYLE STRAIGHT FLANGE

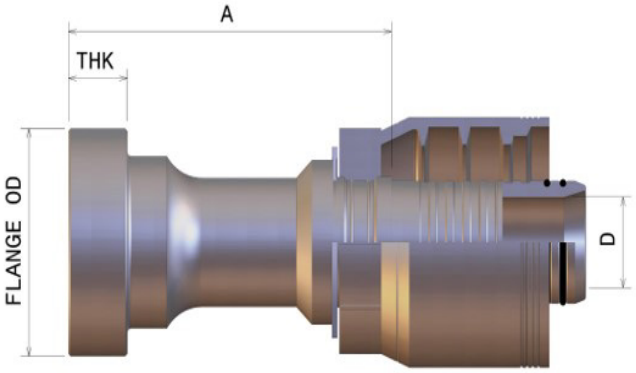

CODE	Ø HOSE			Flange Size	D		A		Flange OD		THK	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in
P4F9K-1212	19	3/4"	12	3/4"	14.3	0.56	85.8	3.38	41.3	1.63	14.5	0.57
P4F9K-1216	19	3/4"	12	1"	14.3	0.56	90.1	3.55	47.6	1.87	14.5	0.57
P4F9K-1616	25	1"	16	1"	19	0.75	89.8	3.54	47.6	1.87	14.5	0.57
P4F9K-1620	25	1"	16	1.1/4"	19	0.75	93.1	3.67	54	2.13	14.5	0.57
P4F9K-2020	31	1.1/4"	20	1.1/4"	25	0.98	94.2	3.71	54	2.13	14.5	0.57
P4F9K-2024	31	1.1/4"	20	1.1/2"	25	0.98	107.9	4.25	63.5	2.50	14.5	0.57
P4F9K-2424	38	1.1/2"	24	1.1/2"	31	1.22	115.3	4.54	63.5	2.50	14.5	0.57
P4F9K-3232	51	2"	32	2"	40	1.57	128.9	5.07	79.5	3.13	14.5	0.57

9K 22.5

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- SUPERCAT H.P. FLANGE
- SUPERCAT STYLE - 22.5° ELBOW FLANGE

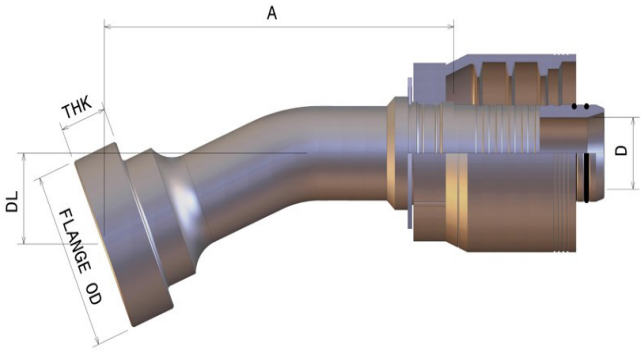

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL		THK	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in
P4F9K2-1212	19	3/4"	12	3/4"	14.3	0.56	90.4	3.56	41.3	1.63	15.2	0.60	14.5	0.57
P4F9K2-1616	25	1"	16	1"	19	0.75	98.7	3.89	47.6	1.87	16	0.63	14.5	0.57
P4F9K2-1620	25	1"	16	1.1/4"	19	0.75	113	4.45	54	2.13	19.8	0.78	14.5	0.57
P4F9K2-2020	31	1.1/4"	20	1.1/4"	25	0.98	138.3	5.44	54	2.13	21	0.83	14.5	0.57
P4F9K2-2024	31	1.1/4"	20	1.1/2"	25	0.98	139.8	5.50	63.5	2.50	22	0.87	14.5	0.57
P4F9K2-2424	38	1.1/2"	24	1.1/2"	31	1.22	153.1	6.03	63.5	2.50	23	0.91	14.5	0.57

PROCRIMP™ By YUVRAJ

9K 30 B

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- SUPERCAT H.P. FLANGE
- SUPERCAT STYLE - 30° ELBOW FLANGE

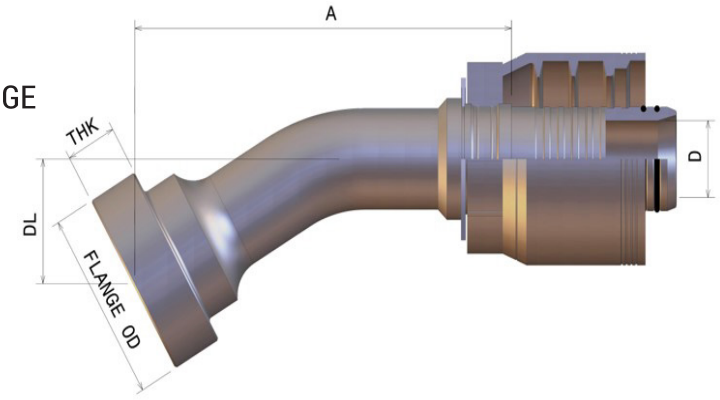

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL		THK	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in
P4F9K3-1212	19	3/4"	12	3/4"	14.3	0.56	91.8	3.61	41.3	1.63	20.9	0.82	14.5	0.57
P4F9K3-1216	19	3/4"	12	1"	14.3	0.56	95.7	3.77	47.6	1.87	24	0.94	14.5	0.57
P4F9K3-1616	25	1"	16	1"	19	0.75	96.3	3.79	47.6	1.87	22	0.87	14.5	0.57
P4F9K3-1620	25	1"	16	1.1/4"	19	0.75	110.3	4.34	54	2.13	27.2	1.07	14.5	0.57
P4F9K3-2020	31	1.1/4"	20	1.1/4"	25	0.98	135.3	5.33	54	2.13	29	1.14	14.5	0.57
P4F9K3-2024	31	1.1/4"	20	1.1/2"	25	0.98	136.3	5.37	63.5	2.50	30.6	1.20	14.5	0.57
P4F9K3-2424	38	1.1/2"	24	1.1/2"	31	1.22	149.6	5.89	63.5	2.50	29.9	1.18	14.5	0.57

NPTF
JIC
ORFS
SAE
JIS
BSP-BSPT
METRIC
SAE 3000 CODE 61
SAE 6000 CODE 62
SUPERCAT STYLE HIGH PRESSURE FLANGE
STAPLE LOCK

9K 45B

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- SUPERCAT H.P. FLANGE
- SUPERCAT STYLE - 45° ELBOW FLANGE

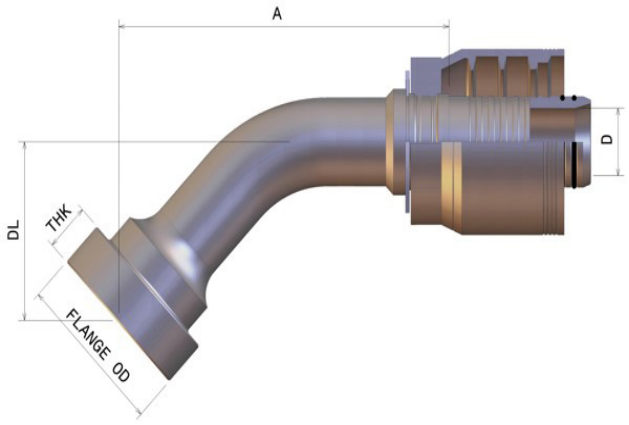

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL		THK	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in
P4F9K4-1212	19	3/4"	12	3/4"	14.3	0.56	92.4	3.64	41.3	1.63	32.5	1.28	14.5	0.57
P4F9K4-1216	19	3/4"	12	1"	14.3	0.56	87.7	3.45	47.6	1.87	37.5	1.48	14.5	0.57
P4F9K4-1616	25	1"	16	1"	19	0.75	88.8	3.50	47.6	1.87	35	1.38	14.5	0.57
P4F9K4-1620	25	1"	16	1.1/4"	19	0.75	101.6	4.00	54	2.13	42.8	1.69	14.5	0.57
P4F9K4-2020	31	1.1/4"	20	1.1/4"	25	0.98	125.3	4.93	54	2.13	46.5	1.83	14.5	0.57
P4F9K4-2024	31	1.1/4"	20	1.1/2"	25	0.98	125.8	4.95	63.5	2.50	48.8	1.92	14.5	0.57
P4F9K4-2424	38	1.1/2"	24	1.1/2"	31	1.22	139.6	5.50	63.5	2.50	48.9	1.93	14.5	0.57
P4F9K4-2432	38	1.1/2"	24	2"	31	1.22	179.1	7.05	79.4	3.13	59	2.32	14.5	0.57
P4F9K4-3232	51	2"	32	2"	40	1.57	183.6	7.23	79.4	3.13	65.3	2.57	14.5	0.57

PROCRIMP™ By YUVRAJ

9K 60B

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- SUPERCAT H.P. FLANGE
- SUPERCAT STYLE - 60° ELBOW FLANGE

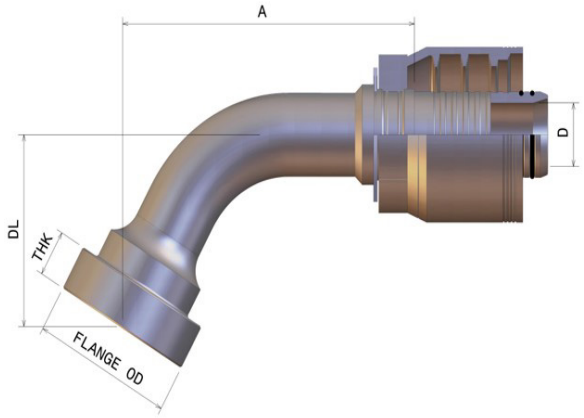

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL		THK	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in
P4F9K6-1212	19	3/4"	12	3/4"	14.3	0.56	91.5	3.60	41.3	1.63	43.1	1.70	14.5	0.57
P4F9K6-1216	19	3/4"	12	1"	14.3	0.56	98	3.86	47.6	1.87	41	1.61	14.5	0.57
P4F9K6-1616	25	1"	16	1"	19	0.75	109.6	4.31	47.6	1.87	48	1.89	14.5	0.57
P4F9K6-1620	25	1"	16	1.1/4"	19	0.75	100.6	3.96	54	2.13	58.2	2.29	14.5	0.57
P4F9K6-2020	31	1.1/4"	20	1.1/4"	25	0.98	121.3	4.78	54	2.13	59	2.32	14.5	0.57
P4F9K6-2024	31	1.1/4"	20	1.1/2"	25	0.98	143.8	5.66	63.5	2.50	67.2	2.65	14.5	0.57
P4F9K6-2424	38	1.1/2"	24	1.1/2"	31	1.22	169.6	6.68	63.5	2.50	68.7	2.70	14.5	0.57

9K 67.5 B

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- SUPERCAT H.P. FLANGE
- SUPERCAT STYLE - 67.5° ELBOW FLANGE

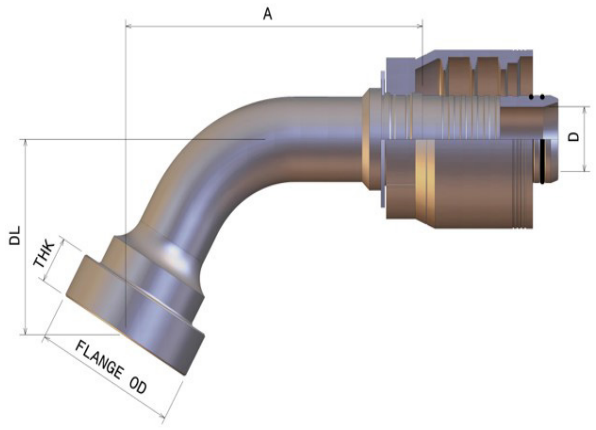

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL		THK	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in
P4F9K7-1616	25	1"	16	1"	19	0.75	102.9	4.05	47.6	1.87	54	2.13	14.5	0.57
P4F9K7-1620	25	1"	16	1.1/4"	19	0.75	95.6	3.76	54	2.13	64	2.52	14.5	0.57
P4F9K7-2020	31	1.1/4"	20	1.1/4"	25	0.98	130.8	5.15	54	2.13	67	2.64	14.5	0.57
P4F9K7-2024	31	1.1/4"	20	1.1/2"	25	0.98	134.8	5.31	63.5	2.50	76.1	3.00	14.5	0.57
P4F9K7-2424	38	1.1/2"	24	1.1/2"	31	1.22	160.1	6.30	63.5	2.50	78.6	3.09	14.5	0.57

PROCRIMP™ By YUVRAJ

9K 90B

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- SUPERCAT H.P. FLANGE
- SUPERCAT STYLE - 90° ELBOW FLANGE

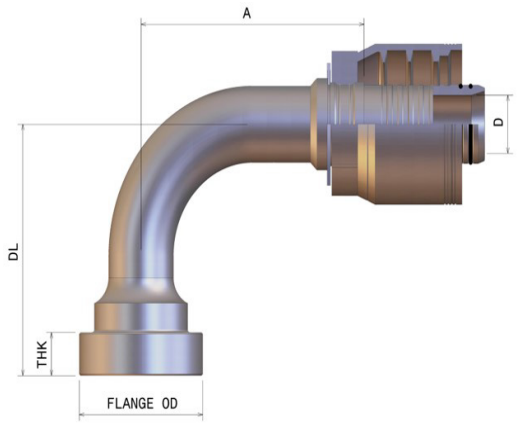

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL		THK	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in
P4F9K9-1212	19	3/4"	12	3/4"	14.3	0.56	62.5	2.46	41.3	1.63	62	2.44	14.5	0.57
P4F9K9-1216	19	3/4"	12	1"	14.3	0.56	62.5	2.46	47.6	1.87	70	2.76	14.5	0.57
P4F9K9-1616	25	1"	16	1"	19	0.75	82.2	3.24	47.6	1.87	71	2.80	14.5	0.57
P4F9K9-1620	25	1"	16	1.1/4"	19	0.75	84.6	3.33	54	2.13	84.5	3.33	14.5	0.57
P4F9K9-2020	31	1.1/4"	20	1.1/4"	25	0.98	110.8	4.36	54	2.13	90	3.54	14.5	0.57
P4F9K9-2024	31	1.1/4"	20	1.1/2"	25	0.98	111	4.37	63.5	2.50	100	3.94	14.5	0.57
P4F9K9-2424	38	1.1/2"	24	1.1/2"	31	1.22	123.6	4.87	63.5	2.50	106	4.17	14.5	0.57
P4F9K9-3232	51	2"	32	2"	40	1.57	165.9	6.53	79.4	3.13	136	5.35	14.5	0.57

- SUPERCAT H.P. FLANGE
- SUPERCAT STYLE - 90° ELBOW FLANGE (LONG DROP)

CODE	Ø HOSE			Flange Size	D		L		Flange OD		DL		Flange Thickness	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in
P4F9K9-1212-155	19	3/4"	12	3/4"	14.3	0.56	69.5	2.74	41.3	1.63	155	6.10	14.5	0.57

STAPLE-LOK SP4

FOR MULTISPIRAL AND WIRE BRAID HOSES - NO SKIVE

- STAPLE LOCK
- STAPLE LOCK MALE

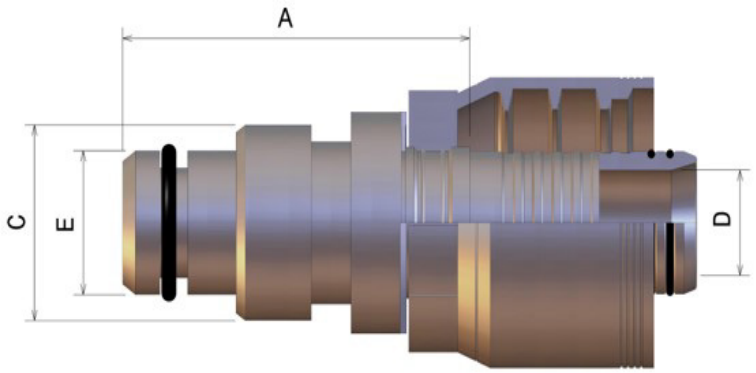

CODE	Ø HOSE			D		A		C		E	
	DN	INCH	SIZE	mm	in	mm	in	mm	in	mm	in
P4STPL-0606	10	3/8"	6	6.4	0.25	38.9	1.53	19.9	0.78	13.9	0.55
P4STPL-0808	12	1/2"	8	9	0.35	39.9	1.57	23.9	0.94	17.9	0.70
P4STPL-1010	16	5/8"	10	12	0.47	41.1	1.62	25.9	1.02	20.9	0.82
P4STPL-1212	19	3/4"	12	14.3	0.56	42.45	1.67	28.9	1.14	23.9	0.94
P4STPL-1616	25	1"	16	19	0.75	50.6	1.99	38.9	1.53	30.9	1.22
P4STPL-2020	31	1.1/4"	20	25	0.98	52.8	2.08	45.9	1.81	37.9	1.49
P4STPL-2424	38	1.1/2"	24	31	1.22	62.6	2.46	54.9	2.16	46.9	1.85
P4STPL-3232	51	2"	32	40	1.57	70.7	2.78	63.9	2.52	55.9	2.20

PROCRIMP™ By YUVRAJ

P6

SERIES

For 6-Spiral Hoses
Non-Skive

PRODUCT	FOR 6 SPIRAL HOSES - NO SKIVE	PAGE
NPTF	NPTF MALE (60° CONE SEAT)	103
JIC	JIC 37° MALE	104
	JIC 37° FEMALE SWIVEL	105
	JIC 37° FEMALE SWIVEL - 45° ELBOW	106
	JIC 37° FEMALE SWIVEL - 90° ELBOW	107
ORFS	ORFS MALE	108
	ORFS FEMALE SWIVEL	109
	ORFS FEMALE SWIVEL - 45° ELBOW	110
	ORFS FEMALE SWIVEL - 90° ELBOW	111
JIS	JAPANESE "KOM" STYLE TERMINATION STRAIGHT FLANGE (FOR METRIC O-RING)	112
	JAPANESE "KOM" STYLE TERMINATION - 45° ELBOW FLANGE (FOR METRIC O-RING)	113
	JAPANESE "KOM" STYLE TERMINATION - 90° ELBOW FLANGE (FOR METRIC O-RING)	114
BSP - BSPT	BSPT TAPERED MALE 60° CONE	115
	BSP MALE 60° CONE	116
	BSP FEMALE SWIVEL 60° CONE	117
	BSP FEMALE SWIVEL 60° CONE - 45° ELBOW	118
	BSP FEMALE SWIVEL 60° CONE - 90° ELBOW	119
METRIC	METRIC HEAVY MALE (24° CONE SEAT)	120
	METRIC HEAVY FEMALE SWIVEL (24° CONE SEAT)	121
	METRIC HEAVY FEMALE SWIVEL - 45° ELBOW (24° CONE SEAT)	122
	METRIC HEAVY FEMALE SWIVEL - 90° ELBOW (24° CONE SEAT)	123
SAE 3000 CODE 61	SAE 3000 CODE 61 STRAIGHT FLANGE	124
	SAE 3000 CODE 61 - 45° ELBOW FLANGE	125
	SAE 3000 CODE 61 - 90° ELBOW FLANGE	126
SAE 6000 CODE 62	SAE 6000 CODE 62 STRAIGHT FLANGE	127
	SAE 6000 CODE 62 - 45° ELBOW FLANGE	128
	SAE 6000 CODE 62 - 90° ELBOW FLANGE	129
	SAE 6000 CODE 62 - 90° ELBOW FLANGE (LONG DROP)	130
SUPERCAT STYLE HIGH PRESSURE FLANGE	SUPERCAT STYLE STRAIGHT FLANGE	131
	SUPERCAT STYLE - 22.5° ELBOW FLANGE	132
	SUPERCAT STYLE - 30° ELBOW FLANGE	133
	SUPERCAT STYLE - 45° ELBOW FLANGE	134
	SUPERCAT STYLE - 60° ELBOW FLANGE	135
	SUPERCAT STYLE - 67.5° ELBOW FLANGE	135
	SUPERCAT STYLE - 90° ELBOW FLANGE	136
H.P. STAPLE LOCK	HIGH PRESSURE STAPLE LOCK MALE	137

PROCRIMP™ By YUVRAJ

NPTF 6SP

FOR 6 SPIRAL HOSES - NO SKIVE

- NPTF
- NPTF MALE (60° CONE SEAT)

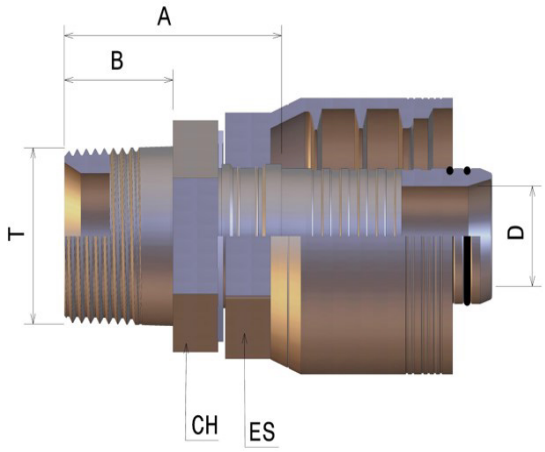

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6MNPT-2020	31	1.1/4"	20	1.1/4" - 11.1/2	25	0.98	52.4	2.06	25	0.98	46	1.811	1.13/16"	46	1.811	1.13/16"
P6MNPT-2424	38	1.1/2"	24	1.1/4" - 11.1/2	31	1.22	60.2	2.37	26	1.02	55	2.165	2.3/16"	50	1.969	2"
P6MNPT-3232	51	2"	32	2" - 11.1/2"	40	1.57	64.1	2.52	26.5	1.04	72	2.835	2.7/8"	65	2.559	2.9/16"

JIC M 6SP

FOR 6 SPIRAL HOSES - NO SKIVE

- JIC
- JIC 37° MALE

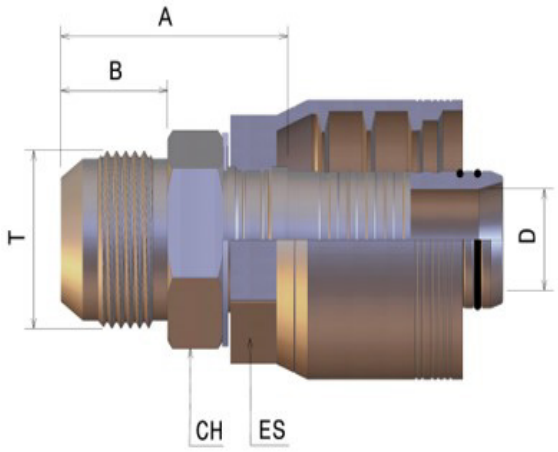

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6MJIC-2020	31	1.1/4"	20	1.5/8" - 12	25	0.98	52.1	2.05	24.3	0.96	46	1.811	1.13/16"	46	1.811	1.13/16"
P6MJIC-2424	38	1.1/2"	24	1.7/8" - 12	31	1.22	62.3	2.45	27.5	1.08	55	2.165	2.3/16"	50	1.969	2"
P6MJIC-3232	51	2"	32	2.1/2" - 12	40	1.57	71.8	2.83	34	1.34	72	2.835	2.7/8"	65	2.559	2.9/16"

PROCRIMP™ By YUVRAJ

JIC FJX 6SP

FOR 6 SPIRAL HOSES - NO SKIVE

- JIC
- JIC 37° FEMALE SWIVEL

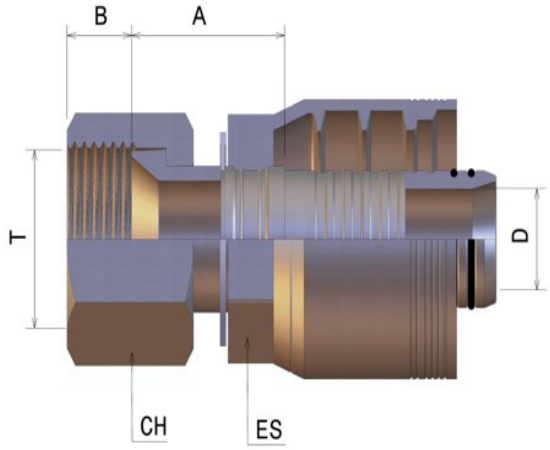

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6JIC-2020	31	1.1/4"	20	1.5/8" - 12	25	0.98	33.4	1.31	16	0.63	46	1.811	1.13/16"	50	1.969	2"
P6JIC-2024	31	1.1/4"	20	1.7/8" - 12	25	0.98	33.3	1.31	18.6	0.73	46	1.811	1.13/16"	55	2.165	2.3/16"
P6JIC-2424	38	1.1/2"	24	1.7/8" - 12	31	1.22	38.8	1.53	18.6	0.73	55	2.165	2.3/16"	55	2.165	2.3/16"
P6JIC-3232	51	2"	32	2.1/2" - 12	40	1.57	44.7	1.76	23.8	0.94	72	2.835	2.7/8"	75	2.953	--

JIC 6SP 45

FOR 6 SPIRAL HOSES - NO SKIVE

- JIC
- JIC 37° FEMALE SWIVEL - 45° ELBOW

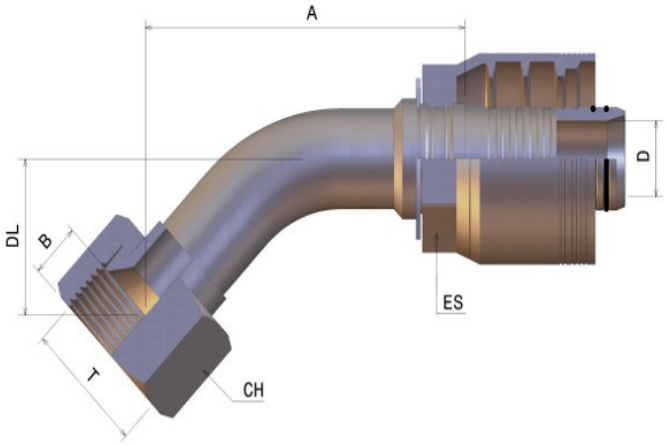

CODE	Ø HOSE			T	D		A		B		DL		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6JIC4-2020	31	1.1/4"	20	1.5/8" - 12	25	0.98	120	4.72	16	0.63	43	1.69	46	1.811	1.13/16"	50	1.969	2"
P6JIC4-2424	38	1.1/2"	24	1.7/8" - 12	31	1.22	146	5.75	18.5	0.73	44.5	1.75	55	2.165	2.3/16"	55	2.165	2.3/16"
P6JIC4-3232	51	2"	32	2.1/2" - 12	40	1.57	178.6	7.03	24	0.94	54.1	2.13	72	2.835	2.7/8"	75	2.953	–

PROCRIMP™ By YUVRAJ

JIC 6SP 90

FOR 6 SPIRAL HOSES - NO SKIVE

- JIC
- JIC 37° FEMALE SWIVEL - 90° ELBOW

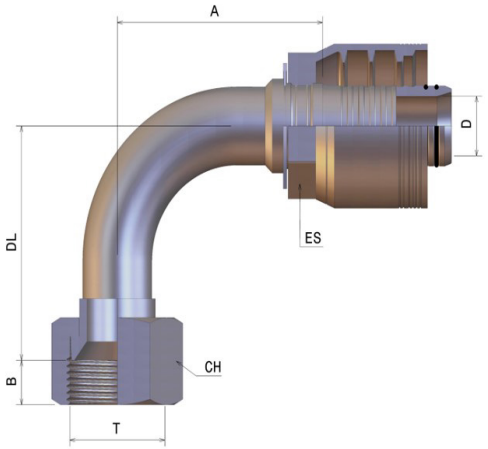

CODE	Ø HOSE			T	D		A		B		DL		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6JIC9-2020	31	1.1/4"	20	1.5/8" - 12	25	0.98	79.5	3.13	16	0.63	77.3	3.04	46	1.811	1.13/16"	50	1.969	2"
P6JIC9-2424	38	1.1/2"	24	1.7/8" - 12	31	1.22	97.2	3.83	18.5	0.73	99	3.90	55	2.165	2.3/16"	55	2.165	2.3/16"
P6JIC9-3232	51	2"	32	2.1/2" - 12	40	1.57	113	4.45	24	0.94	119	4.69	72	2.835	2.7/8"	75	2.953	--

ORFS M 6SP

FOR 6 SPIRAL HOSES - NO SKIVE

- ORFS
- ORFS MALE

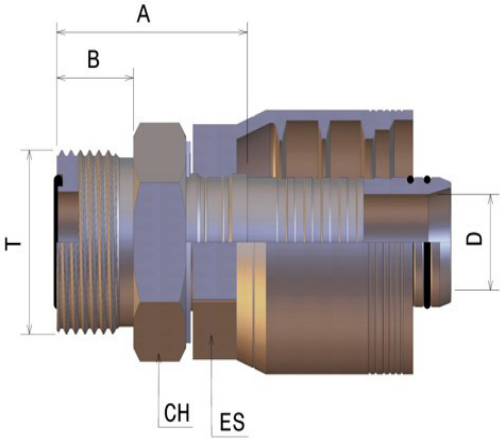

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6MORS-2020	31	1.1/4"	20	1.11/16" - 12	25	0.98	45.3	1.78	17.5	0.69	46	1.811	1.13/16"	46	1.811	1.13/16"
P6MORS-2424	38	1.1/2"	24	2" - 12	31	1.22	46.3	1.82	17.5	0.69	55	2.165	2.3/16"	55	2.165	2.3/16"

PROCRIMP™ By YUVRAJ

ORFS F 6SP

FOR 6 SPIRAL HOSES - NO SKIVE

- ORFS
- ORFS FEMALE SWIVEL

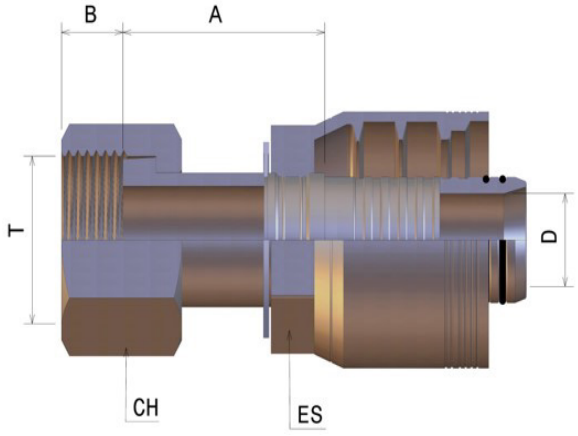

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6ORS-2020	31	1.1/4"	20	1.11/16" - 12	25	0.98	47.3	1.86	14.8	0.58	46	1.811	1.5/8"	50	1.969	2"
P6ORS-2424	38	1.1/2"	24	2" - 12	31	1.22	52.8	2.08	14.8	0.58	55	2.165	2.3/16"	60	2.362	2.3/8"

ORFS 6SP 45

FOR 6 SPIRAL HOSES - NO SKIVE

- ORFS
- ORFS FEMALE SWIVEL - 45° ELBOW

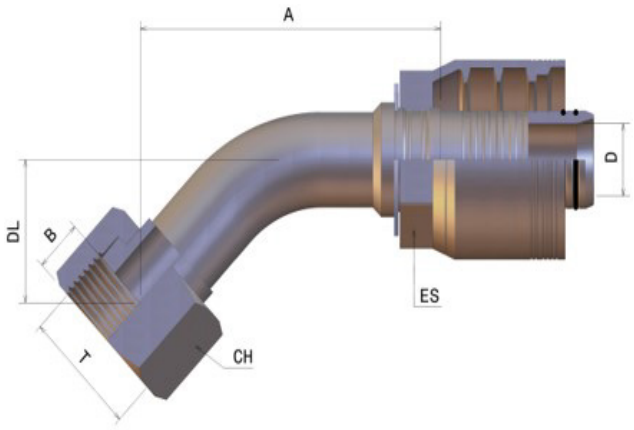

CODE	Ø HOSE			T	D		A		B		DL		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6ORS4-2020	31	1.1/4"	20	1.11/16" - 12	25	0.98	120	4.72	14.8	0.58	37.5	1.48	46	1.811	1.5/8"	50	1.969	2"
P6ORS4-2424	38	1.1/2"	24	2" - 12	31	1.22	146	5.75	14.8	0.58	41	1.61	55	2.165	2.3/16"	60	2.362	2.3/8"

PROCRIMP™ By YUVRAJ

ORFS 6SP 90

FOR 6 SPIRAL HOSES - NO SKIVE

- ORFS
- ORFS FEMALE SWIVEL - 90° ELBOW

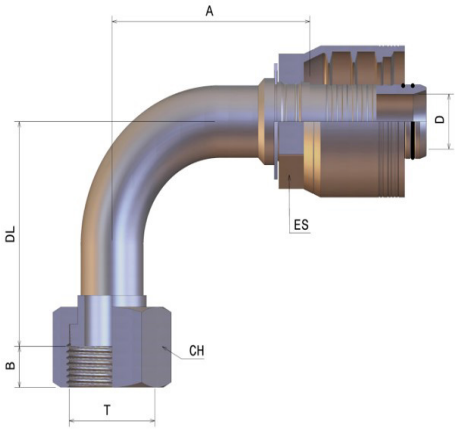

CODE	Ø HOSE			T	D		A		B		DL		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6ORS4-2020	31	1.1/4"	20	1.11/16" - 12	25	0.98	85.6	3.37	14.8	0.58	77	3.03	46	1.811	1.5/8"	50	1.969	2"
P6ORS9-2424	38	1.1/2"	24	2" - 12	31	1.22	101	3.98	14.8	0.58	98	3.86	55	2.165	2.3/16"	60	2.362	2.3/8"

KOM FL 6SP

FOR 6 SPIRAL HOSES - NO SKIVE

- JIS
- JAPANESE “KOM” STYLE TERMINATION STRAIGHT FLANGE (FOR METRIC O-RING)

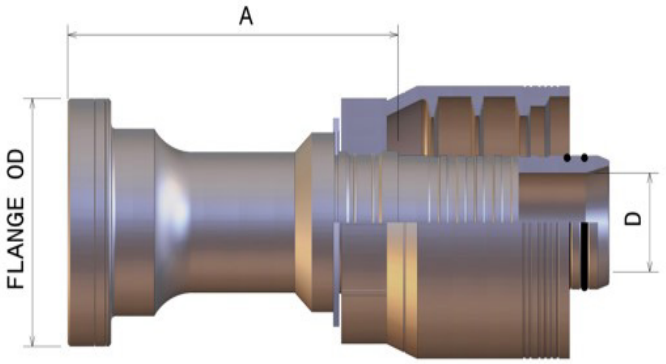

CODE	Ø HOSE			Flange Size	D		A		Flange OD	
	DN	INCH	SIZE		mm	in	mm	in	mm	in
P6KFL-2020	31	1.1/4”	20	1.1/4”	25	0.98	87.4	3.44	50.8	2.00
P6KFL-2424	38	1.1/2”	24	1.1/2”	31	1.22	97.8	3.85	60.3	2.37
P6KFL-3232	51	2”	32	2”	40	1.57	128.6	5.06	71.4	2.81

PROCRIMP™ By YUVRAJ

KOM FL 6SP 45

FOR 6 SPIRAL HOSES - NO SKIVE

- JIS
- JAPANESE “KOM” STYLE TERMINATION
  - 45° ELBOW FLANGE (FOR METRIC O- RING)

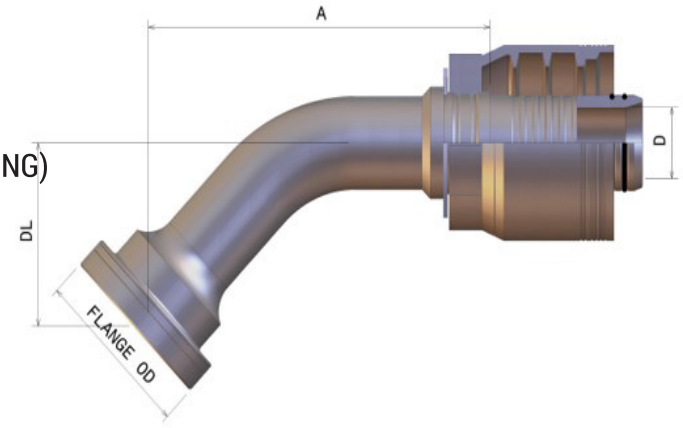

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in
P6KFL4-2020	31	1.1/4”	20	1.1/4”	25	0.98	130	5.12	50.8	2.00	42.3	1.67
P6KFL4-2424	38	1.1/2”	24	1.1/2”	31	1.22	163.2	6.43	60.3	2.37	48.8	1.92
P6KFL4-3232	51	2”	32	2”	40	1.57	210	8.27	71.4	2.81	62.2	2.45

KOM FL 6SP 90

FOR 6 SPIRAL HOSES - NO SKIVE

- JIS
- JAPANESE “KOM” STYLE TERMINATION - 90° ELBOW FLANGE (FOR METRIC O-RING)

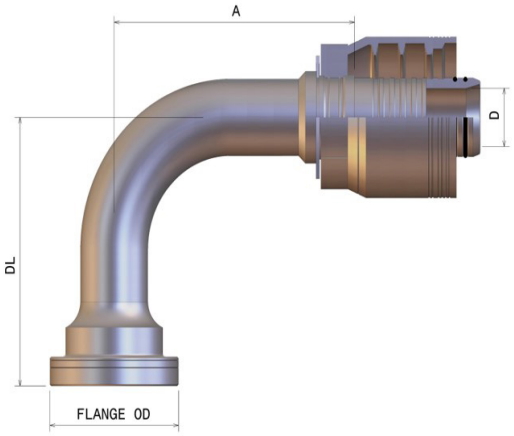

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in
P6KFL9-2020	31	1.1/4”	20	1.1/4”	25	0.98	105	4.13	50.8	2.00	81	3.19
P6KFL9-2424	38	1.1/2”	24	1.1/2”	31	1.22	114.5	4.51	60.3	2.37	98	3.86
P6KFL9-3232	51	2”	32	2”	40	1.57	137.7	5.42	71.4	2.81	128	5.04

PROCRIMP™ By YUVRAJ

BSPT 6SP

FOR 6 SPIRAL HOSES - NO SKIVE

- BSPT
- BSPT TAPERED MALE 60° CONE

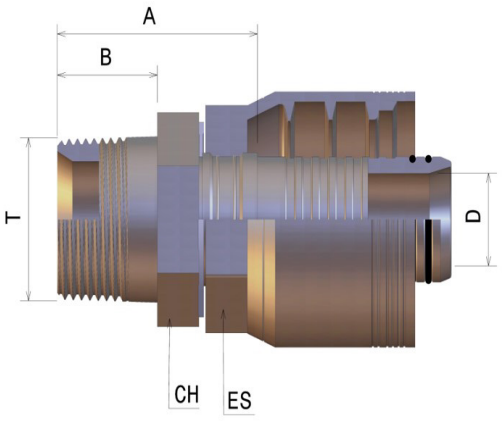

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6MBPT-2020	31	1.1/4"	20	1.1/4" - 11	25	0.98	52.4	2.06	24.6	0.97	46	1.811	1.13/16"	46	1.811	1.13/16"
P6MBPT-2424	38	1.1/2"	24	1.1/2" - 11	31	1.22	60.2	2.37	25.4	1.00	55	2.165	2.3/16"	50	1.969	2"
P6MBPT-3232	51	2"	32	2" - 11	40	1.57	64.1	2.52	26.2	1.03	72	2.835	2.7/8"	60	2.362	2.3/8"

BSPP 6SP

FOR 6 SPIRAL HOSES - NO SKIVE

- BSP
- BSP MALE 60° CONE

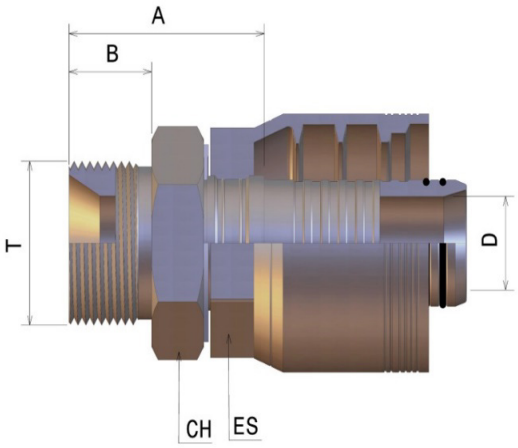

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6MBPP-2020	31	1.1/4"	20	1.1/4" - 11	25	0.98	47.8	1.88	20	0.79	46	1.811	1.13/16"	50	1.969	2"
P6MBPP-2424	38	1.1/2"	24	1.1/2" - 11	31	1.22	56.8	2.24	22	0.87	55	2.165	2.3/16"	55	2.165	2.3/16"
P6MBPP-3232	51	2"	32	2" - 11	40	1.57	62.9	2.48	25	0.98	72	2.835	2.7/8"	70	2.756	2.3/4"

PROCRIMP™ By YUVRAJ

BSP 6SP

FOR 6 SPIRAL HOSES - NO SKIVE

- BSP
- BSP FEMALE SWIVEL 60° CONE

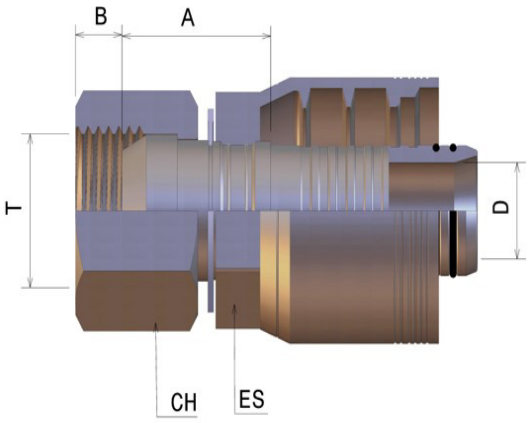

CODE	Ø HOSE			T	D		A		B		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6BSP-2020	31	1.1/4"	20	1.1/4" - 11	25	0.98	39.2	1.54	10.1	0.40	46	1.811	1.13/16"	50	1.969	2"
P6BSP-2424	38	1.1/2"	24	1.1/2" - 11	31	1.22	43.3	1.70	12.5	0.49	55	2.165	2.3/16"	55	2.165	2.3/16"
P6BSP-3232	51	2"	32	2" - 11	40	1.57	46.2	1.82	16.1	0.63	72	2.835	2.7/8"	70	2.756	2.3/4"

BSP 6SP 45

FOR 6 SPIRAL HOSES - NO SKIVE

- BSP
- BSP FEMALE SWIVEL - 45° ELBOW 60° CONE

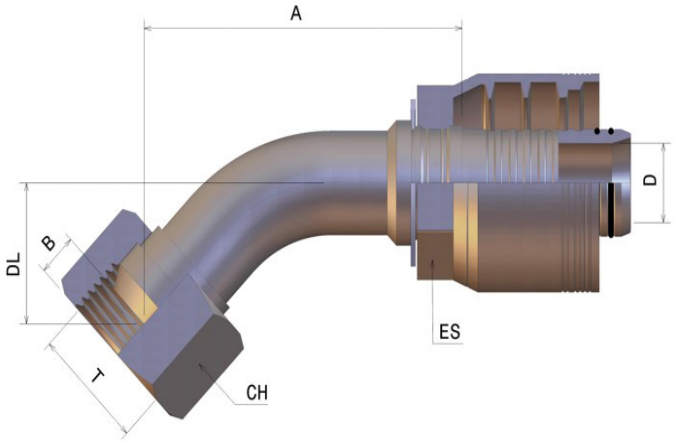

CODE	Ø HOSE			T	D		A		B		DL		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6BSP4-2020	31	1.1/4"	20	1.1/4" - 11	25	0.98	121	4.76	10.1	0.40	42	1.65	46	1.811	1.13/16"	50	1.969	2"
P6BSP4-2424	38	1.1/2"	24	1.1/2" - 11	31	1.22	148	5.83	12.5	0.49	44.5	1.75	55	2.165	2.3/16"	55	2.165	2.3/16"
P6BSP4-3232	51	2"	32	2" - 11	40	1.57	173.7	6.84	16.1	0.63	61.2	2.41	72	2.835	2.7/8"	70	2.756	2.3/4"

PROCRIMP™ By YUVRAJ

BSP 6SP 90

FOR 6 SPIRAL HOSES - NO SKIVE

- BSP
- BSP FEMALE SWIVE - 90° ELBOW 60° CONE

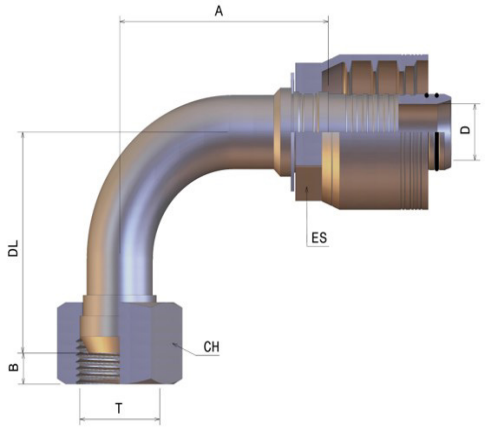

CODE	Ø HOSE			T	D		A		B		DL		ES			CH		
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6BSP4-2020	31	1.1/4"	20	1.1/4" - 11	25	0.98	121	4.76	10.1	0.40	42	1.65	46	1.811	1.13/16"	50	1.969	2"
P6BSP4-2424	38	1.1/2"	24	1.1/2" - 11	31	1.22	148	5.83	12.5	0.49	44.5	1.75	55	2.165	2.3/16"	55	2.165	2.3/16"
P6BSP4-3232	51	2"	32	2" - 11	40	1.57	173.7	6.84	16.1	0.63	61.2	2.41	72	2.835	2.7/8"	70	2.756	2.3/4"

CES 6SP

FOR 6 SPIRAL HOSES - NO SKIVE

- METRIC
- METRIC HEAVY MALE (24° CONE SEAT)

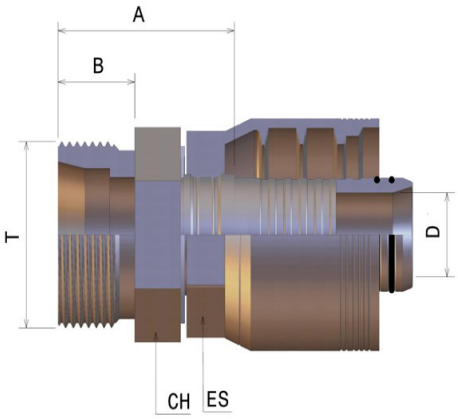

CODE	Ø HOSE			T	Pipe	D		A		B		ES			CH		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6CES-2052	31	1.1/4"	20	M52X2	S38	25	0.98	51.3	2.02	22	0.87	46	1.811	1.13/16"	55	2.165	2.3/16"
P6CES-2452	38	1.1/2"	24	M52X2	S38	31	1.22	56.8	2.24	22	0.87	55	2.165	2.3/16"	55	2.165	2.3/16"

PROCRIMP™ By YUVRAJ

DKO-S 6SP

FOR 6 SPIRAL HOSES - NO SKIVE

- METRIC
- METRIC HEAVY FEMALE SWIVEL (24° CONE SEAT)

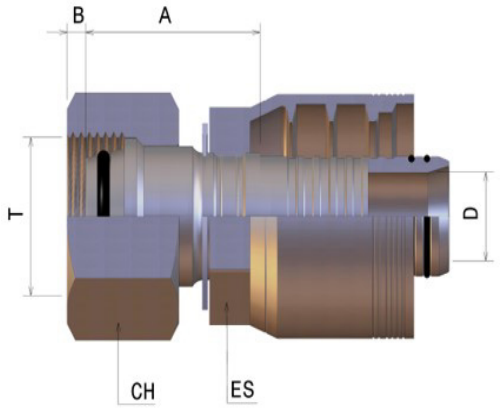

CODE	Ø HOSE			T	Pipe	D		A		B		ES			CH		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6DKS-2052	31	1.1/4"	20	M52X2	S38	25	0.98	56.8	2.24	6.3	0.25	46	1.811	1.13/16"	60	2.362	2.3/8"
P6DKS-2452	38	1.1/2"	24	M52X2	S38	31	1.22	63.2	2.49	7.8	0.31	55	2.165	2.3/16"	60	2.362	2.3/8"

DKO-S 6SP 45

FOR 6 SPIRAL HOSES - NO SKIVE

- METRIC
- METRIC HEAVY FEMALE SWIVEL 45° ELBOW (24° CONE SEAT)

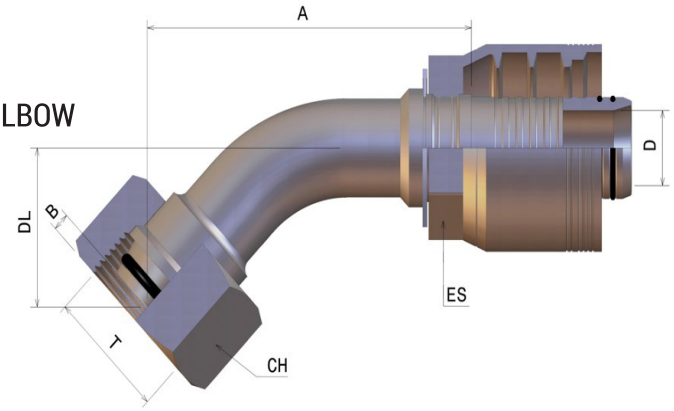

CODE	Ø HOSE			T	Pipe	D		A		B		DL		ES			CH		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6DKS4-2052	31	1.1/4"	20	M52X2	S38	25	0.98	134	5.28	6.3	0.25	45.6	1.80	46	1.811	1.13/16"	60	2.362	2.3/8"
P6DKS4-2452	38	1.1/2"	24	M52X2	S38	31	1.22	157	6.18	7.8	0.31	52.2	2.06	55	2.165	2.3/16"	60	2.362	2.3/8"

PROCRIMP™ By YUVRAJ

DKO-S 6SP 90

FOR 6 SPIRAL HOSES - NO SKIVE

- METRIC
- METRIC HEAVY FEMALE SWIVEL 90° ELBOW (24° CONE SEAT)

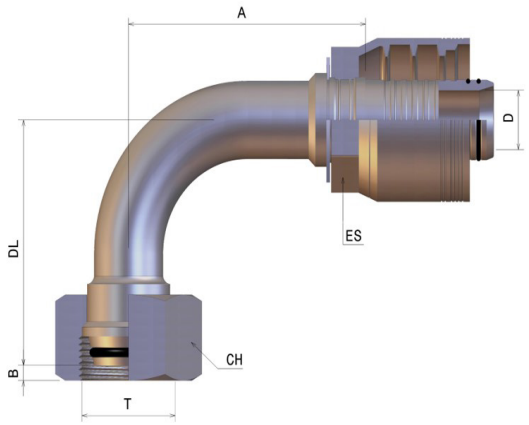

CODE	Ø HOSE			T	Pipe	D		A		B		DL		ES			CH		
	DN	INCH	SIZE			mm	in	mm	in	mm	in	mm	in	mm	in	in	mm	in	in
P6DKS9-2052	31	1.1/4"	20	M52X2	S38	25	0.98	84	3.31	6.3	0.25	86.5	3.41	46	1.811	1.13/16"	60	2.362	2.3/8"
P6DKS9-2452	38	1.1/2"	24	M52X2	S38	31	1.22	87	3.43	7.8	0.31	96	3.78	55	2.165	2.3/16"	60	2.362	2.3/8"

FL61 6SP

FOR 6 SPIRAL HOSES - NO SKIVE

- SAE 3000 CODE 61
- SAE 3000 CODE 61 STRAIGHT FLANGE

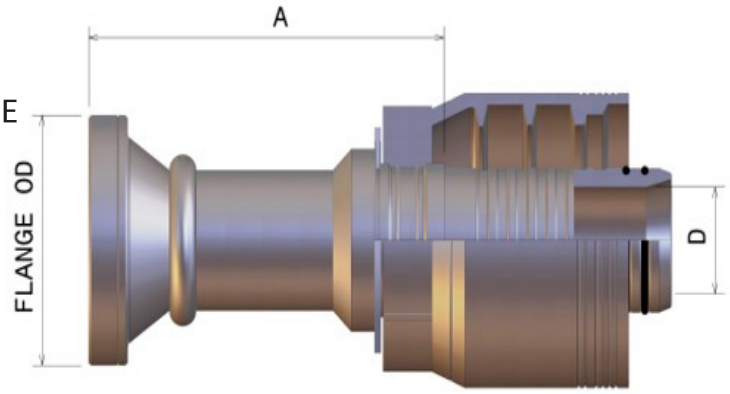

CODE	Ø HOSE			Flange Size	D		A		Flange OD	
	DN	INCH	SIZE		mm	in	mm	in	mm	in
P6F3K-2020	31	1.1/4"	20	1.1/4"	25	0.98	82	3.23	50.8	2.00
P6F3K-2024	31	1.1/4"	20	1.1/2"	25	0.98	94.3	3.71	60.3	2.38
P6F3K-2424	38	1.1/2"	24	1.1/2"	31	1.22	101.6	4.00	60.3	2.37
P6F3K-2432	38	1.1/2"	24	2"	31	1.22	108.2	4.26	71.4	2.81
P6F3K-3232	51	2"	32	2"	40	1.57	110.2	4.34	71.4	2.81

PROCRIMP™ By YUVRAJ

FL61 6SP 45

FOR 6 SPIRAL HOSES - NO SKIVE

- SAE 3000 CODE 61
- SAE 3000 CODE 61 - 45° ELBOW FLANGE

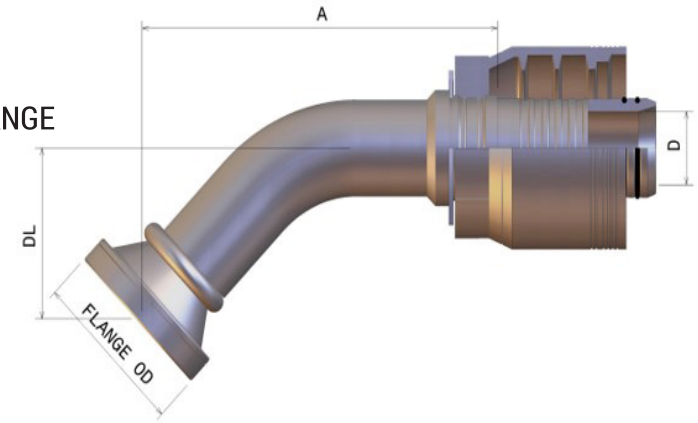

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in
P6F3K4-2020	31	1.1/4"	20	1.1/4"	25	0.98	122.6	4.83	50.8	2.00	48.5	1.91
P6F3K4-2424	38	1.1/2"	24	1.1/2"	31	1.22	163.2	6.43	60.3	2.37	51.1	2.01
P6F3K4-3232	51	2"	32	2"	40	1.57	210	8.27	71.4	2.81	62.2	2.45

FL61 6SP 90

FOR 6 SPIRAL HOSES - NO SKIVE

- SAE 3000 CODE 61
- SAE 3000 CODE 61- 90° ELBOW FLANGE

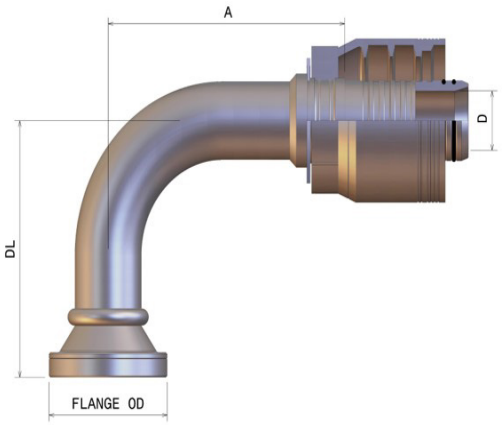

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in
P6F3K9-2020	31	1.1/4"	20	1.1/4"	25	0.98	89.2	3.51	50.8	2.00	76.3	3.00
P6F3K9-2024	31	1.1/4"	20	1.1/2"	25	0.98	92.1	3.63	60.3	2.37	92.8	3.65
P6F3K9-2424	38	1.1/2"	24	1.1/2"	31	1.22	114.5	4.51	60.3	2.37	98	3.86
P6F3K9-2432	38	1.1/2"	24	2"	31	1.22	123.1	4.85	71.4	2.81	108	4.25
P6F3K9-3232	51	2"	32	2"	40	1.57	137.7	5.42	71.4	2.81	128	5.04

PROCRIMP™ By YUVRAJ

FL62 6SP

FOR 6 SPIRAL HOSES - NO SKIVE

- SAE 6000 CODE 62
- SAE 6000 CODE 62 STRAIGHT FLANGE

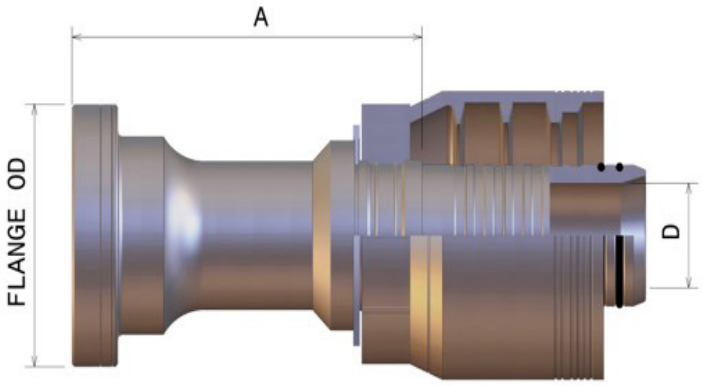

CODE	Ø HOSE			Flange Size	D		A		Flange OD	
	DN	INCH	SIZE		mm	in	mm	in	mm	in
P6F6K-2020	31	1.1/4"	20	1.1/4"	25	0.98	90	3.54	54	2.13
P6F6K-2024	31	1.1/4"	20	1.1/2"	25	0.98	106	4.17	63.5	2.50
P6F6K-2424	38	1.1/2"	24	1.1/2"	31	1.22	113.4	4.46	63.5	2.50
P6F6K-2432	38	1.1/2"	24	2"	31	1.22	125.1	4.93	79.4	3.13
P6F6K-3232	51	2"	32	2"	40	1.57	127	5.00	79.4	3.13

FL62 6SP 45

FOR 6 SPIRAL HOSES - NO SKIVE

- SAE 6000 CODE 62
- SAE 6000 CODE 62 - 45° ELBOW FLANGE

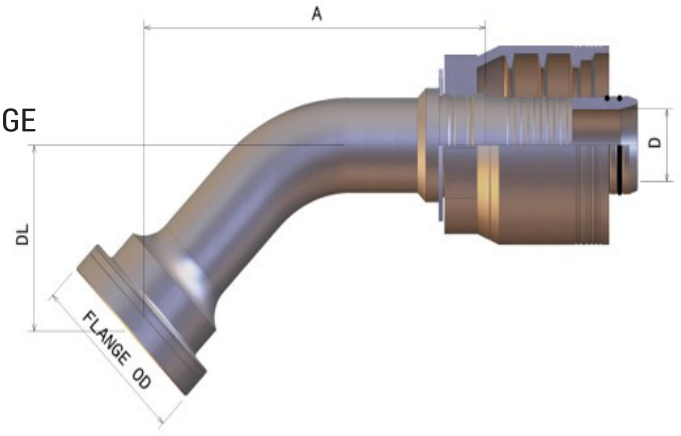

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in
P6F6K4-2020	31	1.1/4"	20	1.1/4"	25	0.98	115	4.53	54	2.13	50.6	1.99
P6F6K4-2024	31	1.1/4"	20	1.1/2"	25	0.98	148.2	5.83	63.5	2.50	58.6	2.31
P6F6K4-2424	38	1.1/2"	24	1.1/2"	31	1.22	144.6	5.69	63.5	2.50	59	2.32
P6F6K4-3232	51	2"	32	2"	40	1.57	205.2	8.08	79.4	3.13	70.4	2.77

PROCRIMP™ By YUVRAJ

FL62 6SP 90

FOR 6 SPIRAL HOSES - NO SKIVE

- SAE 6000 CODE 62
- SAE 6000 CODE 62 - 90° ELBOW FLANGE

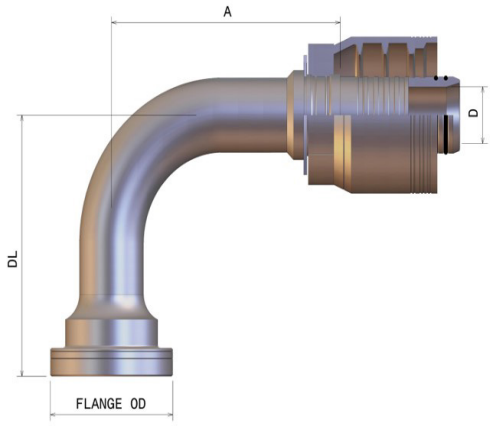

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in
P6F6K9-2020	31	1.1/4"	20	1.1/4"	25	0.98	85	3.35	54	2.13	93.2	3.67
P6F6K9-2024	31	1.1/4"	20	1.1/2"	25	0.98	117.8	4.64	63.5	2.50	89.3	3.52
P6F6K9-2424	38	1.1/2"	24	1.1/2"	31	1.22	116	4.57	63.5	2.50	108.7	4.28
P6F6K9-3232	51	2"	32	2"	40	1.57	116.2	4.57	79.4	3.13	132	5.20

FL62 6SP 90L

FOR 6 SPIRAL HOSES - NO SKIVE

- SAE 6000 CODE 62
- SAE 6000 CODE 62 - 90° ELBOW FLANGE (LONG DROP)

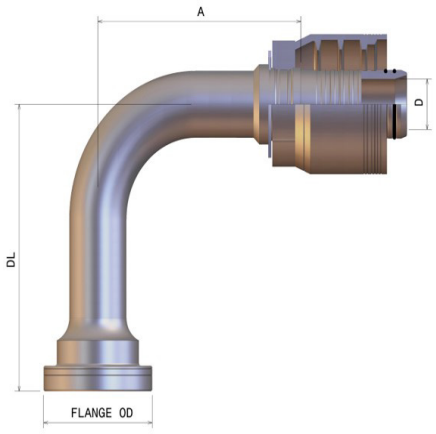

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in
P6F6K9-2020-130	31	1.1/4"	20	1.1/4"	25	0.98	86	3.39	54	2.13	130	5.12
P6F6K9-2020-150	31	1.1/4"	20	1.1/4"	25		86.4	3.40	54	2.13	150	5.91
P6F6K9-2424-114	38	1.1/2"	24	1.1/2"	31	1.22	116	4.57	63.5	2.50	114	4.49
P6F6K9-3232-155	51	2"	32	2"	40	1.57	121	4.76	79.4	3.13	155	6.10

PROCRIMP™ By YUVRAJ

CAT FL 6SP

FOR 6 SPIRAL HOSES - NO SKIVE

- SUPERCAT H.P. FLANGE
- SUPERCAT STYLE STRAIGHT FLANGE

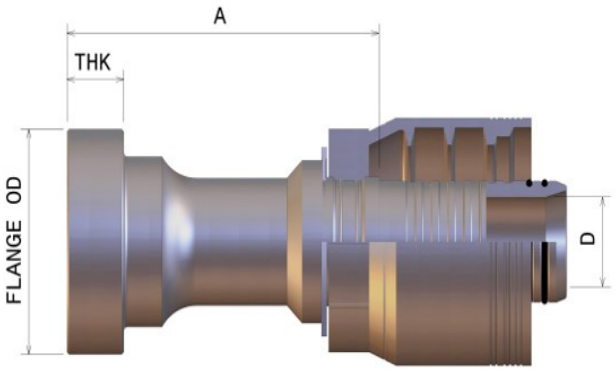

CODE	Ø HOSE			Flange Size	D		A		Flange OD		THK	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in
P6F9K-2020	31	1.1/4"	20	1.1/4"	25	0.98	94.2	3.71	54	2.13	14.5	0.57
P6F9K-2024	31	1.1/4"	20	1.1/2"	25	0.98	107.9	4.25	63.5	2.50	14.5	0.57
P6F9K-2424	38	1.1/2"	24	1.1/2"	31	1.22	115.3	4.54	63.5	2.50	14.5	0.57
P6F9K-2432	38	1.1/2"	24	2"	31	1.22	125.6	4.94	79.4	3.13	14.5	0.57
P6F9K-3232	51	2"	32	2"	40	1.57	128.9	5.07	79.4	3.13	14.5	0.57

CAT 6SP 22.5

FOR 6 SPIRAL HOSES - NO SKIVE

- SUPERCAT H.P. FLANGE
- SUPERCAT STYLE - 22.5° ELBOW FLANGE

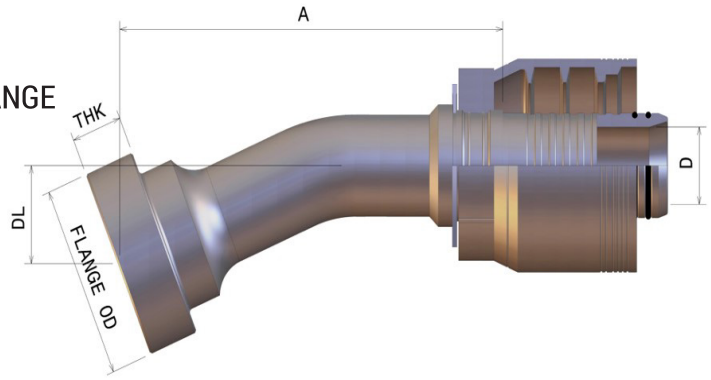

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL		THK	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in
P6F9K2-2020	31	1.1/4"	20	1.1/4"	25	0.98	138.3	5.44	54	2.13	21	0.83	14.5	0.57
P6F9K2-2024	31	1.1/4"	20	1.1/2"	25	0.98	139.8	5.50	63.5	2.50	22	0.87	14.5	0.57
P6F9K2-2424	38	1.1/2"	24	1.1/2"	31	1.22	153.1	6.03	63.5	2.50	23	0.91	14.5	0.57

PROCRIMP™ By YUVRAJ

CAT 6SP 30

FOR 6 SPIRAL HOSES - NO SKIVE

- SUPERCAT H.P. FLANGE
- SUPERCAT STYLE - 30° ELBOW FLANGE

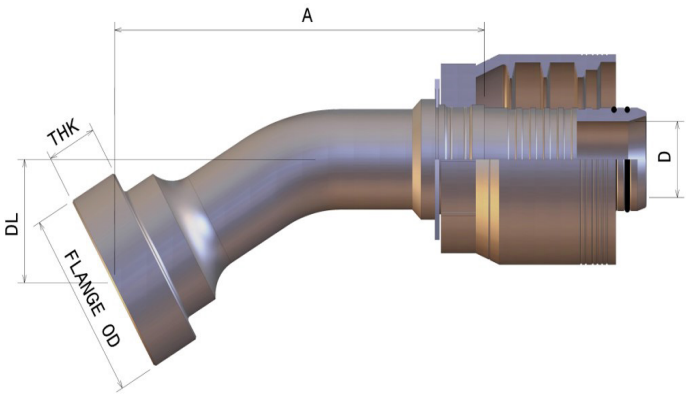

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL		THK	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in
P6F9K3-2024	31	1.1/4"	20	1.1/2"	25	0.98	136.3	5.37	63.5	2.50	31	1.22	14.5	0.57
P6F9K3-2424	38	1.1/2"	24	1.1/2"	25	0.98	149.6	5.89	63.5	2.50	30	1.18	14.5	0.57

CAT 6SP 45

FOR 6 SPIRAL HOSES - NO SKIVE

- SUPERCAT H.P. FLANGE
- SUPERCAT STYLE - 45° ELBOW FLANGE

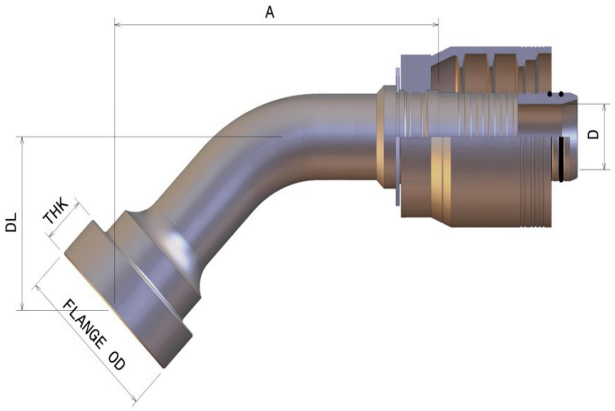

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL		THK	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in
P6F9K4-2020	31	1.1/4"	20	1.1/4"	25	0.98	125.3	4.93	54	2.13	46.5	1.83	14.5	0.57
P6F9K4-2024	31	1.1/4"	20	1.1/2"	25	0.98	125.8	4.95	63.5	2.50	48.8	1.92	14.5	0.57
P6F9K4-2424	38	1.1/2"	24	1.1/2"	31	1.22	139.6	5.50	63.5	2.50	48.9	1.93	14.5	0.57
P6F9K4-2432	38	1.1/2"	24	2"	31	1.22	179.1	7.05	79.4	3.13	59	2.32	14.5	0.57
P6F9K4-3232	51	2"	32	2"	40	1.57	183.6	7.23	79.4	3.13	65.3	2.57	14.5	0.57

PROCRIMP By YUVRAJ

- SUPERCAT H.P. FLANGE
- SUPERCAT STYLE - 60° ELBOW FLANGE

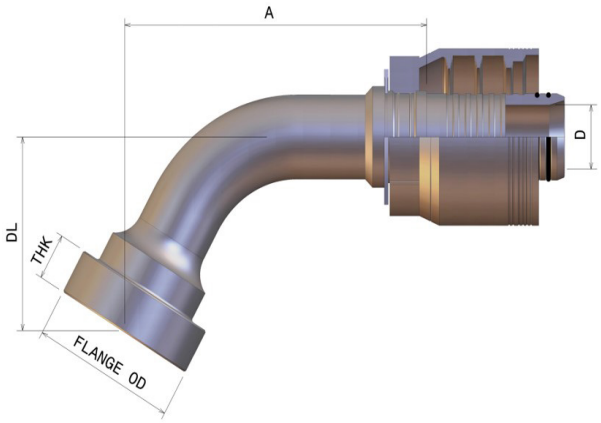

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL		THK	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in
P6F9K6-2020	31	1.1/4"	20	1.1/4"	25	0.98	121.3	4.78	54	2.13	59	2.32	14.5	0.57
P6F9K6-2024	31	1.1/4"	20	1.1/2"	25	0.98	143.8	5.66	63.5	2.50	67.2	2.65	14.5	0.57
P6F9K6-2424	38	1.1/2"	24	1.1/2"	31	1.22	169.6	6.68	63.5	2.50	68.7	2.70	14.5	0.57

- SUPERCAT H.P. FLANGE
- SUPERCAT STYLE - 67.5° ELBOW FLANGE

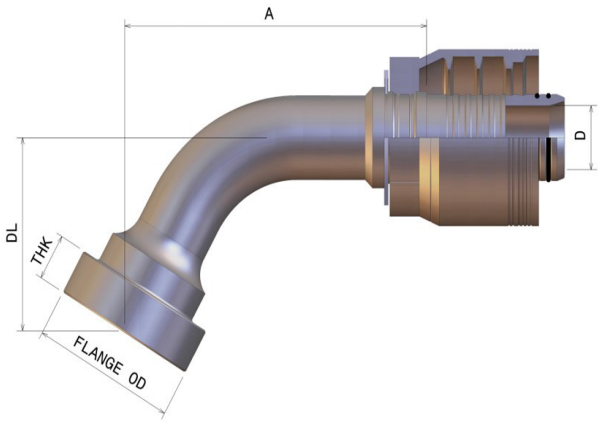

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL		THK	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in
P6F9K7-2020	31	1.1/4"	20	1.1/4"	25	0.98	130.8	5.15	54	2.13	67	2.64	14.5	0.57

CAT 6SP 90

FOR 6 SPIRAL HOSES - NO SKIVE

- SUPERCAT H.P. FLANGE
- SUPERCAT STYLE - 90° ELBOW FLANGE

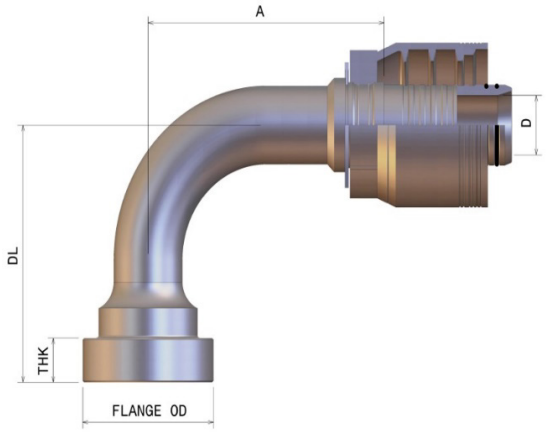

CODE	Ø HOSE			Flange Size	D		A		Flange OD		DL		THK	
	DN	INCH	SIZE		mm	in	mm	in	mm	in	mm	in	mm	in
P6F9K9-2020	31	1.1/4"	20	1.1/4"	25	0.98	110.8	4.36	54	2.13	90	3.54	14.5	0.57
P6F9K9-2024	31	1.1/4"	20	1.1/2"	25	0.98	111	4.37	63.5	2.50	100	3.94	14.5	0.57
P6F9K9-2424	38	1.1/2"	24	1.1/2"	31	1.22	123.6	4.87	63.5	2.50	106	4.17	14.5	0.57
P6F9K9-2432	38	1.1/2"	24	2"	31	1.22	140.2	5.52	79.4	3.13	122	4.80	14.5	0.57
P6F9K9-3232	51	2"	32	2"	40	1.57	165.9	6.53	79.4	3.13	136	5.35	14.5	0.57

PROCRIMP™ By YUVRAJ

STAPLE-LOK 6SP

FOR 6 SPIRAL HOSES - NO SKIVE

- H.P. STAPLE LOCK
- HIGH PRESSURE STAPLE LOCK MALE

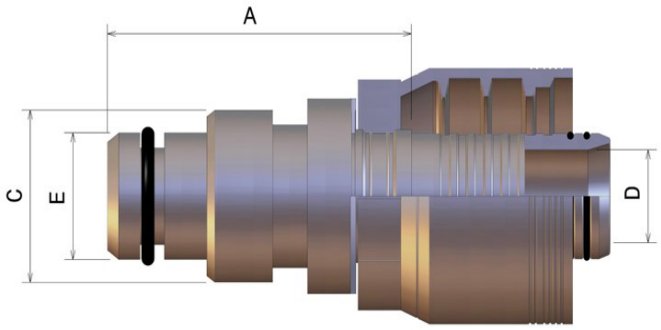

CODE	Ø HOSE			D		A		C		E	
	DN	INCH	SIZE	mm	in	mm	in	mm	in	mm	in
P6STPL-2020	31	1.1/4"	20	25	0.98	52.8	2.08	45.4	1.79	37.9	1.49
P6STPL-2424	38	1.1/2"	24	31	1.22	62.6	2.46	54.4	2.14	43.9	1.73
P6STPL-3232	51	2"	32	40	1.57	70.7	2.78	63.4	2.50	49.9	1.96

NOTES

PROCRIMP™
By
YUVRAJ

NOTES

PROCRIMP™

By

YUVRAJ

YUVRAJ
OVERSEAS PVT. LTD.
An IATF 16949:2016 Certified Company

Head Office: Southern Bypass, Jaspal Bangar, Ludhiana, Punjab, India - 141122
Plant: 13, Industrial Area - C, Sua Rd, Kanganwal, Ludhiana, Punjab, India - 141010
Contact no.: +91-8699904647
Email: info@yuvrajoverseas.com, sales@yuvrajoverseas.com
WhatsApp: +91-8699904647