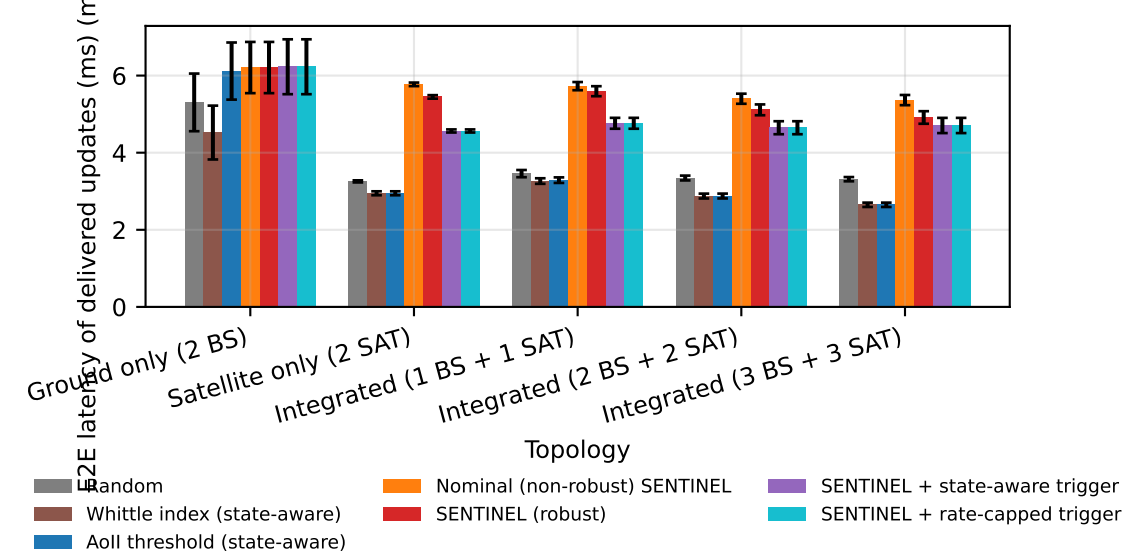
E2E latency of delivered updates (ms) (mean ± 95% CI)
0
2
4
6
Ground only (2 BS)
Satellite only (2 SAT)
Integrated (1 BS + 1 SAT)
Integrated (2 BS + 2 SAT)
Integrated (3 BS + 3 SAT)
Topology
Random
Whittle index (state-aware)
AoII threshold (state-aware)
Nominal (non-robust) SENTINEL
SENTINEL (robust)
SENTINEL + state-aware trigger
SENTINEL + rate-capped trigger